Integrated Energy Project Model
Version 1.0 XML Schema Documentation

CSI RD&D – Solicitation #1
Devan Johnson, kW Engineering – Principal Investigator

October 31, 2011

Schema documentation for Project.xsd

november 15, 2011

Table of Contents

Resource hierarchy:

Legend: *Import,* *Include,* *Redefine,* *Cycle detected*

- Project.xsd
  - Appliance.xsd
    - CommonSystemProperties.xsd
      - Common.xsd
      - EnergyConsumption.xsd
        - Common.xsd
      - Schedule.xsd
  - Building.xsd
    - Appliance.xsd
      - CommonSystemProperties.xsd
        - Common.xsd
        - EnergyConsumption.xsd
          - Common.xsd
        - Schedule.xsd
    - Common.xsd
    - EnergyConsumption.xsd
      - Common.xsd

- LayoutPlane.xsd
  - Common.xsd
  - Shading.xsd
    - Common.xsd
    - YearIntervalData.xsd
- Zone.xsd
  - Common.xsd
  - Schedule.xsd
- Common.xsd
- DistributionSystem.xsd
  - Common.xsd
  - CommonSystemProperties.xsd
    - Common.xsd
    - EnergyConsumption.xsd
      - Common.xsd
    - Schedule.xsd
  - Building.xsd
    - Appliance.xsd
      - CommonSystemProperties.xsd
        - Common.xsd
        - EnergyConsumption.xsd
          - Common.xsd
        - Schedule.xsd
    - Common.xsd
    - EnergyConsumption.xsd
      - Common.xsd
    - LayoutPlane.xsd
      - Common.xsd
      - Shading.xsd
        - Common.xsd

- YearIntervalData.xsd
- Zone.xsd
  - Common.xsd
  - Schedule.xsd
- CommonElectrical.xsd
  - Common.xsd
- HVACSystem.xsd
  - Common.xsd
  - CommonSystemProperties.xsd
    - Common.xsd
    - EnergyConsumption.xsd
      - Common.xsd
    - Schedule.xsd
  - DistributionSystem.xsd
    - Common.xsd
    - CommonSystemProperties.xsd
      - Common.xsd
      - EnergyConsumption.xsd
        - Common.xsd
      - Schedule.xsd
    - Building.xsd
      - Appliance.xsd
        - CommonSystemProperties.xsd
          - Common.xsd
          - EnergyConsumption.xsd
            - Common.xsd
          - Schedule.xsd
      - Common.xsd
      - EnergyConsumption.xsd
        - Common.xsd

- LayoutPlane.xsd
  - Common.xsd
  - Shading.xsd
    - Common.xsd
    - YearIntervalData.xsd
  - Zone.xsd
    - Common.xsd
    - Schedule.xsd
- Schedule.xsd

- LightingSystem.xsd
  - Common.xsd
  - CommonSystemProperties.xsd
    - Common.xsd
    - EnergyConsumption.xsd
      - Common.xsd
    - Schedule.xsd
  - Schedule.xsd

- Participant.xsd
  - Common.xsd

- PvSystem.xsd
  - Common.xsd
  - CommonElectrical.xsd
    - Common.xsd
  - Shading.xsd
    - Common.xsd
    - YearIntervalData.xsd
  - LayoutPlane.xsd
    - Common.xsd
    - Shading.xsd
      - Common.xsd

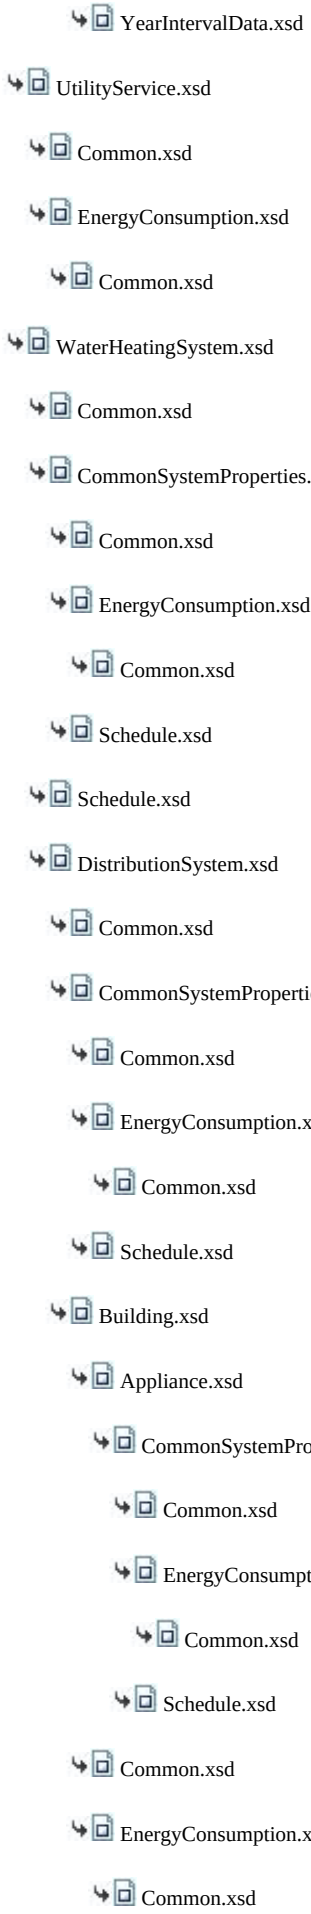
YearIntervalData.xsd
UtilityService.xsd
Common.xsd
EnergyConsumption.xsd
Common.xsd
WaterHeatingSystem.xsd
Common.xsd
CommonSystemProperties.xsd
Common.xsd
EnergyConsumption.xsd
Common.xsd
Schedule.xsd
Schedule.xsd
DistributionSystem.xsd
Common.xsd
CommonSystemProperties.xsd
Common.xsd
EnergyConsumption.xsd
Common.xsd
Schedule.xsd
Building.xsd
Appliance.xsd
CommonSystemProperties.xsd
Common.xsd
EnergyConsumption.xsd
Common.xsd
Schedule.xsd
Common.xsd
EnergyConsumption.xsd
Common.xsd

- LayoutPlane.xsd
  - Common.xsd
  - Shading.xsd
    - Common.xsd
    - YearIntervalData.xsd
- Zone.xsd
  - Common.xsd
  - Schedule.xsd

Namespace: "http://www.iepmodel.net"

Schema(s)

Main schema `Project.xsd`

Namespace	http://www.iepmodel.net
Properties	attribute form default: `unqualified` element form default: `unqualified`

Included schema `Appliance.xsd`

Namespace	http://www.iepmodel.net
Properties	attribute form default: `unqualified` element form default: `unqualified`

Included schema `CommonSystemProperties.xsd`

Namespace	http://www.iepmodel.net

Annotations	`This schema defines the common attributes used by all systems.`
	
	`System contains "Design_____" quantities to refer to the level of performance that the "system" was design to operate at. Generally when doing an analysis, the design range of performance is considered. However, a particular equipment may have a different constraint on its capacity or output.`

Properties	attribute form default: `unqualified` element form default: `unqualified`

Included schema `Common.xsd`

Namespace	http://www.iepmodel.net

Annotations	`The purpose of this schema is to define a set of types and quantities that are frequently used by other schema and can be referenced in a consistent manner.`
	
	`Each object is a ComplexType that includes a Value attribute and a Units attribute, which refers to an associated enumeration of units of measurement.`
	
	`Some objects have additional attributes that are useful for specifying additional information relevant to the value of the quantity (such as test conditions).`
	
	`The purpose of these classes/objects is not to indicate the way a quantity is used, but rather the value and unit of measurement of that quantity.`
	
	`The naming of the element or attribute, which is of a "CommonQuantities" type is the way in which we should indicate the manner in which the quantity is use`

Properties	attribute form default: unqualified element form default: qualified version: 1.0

Included schema EnergyConsumption.xsd

Namespace	http://www.iepmodel.net
Annotations	<xs:include schemaLocation="\CommonQuantities.xsd"/> The IEPModel team looked at using the gbXML model for energy consumption, which uses a time period ENUM of named calendar months, or "annual." A critical IEP use of energy consumption data is to pass historical billing data. Billing data starts on any given date, and has a number of billing days, along with qty. We should not assume that such raw billing data will be transformed into monthly/annual periods prior to being transferred via IEP between applications. Consider that a PV marketer could actually collect billing data as part of their service. They would transfer the data as part of a lead that they sell to a contractor. The IEP team agreed that it is NOT sufficient to simplify energy consumption periods into calendar months or annual periods. We agreed that it makes sense to provide for abilty to send raw billing data or monthly/annual data. Therefore our IEP model defines an EnergyConsumption type that can contain multiple EnergyConsumptionRecords that each correspond to a defined time period. Note that we currently use UtilityService XSD for capturing simple rough consumption estimates (e.g. I use 1000kWhrs/month, or my bill averages $X/month). OPEN ISSUES: 1) Currently design uses a granularity of one day. Should we vary the model to represent any time period type? Note that Mark Galli's YearlyInterval model describes any data content in regular intervals very well, for example output data from a PV system every 15 min.
Properties	attribute form default: unqualified element form default: unqualified

Included schema Schedule.xsd

Namespace	http://www.iepmodel.net
Annotations	This is based on the gbxml Schedule classes
Properties	attribute form default: unqualified element form default: unqualified

Included schema Building.xsd

Namespace	http://www.iepmodel.net
Annotations	Need to add other types of spaces within a building to cover buildings other than homes Consider extending BuildingType and SpaceType in the Space xml class to cover more than one program type
Properties	attribute form default: unqualified element form default: unqualified

Included schema LayoutPlane.xsd

Namespace	http://www.iepmodel.net
Properties	attribute form default: unqualified element form default: qualified version: 1.0

Included schema Shading.xsd

Namespace	http://www.iepmodel.net

Properties	attribute form default: `unqualified` element form default: `qualified` version: `1.0`

Included schema `YearIntervalData.xsd`

Namespace	http://www.iepmodel.net
Properties	attribute form default: `unqualified` element form default: `qualified` version: `1.0`

Included schema `Zone.xsd`

Namespace	http://www.iepmodel.net
Annotations	`A Zone should point to systems that condition it. (Systems point to a zone to indicate location - where the equipment resides).`
Properties	attribute form default: `unqualified` element form default: `unqualified`

Included schema `DistributionSystem.xsd`

Namespace	http://www.iepmodel.net
Properties	attribute form default: `unqualified` element form default: `unqualified`

Included schema `CommonElectrical.xsd`

Namespace	http://www.iepmodel.net
Properties	attribute form default: `unqualified` element form default: `qualified` version: `1.0`

Included schema `HVACSystem.xsd`

Namespace	http://www.iepmodel.net
Annotations	`This schema defines the parameters associated with an HVAC system.` `An HVAC system may contain any combination of the following: a heating system, a cooling system and ventilation system. Ventilation is defined here as a system that exchanges air in a conditioned zone with air outside the building.` `An HVAC system may also contain an instance of a distribution system, which is used to condition (transfer heat to or from) a space. The distribution system consists (optionally) of prime movers (pumps or fans) and segments (segments of duct or pipe, etc.). Note that there can be only one space-serving distribution system per instance of an HVAC system. Therefore, if multiple distribution systems serve a space, multiple HVAC systems must be defined.`  `An HVAC system serves a zone, however, zones reference the HVAC systems that serve them.`  `Note that parameters associated with the transport and movement of air and water are captured in a Distribution System.`
Properties	attribute form default: `unqualified` element form default: `unqualified`

Included schema `LightingSystem.xsd`

Namespace	http://www.iepmodel.net

Annotations	<xs:include schemaLocation="\CommonQuantities.xsd"/> <xs:include schemaLocation="\Equipment.xsd"/> The lighting system is a collection of lighting as defined by the user that illuminates one area. Note that the area may encompass many rooms or a single physical space as the user desires. However, if the user wishes to distinguish between different areas, multiple Lighting Systems should be defined. This object may represent a collection of different types of lighting or it may be convenient (and simpler) to only define one type of lighting in the system and use multiple Lighting Systems varying lighting types.
Properties	attribute form default: unqualified element form default: unqualified

Included schema `Participant.xsd`

Namespace	http://www.iepmodel.net
Annotations	This is intended to cover all participants including Consumers, Service Providers, etc.
Properties	attribute form default: unqualified element form default: unqualified

Included schema `PvSystem.xsd`

Namespace	http://www.iepmodel.net
Properties	attribute form default: unqualified element form default: unqualified

Included schema `UtilityService.xsd`

Namespace	http://www.iepmodel.net
Annotations	Defines a utility service for a site.
Properties	attribute form default: unqualified element form default: unqualified

Included schema `WaterHeatingSystem.xsd`

Namespace	http://www.iepmodel.net
Properties	attribute form default: unqualified element form default: unqualified

Element(s)

Element `Project`

Namespace	http://www.iepmodel.net

Diagram

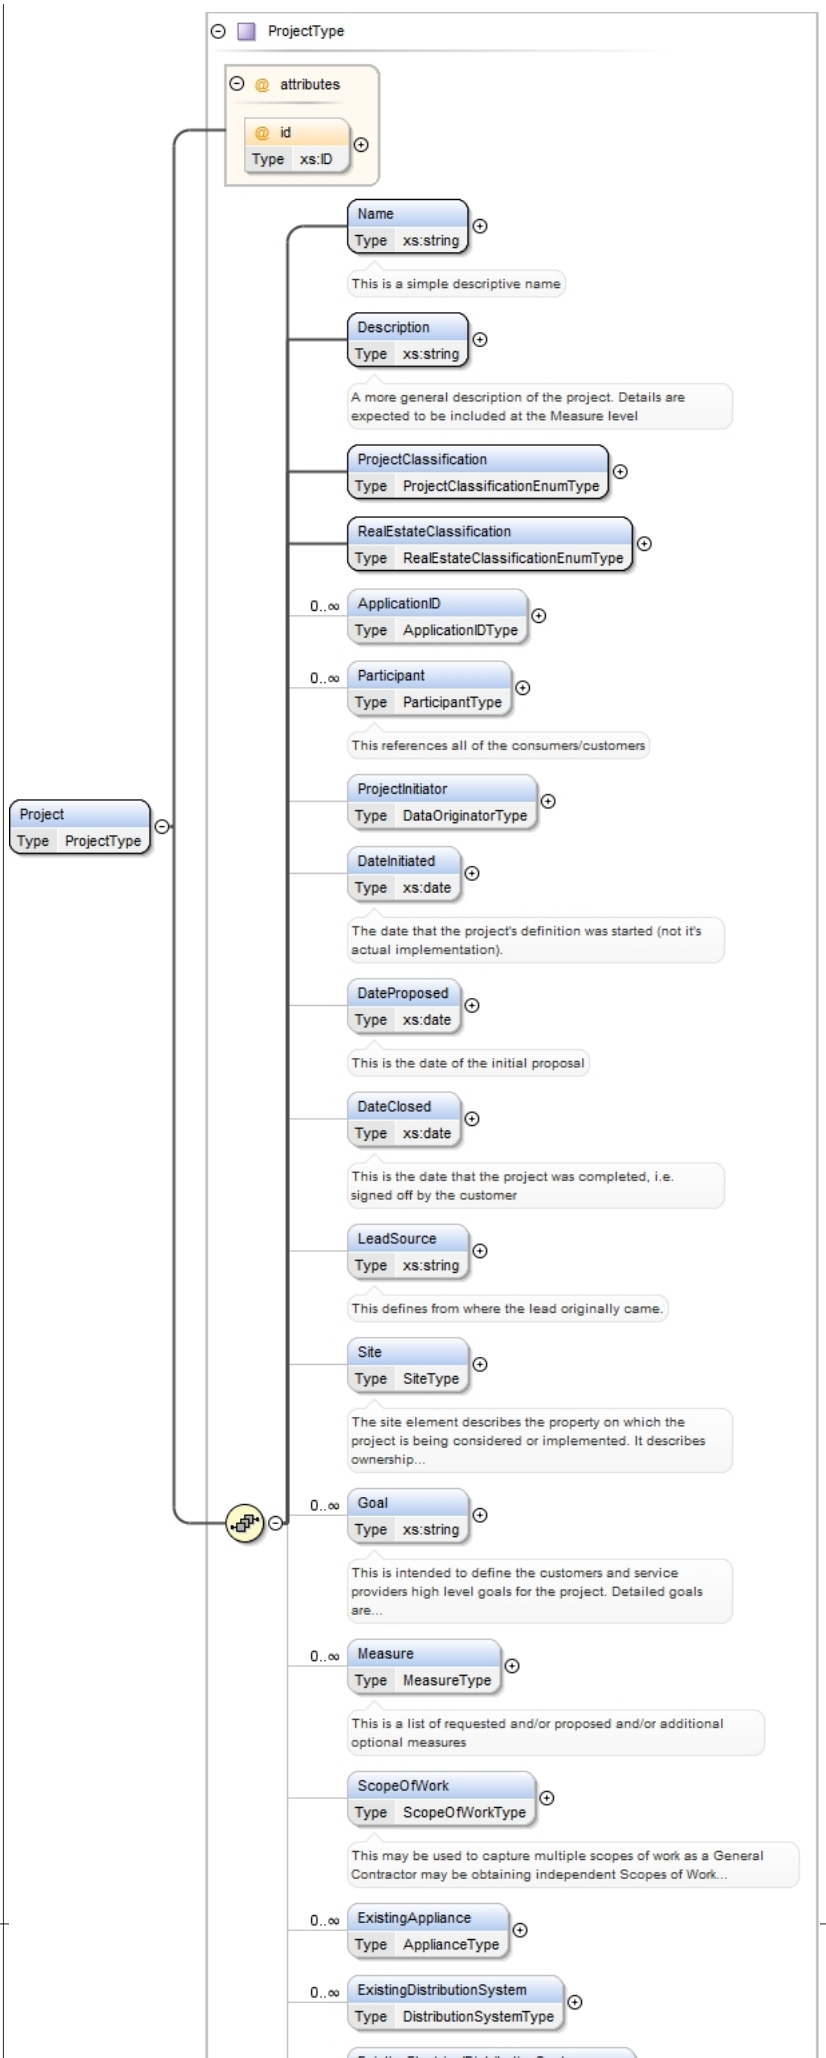
ProjectType
attributes
id
Type xs:ID
Name
Type xs:string
This is a simple descriptive name
Description
Type xs:string
A more general description of the project. Details are expected to be included at the Measure level
ProjectClassification
Type ProjectClassificationEnumType
RealEstateClassification
Type RealEstateClassificationEnumType
0..∞
ApplicationID
Type ApplicationIDType
0..∞
Participant
Type ParticipantType
This references all of the consumers/customers
ProjectInitiator
Type DataOriginatorType
DateInitiated
Type xs:date
The date that the project's definition was started (not it's actual implementation).
DateProposed
Type xs:date
This is the date of the initial proposal
DateClosed
Type xs:date
This is the date that the project was completed, i.e. signed off by the customer
LeadSource
Type xs:string
This defines from where the lead originally came.
Site
Type SiteType
The site element describes the property on which the project is being considered or implemented. It describes ownership...
Project
Type ProjectType
0..∞
Goal
Type xs:string
This is intended to define the customers and service providers high level goals for the project. Detailed goals are...
0..∞
Measure
Type MeasureType
This is a list of requested and/or proposed and/or additional optional measures
ScopeOfWork
Type ScopeOfWorkType
This may be used to capture multiple scopes of work as a General Contractor may be obtaining independent Scopes of Work...
0..∞
ExistingAppliance
Type ApplianceType
0..∞
ExistingDistributionSystem
Type DistributionSystemType

Type	ProjectType
Properties	content: complex
Model	Name , Description , ProjectClassification , RealEstateClassification , ApplicationID* , Participant* , ProjectInitiator{0,1} , DateInitiated{0,1} , DateProposed{0,1} , DateClosed{0,1} , LeadSource{0,1} , Site{0,1} , Goal* , Measure* , ScopeOfWork{0,1} , ExistingAppliance* , ExistingDistributionSystem* , ExistingElectricalDistributionSystem{0,1} , ExistingHVAC* , ExistingLighting* , ExistingPvSystem* , ExistingWaterHeatingSystem* , Schedules{0,1} , UtilityService* , OccupantConstraints* , ConsumerFeedback*
Children	ApplicationID, ConsumerFeedback, DateClosed, DateInitiated, DateProposed, Description, ExistingAppliance, ExistingDistributionSystem, ExistingElectricalDistributionSystem, ExistingHVAC, ExistingLighting, ExistingPvSystem, ExistingWaterHeatingSystem, Goal, LeadSource, Measure, Name, OccupantConstraints, Participant, ProjectClassification, ProjectInitiator, RealEstateClassification, Schedules, ScopeOfWork, Site, UtilityService

Instance

```
<Project id="" xmlns="http://www.iepmodel.net">
  <Name>{1,1}</Name>
  <Description>{1,1}</Description>
  <ProjectClassification>{1,1}</ProjectClassification>
  <RealEstateClassification>{1,1}</RealEstateClassification>
  <ApplicationID>{0,unbounded}</ApplicationID>
  <Participant id="">{0,unbounded}</Participant>
  <ProjectInitiator>{0,1}</ProjectInitiator>
  <DateInitiated>{0,1}</DateInitiated>
  <DateProposed>{0,1}</DateProposed>
  <DateClosed>{0,1}</DateClosed>
  <LeadSource>{0,1}</LeadSource>
  <Site id="">{0,1}</Site>
  <Goal>{0,unbounded}</Goal>
  <Measure id="">{0,unbounded}</Measure>
  <ScopeOfWork id="">{0,1}</ScopeOfWork>
  <ExistingAppliance>{0,unbounded}</ExistingAppliance>
  <ExistingDistributionSystem id="">{0,unbounded}</ExistingDistributionSystem>
  <ExistingElectricalDistributionSystem>{0,1}</ExistingElectricalDistributionSystem>
  <ExistingHVAC id="">{0,unbounded}</ExistingHVAC>
  <ExistingLighting>{0,unbounded}</ExistingLighting>
  <ExistingPvSystem>{0,unbounded}</ExistingPvSystem>
  <ExistingWaterHeatingSystem id="">{0,unbounded}</ExistingWaterHeatingSystem>
  <Schedules>{0,1}</Schedules>
  <UtilityService>{0,unbounded}</UtilityService>
  <OccupantConstraints>{0,unbounded}</OccupantConstraints>
  <ConsumerFeedback>{0,unbounded}</ConsumerFeedback>
</Project>
```

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			optional

Source

```
<xs:element name="Project" type="ProjectType"/>
```

Element ApplicationIDType / IDValue

Namespace	http://www.iepmodel.net
Annotations	This is the applications ID tag
Diagram	

Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1

Source

```
<xs:element name="IDValue" type="xs:string" minOccurs="1" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>This is the applications ID tag</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element ApplicationIDType / IDSource

Namespace	http://www.iepmodel.net
Annotations	This is a simple description of the source of the information

Diagram	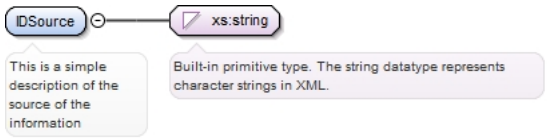
Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1

Source	`<xs:element name="IDSource" type="xs:string" minOccurs="1" maxOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>This is a simple description of the source of the information</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element DataOriginatorType / Description

Namespace	http://www.iepmodel.net
Annotations	This is used as a general descript, name, etc. to be used in place of the Participant
Diagram	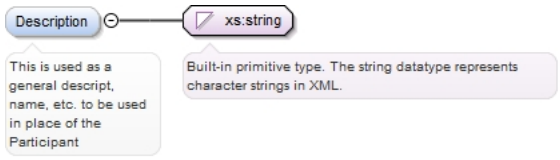
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source	`<xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>This is used as a general descript, name, etc. to be used in place of the Participant</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element DataOriginatorType / ParticipantID

Namespace	http://www.iepmodel.net
Annotations	This references the set of specific Participant involved in providing data.
Diagram	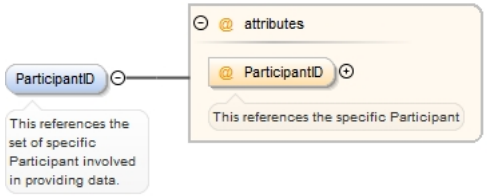
Properties	content: complex minOccurs: 0 maxOccurs: 1
Attributes	**QName** | **Type** | **Fixed** | **Default** | **Use** **ParticipantID** | xs:IDREF | | | optional This references the specific Participant

Source	`<xs:element name="ParticipantID" minOccurs="0" maxOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>This references the set of specific Participant involved in providing data.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:complexType>`
	`  <xs:attribute name="ParticipantID" type="xs:IDREF">`

```
      <xs:annotation>
        <xs:documentation>This references the specific Participant</xs:documentation>
      </xs:annotation>
    </xs:attribute>
  </xs:complexType>
</xs:element>
```

Element DataOriginatorType / OriginiationDate

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:date
Properties	content: simple minOccurs: 0
Source	`<xs:element minOccurs="0" name="OriginiationDate" type="xs:date"/>`

Element SpaceType / Name

Namespace	http://www.iepmodel.net
Annotations	This is simply a descriptive name, typically a common name used for the system.
Diagram	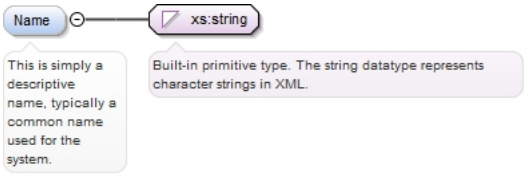
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source	`<xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>This is simply a descriptive name, typically a common name used for the system.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element SpaceType / Description

Namespace	http://www.iepmodel.net
Annotations	Place for user to include additional notes/description. Examples: - Laundromat, 1st floor - Pop's Barber shop, 2nd floor - Apartments, floors 3-6
Diagram	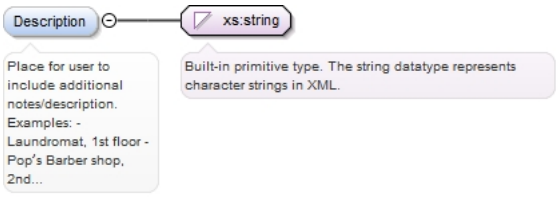
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element maxOccurs="1" minOccurs="0" name="Description" type="xs:string">` `  <xs:annotation>`

```
    <xs:documentation>Place for user to include additional notes/description. Examples:
 - Laundromat, 1st floor - Pop's Barber shop, 2nd floor - Apartments, floors 3-6</
xs:documentation>
  </xs:annotation>
</xs:element>
```

Element SpaceType / NewExisting

Namespace	http://www.iepmodel.net
Annotations	For items marked as new, they will be added as long as the ESP identifier is not found (error otherwise). For items marked as existing, only updates will be performed if the ESP identifier is found (error otherwise). For items marked unknown, they will be created if the ESP identifier is not found and updated if the ESP identifier is found (similar to ABS 1.0)
Diagram	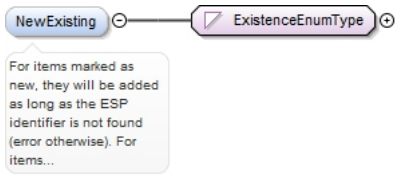
Type	ExistenceEnumType
Properties	content: simple minOccurs: 0
Facets	enumeration: Existing enumeration: New enumeration: Unknown
Source	<xs:element minOccurs="0" name="NewExisting" type="ExistenceEnumType"> <xs:annotation> <xs:documentation>For items marked as new, they will be added as long as the ESP identifier is not found (error otherwise). For items marked as existing, only updates will be performed if the ESP identifier is found (error otherwise). For items marked unknown, they will be created if the ESP identifier is not found and updated if the ESP identifier is found (similar to ABS 1.0)</xs:documentation> </xs:annotation> </xs:element>

Element SpaceType / BuildingFraction

Namespace	http://www.iepmodel.net
Annotations	The fraction of the total building that this space occupies. This is useful for tools including Portfolio Manager: http://www.energystar.gov/index.cfm?c=evaluate_performance.bus_portfoliomanager
Diagram	
Type	restriction of xs:float
Properties	content: simple minOccurs: 0
Facets	maxInclusive: 1 minInclusive: 0
Source	<xs:element minOccurs="0" name="BuildingFraction"> <xs:annotation> <xs:documentation>The fraction of the total building that this space occupies. This is useful for tools including Portfolio Manager: http://www.energystar.gov/index.cfm?c=evaluate_performance.bus_portfoliomanager</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:float"> <xs:minInclusive value="0"/> <xs:maxInclusive value="1"/> </xs:restriction> </xs:simpleType>

```
</xs:element>
```

Element SpaceType / SpaceClassification

Namespace	http://www.iepmodel.net
Annotations	This defines the classification type of the building in terms of residential or non-residential / commercial and further details where relevant.
Diagram	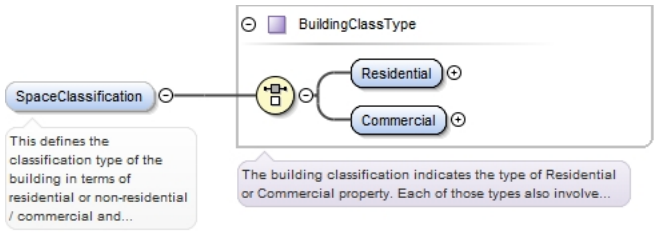
Type	BuildingClassType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	Residential | Commercial
Children	Commercial, Residential
Instance	<SpaceClassification xmlns="http://www.iepmodel.net"> <Residential>{1,1}</Residential> <Commercial>{1,1}</Commercial> </SpaceClassification>
Source	<xs:element name="SpaceClassification" type="BuildingClassType" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This defines the classification type of the building in terms of residential or non-residential / commercial and further details where relevant.</xs:documentation> </xs:annotation> </xs:element>

Element BuildingClassType / Residential

Namespace	http://www.iepmodel.net
Diagram	
Type	ResidentialEnumType
Properties	content: simple
Facets	enumeration: Single-Family enumeration: Multi-Family
Source	<xs:element name="Residential" type="ResidentialEnumType"> </xs:element>

Element BuildingClassType / Commercial

Namespace	http://www.iepmodel.net
Diagram	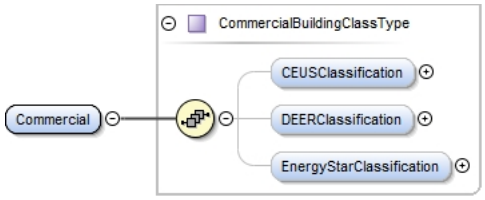
Type	CommercialBuildingClassType
Properties	content: complex
Model	CEUSClassification{0,1} , DEERClassification{0,1} , EnergyStarClassification{0,1}
Children	CEUSClassification, DEERClassification, EnergyStarClassification
Instance	<Commercial xmlns="http://www.iepmodel.net">

```
  <CEUSClassification>{0,1}</CEUSClassification>
  <DEERClassification>{0,1}</DEERClassification>
  <EnergyStarClassification>{0,1}</EnergyStarClassification>
</Commercial>
```

Source

```
<xs:element name="Commercial" type="CommercialBuildingClassType"/>
```

Element CommercialBuildingClassType / CEUSClassification

Namespace	http://www.iepmodel.net
Diagram	
Type	CEUSBuildingEnumType
Properties	content: simple minOccurs: 0
Facets	enumeration: College enumeration: Food Store enumeration: Health enumeration: Large Office (>=30k ft2) enumeration: Lodging enumeration: Miscellaneous enumeration: Refrigerated Warehouse enumeration: Restaurant enumeration: Retail enumeration: School enumeration: Small Office (<30k ft2) enumeration: Unrefrigerated Warehouse

Source

```
<xs:element name="CEUSClassification" minOccurs="0" type="CEUSBuildingEnumType">
</xs:element>
```

Element CommercialBuildingClassType / DEERClassification

Namespace	http://www.iepmodel.net
Diagram	
Type	DEERBuildingEnumType
Properties	content: simple minOccurs: 0
Facets	enumeration: Education - Community College enumeration: Education - Primary School enumeration: Education - Secondary School enumeration: Education - University enumeration: Grocery enumeration: Health/Medical - Hospital enumeration: Health/Medical - Nursing Home enumeration: Lodging - Guest Rooms

	enumeration	Lodging - Hotel
	enumeration	Lodging - Motel
	enumeration	Manufacturing - Light Industrial
	enumeration	Office - Large
	enumeration	Office - Small
	enumeration	Residential - Indoor
	enumeration	Residential - Outdoor
	enumeration	Restaurant - Fast-Food
	enumeration	Restaurant - Sit-Down
	enumeration	Retail - 3-Story Large
	enumeration	Retail - Single-Story Large
	enumeration	Retail - Small
	enumeration	Storage - Conditioned
	enumeration	Storage - Unconditioned
	enumeration	Warehouse - Refrigerated
Source	<xs:element name="DEERClassification" minOccurs="0" type="DEERBuildingEnumType"> </xs:element>	

Element CommercialBuildingClassType / EnergyStarClassification

Namespace	http://www.iepmodel.net	
Annotations		
Diagram		
Type	EnergyStarBuildingEnumType	
Properties	content:	simple
	minOccurs:	0
Facets	enumeration	Office
	enumeration	Bank/Financial Institution
	enumeration	Courthouse
	enumeration	Dormitory / Residence Hall
	enumeration	K-12 School
	enumeration	Hospital (Acute Care and Children's)
	enumeration	House of Worship
	enumeration	Hotel
	enumeration	Retail Store
	enumeration	Supermarket
	enumeration	Senior Care Facility
	enumeration	Residence Halls/ Dormitorie
	enumeration	Warehouse
	enumeration	Medical Office
	enumeration	Wastewater Facility
	enumeration	Data Center
	enumeration	Swimming Pool

	enumeration	Parking
	enumeration	Other
Source	<xs:element minOccurs="0" name="EnergyStarClassification" type="EnergyStarBuildingEnumType"> <xs:annotation> <xs:documentation/> </xs:annotation> </xs:element>	

Element SpaceType / EspSpaceID

Namespace	http://www.iepmodel.net
Annotations	The identifier for the space as defined in the ESP's system ReqStringTypeLen60?
Diagram	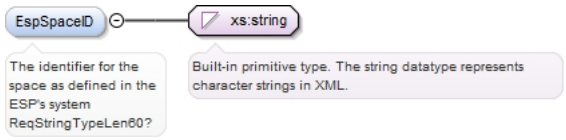
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="EspSpaceID" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>The identifier for the space as defined in the ESP's system ReqStringTypeLen60?</xs:documentation> </xs:annotation> </xs:element>

Element SpaceType / GrossFloorArea

Namespace	http://www.iepmodel.net
Annotations	Total floor area, including conditioned (heated/ cooled/ ventilated) and unconditioned spaces.
Diagram	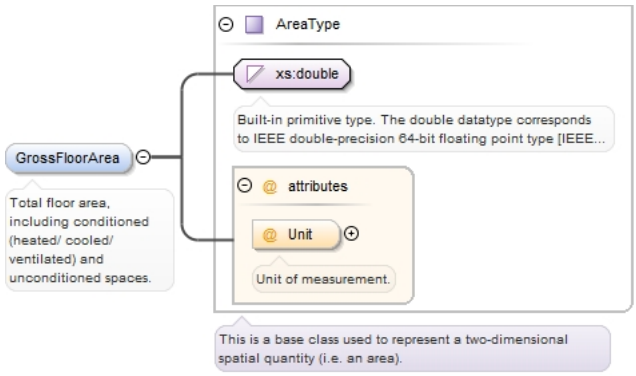
Type	AreaType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Attributes	**QName**: **Unit**; **Type**: AreaUnitEnumType; **Fixed**: ; **Default**: SquareMeters; **Use**: optional Unit of measurement.
Source	<xs:element name="GrossFloorArea" type="AreaType" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Total floor area, including conditioned (heated/ cooled/ ventilated) and unconditioned spaces.</xs:documentation> </xs:annotation> </xs:element>

Element SpaceType / ConditionedArea

Namespace	http://www.iepmodel.net
Annotations	Total floor area that is conditioned (heated/ cooled/ ventilated).
Diagram	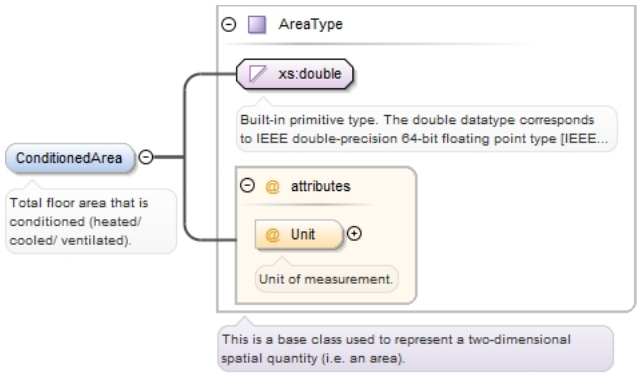
Type	AreaType
Properties	content: complex minOccurs: 0 maxOccurs: 1

Attributes

QName	Type	Fixed	Default	Use
Unit	AreaUnitEnumType		SquareMeters	optional
	Unit of measurement.			

Source

```
<xs:element name="ConditionedArea" type="AreaType" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>Total floor area that is conditioned (heated/ cooled/ ventilated).</
xs:documentation>
  </xs:annotation>
</xs:element>
```

Element SpaceType / NumberFloorsAboveGround

Namespace	http://www.iepmodel.net
Diagram	
Type	restriction of xs:int
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minInclusive 0

Source

```
<xs:element name="NumberFloorsAboveGround" minOccurs="0" maxOccurs="1">
  <xs:simpleType>
    <xs:restriction base="xs:int">
      <xs:minInclusive value="0"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element SpaceType / DateBuilt

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:date
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source	<xs:element name="DateBuilt" type="xs:date" minOccurs="0" maxOccurs="1"/>

Element SpaceType / MaximumNumberPersons

Namespace	http://www.iepmodel.net
Annotations	This is the typical maximum occupancy for the building and does not relate to fire codes. This is not currently validated against the NumberAdults, NumberInfants and NumberTeenagers.
Diagram	
Type	restriction of xs:int
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minInclusive 0
Source	<xs:element name="MaximumNumberPersons" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This is the typical maximum occupancy for the building and does not relate to fire codes. This is not currently validated against the NumberAdults, NumberInfants and NumberTeenagers.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:int"> <xs:minInclusive value="0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element SpaceType / NumberAdults

Namespace	http://www.iepmodel.net
Annotations	This is the typical number of adults occupying the building during normal occupation hours.
Diagram	
Type	restriction of xs:int
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minInclusive 0
Source	<xs:element name="NumberAdults" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This is the typical number of adults occupying the building during normal occupation hours.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:int"> <xs:minInclusive value="0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element SpaceType / NumberTeenagers

Namespace	http://www.iepmodel.net
Annotations	This is the typical number of teenagers occupying the building during normal occupation hours.

Diagram	
Type	restriction of xs:int
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minInclusive 0

Source	`<xs:element name="NumberTeenagers" minOccurs="0" maxOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>This is the typical number of teenagers occupying the building during normal occupation hours.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:int">`
	`  <xs:minInclusive value="0"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

Element SpaceType / NumberInfants

Namespace	http://www.iepmodel.net
Annotations	This is the typical number of infants occupying the building during normal occupation hours.
Diagram	
Type	restriction of xs:int
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minInclusive 0

Source	`<xs:element name="NumberInfants" minOccurs="0" maxOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>This is the typical number of infants occupying the building during normal occupation hours.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:int">`
	`  <xs:minInclusive value="0"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

Element SpaceType / NumberBathrooms

Namespace	http://www.iepmodel.net
Annotations	This defines the number of bathrooms where a whole bathroom includes toilet and shower, half baths only include toilets.
Diagram	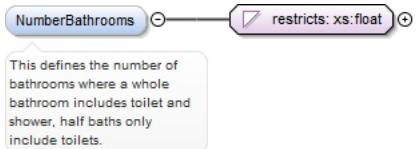
Type	restriction of xs:float
Properties	content: simple

	minOccurs:	0
	maxOccurs:	1
Facets	minInclusive	0

Source

```
<xs:element name="NumberBathrooms" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>This defines the number of bathrooms where a whole bathroom includes
 toilet and shower, half baths only include toilets.</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:float">
      <xs:minInclusive value="0"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element SpaceType / NumberBedrooms

Namespace	http://www.iepmodel.net
Diagram	
Type	restriction of xs:int
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minInclusive 0

Source

```
<xs:element name="NumberBedrooms" minOccurs="0" maxOccurs="1">
  <xs:simpleType>
    <xs:restriction base="xs:int">
      <xs:minInclusive value="0"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element SpaceType / NumberOffices

Namespace	http://www.iepmodel.net
Diagram	
Type	restriction of xs:int
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minInclusive 0

Source

```
<xs:element name="NumberOffices" minOccurs="0" maxOccurs="1">
  <xs:simpleType>
    <xs:restriction base="xs:int">
      <xs:minInclusive value="0"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element SpaceType / NumberKitchens

Namespace	http://www.iepmodel.net
Annotations	Number of kitchens or cooking environments. This is an input for certain space types in Energy Star Portfolio Manager. http://www.energystar.gov/index.cfm?c=eligibility.bus_portfoliomanager_space_types#hotel
Diagram	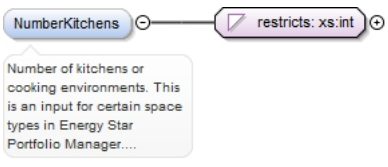

Type	restriction of xs:int
Properties	content: simple minOccurs: 0
Facets	minInclusive 0
Source	<xs:element minOccurs="0" name="NumberKitchens"> <xs:annotation> <xs:documentation>Number of kitchens or cooking environments. This is an input for certain space types in Energy Star Portfolio Manager. http://www.energystar.gov/index.cfm?c=eligibility.bus_portfoliomanager_space_types#hotel</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:int"> <xs:minInclusive value="0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element LayoutPlaneType / Name

Namespace	http://www.iepmodel.net
Annotations	Used to describe what this Layout Plane is. For example, "SE Roof", or "Ground Mount Rack", etc
Diagram	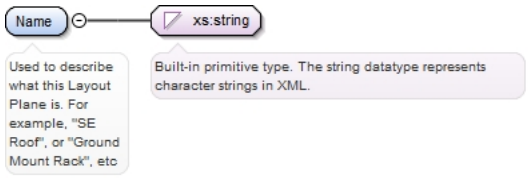
Type	xs:string
Properties	content: simple
Source	<xs:element name="Name" type="xs:string"> <xs:annotation> <xs:documentation>Used to describe what this Layout Plane is. For example, "SE Roof", or "Ground Mount Rack", etc</xs:documentation> </xs:annotation> </xs:element>

Element LayoutPlaneType / AzimuthRotation

Namespace	http://www.iepmodel.net
Annotations	For 'Fixed' tracking mode, this represents the azimuth angle clockwise from true north that the plane faces. For '1-Axis' tracking, this represents the azimuth angle clockwise from true north of the axis of rotation. If this is a child plane, instead of the angle representing azimuth relative to world space north, this represent the angle rotation about the z-axis relative to the parent plane of this child plane.
Diagram	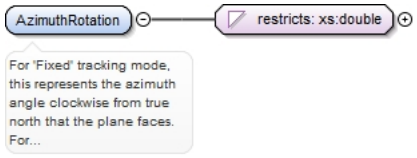
Type	restriction of xs:double
Properties	content: simple minOccurs: 1 maxOccurs: 1 nillable: true
Facets	maxInclusive 360 minInclusive 0
Source	<xs:element name="AzimuthRotation" nillable="true" maxOccurs="1" minOccurs="1"> <xs:annotation> <xs:documentation>For 'Fixed' tracking mode, this represents the azimuth angle clockwise from true north that the plane faces. For '1-Axis' tracking, this represents the azimuth angle clockwise from true north of the axis of rotation. If this is a child

```
plane, instead of the angle representing azimuth relative to world space north, this
represent the angle rotation about the z-axis relative to the parent plane of this child
plane.</xs:documentation>
 </xs:annotation>
 <xs:simpleType>
   <xs:restriction base="xs:double">
     <xs:minInclusive value="0"/>
     <xs:maxInclusive value="360"/>
   </xs:restriction>
 </xs:simpleType>
</xs:element>
```

Element LayoutPlaneType / Tilt

Namespace	http://www.iepmodel.net
Annotations	For 'Fixed' tracking mode, this represents the angle from horizontal of the inclination of the plane (0° = horizontal, 90° = vertical). For '1-Axis' tracking, this represents the angle from horizontal of the inclination of the tracker axis. Units are degrees. If this is a child plane, instead of this angle being relative to the horizontal, it is relative to its parent plane.
Diagram	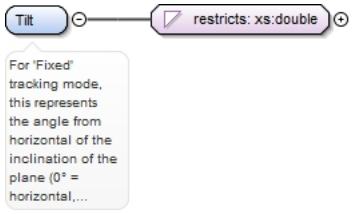
Type	restriction of xs:double
Properties	content: simple minOccurs: 1 maxOccurs: 1 nillable: true
Facets	maxInclusive 90 minInclusive 0
Source	

```
<xs:element name="Tilt" nillable="true" maxOccurs="1" minOccurs="1">
  <xs:annotation>
    <xs:documentation>For 'Fixed' tracking mode, this represents the angle from horizontal
 of the inclination of the plane (0° = horizontal, 90° = vertical). For '1-Axis' tracking,
 this represents the angle from horizontal of the inclination of the tracker axis. Units
 are degrees. If this is a child plane, instead of this angle being relative to the
 horizontal, it is relative to its parent plane.</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:double">
      <xs:minInclusive value="0"/>
      <xs:maxInclusive value="90"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element LayoutPlaneType / TrackingMode

Namespace	http://www.iepmodel.net
Annotations	Plane tracking mode.
Diagram	
Type	TrackingModeEnumType
Properties	content: simple minOccurs: 1 maxOccurs: 1 default: Fixed
Facets	enumeration Fixed

	enumeration	Single-Axis
	enumeration	Dual-Axis
Source	<xs:element name="TrackingMode" default="Fixed" maxOccurs="1" minOccurs="1" type="TrackingModeEnumType"> <xs:annotation> <xs:documentation>Plane tracking mode.</xs:documentation> </xs:annotation> </xs:element>	

Element LayoutPlaneType / TrackingRange1Axis

Namespace	http://www.iepmodel.net
Annotations	For '1-Axis' tracking only, this represents the +/- range that the tracking mechanism rotates around the axis of rotation.
Diagram	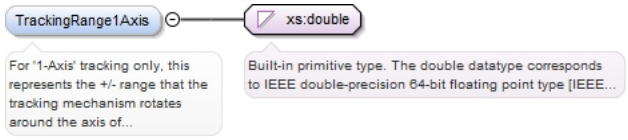
Type	xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1 default: 45 nillable: true
Source	<xs:element name="TrackingRange1Axis" type="xs:double" default="45" nillable="true" maxOccurs="1" minOccurs="0"> <xs:annotation> <xs:documentation>For '1-Axis' tracking only, this represents the +/- range that the tracking mechanism rotates around the axis of rotation.</xs:documentation> </xs:annotation> </xs:element>

Element LayoutPlaneType / Shading

Namespace	http://www.iepmodel.net
Diagram	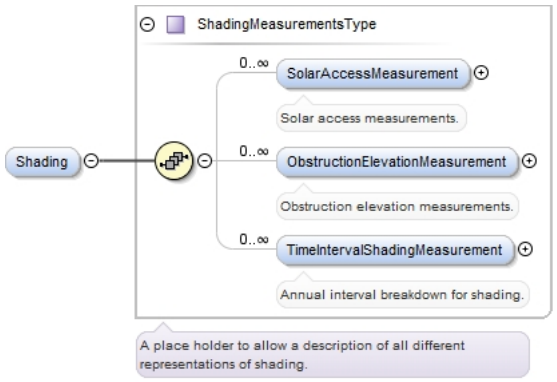
Type	ShadingMeasurementsType
Properties	content: complex minOccurs: 0
Model	SolarAccessMeasurement* , ObstructionElevationMeasurement* , TimeIntervalShadingMeasurement*
Children	ObstructionElevationMeasurement, SolarAccessMeasurement, TimeIntervalShadingMeasurement
Instance	<Shading xmlns="http://www.iepmodel.net"> <SolarAccessMeasurement>{0,unbounded}</SolarAccessMeasurement> <ObstructionElevationMeasurement>{0,unbounded}</ObstructionElevationMeasurement> <TimeIntervalShadingMeasurement>{0,unbounded}</TimeIntervalShadingMeasurement> </Shading>
Source	<xs:element name="Shading" type="ShadingMeasurementsType" minOccurs="0"/>

Element ShadingMeasurementsType / SolarAccessMeasurement

Namespace	http://www.iepmodel.net
Annotations	Solar access measurements.
Diagram	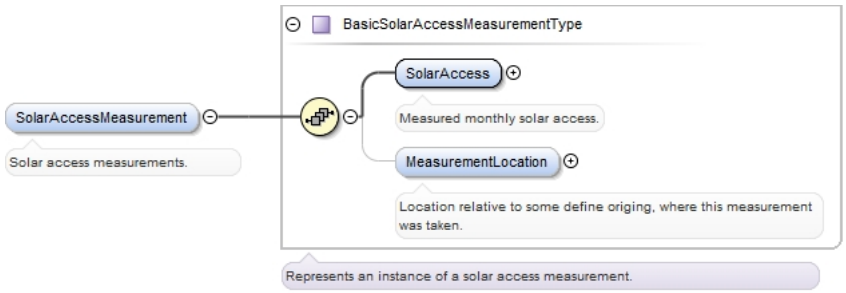
Type	BasicSolarAccessMeasurementType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	SolarAccess , MeasurementLocation{0,1}
Children	MeasurementLocation, SolarAccess
Instance	<SolarAccessMeasurement xmlns="http://www.iepmodel.net"> <SolarAccess>{1,1}</SolarAccess> <MeasurementLocation>{0,1}</MeasurementLocation> </SolarAccessMeasurement>
Source	<xs:element name="SolarAccessMeasurement" type="BasicSolarAccessMeasurementType" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>Solar access measurements.</xs:documentation> </xs:annotation> </xs:element>

Element BasicSolarAccessMeasurementType / SolarAccess

Namespace	http://www.iepmodel.net
Annotations	Measured monthly solar access.
Diagram	
Type	BasicSolarAccessType
Properties	content: complex

	minOccurs: 1 maxOccurs: 1
Model	SolarAccessAnnual{0,1} , SolarAccessJan{0,1} , SolarAccessFeb{0,1} , SolarAccessMar{0,1} , SolarAccessApr{0,1} , SolarAccessMay{0,1} , SolarAccessJun{0,1} , SolarAccessJul{0,1} , SolarAccessAug{0,1} , SolarAccessSep{0,1} , SolarAccessOct{0,1} , SolarAccessNov{0,1} , SolarAccessDec{0,1}
Children	SolarAccessAnnual, SolarAccessApr, SolarAccessAug, SolarAccessDec, SolarAccessFeb, SolarAccessJan, SolarAccessJul, SolarAccessJun, SolarAccessMar, SolarAccessMay, SolarAccessNov, SolarAccessOct, SolarAccessSep
Instance	<SolarAccess xmlns="http://www.iepmodel.net"> <SolarAccessAnnual>{0,1}</SolarAccessAnnual> <SolarAccessJan>{0,1}</SolarAccessJan> <SolarAccessFeb>{0,1}</SolarAccessFeb> <SolarAccessMar>{0,1}</SolarAccessMar> <SolarAccessApr>{0,1}</SolarAccessApr> <SolarAccessMay>{0,1}</SolarAccessMay> <SolarAccessJun>{0,1}</SolarAccessJun> <SolarAccessJul>{0,1}</SolarAccessJul> <SolarAccessAug>{0,1}</SolarAccessAug> <SolarAccessSep>{0,1}</SolarAccessSep> <SolarAccessOct>{0,1}</SolarAccessOct> <SolarAccessNov>{0,1}</SolarAccessNov> <SolarAccessDec>{0,1}</SolarAccessDec> </SolarAccess>
Source	<xs:element name="SolarAccess" type="BasicSolarAccessType" maxOccurs="1" minOccurs="1"> <xs:annotation> <xs:documentation>Measured monthly solar access.</xs:documentation> </xs:annotation> </xs:element>

Element BasicSolarAccessType / SolarAccessAnnual

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:int
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="SolarAccessAnnual" type="xs:int" minOccurs="0" maxOccurs="1"/>

Element BasicSolarAccessType / SolarAccessJan

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:int
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="SolarAccessJan" type="xs:int" minOccurs="0" maxOccurs="1"/>

Element BasicSolarAccessType / SolarAccessFeb

Namespace	http://www.iepmodel.net
Diagram	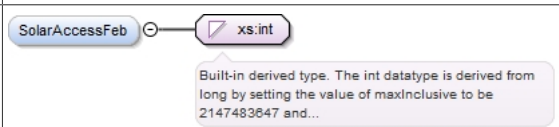

Type	xs:int
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="SolarAccessFeb" type="xs:int" minOccurs="0" maxOccurs="1"/>`

Element BasicSolarAccessType / SolarAccessMar

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:int
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="SolarAccessMar" type="xs:int" minOccurs="0" maxOccurs="1"/>`

Element BasicSolarAccessType / SolarAccessApr

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:int
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="SolarAccessApr" type="xs:int" minOccurs="0" maxOccurs="1"/>`

Element BasicSolarAccessType / SolarAccessMay

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:int
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="SolarAccessMay" type="xs:int" minOccurs="0" maxOccurs="1"/>`

Element BasicSolarAccessType / SolarAccessJun

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:int

Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="SolarAccessJun" type="xs:int" minOccurs="0" maxOccurs="1"/>`

Element BasicSolarAccessType / SolarAccessJul

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:int
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="SolarAccessJul" type="xs:int" minOccurs="0" maxOccurs="1"/>`

Element BasicSolarAccessType / SolarAccessAug

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:int
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="SolarAccessAug" type="xs:int" minOccurs="0" maxOccurs="1"/>`

Element BasicSolarAccessType / SolarAccessSep

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:int
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="SolarAccessSep" type="xs:int" minOccurs="0" maxOccurs="1"/>`

Element BasicSolarAccessType / SolarAccessOct

Namespace	http://www.iepmodel.net
Diagram	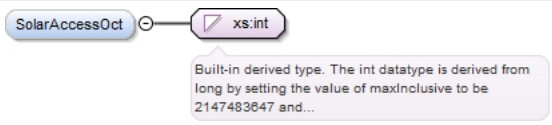
Type	xs:int
Properties	content: simple

	minOccurs:	0
	maxOccurs:	1
Source	<xs:element name="SolarAccessOct" type="xs:int" minOccurs="0" maxOccurs="1"/>	

Element BasicSolarAccessType / SolarAccessNov

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:int
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="SolarAccessNov" type="xs:int" minOccurs="0" maxOccurs="1"/>

Element BasicSolarAccessType / SolarAccessDec

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:int
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="SolarAccessDec" type="xs:int" minOccurs="0" maxOccurs="1"/>

Element BasicSolarAccessMeasurementType / MeasurementLocation

Namespace	http://www.iepmodel.net
Annotations	Location relative to some define origing, where this measurement was taken.
Diagram	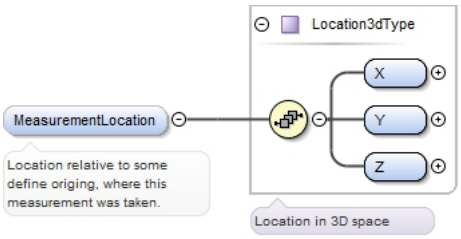
Type	Location3dType
Properties	content: complex minOccurs: 0
Model	X , Y , Z
Children	X, Y, Z
Instance	<MeasurementLocation xmlns="http://www.iepmodel.net"> <X>{1,1}</X> <Y>{1,1}</Y> <Z>{1,1}</Z> </MeasurementLocation>
Source	<xs:element name="MeasurementLocation" type="Location3dType" minOccurs="0"> <xs:annotation> <xs:documentation>Location relative to some define origing, where this measurement was taken.</xs:documentation>

```
  </xs:annotation>
</xs:element>
```

Element Location3dType / X

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:double
Properties	content: simple
Source	`<xs:element name="X" type="xs:double"/>`

Element Location3dType / Y

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:double
Properties	content: simple
Source	`<xs:element name="Y" type="xs:double"/>`

Element Location3dType / Z

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:double
Properties	content: simple
Source	`<xs:element name="Z" type="xs:double"/>`

Element ShadingMeasurementsType / ObstructionElevationMeasurement

Namespace	http://www.iepmodel.net
Annotations	Obstruction elevation measurements.
Diagram	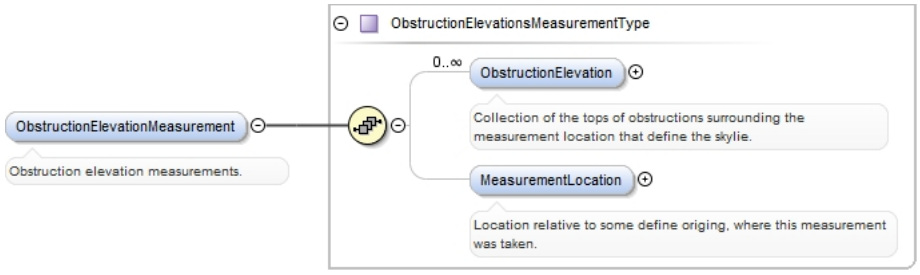
Type	ObstructionElevationsMeasurementType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	ObstructionElevation* , MeasurementLocation{0,1}
Children	MeasurementLocation, ObstructionElevation
Instance	`<ObstructionElevationMeasurement xmlns="http://www.iepmodel.net">`

	<ObstructionElevation>{0,unbounded}</ObstructionElevation> <MeasurementLocation>{0,1}</MeasurementLocation> </ObstructionElevationMeasurement>
Source	<xs:element name="ObstructionElevationMeasurement" type="ObstructionElevationsMeasurementType" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>Obstruction elevation measurements.</xs:documentation> </xs:annotation> </xs:element>

Element ObstructionElevationsMeasurementType / ObstructionElevation

Namespace	http://www.iepmodel.net
Annotations	Collection of the tops of obstructions surrounding the measurement location that define the skylie.
Diagram	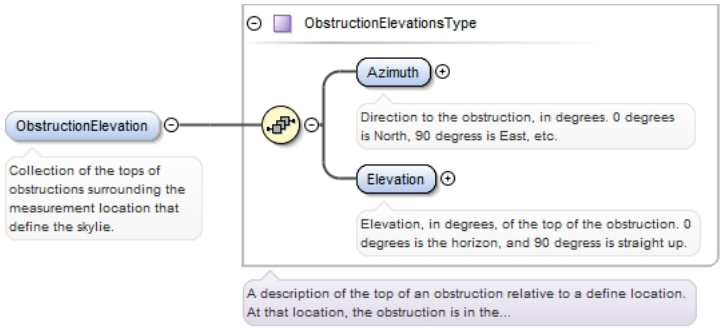
Type	ObstructionElevationsType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Azimuth , Elevation
Children	Azimuth, Elevation
Instance	<ObstructionElevation xmlns="http://www.iepmodel.net"> <Azimuth>{1,1}</Azimuth> <Elevation>{1,1}</Elevation> </ObstructionElevation>
Source	<xs:element name="ObstructionElevation" type="ObstructionElevationsType" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>Collection of the tops of obstructions surrounding the measurement location that define the skylie.</xs:documentation> </xs:annotation> </xs:element>

Element ObstructionElevationsType / Azimuth

Namespace	http://www.iepmodel.net
Annotations	Direction to the obstruction, in degrees. 0 degrees is North, 90 degress is East, etc.
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 1 maxOccurs: 1
Facets	maxInclusive 359 minInclusive 0
Source	<xs:element name="Azimuth" maxOccurs="1" minOccurs="1">

```
  <xs:annotation>
    <xs:documentation>Direction to the obstruction, in degrees. 0 degrees is North, 90
 degress is East, etc.</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:double">
      <xs:minInclusive value="0"/>
      <xs:maxInclusive value="359"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element ObstructionElevationsType / Elevation

Namespace	http://www.iepmodel.net
Annotations	Elevation, in degrees, of the top of the obstruction. 0 degrees is the horizon, and 90 degress is straight up.
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 1 maxOccurs: 1
Facets	maxInclusive 90 minInclusive 0
Source	<xs:element name="Elevation" maxOccurs="1" minOccurs="1"> <xs:annotation> <xs:documentation>Elevation, in degrees, of the top of the obstruction. 0 degrees is the horizon, and 90 degress is straight up.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="0"/> <xs:maxInclusive value="90"/> </xs:restriction> </xs:simpleType> </xs:element>

Element ObstructionElevationsMeasurementType / MeasurementLocation

Namespace	http://www.iepmodel.net
Annotations	Location relative to some define origing, where this measurement was taken.
Diagram	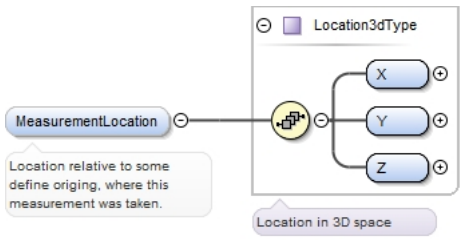
Type	Location3dType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	X , Y , Z
Children	X, Y, Z
Instance	<MeasurementLocation xmlns="http://www.iepmodel.net"> <X>{1,1}</X>

```
  <Y>{1,1}</Y>
  <Z>{1,1}</Z>
</MeasurementLocation>
```

Source

```
<xs:element name="MeasurementLocation" type="Location3dType" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>Location relative to some define origing, where this measurement was
 taken.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element ShadingMeasurementsType / TimeIntervalShadingMeasurement

Namespace	http://www.iepmodel.net
Annotations	Annual interval breakdown for shading.
Diagram	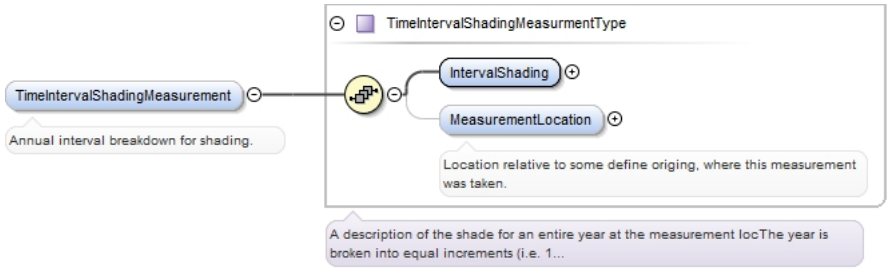
Type	TimeIntervalShadingMeasurmentType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	IntervalShading , MeasurementLocation{0,1}
Children	IntervalShading, MeasurementLocation
Instance	<TimeIntervalShadingMeasurement xmlns="http://www.iepmodel.net"> <IntervalShading>{1,1}</IntervalShading> <MeasurementLocation>{0,1}</MeasurementLocation> </TimeIntervalShadingMeasurement>
Source	<xs:element name="TimeIntervalShadingMeasurement" type="TimeIntervalShadingMeasurmentType" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>Annual interval breakdown for shading.</xs:documentation> </xs:annotation> </xs:element>

Element TimeIntervalShadingMeasurmentType / IntervalShading

Namespace	http://www.iepmodel.net
Diagram	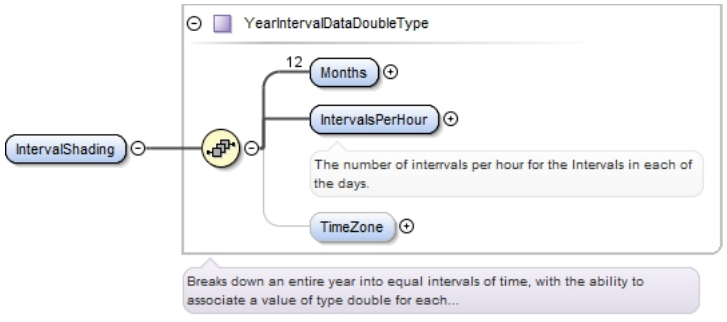
Type	YearIntervalDataDoubleType
Properties	content: complex minOccurs: 1 maxOccurs: 1
Model	Months{12,12} , IntervalsPerHour , TimeZone{0,1}
Children	IntervalsPerHour, Months, TimeZone
Instance	<IntervalShading xmlns="http://www.iepmodel.net">

	<Months>{12,12}</Months> <IntervalsPerHour>{1,1}</IntervalsPerHour> <TimeZone>{0,1}</TimeZone> </IntervalShading>
Source	<xs:element name="IntervalShading" type="YearIntervalDataDoubleType" maxOccurs="1" minOccurs="1"/>

Element YearIntervalDataDoubleType / Months

Namespace	http://www.iepmodel.net
Diagram	
Type	MonthlyIntervalDataType
Properties	content: complex minOccurs: 12 maxOccurs: 12
Model	Days{1,31}
Children	Days
Instance	<Months xmlns="http://www.iepmodel.net"> <Days>{1,31}</Days> </Months>
Source	<xs:element name="Months" type="MonthlyIntervalDataType" minOccurs="12" maxOccurs="12"/>

Element MonthlyIntervalDataType / Days

Namespace	http://www.iepmodel.net
Diagram	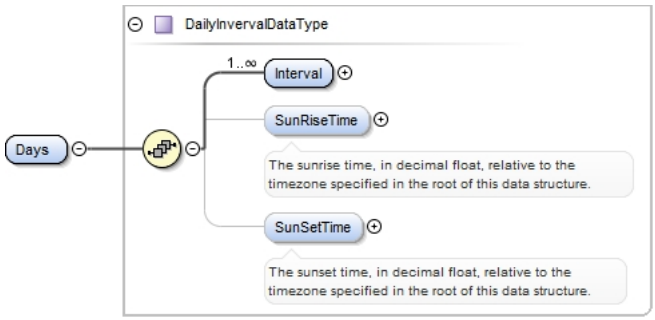
Type	DailyInvervalDataType
Properties	content: complex minOccurs: 1 maxOccurs: 31
Model	Interval+ , SunRiseTime{0,1} , SunSetTime{0,1}
Children	Interval, SunRiseTime, SunSetTime
Instance	<Days xmlns="http://www.iepmodel.net"> <Interval>{1,unbounded}</Interval> <SunRiseTime>{0,1}</SunRiseTime> <SunSetTime>{0,1}</SunSetTime> </Days>
Source	<xs:element name="Days" type="DailyInvervalDataType" maxOccurs="31" minOccurs="1"/>

Element DailyInvervalDataType / Interval

Namespace	http://www.iepmodel.net
Diagram	

Type	IntervalDataDoubleType
Properties	content: complex minOccurs: 1 maxOccurs: unbounded
Model	Data
Children	Data
Instance	<Interval xmlns="http://www.iepmodel.net"> <Data>{1,1}</Data> </Interval>
Source	<xs:element name="Interval" type="IntervalDataDoubleType" maxOccurs="unbounded" minOccurs="1"/>

Element IntervalDataDoubleType / Data

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:double
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="Data" type="xs:double" maxOccurs="1" minOccurs="1"/>

Element DailyInvervalDataType / SunRiseTime

Namespace	http://www.iepmodel.net
Annotations	The sunrise time, in decimal float, relative to the timezone specified in the root of this data structure.
Diagram	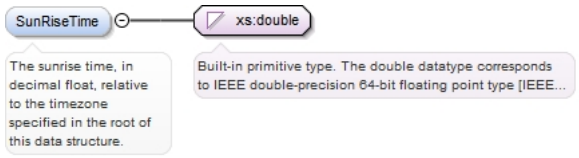
Type	xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="SunRiseTime" type="xs:double" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>The sunrise time, in decimal float, relative to the timezone specified in the root of this data structure.</xs:documentation> </xs:annotation> </xs:element>

Element DailyInvervalDataType / SunSetTime

Namespace	http://www.iepmodel.net
Annotations	The sunset time, in decimal float, relative to the timezone specified in the root of this data structure.
Diagram	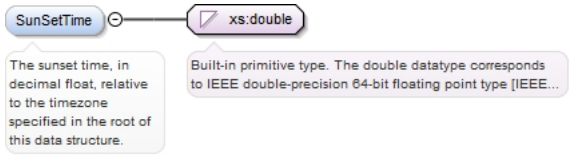

Type	xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="SunSetTime" type="xs:double" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>The sunset time, in decimal float, relative to the timezone specified in the root of this data structure.</xs:documentation> </xs:annotation> </xs:element>

Element YearIntervalDataDoubleType / IntervalsPerHour

Namespace	http://www.iepmodel.net
Annotations	The number of interrvals per hour for the Intervals in each of the days.
Diagram	
Type	xs:int
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="IntervalsPerHour" type="xs:int" maxOccurs="1" minOccurs="1"> <xs:annotation> <xs:documentation>The number of interrvals per hour for the Intervals in each of the days.</xs:documentation> </xs:annotation> </xs:element>

Element YearIntervalDataDoubleType / TimeZone

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="TimeZone" type="xs:double" minOccurs="0" maxOccurs="1"/>

Element TimeIntervalShadingMeasurmentType / MeasurementLocation

Namespace	http://www.iepmodel.net
Annotations	Location relative to some define origing, where this measurement was taken.
Diagram	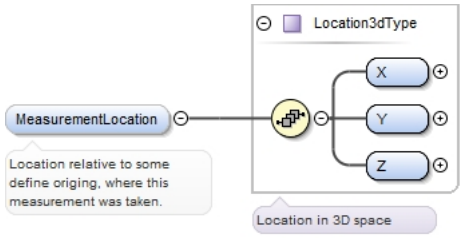
Type	Location3dType
Properties	content: complex

	minOccurs:	0
	maxOccurs:	1
Model	X , Y , Z	
Children	X, Y, Z	
Instance	<MeasurementLocation xmlns="http://www.iepmodel.net"> <X>{1,1}</X> <Y>{1,1}</Y> <Z>{1,1}</Z> </MeasurementLocation>	
Source	<xs:element name="MeasurementLocation" type="Location3dType" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Location relative to some define origing, where this measurement was taken.</xs:documentation> </xs:annotation> </xs:element>	

Element LayoutPlaneType / RoofRafterBeamCrossSection

Namespace	http://www.iepmodel.net	
Diagram		
Type	RafterBeamCrossSectionEnumType	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	enumeration	2x10
	enumeration	2x12
	enumeration	2x4
	enumeration	2x6
	enumeration	2x8
	enumeration	Other
Source	<xs:element maxOccurs="1" minOccurs="0" name="RoofRafterBeamCrossSection" type="RafterBeamCrossSectionEnumType"/>	

Element LayoutPlaneType / RoofRafterBeamSpacing

Namespace	http://www.iepmodel.net	
Diagram		
Type	RafterBeamSpacingEnumType	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	enumeration	12
	enumeration	16
	enumeration	24
	enumeration	Other
Source	<xs:element maxOccurs="1" minOccurs="0" name="RoofRafterBeamSpacing" type="RafterBeamSpacingEnumType"/>	

Element LayoutPlaneType / BeamsExposedToInteriorSpace

Namespace	http://www.iepmodel.net

Annotations	Are the roof structure beams exposed to the occupied spaces below?
Diagram	
Type	xs:boolean
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element maxOccurs="1" minOccurs="0" name="BeamsExposedToInteriorSpace" type="xs:boolean"> <xs:annotation> <xs:documentation>Are the roof structure beams exposed to the occupied spaces below?</xs:documentation> </xs:annotation> </xs:element>

Element LayoutPlaneType / StructuralMaterial

Namespace	http://www.iepmodel.net
Annotations	Structural material used for the layout plane.
Diagram	
Type	StructuralMaterialEnumType
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	enumeration: Wood, Fir#2 Or Better enumeration: Wood enumeration: Steel enumeration: Aluminum
Source	<xs:element maxOccurs="1" minOccurs="0" name="StructuralMaterial" type="StructuralMaterialEnumType"> <xs:annotation> <xs:documentation>Structural material used for the layout plane.</xs:documentation> </xs:annotation> </xs:element>

Element LayoutPlaneType / PlaneCenterLocation

Namespace	http://www.iepmodel.net
Annotations	If this is a top level plane, this represents the position in 3D space where center of plane is located relative to the scene origin. If this a child of another plane, this represents the center of this plane relative to its parent plane.
Diagram	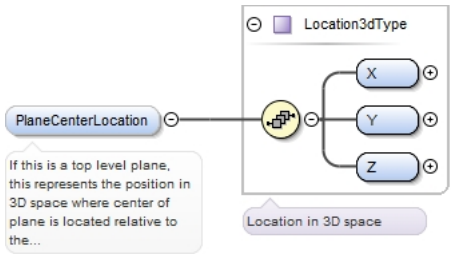
Type	Location3dType
Properties	content: complex minOccurs: 0 maxOccurs: 1

Model	X , Y , Z
Children	X, Y, Z

`Instance`	`<PlaneCenterLocation xmlns="http://www.iepmodel.net">`
	`  <X>{1,1}</X>`
	`  <Y>{1,1}</Y>`
	`  <Z>{1,1}</Z>`
	`</PlaneCenterLocation>`

`Source`	`<xs:element name="PlaneCenterLocation" type="Location3dType" maxOccurs="1" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>If this is a top level plane, this represents the position in 3D space where center of plane is located relative to the scene origin. If this a child of another plane, this represents the center of this plane relative to its parent plane.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element `LayoutPlaneType / ChildModulePlane`

Namespace	http://www.iepmodel.net
Diagram	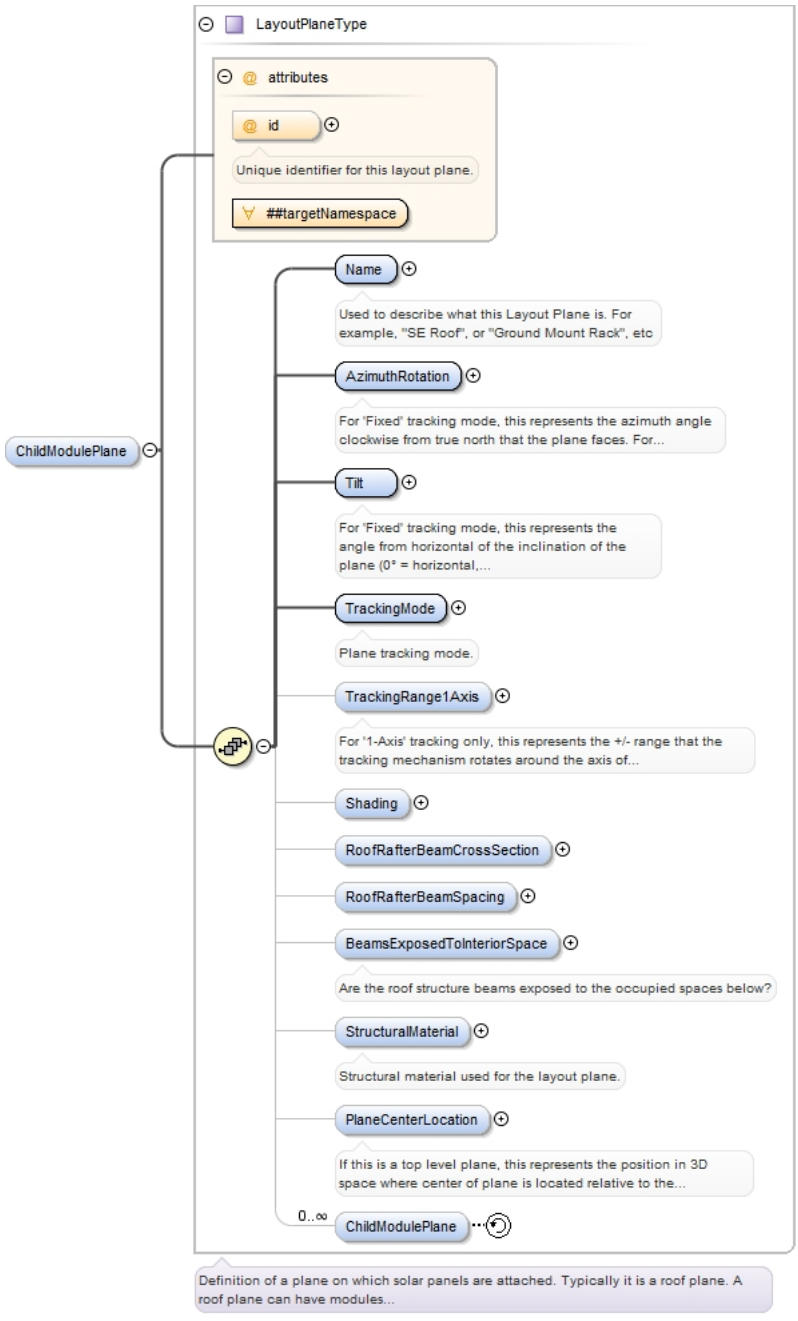

Type	LayoutPlaneType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Name , AzimuthRotation , Tilt , TrackingMode , TrackingRange1Axis{0,1} , Shading{0,1} , RoofRafterBeamCrossSection{0,1} , RoofRafterBeamSpacing{0,1} , BeamsExposedToInteriorSpace{0,1} , StructuralMaterial{0,1} , PlaneCenterLocation{0,1} , ChildModulePlane*
Children	AzimuthRotation, BeamsExposedToInteriorSpace, ChildModulePlane, Name, PlaneCenterLocation, RoofRafterBeamCrossSection, RoofRafterBeamSpacing, Shading, StructuralMaterial, Tilt, TrackingMode, TrackingRange1Axis

Instance

```
<ChildModulePlane id="" xmlns="http://www.iepmodel.net">
  <Name>{1,1}</Name>
  <AzimuthRotation>{1,1}</AzimuthRotation>
  <Tilt>{1,1}</Tilt>
  <TrackingMode>{1,1}</TrackingMode>
  <TrackingRange1Axis>{0,1}</TrackingRange1Axis>
  <Shading>{0,1}</Shading>
  <RoofRafterBeamCrossSection>{0,1}</RoofRafterBeamCrossSection>
  <RoofRafterBeamSpacing>{0,1}</RoofRafterBeamSpacing>
  <BeamsExposedToInteriorSpace>{0,1}</BeamsExposedToInteriorSpace>
  <StructuralMaterial>{0,1}</StructuralMaterial>
  <PlaneCenterLocation>{0,1}</PlaneCenterLocation>
  <ChildModulePlane id="">{0,unbounded}</ChildModulePlane>
</ChildModulePlane>
```

Attributes

QName	Type	Fixed	Default	Use
ANY attribute from TARGET namespace 'http://www.iepmodel.net'				
id	xs:ID			optional
	Unique identifier for this layout plane.			

Source

```
<xs:element maxOccurs="unbounded" minOccurs="0" name="ChildModulePlane"
 type="LayoutPlaneType"/>
```

Element Name

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:Name
Properties	content: simple
Used by	Complex Types DayScheduleType, ScheduleType, WeekScheduleType, YearScheduleType

Source

```
<xs:element name="Name" type="xs:Name"/>
```

Element Description

Namespace	http://www.iepmodel.net
Diagram	
Type	DescriptionType
Properties	content: simple
Used by	Complex Types DayScheduleType, ScheduleType, WeekScheduleType, YearScheduleType

Source

```
<xs:element name="Description" type="DescriptionType"/>
```

Element YearSchedule

Namespace	http://www.iepmodel.net

Diagram	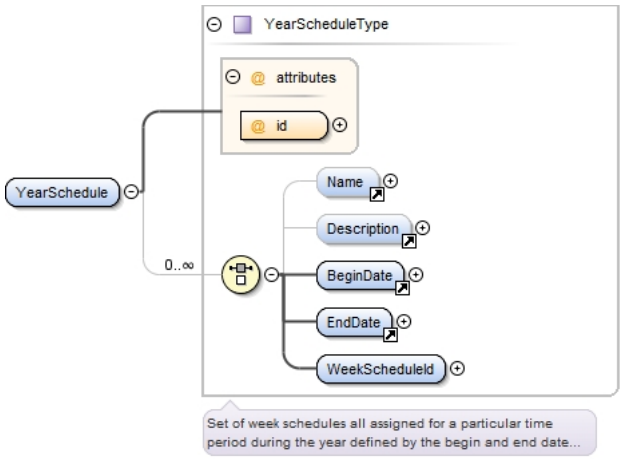
Type	YearScheduleType
Properties	content: complex
Used by	Complex Type ScheduleType
Model	Name{0,1} | Description{0,1} | BeginDate | EndDate | WeekScheduleId
Children	BeginDate, Description, EndDate, Name, WeekScheduleId
Instance	<YearSchedule id="" xmlns="http://www.iepmodel.net"> <Name>{0,1}</Name> <Description>{0,1}</Description> <BeginDate>{1,1}</BeginDate> <EndDate>{1,1}</EndDate> <WeekScheduleId weekScheduleIdRef="">{1,1}</WeekScheduleId> </YearSchedule>

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			required

Source	<xs:element name="YearSchedule" type="YearScheduleType"/>

Element BeginDate

Namespace	http://www.iepmodel.net
Diagram	
Type	BeginDateType
Properties	content: simple
Used by	Complex Type YearScheduleType
Source	<xs:element name="BeginDate" type="BeginDateType"/>

Element EndDate

Namespace	http://www.iepmodel.net
Diagram	
Type	EndDateType
Properties	content: simple
Used by	Complex Type YearScheduleType
Source	<xs:element name="EndDate" type="EndDateType"/>

Element EquipmentLocationType / Description

Namespace	http://www.iepmodel.net
Annotations	Detailed description of the location. Use to provide detail that can assist a user in identifying the precise location on a site, access information, etc. Typically use room names, compass directions, etc to identify the location to users.

	When used for site surveys, should include what types of equipment are envisioned to be placed here. For eaxample, in PV Systems, equipment might include: DC transition box, DC Combiner, DC Disconnect, Inverter.
Diagram	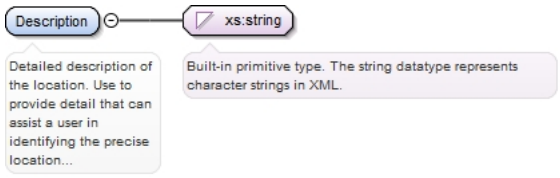
Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="Description" type="xs:string" minOccurs="1" maxOccurs="1"> <xs:annotation> <xs:documentation>Detailed description of the location. Use to provide detail that can assist a user in identifying the precise location on a site, access information, etc. Typically use room names, compass directions, etc to identify the location to users. When used for site surveys, should include what types of equipment are envisioned to be placed here. For eaxample, in PV Systems, equipment might include: DC transition box, DC Combiner, DC Disconnect, Inverter.</xs:documentation> </xs:annotation> </xs:element>

Element EquipmentLocationType / Exposure

Namespace	http://www.iepmodel.net
Annotations	Describes the elemental exposure of a location. Important to describe requirements that a piece of equipment must fulfill. Suggested values include: Indoor-Conditioned, Indoor-Unconditioned, Outdoor-Covered, Outdoor-Uncovered, Rooftop.
Diagram	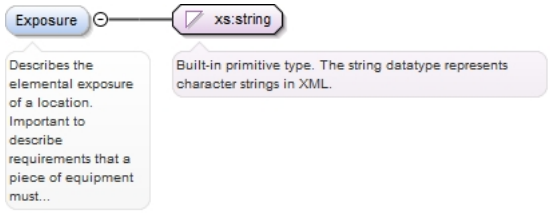
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Exposure" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Describes the elemental exposure of a location. Important to describe requirements that a piece of equipment must fulfill. Suggested values include: Indoor-Conditioned, Indoor-Unconditioned, Outdoor-Covered, Outdoor-Uncovered, Rooftop.</xs:documentation> </xs:annotation> </xs:element>

Element EquipmentLocationType / Mounting

Namespace	http://www.iepmodel.net
Annotations	Describes the type of mounting that equipment would be required to have to occupy the location. For example: Wall Mount, Wall Mount-Surface, Wall Mount-Flush, Pad Mount.
Diagram	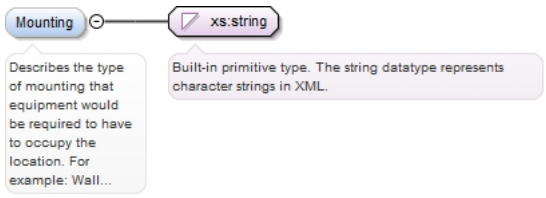
Type	xs:string

Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Mounting" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Describes the type of mounting that equipment would be required to have to occupy the location. For example: Wall Mount, Wall Mount-Surface, Wall Mount-Flush, Pad Mount.</xs:documentation> </xs:annotation> </xs:element>

Element EquipmentLocationType / AvailableWidth

Namespace	http://www.iepmodel.net
Annotations	Width of the location. Dimension is assumed to be meters. Used to determine how much space is available for both equipment and code mandated clearances.
Diagram	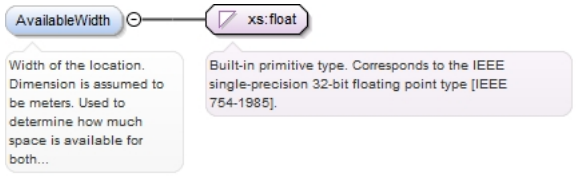
Type	xs:float
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="AvailableWidth" type="xs:float" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Width of the location. Dimension is assumed to be meters. Used to determine how much space is available for both equipment and code mandated clearances.</xs:documentation> </xs:annotation> </xs:element>

Element EquipmentLocationType / AvailableHeight

Namespace	http://www.iepmodel.net
Annotations	Height of the location. Dimension is assumed to be meters. Used to determine how much space is available for both equipment and code mandated clearances.
Diagram	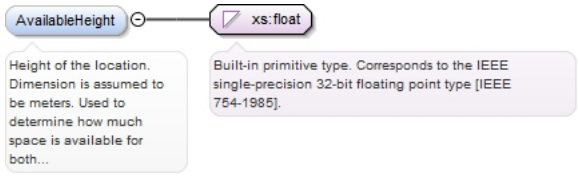
Type	xs:float
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="AvailableHeight" type="xs:float" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Height of the location. Dimension is assumed to be meters. Used to determine how much space is available for both equipment and code mandated clearances.</xs:documentation> </xs:annotation> </xs:element>

Element EquipmentLocationType / AvailableDepth

Namespace	http://www.iepmodel.net
Annotations	Depth of the location. Dimension is assumed to be meters. Used to determine how much space is available for both equipment and code mandated clearances.

Diagram	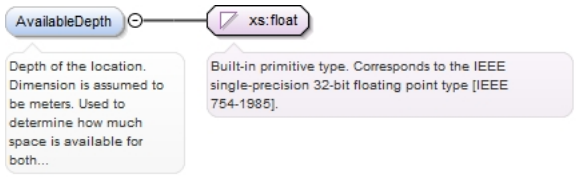
Type	xs:float
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="AvailableDepth" type="xs:float" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Depth of the location. Dimension is assumed to be meters. Used to determine how much space is available for both equipment and code mandated clearances.</xs:documentation> </xs:annotation> </xs:element>

Element EquipmentLocationType / ZoneRef

Namespace	http://www.iepmodel.net
Annotations	The conditioned zone that this EquipmentLocation occupies.
Diagram	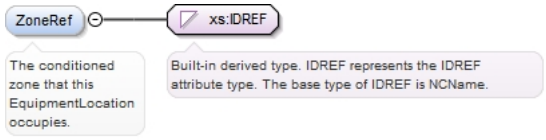
Type	xs:IDREF
Properties	content: simple minOccurs: 0
Source	<xs:element minOccurs="0" name="ZoneRef" type="xs:IDREF"> <xs:annotation> <xs:documentation>The conditioned zone that this EquipmentLocation occupies.</xs:documentation> </xs:annotation> </xs:element>

Element WirewaySegmentType / Name

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0
Source	<xs:element name="Name" type="xs:string" minOccurs="0"/>

Element WirewaySegmentType / LocationDescription

Namespace	http://www.iepmodel.net
Annotations	Description of where the segment is, or through which locations it traverses. Include descriptions such as attic, interior, exterior, roof, or trench.
Diagram	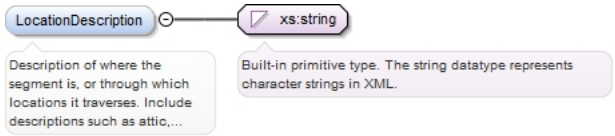
Type	xs:string

Properties	content: simple minOccurs: 0
Source	<xs:element minOccurs="0" name="LocationDescription" type="xs:string"> <xs:annotation> <xs:documentation>Description of where the segment is, or through which locations it traverses. Include descriptions such as attic, interior, exterior, roof, or trench.</xs:documentation> </xs:annotation> </xs:element>

Element WirewaySegmentType / HighTempExposure

Namespace	http://www.iepmodel.net
Annotations	Is the conduit exposed to high temperatures? For example, sitting on a roof in direct sun. If so, any conductors contained within the segment may have to have their rated current carrying capacity derated.
Diagram	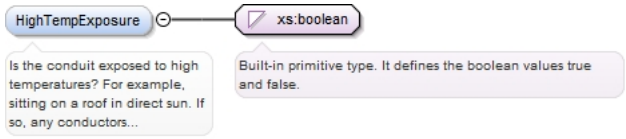
Type	xs:boolean
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="HighTempExposure" type="xs:boolean" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Is the conduit exposed to high temperatures? For example, sitting on a roof in direct sun. If so, any conductors contained within the segment may have to have their rated current carrying capacity derated.</xs:documentation> </xs:annotation> </xs:element>

Element WeatherType / Source

Namespace	http://www.iepmodel.net
Annotations	This defines the type of weather data such as TMY2 or TMY3
Diagram	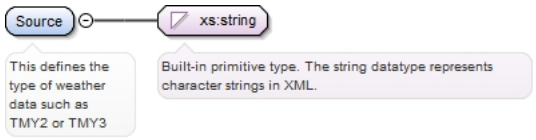
Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="Source" type="xs:string" minOccurs="1" maxOccurs="1"> <xs:annotation> <xs:documentation>This defines the type of weather data such as TMY2 or TMY3</xs:documentation> </xs:annotation> </xs:element>

Element WeatherType / DataLocation

Namespace	http://www.iepmodel.net
Annotations	This is a simple string defining the reference name for the weather data such as the TMY2 region name
Diagram	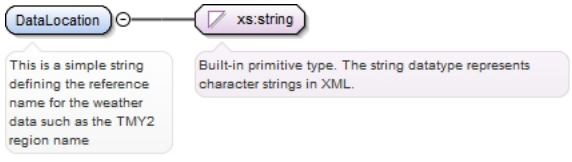

Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="DataLocation" type="xs:string" minOccurs="1" maxOccurs="1"> <xs:annotation> <xs:documentation>This is a simple string defining the reference name for the weather data such as the TMY2 region name</xs:documentation> </xs:annotation> </xs:element>

Element EquipmentDefinitionType / Manufacturer

Namespace	http://www.iepmodel.net
Annotations	Name of the entity who manufactures the equipment.
Diagram	
Type	xs:string
Properties	content: simple
Source	<xs:element name="Manufacturer" type="xs:string"> <xs:annotation> <xs:documentation>Name of the entity who manufactures the equipment.</xs:documentation> </xs:annotation> </xs:element>

Element EquipmentDefinitionType / ModelNumber

Namespace	http://www.iepmodel.net
Annotations	Manufacturer's unique identifier for this model of equipment.
Diagram	
Type	xs:string
Properties	content: simple
Source	<xs:element name="ModelNumber" type="xs:string"> <xs:annotation> <xs:documentation>Manufacturer's unique identifier for this model of equipment.</xs:documentation> </xs:annotation> </xs:element>

Element EquipmentDefinitionType / ProductFamilyName

Namespace	http://www.iepmodel.net
Annotations	A general name for a group of product models. Typically each member of the family differs in size or capacity in some way.
Diagram	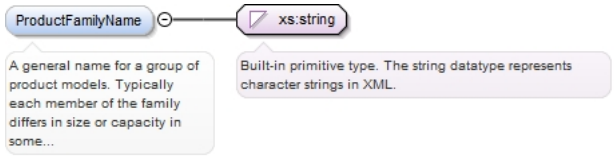
Type	xs:string
Properties	content: simple minOccurs: 0
Source	<xs:element minOccurs="0" name="ProductFamilyName" type="xs:string">

```
  <xs:annotation>
    <xs:documentation>A general name for a group of product models. Typically each member
 of the family differs in size or capacity in some way.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element EquipmentDefinitionType / Description

Namespace	http://www.iepmodel.net
Annotations	Detailed description of the product.
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0

Source	`<xs:element minOccurs="0" name="Description" type="xs:string">`
	`  <xs:annotation>`
	`  <xs:documentation>Detailed description of the product.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element EquipmentDefinitionType / MountingStyle

Namespace	http://www.iepmodel.net
Annotations	Describes how the equipment/box is installed (or designed to be installed). This is important for determining components required for interfacing with it. Suggested values include: Wall Mount, Wall Mount-Surface, Wall Mount-Flush, Pad Mount.
Diagram	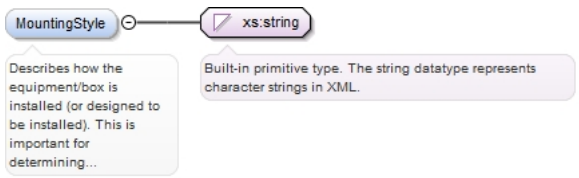
Type	xs:string
Properties	content: simple minOccurs: 0

Source	`<xs:element minOccurs="0" name="MountingStyle" type="xs:string">`
	`  <xs:annotation>`
	`  <xs:documentation>Describes how the equipment/box is installed (or designed to be installed). This is important for determining components required for interfacing with it. Suggested values include: Wall Mount, Wall Mount-Surface, Wall Mount-Flush, Pad Mount.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element EquipmentDefinitionType / Length

Namespace	http://www.iepmodel.net
Annotations	Dimension assumed to be meters. The long dimension of the equipment's primary envelope (for example, the height of a wall mounted inverter, or the long edge of a PV Module frame).
Diagram	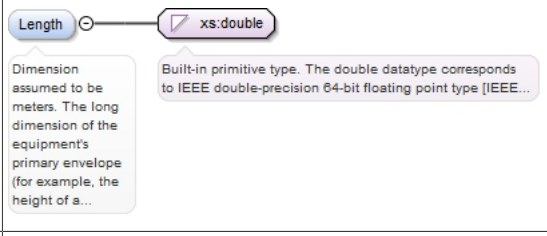
Type	xs:double
Properties	content: simple

	minOccurs: 0
Source	<xs:element minOccurs="0" name="Length" type="xs:double"> <xs:annotation> <xs:documentation>Dimension assumed to be meters. The long dimension of the equipment's primary envelope (for example, the height of a wall mounted inverter, or the long edge of a PV Module frame).</xs:documentation> </xs:annotation> </xs:element>

Element EquipmentDefinitionType / Width

Namespace	http://www.iepmodel.net
Annotations	Dimension assumed to be meters. The width dimension of the equipment's primary envelope (for example, the width of a wall mounted inverter, or the short edge of a PV Module frame).
Diagram	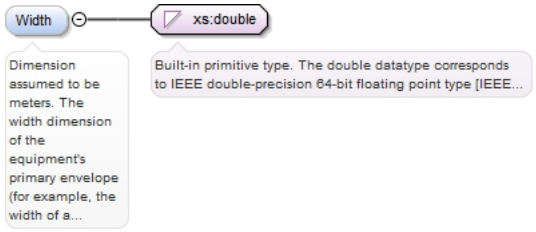
Type	xs:double
Properties	content: simple minOccurs: 0
Source	<xs:element minOccurs="0" name="Width" type="xs:double"> <xs:annotation> <xs:documentation>Dimension assumed to be meters. The width dimension of the equipment's primary envelope (for example, the width of a wall mounted inverter, or the short edge of a PV Module frame).</xs:documentation> </xs:annotation> </xs:element>

Element EquipmentDefinitionType / Depth

Namespace	http://www.iepmodel.net
Annotations	Dimension assumed to be meters. The dimension of the equipment's primary envelope perpendicular to the side of its primary interface (for example the thickness of a PV module's frame, or the thickness of a wall mounted inverter from the wall to the front of the inverter.) Note: PV Module thickness with J-box would be given as part of PvModuleDefintion.
Diagram	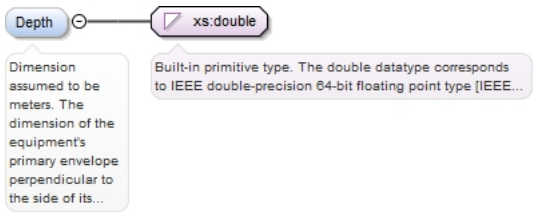
Type	xs:double
Properties	content: simple minOccurs: 0
Source	<xs:element minOccurs="0" name="Depth" type="xs:double"> <xs:annotation> <xs:documentation>Dimension assumed to be meters. The dimension of the equipment's primary envelope perpendicular to the side of its primary interface (for example the thickness of a PV module's frame, or the thickness of a wall mounted inverter from the wall to the front of the inverter.) Note: PV Module thickness with J-box would be given as part of PvModuleDefintion.</xs:documentation> </xs:annotation> </xs:element>

Element EquipmentDefinitionType / Weight

Namespace	http://www.iepmodel.net

Annotations	Weight of equipment in kilograms (kg).
Diagram	
Type	xs:double
Properties	content: simple minOccurs: 0
Source	<xs:element minOccurs="0" name="Weight" type="xs:double"> <xs:annotation> <xs:documentation>Weight of equipment in kilograms (kg).</xs:documentation> </xs:annotation> </xs:element>

Element EquipmentDefinitionType / EnclosureMaterial

Namespace	http://www.iepmodel.net
Annotations	The material making up the enclosure, such as steel, stainless steel, fiberglass, PVC, etc.
Diagram	
Type	restriction of xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxLength 255
Source	<xs:element name="EnclosureMaterial" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>The material making up the enclosure, such as steel, stainless steel, fiberglass, PVC, etc.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="255"/> </xs:restriction> </xs:simpleType> </xs:element>

Element EquipmentDefinitionType / EnclosureNemaRating

Namespace	http://www.iepmodel.net
Annotations	Equipment enclosures typically have a NEMA rating that describes its protection from weather/elements.
Diagram	
Type	NemaRatingEnumType
Properties	content: simple minOccurs: 0
Facets	enumeration 3 enumeration 3R enumeration 4 enumeration 4X
Source	<xs:element minOccurs="0" name="EnclosureNemaRating" type="NemaRatingEnumType">

```
  <xs:annotation>
    <xs:documentation>Equipment enclosures typically have a NEMA rating that describes its
 protection from weather/elements.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element EquipmentDefinitionType / ListingAgency

Namespace	http://www.iepmodel.net
Annotations	Agency under which the equipment was listed per the associated standard. Examples include ETL, UL, CSA, etc
Diagram	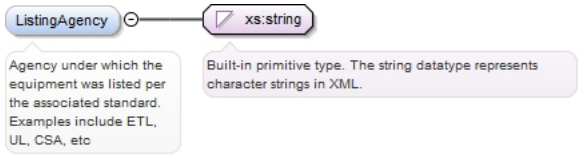
Type	xs:string
Properties	content: simple minOccurs: 0
Source	<xs:element minOccurs="0" name="ListingAgency" type="xs:string"> <xs:annotation> <xs:documentation>Agency under which the equipment was listed per the associated standard. Examples include ETL, UL, CSA, etc</xs:documentation> </xs:annotation> </xs:element>

Element EquipmentDefinitionType / Warranty

Namespace	http://www.iepmodel.net
Annotations	Description of Manufacturer's warranty on the equipment.
Diagram	
Type	restriction of xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxLength 255
Source	<xs:element name="Warranty" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Description of Manufacturer's warranty on the equipment.</ xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="255"/> </xs:restriction> </xs:simpleType> </xs:element>

Element EquipmentDefinitionType / EnergyStarRated

Namespace	http://www.iepmodel.net
Annotations	Does the equipment have an EnergyStar rating?
Diagram	
Type	xs:boolean
Properties	content: simple

	minOccurs: 0
Source	<xs:element minOccurs="0" name="EnergyStarRated" type="xs:boolean"> <xs:annotation> <xs:documentation>Does the equipment have an EnergyStar rating?</xs:documentation> </xs:annotation> </xs:element>

Element EquipmentDefinitionType / WhereManufactured

Namespace	http://www.iepmodel.net
Annotations	In which country was the equipment manufactured? Important to know for some incentive programs, as there may be a requirement for rebates to only be paid on domestically manufactured equipment.
Diagram	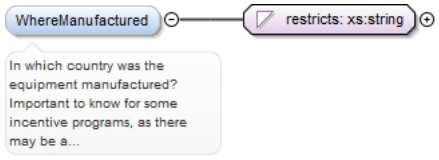
Type	restriction of xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxLength 255
Source	<xs:element name="WhereManufactured" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>In which country was the equipment manufactured? Important to know for some incentive programs, as there may be a requirement for rebates to only be paid on domestically manufactured equipment.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="255"/> </xs:restriction> </xs:simpleType> </xs:element>

Element EquipmentInstanceType / Name

Namespace	http://www.iepmodel.net
Annotations	A user provided name for convenience. For example, an electrical panel might be the "Main service entry panel", or the "AC combiner panel."
Diagram	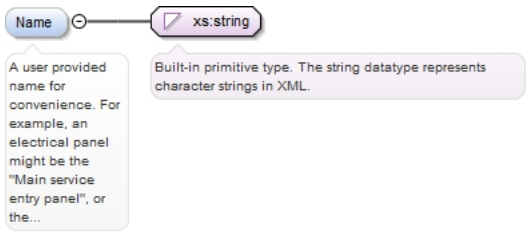
Type	xs:string
Properties	content: simple minOccurs: 0
Source	<xs:element minOccurs="0" name="Name" type="xs:string"> <xs:annotation> <xs:documentation>A user provided name for convenience. For example, an electrical panel might be the "Main service entry panel", or the "AC combiner panel."</ xs:documentation> </xs:annotation> </xs:element>

Element EquipmentInstanceType / SerialNumber

Namespace	http://www.iepmodel.net

Annotations	Serial number of the equipment
Diagram	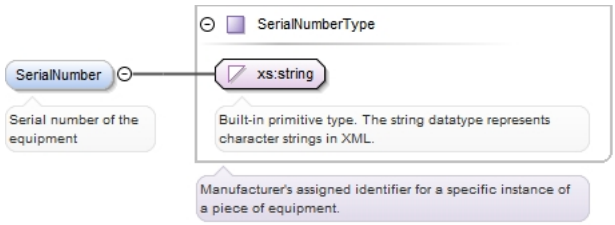
Type	SerialNumberType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Source	<xs:element name="SerialNumber" type="SerialNumberType" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Serial number of the equipment</xs:documentation> </xs:annotation> </xs:element>

Element EquipmentInstanceType / DateManufactured

Namespace	http://www.iepmodel.net
Annotations	The calendar date on which the manufacturer completed manufacture of this specific piece of equipment. May be limited to the year.
Diagram	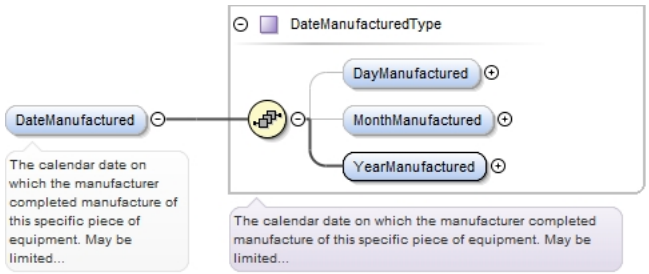
Type	DateManufacturedType
Properties	content: complex minOccurs: 0
Model	DayManufactured{0,1} , MonthManufactured{0,1} , YearManufactured
Children	DayManufactured, MonthManufactured, YearManufactured
Instance	<DateManufactured xmlns="http://www.iepmodel.net"> <DayManufactured>{0,1}</DayManufactured> <MonthManufactured>{0,1}</MonthManufactured> <YearManufactured>{1,1}</YearManufactured> </DateManufactured>
Source	<xs:element minOccurs="0" name="DateManufactured" type="DateManufacturedType"> <xs:annotation> <xs:documentation>The calendar date on which the manufacturer completed manufacture of this specific piece of equipment. May be limited to the year.</xs:documentation> </xs:annotation> </xs:element>

Element DateManufacturedType / DayManufactured

Namespace	http://www.iepmodel.net
Diagram	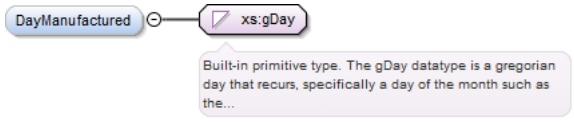
Type	xs:gDay
Properties	content: simple minOccurs: 0

Source	`<xs:element minOccurs="0" name="DayManufactured" type="xs:gDay"/>`

Element DateManufacturedType / MonthManufactured

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:gMonth
Properties	content: simple minOccurs: 0
Source	`<xs:element minOccurs="0" name="MonthManufactured" type="xs:gMonth"/>`

Element DateManufacturedType / YearManufactured

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:gYear
Properties	content: simple
Source	`<xs:element name="YearManufactured" type="xs:gYear"/>`

Element EquipmentInstanceType / Location

Namespace	http://www.iepmodel.net
Annotations	A place where the equipment is located on the site or within the building.
Diagram	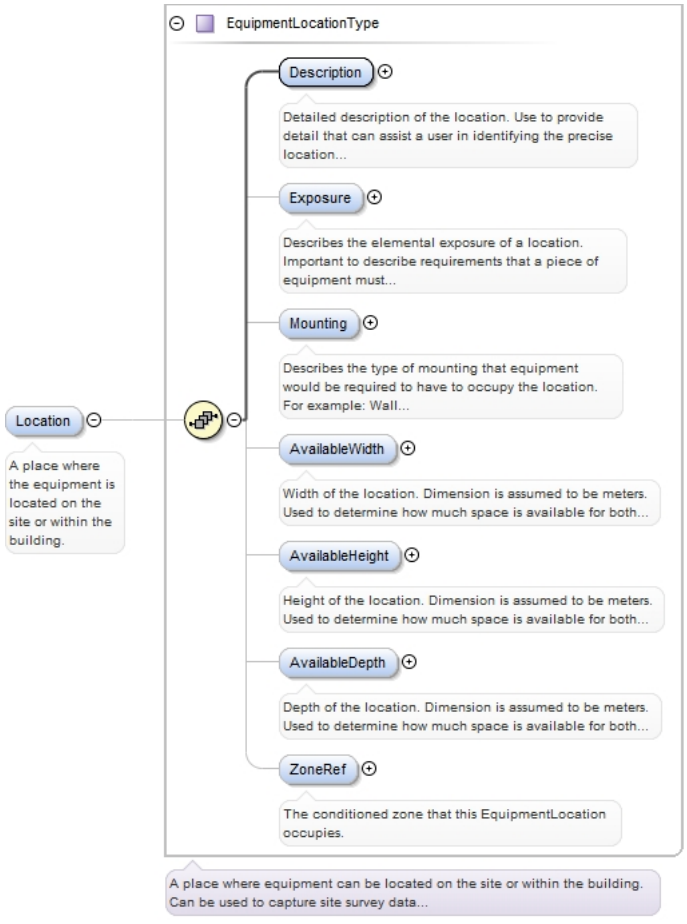

Type	EquipmentLocationType
Properties	content: complex minOccurs: 0
Model	Description , Exposure{0,1} , Mounting{0,1} , AvailableWidth{0,1} , AvailableHeight{0,1} , AvailableDepth{0,1} , ZoneRef{0,1}
Children	AvailableDepth, AvailableHeight, AvailableWidth, Description, Exposure, Mounting, ZoneRef
Instance	<Location xmlns="http://www.iepmodel.net"> <Description>{1,1}</Description> <Exposure>{0,1}</Exposure> <Mounting>{0,1}</Mounting> <AvailableWidth>{0,1}</AvailableWidth> <AvailableHeight>{0,1}</AvailableHeight> <AvailableDepth>{0,1}</AvailableDepth> <ZoneRef>{0,1}</ZoneRef> </Location>
Source	<xs:element minOccurs="0" name="Location" type="EquipmentLocationType"> <xs:annotation> <xs:documentation>A place where the equipment is located on the site or within the building.</xs:documentation> </xs:annotation> </xs:element>

Element EquipmentInstanceType / Condition

Namespace	http://www.iepmodel.net
Annotations	A description of the equipment's condition. Suggested values include: brand new, mal-functioning, non-functional, normal wear, other.
Diagram	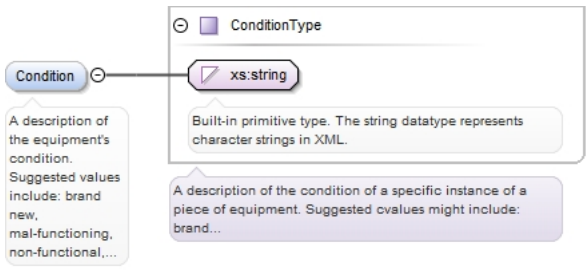
Type	ConditionType
Properties	content: complex minOccurs: 0
Source	<xs:element minOccurs="0" name="Condition" type="ConditionType"> <xs:annotation> <xs:documentation>A description of the equipment's condition. Suggested values include: brand new, mal-functioning, non-functional, normal wear, other.</xs:documentation> </xs:annotation> </xs:element>

Element EquipmentInstanceType / LastServiced

Namespace	http://www.iepmodel.net
Annotations	The date that the equipment was last serviced, if applicable.
Diagram	
Type	LastServicedType
Properties	content: complex minOccurs: 0

Source	<xs:element minOccurs="0" name="LastServiced" type="LastServicedType"> <xs:annotation> <xs:documentation>The date that the equipment was last serviced, if applicable.</ xs:documentation> </xs:annotation> </xs:element>

Element EquipmentInstanceType / UsefulLife

Namespace	http://www.iepmodel.net
Annotations	A description of the expected remaining service life for the equipment.
Diagram	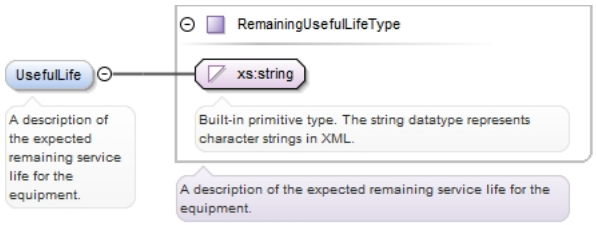
Type	RemainingUsefulLifeType
Properties	content: complex minOccurs: 0
Source	<xs:element minOccurs="0" name="UsefulLife" type="RemainingUsefulLifeType"> <xs:annotation> <xs:documentation>A description of the expected remaining service life for the equipment.</xs:documentation> </xs:annotation> </xs:element>

Element ElectricalDistributionHierarchyType / ElectricalDistributionPanel

Namespace	http://www.iepmodel.net

Diagram

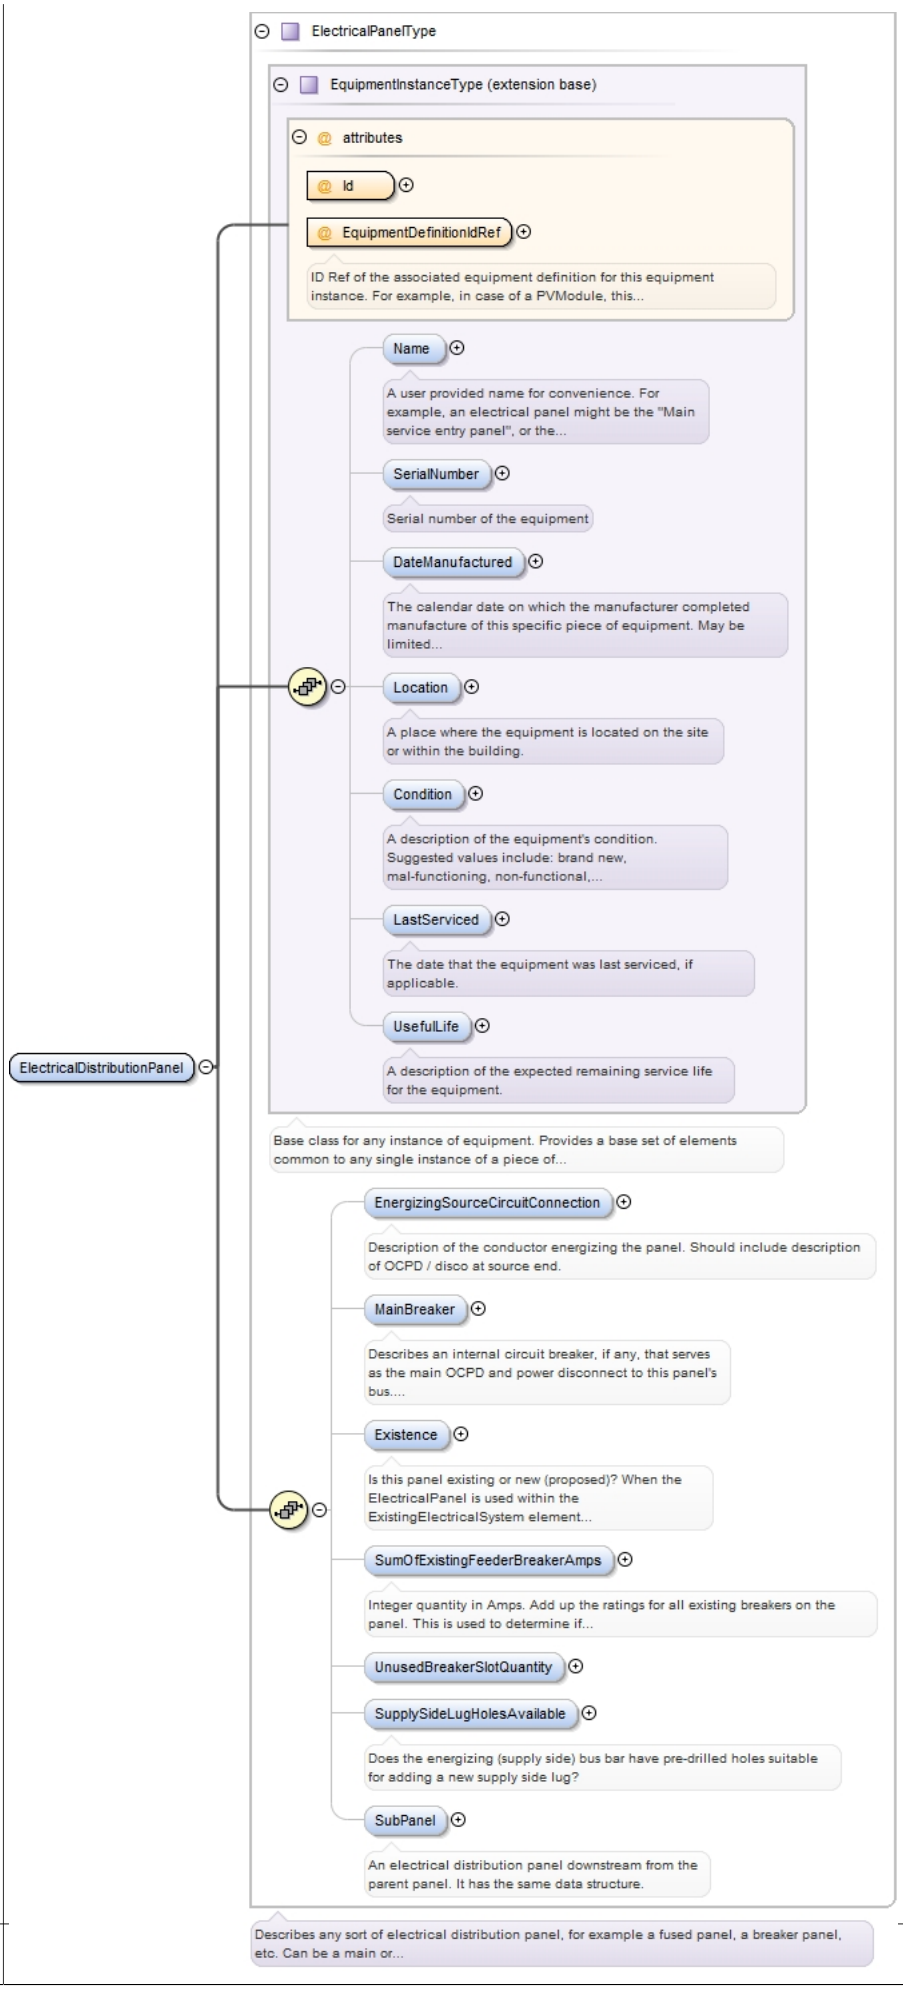
ElectricalPanelType
EquipmentInstanceType (extension base)
attributes
Id
EquipmentDefinitionIdRef
ID Ref of the associated equipment definition for this equipment instance. For example, in case of a PVModule, this...
Name
A user provided name for convenience. For example, an electrical panel might be the "Main service entry panel", or the...
SerialNumber
Serial number of the equipment
DateManufactured
The calendar date on which the manufacturer completed manufacture of this specific piece of equipment. May be limited...
Location
A place where the equipment is located on the site or within the building.
Condition
A description of the equipment's condition. Suggested values include: brand new, mal-functioning, non-functional,...
LastServiced
The date that the equipment was last serviced, if applicable.
UsefulLife
A description of the expected remaining service life for the equipment.
Base class for any instance of equipment. Provides a base set of elements common to any single instance of a piece of...
ElectricalDistributionPanel
EnergizingSourceCircuitConnection
Description of the conductor energizing the panel. Should include description of OCPD / disco at source end.
MainBreaker
Describes an internal circuit breaker, if any, that serves as the main OCPD and power disconnect to this panel's bus....
Existence
Is this panel existing or new (proposed)? When the ElectricalPanel is used within the ExistingElectricalSystem element...
SumOfExistingFeederBreakerAmps
Integer quantity in Amps. Add up the ratings for all existing breakers on the panel. This is used to determine if...
UnusedBreakerSlotQuantity
SupplySideLugHolesAvailable
Does the energizing (supply side) bus bar have pre-drilled holes suitable for adding a new supply side lug?
SubPanel
An electrical distribution panel downstream from the parent panel. It has the same data structure.
Describes any sort of electrical distribution panel, for example a fused panel, a breaker panel, etc. Can be a main or...

Type	ElectricalPanelType
Type hierarchy	• EquipmentInstanceType • ElectricalPanelType
Properties	content: complex
Model	Name{0,1} , SerialNumber{0,1} , DateManufactured{0,1} , Location{0,1} , Condition{0,1} , LastServiced{0,1} , UsefulLife{0,1} , EnergizingSourceCircuitConnection{0,1} , MainBreaker{0,1} , Existence{0,1} , SumOfExistingFeederBreakerAmps{0,1} , UnusedBreakerSlotQuantity{0,1} , SupplySideLugHolesAvailable{0,1} , SubPanel{0,1}
Children	Condition, DateManufactured, EnergizingSourceCircuitConnection, Existence, LastServiced, Location, MainBreaker, Name, SerialNumber, SubPanel, SumOfExistingFeederBreakerAmps, SupplySideLugHolesAvailable, UnusedBreakerSlotQuantity, UsefulLife
Instance	<ElectricalDistributionPanel EquipmentDefinitionIdRef="" Id="" xmlns="http://www.iepmodel.net"> <Name>{0,1}</Name> <SerialNumber>{0,1}</SerialNumber> <DateManufactured>{0,1}</DateManufactured> <Location>{0,1}</Location> <Condition>{0,1}</Condition> <LastServiced>{0,1}</LastServiced> <UsefulLife>{0,1}</UsefulLife> <EnergizingSourceCircuitConnection EquipmentWhereConnectedIdRef="">{0,1}</EnergizingSourceCircuitConnection> <MainBreaker>{0,1}</MainBreaker> <Existence>{0,1}</Existence> <SumOfExistingFeederBreakerAmps>{0,1}</SumOfExistingFeederBreakerAmps> <UnusedBreakerSlotQuantity>{0,1}</UnusedBreakerSlotQuantity> <SupplySideLugHolesAvailable>{0,1}</SupplySideLugHolesAvailable> <SubPanel EquipmentDefinitionIdRef="" Id="">{0,1}</SubPanel> </ElectricalDistributionPanel>
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **EquipmentDefinitionIdRef** / IDREF / / / required ID Ref of the associated equipment definition for this equipment instance. For example, in case of a PVModule, this would be the ID of the PvModuleDefinition element that describes this particular PV module instance. **Id** / xs:ID / / / required
Source	<xs:element name="ElectricalDistributionPanel" type="ElectricalPanelType"/>

Element ElectricalPanelType / EnergizingSourceCircuitConnection

Namespace	http://www.iepmodel.net
Annotations	Description of the conductor energizing the panel. Should include description of OCPD / disco at source end.

Diagram	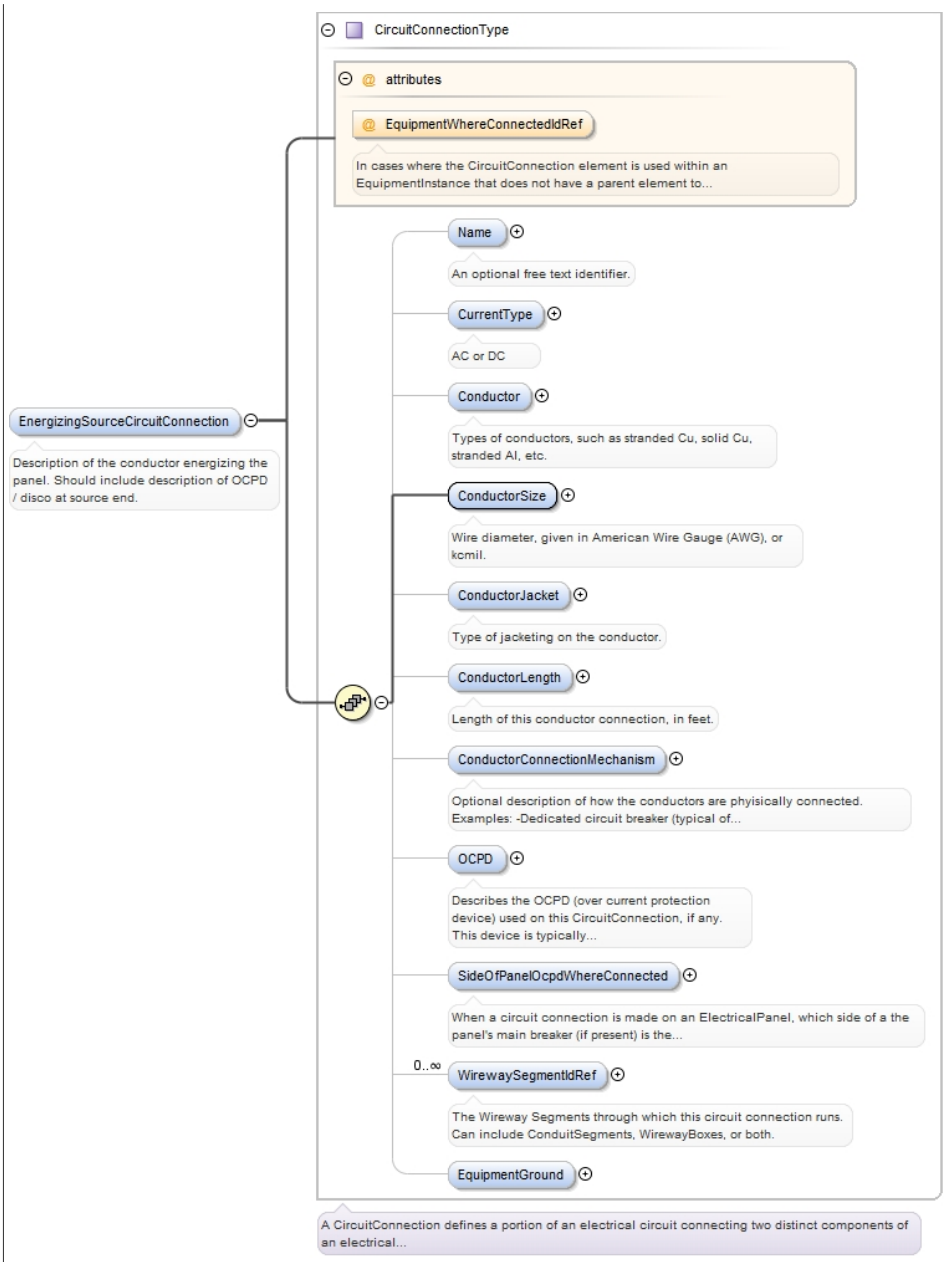
Type	CircuitConnectionType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	Name{0,1} , CurrentType{0,1} , Conductor{0,1} , ConductorSize , ConductorJacket{0,1} , ConductorLength{0,1} , ConductorConnectionMechanism{0,1} , OCPD{0,1} , SideOfPanelOcpdWhereConnected{0,1} , WirewaySegmentIdRef* , EquipmentGround{0,1}
Children	Conductor, ConductorConnectionMechanism, ConductorJacket, ConductorLength, ConductorSize, CurrentType, EquipmentGround, Name, OCPD, SideOfPanelOcpdWhereConnected, WirewaySegmentIdRef
Instance	<EnergizingSourceCircuitConnection EquipmentWhereConnectedIdRef="" xmlns="http://www.iepmodel.net"> <Name>{0,1}</Name> <CurrentType>{0,1}</CurrentType> <Conductor>{0,1}</Conductor> <ConductorSize>{1,1}</ConductorSize> <ConductorJacket>{0,1}</ConductorJacket> <ConductorLength>{0,1}</ConductorLength> <ConductorConnectionMechanism>{0,1}</ConductorConnectionMechanism> <OCPD>{0,1}</OCPD> <SideOfPanelOcpdWhereConnected>{0,1}</SideOfPanelOcpdWhereConnected> <WirewaySegmentIdRef>{0,unbounded}</WirewaySegmentIdRef>

```
  <EquipmentGround>{0,1}</EquipmentGround>
</EnergizingSourceCircuitConnection>
```

Attributes

QName	Type	Fixed	Default	Use
EquipmentWhereConnectedIdRef				optional

In cases where the CircuitConnection element is used within an EquipmentInstance that does not have a parent element to which the CircuitConnection is assumed to connect, a reference ID can be used to associate this CircuitConnection to another EquipmentInstance elsewhere in a document instance. For example, a PvSystem may have an AcPointOfConnection that uses a new ElectricalPanel as an AC combiner for more than one Inverter. The new electrical panel can be described by an ElectricalPanel element in the PvDesign (which in turn refers to an ElectricalPanelDefinition element).

in the AcPointOfConnection's EquipmentWhereConnected element. That ElectricPanel's EnergizingCircuitConnection element may reference another ElectricPanel in an instance of the Project's ExistingElectricalHierarchy element.

Source

```
<xs:element minOccurs="0" name="EnergizingSourceCircuitConnection"
 type="CircuitConnectionType" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>Description of the conductor energizing the panel. Should include
 description of OCPD / disco at source end.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element CircuitConnectionType / Name

Namespace	http://www.iepmodel.net
Annotations	An optional free text identifier.
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0
Source	


```
<xs:element minOccurs="0" name="Name" type="xs:string">
  <xs:annotation>
    <xs:documentation>An optional free text identifier.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element CircuitConnectionType / CurrentType

Namespace	http://www.iepmodel.net
Annotations	AC or DC
Diagram	
Type	CurrentEnumType
Properties	content: simple minOccurs: 0
Facets	enumeration: AC enumeration: DC
Source	


```
<xs:element name="CurrentType" minOccurs="0" type="CurrentEnumType">
  <xs:annotation>
    <xs:documentation>AC or DC</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element CircuitConnectionType / Conductor

Namespace	http://www.iepmodel.net

Annotations	Types of conductors, such as stranded Cu, solid Cu, stranded Al, etc.
Diagram	
Type	ConductorEnumType
Properties	content: simple minOccurs: 0
Facets	enumeration: Stranded Cu enumeration: Solid Cu enumeration: Stranded Al
Source	<xs:element minOccurs="0" name="Conductor" type="ConductorEnumType"> <xs:annotation> <xs:documentation>Types of conductors, such as stranded Cu, solid Cu, stranded Al, etc.</xs:documentation> </xs:annotation> </xs:element>

Element CircuitConnectionType / ConductorSize

Namespace	http://www.iepmodel.net
Annotations	Wire diameter, given in American Wire Gauge (AWG), or kcmil.
Diagram	
Type	ConductorSizeEnumType
Properties	content: simple
Facets	enumeration: 12 enumeration: 10 enumeration: 8 enumeration: 6 enumeration: 4 enumeration: 3 enumeration: 2 enumeration: 1/0 enumeration: 2/0 enumeration: 3/0 enumeration: 4/0 enumeration: 250 enumeration: 350 enumeration: 400 enumeration: 500
Source	<xs:element name="ConductorSize" type="ConductorSizeEnumType"> <xs:annotation> <xs:documentation>Wire diameter, given in American Wire Gauge (AWG), or kcmil.</xs:documentation> </xs:annotation> </xs:element>

Element CircuitConnectionType / ConductorJacket

Namespace	http://www.iepmodel.net
Annotations	Type of jacketing on the conductor.

Diagram	
Type	ConductorJacketEnumType
Properties	content: simple minOccurs: 0
Facets	enumeration bare enumeration USE enumeration USE-2 enumeration THWN enumeration THWN-2 enumeration THHN enumeration THHW

Source	`<xs:element minOccurs="0" name="ConductorJacket" type="ConductorJacketEnumType">`
	`  <xs:annotation>`
	`  <xs:documentation>Type of jacketing on the conductor.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element CircuitConnectionType / ConductorLength

Namespace	http://www.iepmodel.net
Annotations	Length of this conductor connection, in feet.
Diagram	
Type	xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source	`<xs:element name="ConductorLength" type="xs:double" minOccurs="0" maxOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>Length of this conductor connection, in feet.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element CircuitConnectionType / ConductorConnectionMechanism

Namespace	http://www.iepmodel.net
Annotations	Optional description of how the conductors are phyisically connected. Examples: -Dedicated circuit breaker (typical of load side, but breaker-can also be on service side if hot-bussed panel has breaker slot on the service side) -lugs (supply side typical) -wire taps (supply side typical)
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0
Source	`<xs:element minOccurs="0" name="ConductorConnectionMechanism" type="xs:string">` `  <xs:annotation>` ` <xs:documentation>Optional description of how the conductors are phyisically connected. Examples: -Dedicated circuit breaker (typical of load side, but breaker-can also be on service side if hot-bussed panel has breaker slot on the service side) -lugs (supply side typical) -wire taps (supply side typical)</xs:documentation>` ` </xs:annotation>`

```
</xs:element>
```

Element CircuitConnectionType / OCPD

Namespace	http://www.iepmodel.net
Annotations	Describes the OCPD (over current protection device) used on this CircuitConnection, if any. This device is typically housed within the electrical equipment that is the parent element of the element which contains this CircuitConnection. For example, if this CircuitConnection is part of a PvString element that is a child of a CombinerBox, the OCPD will be housed within the CombinerBox.
Diagram	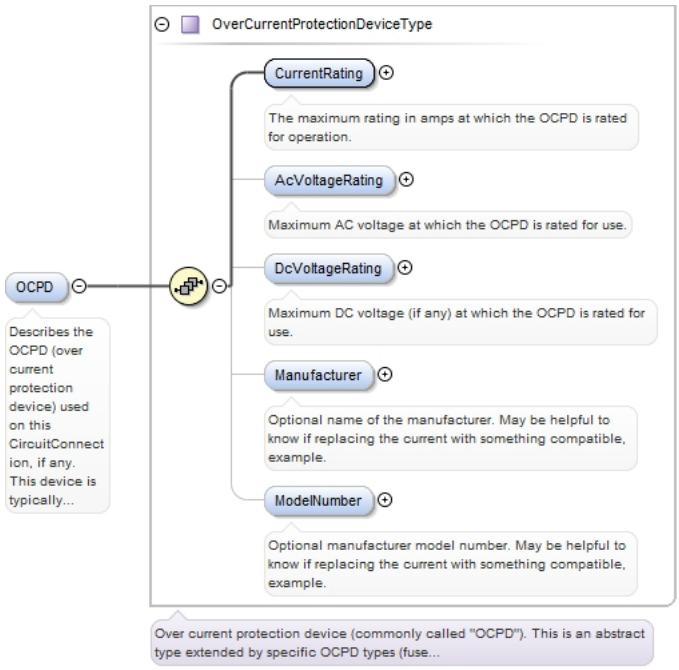
Type	OverCurrentProtectionDeviceType
Properties	content: complex minOccurs: 0
Model	CurrentRating , AcVoltageRating{0,1} , DcVoltageRating{0,1} , Manufacturer{0,1} , ModelNumber{0,1}
Children	AcVoltageRating, CurrentRating, DcVoltageRating, Manufacturer, ModelNumber
Instance	<OCPD xmlns="http://www.iepmodel.net"> <CurrentRating>{1,1}</CurrentRating> <AcVoltageRating>{0,1}</AcVoltageRating> <DcVoltageRating>{0,1}</DcVoltageRating> <Manufacturer>{0,1}</Manufacturer> <ModelNumber>{0,1}</ModelNumber> </OCPD>
Source	<xs:element name="OCPD" minOccurs="0" type="OverCurrentProtectionDeviceType"> <xs:annotation> <xs:documentation>Describes the OCPD (over current protection device) used on this CircuitConnection, if any. This device is typically housed within the electrical equipment that is the parent element of the element which contains this CircuitConnection. For example, if this CircuitConnection is part of a PvString element that is a child of a CombinerBox, the OCPD will be housed within the CombinerBox.</xs:documentation> </xs:annotation> </xs:element>

Element OverCurrentProtectionDeviceType / CurrentRating

Namespace	http://www.iepmodel.net
Annotations	The maximum rating in amps at which the OCPD is rated for operation.
Diagram	

Type	xs:integer
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="CurrentRating" type="xs:integer" minOccurs="1" maxOccurs="1"> <xs:annotation> <xs:documentation>The maximum rating in amps at which the OCPD is rated for operation.</xs:documentation> </xs:annotation> </xs:element>

Element OverCurrentProtectionDeviceType / AcVoltageRating

Namespace	http://www.iepmodel.net
Annotations	Maximum AC voltage at which the OCPD is rated for use.
Diagram	
Type	xs:integer
Properties	content: simple minOccurs: 0
Source	<xs:element name="AcVoltageRating" type="xs:integer" minOccurs="0"> <xs:annotation> <xs:documentation>Maximum AC voltage at which the OCPD is rated for use.</xs:documentation> </xs:annotation> </xs:element>

Element OverCurrentProtectionDeviceType / DcVoltageRating

Namespace	http://www.iepmodel.net
Annotations	Maximum DC voltage (if any) at which the OCPD is rated for use.
Diagram	
Type	xs:integer
Properties	content: simple minOccurs: 0
Source	<xs:element minOccurs="0" name="DcVoltageRating" type="xs:integer"> <xs:annotation> <xs:documentation>Maximum DC voltage (if any) at which the OCPD is rated for use.</xs:documentation> </xs:annotation> </xs:element>

Element OverCurrentProtectionDeviceType / Manufacturer

Namespace	http://www.iepmodel.net
Annotations	Optional name of the manufacturer. May be helpful to know if replacing the current with something compatible, example.
Diagram	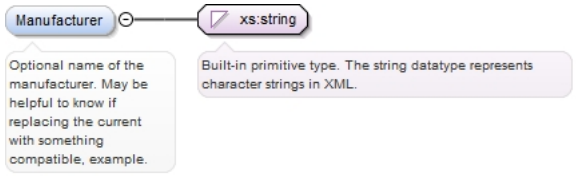
Type	xs:string
Properties	content: simple

	minOccurs: 0
Source	<xs:element minOccurs="0" name="Manufacturer" type="xs:string"> <xs:annotation> <xs:documentation>Optional name of the manufacturer. May be helpful to know if replacing the current with something compatible, example.</xs:documentation> </xs:annotation> </xs:element>

Element OverCurrentProtectionDeviceType / ModelNumber

Namespace	http://www.iepmodel.net
Annotations	Optional manufacturer model number. May be helpful to know if replacing the current with something compatible, example.
Diagram	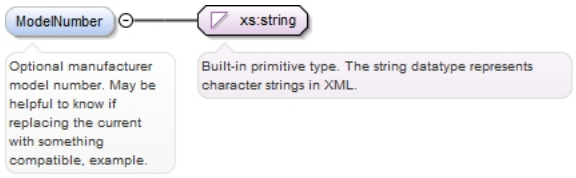
Type	xs:string
Properties	content: simple minOccurs: 0
Source	<xs:element minOccurs="0" name="ModelNumber" type="xs:string"> <xs:annotation> <xs:documentation>Optional manufacturer model number. May be helpful to know if replacing the current with something compatible, example.</xs:documentation> </xs:annotation> </xs:element>

Element CircuitConnectionType / SideOfPanelOcpdWhereConnected

Namespace	http://www.iepmodel.net
Annotations	When a circuit connection is made on an ElectricalPanel, which side of a the panel's main breaker (if present) is the interconnection made (supply or load side)? This is a very important consideration, as the NEC dictates the maximum allowable interconnected current, and it is very different for each side of the OCPD. For example, when tied to the load side of a panel's bus, the total of all circuits amperage can sum to 120% of the bus's current rating when using a backfed breaker. If tied to the supply side, the allowable PV circuit amperage can go up to the maximum rated amperage of the bus (as the main breaker protects the load side). Note that this also differs between residential and commercial systems. Most residential systems are interconnected on the load side. Conversely, most commercial systems are interconnected on the supply side because NEC 690 currently has no 120% rule on commercial load side tie-in (significantly limiting possible size), and also commercial system equipment is more likely to have connections available on the supply side (e.g. lugs).
Diagram	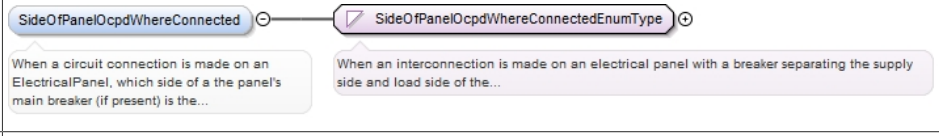
Type	SideOfPanelOcpdWhereConnectedEnumType
Properties	content: simple minOccurs: 0 default: load-side
Facets	enumeration supply-side enumeration load-side
Source	<xs:element default="load-side" minOccurs="0" name="SideOfPanelOcpdWhereConnected" type="SideOfPanelOcpdWhereConnectedEnumType"> <xs:annotation> <xs:documentation>When a circuit connection is made on an ElectricalPanel, which side of a the panel's main breaker (if present) is the interconnection made (supply or load side)? This is a very important consideration, as the NEC dictates the maximum allowable interconnected current, and it is very different for each side of the OCPD. For example, when tied to the load side of a panel's bus, the total of all circuits amperage can sum to 120% of the bus's current rating when using a backfed breaker. If tied to the supply side, the allowable PV circuit amperage can go up to the maximum rated amperage of the

```
bus (as the main breaker protects the load side). Note that this also differs between
residential and commercial systems. Most residential systems are interconnected on the
load side. Conversely, most commercial systems are interconnected on the supply side
because NEC 690 currently has no 120% rule on commercial load side tie-in (significantly
limiting possible size), and also commercial system equipment is more likely to have
connections available on the supply side (e.g. lugs).</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element CircuitConnectionType / WirewaySegmentIdRef

Namespace	http://www.iepmodel.net
Annotations	The Wireway Segments through which this circuit connection runs. Can include ConduitSegments, WirewayBoxes, or both.
Diagram	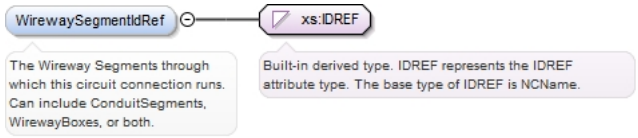
Type	xs:IDREF
Properties	content: simple minOccurs: 0 maxOccurs: unbounded
Source	<xs:element name="WirewaySegmentIdRef" type="xs:IDREF" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>The Wireway Segments through which this circuit connection runs. Can include ConduitSegments, WirewayBoxes, or both.</xs:documentation> </xs:annotation> </xs:element>

Element CircuitConnectionType / EquipmentGround

Namespace	http://www.iepmodel.net
Diagram	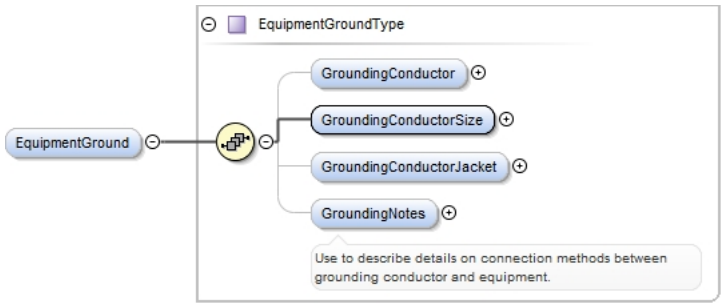
Type	EquipmentGroundType
Properties	content: complex minOccurs: 0
Model	GroundingConductor{0,1} , GroundingConductorSize , GroundingConductorJacket{0,1} , GroundingNotes{0,1}
Children	GroundingConductor, GroundingConductorJacket, GroundingConductorSize, GroundingNotes
Instance	<EquipmentGround xmlns="http://www.iepmodel.net"> <GroundingConductor>{0,1}</GroundingConductor> <GroundingConductorSize>{1,1}</GroundingConductorSize> <GroundingConductorJacket>{0,1}</GroundingConductorJacket> <GroundingNotes>{0,1}</GroundingNotes> </EquipmentGround>
Source	<xs:element minOccurs="0" name="EquipmentGround" type="EquipmentGroundType"/>

Element EquipmentGroundType / GroundingConductor

Namespace	http://www.iepmodel.net
Diagram	

Type	ConductorEnumType	
Properties	content:	simple
	minOccurs:	0
Facets	enumeration	Stranded Cu
	enumeration	Solid Cu
	enumeration	Stranded Al
Source	<xs:element minOccurs="0" name="GroundingConductor" type="ConductorEnumType"/>	

Element EquipmentGroundType / GroundingConductorSize

Namespace	http://www.iepmodel.net	
Diagram		
Type	ConductorSizeEnumType	
Properties	content:	simple
Facets	enumeration	12
	enumeration	10
	enumeration	8
	enumeration	6
	enumeration	4
	enumeration	3
	enumeration	2
	enumeration	1/0
	enumeration	2/0
	enumeration	3/0
	enumeration	4/0
	enumeration	250
	enumeration	350
	enumeration	400
	enumeration	500
Source	<xs:element name="GroundingConductorSize" type="ConductorSizeEnumType"/>	

Element EquipmentGroundType / GroundingConductorJacket

Namespace	http://www.iepmodel.net	
Diagram		
Type	ConductorJacketEnumType	
Properties	content:	simple
	minOccurs:	0
Facets	enumeration	bare
	enumeration	USE
	enumeration	USE-2
	enumeration	THWN
	enumeration	THWN-2
	enumeration	THHN
	enumeration	THHW
Source	<xs:element minOccurs="0" name="GroundingConductorJacket" type="ConductorJacketEnumType"/>	

Element `EquipmentGroundType / GroundingNotes`

Namespace	http://www.iepmodel.net
Annotations	Use to describe details on connection methods between grounding conductor and equipment.
Diagram	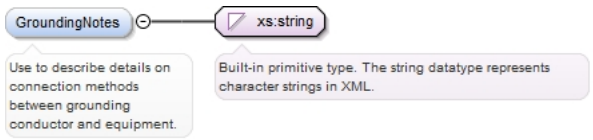
Type	xs:string
Properties	content: simple minOccurs: 0

Source	`<xs:element minOccurs="0" name="GroundingNotes" type="xs:string">`
	`  <xs:annotation>`
	`  <xs:documentation>Use to describe details on connection methods between grounding conductor and equipment.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element `ElectricalPanelType / MainBreaker`

Namespace	http://www.iepmodel.net
Annotations	Describes an internal circuit breaker, if any, that serves as the main OCPD and power disconnect to this panel's bus. Note that the ElectricPanel may or may not have an internal main breaker. Panels with or without a main internal breaker may also have an OCPD on the ElectricPanel's CircuitConnection element which serves as the energizing source for this panel.
Diagram	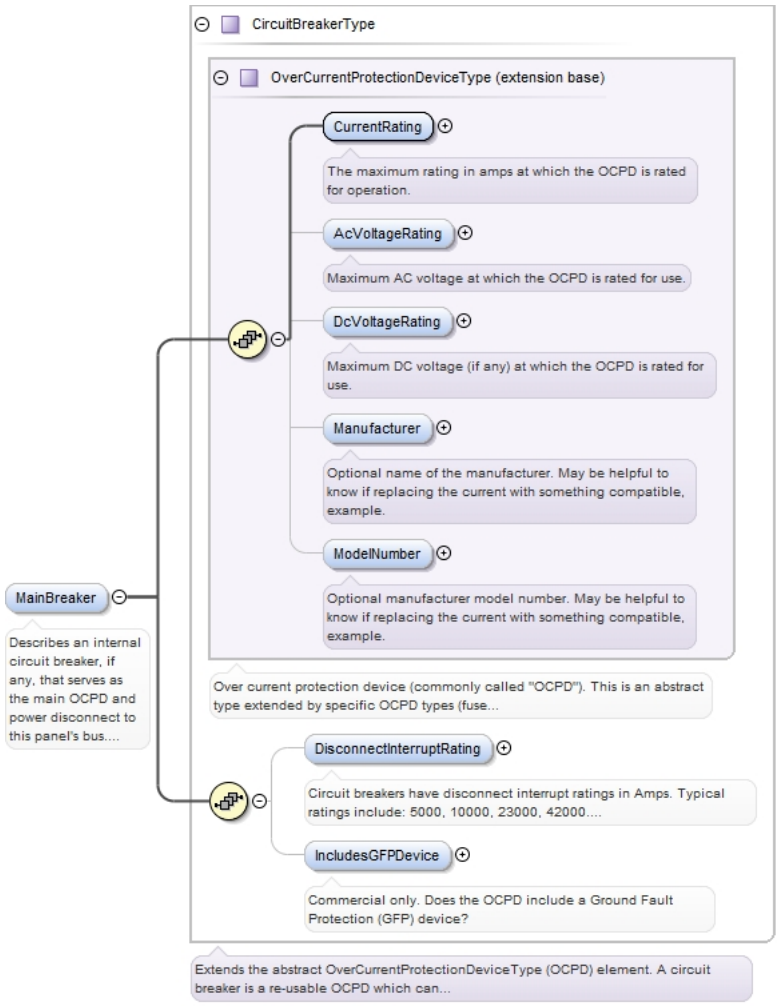
Type	CircuitBreakerType

Type hierarchy	• OverCurrentProtectionDeviceType • CircuitBreakerType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	CurrentRating , AcVoltageRating{0,1} , DcVoltageRating{0,1} , Manufacturer{0,1} , ModelNumber{0,1} , DisconnectInterruptRating{0,1} , IncludesGFPDevice{0,1}
Children	AcVoltageRating, CurrentRating, DcVoltageRating, DisconnectInterruptRating, IncludesGFPDevice, Manufacturer, ModelNumber
Instance	<MainBreaker xmlns="http://www.iepmodel.net"> <CurrentRating>{1,1}</CurrentRating> <AcVoltageRating>{0,1}</AcVoltageRating> <DcVoltageRating>{0,1}</DcVoltageRating> <Manufacturer>{0,1}</Manufacturer> <ModelNumber>{0,1}</ModelNumber> <DisconnectInterruptRating>{0,1}</DisconnectInterruptRating> <IncludesGFPDevice>{0,1}</IncludesGFPDevice> </MainBreaker>
Source	<xs:element minOccurs="0" name="MainBreaker" type="CircuitBreakerType" maxOccurs="1"> <xs:annotation> <xs:documentation>Describes an internal circuit breaker, if any, that serves as the main OCPD and power disconnect to this panel's bus. Note that the ElectricPanel may or may not have an internal main breaker. Panels with or without a main internal breaker may also have an OCPD on the ElectricPanel's CircuitConnection element which serves as the energizing source for this panel.</xs:documentation> </xs:annotation> </xs:element>

Element CircuitBreakerType / DisconnectInterruptRating

Namespace	http://www.iepmodel.net
Annotations	Circuit breakers have disconnect interrupt ratings in Amps. Typical ratings include: 5000, 10000, 23000, 42000. Typically if rating is not listed on a breaker, it is 5000.
Diagram	
Type	xs:integer
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element minOccurs="0" name="DisconnectInterruptRating" type="xs:integer" maxOccurs="1"> <xs:annotation> <xs:documentation>Circuit breakers have disconnect interrupt ratings in Amps. Typical ratings include: 5000, 10000, 23000, 42000. Typically if rating is not listed on a breaker, it is 5000.</xs:documentation> </xs:annotation> </xs:element>

Element CircuitBreakerType / IncludesGFPDevice

Namespace	http://www.iepmodel.net
Annotations	Commercial only. Does the OCPD include a Ground Fault Protection (GFP) device?
Diagram	
Type	xs:boolean
Properties	content: simple minOccurs: 0

	maxOccurs: 1
Source	<xs:element minOccurs="0" name="IncludesGFPDevice" type="xs:boolean" maxOccurs="1"> <xs:annotation> <xs:documentation>Commercial only. Does the OCPD include a Ground Fault Protection (GFP) device?</xs:documentation> </xs:annotation> </xs:element>

Element ElectricalPanelType / Existence

Namespace	http://www.iepmodel.net
Annotations	Is this panel existing or new (proposed)? When the ElectricalPanel is used within the ExistingElectricalSystem element inside of a Project's Site element, this is assumed to be an existing panel. However, if the panel is just being defined within a PvDesign's AcTie-InPanel element, then its important to know if the panel being described already exists or is new (and therefore part of the scope of work).
Diagram	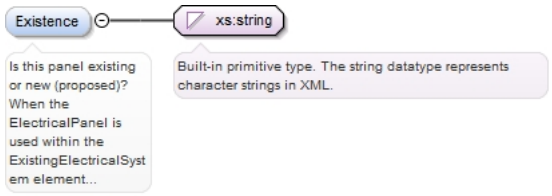
Type	xs:string
Properties	content: simple minOccurs: 0
Source	<xs:element minOccurs="0" name="Existence" type="xs:string"> <xs:annotation> <xs:documentation>Is this panel existing or new (proposed)? When the ElectricalPanel is used within the ExistingElectricalSystem element inside of a Project's Site element, this is assumed to be an existing panel. However, if the panel is just being defined within a PvDesign's AcTie-InPanel element, then its important to know if the panel being described already exists or is new (and therefore part of the scope of work).</xs:documentation> </xs:annotation> </xs:element>

Element ElectricalPanelType / SumOfExistingFeederBreakerAmps

Namespace	http://www.iepmodel.net
Annotations	Integer quantity in Amps. Add up the ratings for all existing breakers on the panel. This is used to determine if existing panel configuration meets code, and if additional breakers can be added.
Diagram	
Type	xs:integer
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element maxOccurs="1" minOccurs="0" name="SumOfExistingFeederBreakerAmps" type="xs:integer"> <xs:annotation> <xs:documentation>Integer quantity in Amps. Add up the ratings for all existing breakers on the panel. This is used to determine if existing panel configuration meets code, and if additional breakers can be added.</xs:documentation> </xs:annotation> </xs:element>

Element ElectricalPanelType / UnusedBreakerSlotQuantity

Namespace	http://www.iepmodel.net

Diagram	
Type	xs:integer
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element minOccurs="0" name="UnusedBreakerSlotQuantity" type="xs:integer" maxOccurs="1"/>`

Element ElectricalPanelType / SupplySideLugHolesAvailable

Namespace	http://www.iepmodel.net
Annotations	Does the energizing (supply side) bus bar have pre-drilled holes suitable for adding a new supply side lug?
Diagram	
Type	xs:boolean
Properties	content: simple minOccurs: 0

Source	`<xs:element minOccurs="0" name="SupplySideLugHolesAvailable" type="xs:boolean">`
	`  <xs:annotation>`
	`  <xs:documentation>Does the energizing (supply side) bus bar have pre-drilled holes suitable for adding a new supply side lug?</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element ElectricalPanelType / SubPanel

Namespace	http://www.iepmodel.net
Annotations	An electrical distribution panel downstream from the parent panel. It has the same data structure.

Diagram

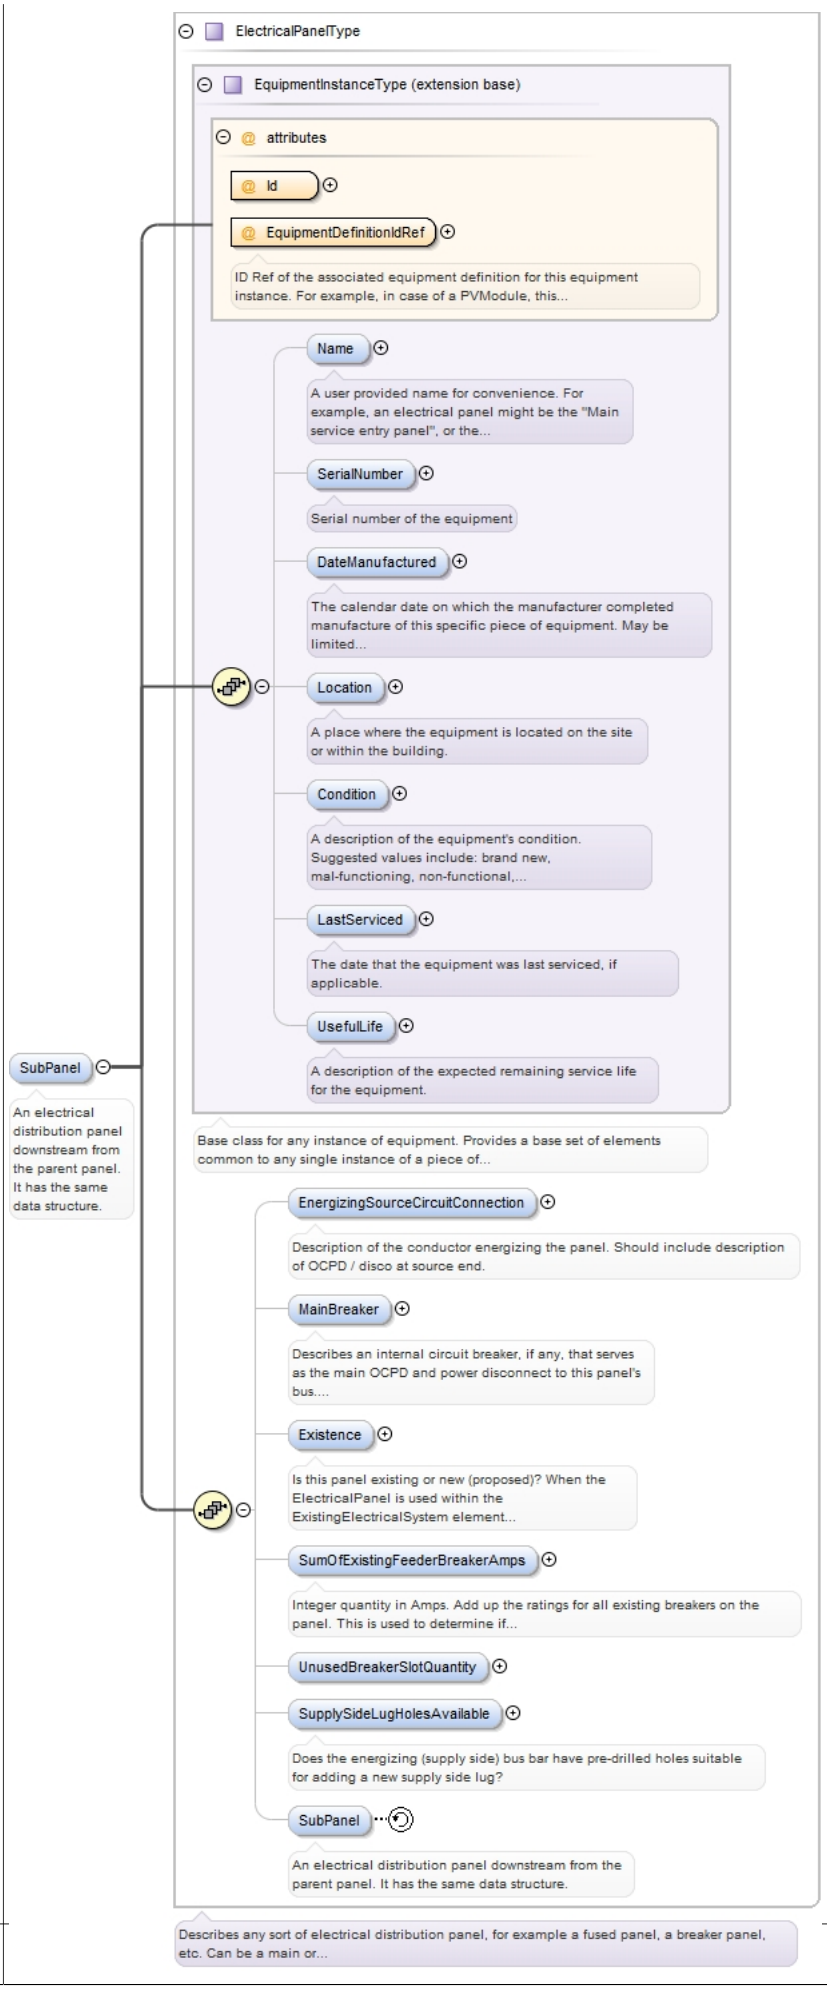
ElectricalPanelType
EquipmentInstanceType (extension base)
attributes
Id
EquipmentDefinitionIdRef
ID Ref of the associated equipment definition for this equipment instance. For example, in case of a PVModule, this...
Name
A user provided name for convenience. For example, an electrical panel might be the "Main service entry panel", or the...
SerialNumber
Serial number of the equipment
DateManufactured
The calendar date on which the manufacturer completed manufacture of this specific piece of equipment. May be limited...
Location
A place where the equipment is located on the site or within the building.
Condition
A description of the equipment's condition. Suggested values include: brand new, mal-functioning, non-functional,...
LastServiced
The date that the equipment was last serviced, if applicable.
UsefulLife
A description of the expected remaining service life for the equipment.
Base class for any instance of equipment. Provides a base set of elements common to any single instance of a piece of...
SubPanel
An electrical distribution panel downstream from the parent panel. It has the same data structure.
EnergizingSourceCircuitConnection
Description of the conductor energizing the panel. Should include description of OCPD / disco at source end.
MainBreaker
Describes an internal circuit breaker, if any, that serves as the main OCPD and power disconnect to this panel's bus....
Existence
Is this panel existing or new (proposed)? When the ElectricalPanel is used within the ExistingElectricalSystem element...
SumOfExistingFeederBreakerAmps
Integer quantity in Amps. Add up the ratings for all existing breakers on the panel. This is used to determine if...
UnusedBreakerSlotQuantity
SupplySideLugHolesAvailable
Does the energizing (supply side) bus bar have pre-drilled holes suitable for adding a new supply side lug?
SubPanel
An electrical distribution panel downstream from the parent panel. It has the same data structure.
Describes any sort of electrical distribution panel, for example a fused panel, a breaker panel, etc. Can be a main or...

Type	ElectricalPanelType
Type hierarchy	• EquipmentInstanceType • ElectricalPanelType
Properties	content: complex minOccurs: 0
Model	Name{0,1} , SerialNumber{0,1} , DateManufactured{0,1} , Location{0,1} , Condition{0,1} , LastServiced{0,1} , UsefulLife{0,1} , EnergizingSourceCircuitConnection{0,1} , MainBreaker{0,1} , Existence{0,1} , SumOfExistingFeederBreakerAmps{0,1} , UnusedBreakerSlotQuantity{0,1} , SupplySideLugHolesAvailable{0,1} , SubPanel{0,1}
Children	Condition, DateManufactured, EnergizingSourceCircuitConnection, Existence, LastServiced, Location, MainBreaker, Name, SerialNumber, SubPanel, SumOfExistingFeederBreakerAmps, SupplySideLugHolesAvailable, UnusedBreakerSlotQuantity, UsefulLife

Instance

```
<SubPanel EquipmentDefinitionIdRef="" Id="" xmlns="http://www.iepmodel.net">
  <Name>{0,1}</Name>
  <SerialNumber>{0,1}</SerialNumber>
  <DateManufactured>{0,1}</DateManufactured>
  <Location>{0,1}</Location>
  <Condition>{0,1}</Condition>
  <LastServiced>{0,1}</LastServiced>
  <UsefulLife>{0,1}</UsefulLife>
  <EnergizingSourceCircuitConnection EquipmentWhereConnectedIdRef="">{0,1}</
EnergizingSourceCircuitConnection>
  <MainBreaker>{0,1}</MainBreaker>
  <Existence>{0,1}</Existence>
  <SumOfExistingFeederBreakerAmps>{0,1}</SumOfExistingFeederBreakerAmps>
  <UnusedBreakerSlotQuantity>{0,1}</UnusedBreakerSlotQuantity>
  <SupplySideLugHolesAvailable>{0,1}</SupplySideLugHolesAvailable>
  <SubPanel EquipmentDefinitionIdRef="" Id="">{0,1}</SubPanel>
</SubPanel>
```

Attributes

QName	Type	Fixed	Default	Use
EquipmentDefinitionIdRef	xs:IDREF			required
	ID Ref of the associated equipment definition for this equipment instance. For example, in case of a PVModule, this would be the ID of the PvModuleDefinition element that describes this particular PV module instance.			
Id	xs:ID			required

Source

```
<xs:element minOccurs="0" name="SubPanel" type="ElectricalPanelType">
  <xs:annotation>
    <xs:documentation>An electrical distribution panel downstream from the parent panel.
 It has the same data structure.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element ElectricalDistributionHierarchyType / BuildingID

Namespace	http://www.iepmodel.net
Annotations	Describes the building(s) that the electrical distribution system services.
Diagram	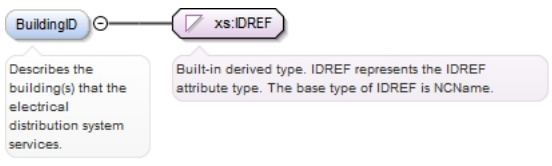
Type	xs:IDREF
Properties	content: simple minOccurs: 0 maxOccurs: unbounded

Source

```
<xs:element maxOccurs="unbounded" minOccurs="0" name="BuildingID" type="xs:IDREF">
  <xs:annotation>
    <xs:documentation>Describes the building(s) that the electrical distribution system
 services.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element ElectricalDistributionHierarchyType / ElectricalDistributionPanelDefinition

Namespace	http://www.iepmodel.net

Diagram

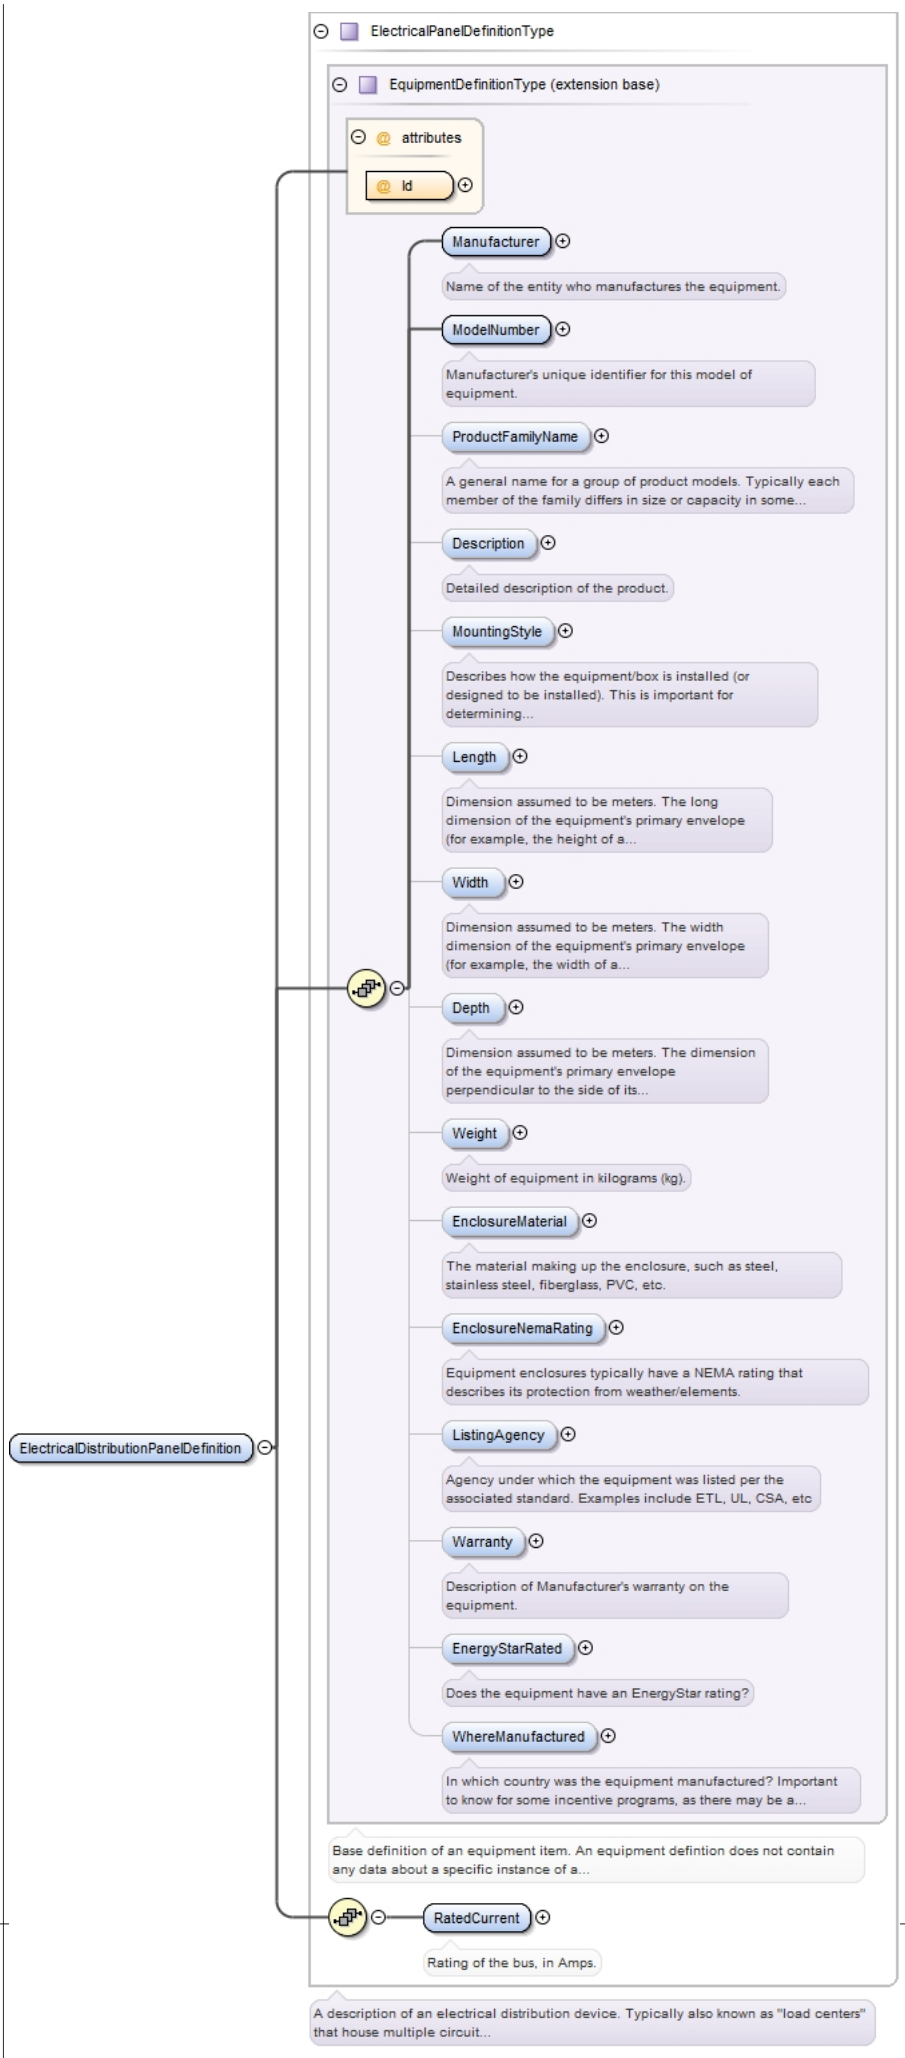
ElectricalPanelDefinitionType
EquipmentDefinitionType (extension base)
attributes
Id
Manufacturer
Name of the entity who manufactures the equipment.
ModelNumber
Manufacturer's unique identifier for this model of equipment.
ProductFamilyName
A general name for a group of product models. Typically each member of the family differs in size or capacity in some...
Description
Detailed description of the product.
MountingStyle
Describes how the equipment/box is installed (or designed to be installed). This is important for determining...
Length
Dimension assumed to be meters. The long dimension of the equipment's primary envelope (for example, the height of a...
Width
Dimension assumed to be meters. The width dimension of the equipment's primary envelope (for example, the width of a...
Depth
Dimension assumed to be meters. The dimension of the equipment's primary envelope perpendicular to the side of its...
Weight
Weight of equipment in kilograms (kg).
EnclosureMaterial
The material making up the enclosure, such as steel, stainless steel, fiberglass, PVC, etc.
EnclosureNemaRating
Equipment enclosures typically have a NEMA rating that describes its protection from weather/elements.
ListingAgency
Agency under which the equipment was listed per the associated standard. Examples include ETL, UL, CSA, etc
Warranty
Description of Manufacturer's warranty on the equipment.
EnergyStarRated
Does the equipment have an EnergyStar rating?
WhereManufactured
In which country was the equipment manufactured? Important to know for some incentive programs, as there may be a...
Base definition of an equipment item. An equipment defintion does not contain any data about a specific instance of a...
RatedCurrent
Rating of the bus, in Amps.
ElectricalDistributionPanelDefinition
A description of an electrical distribution device. Typically also known as "load centers" that house multiple circuit...

Type	ElectricalPanelDefinitionType
Type hierarchy	• EquipmentDefinitionType • ElectricalPanelDefinitionType
Properties	content: complex maxOccurs: unbounded
Model	Manufacturer , ModelNumber , ProductFamilyName{0,1} , Description{0,1} , MountingStyle{0,1} , Length{0,1} , Width{0,1} , Depth{0,1} , Weight{0,1} , EnclosureMaterial{0,1} , EnclosureNemaRating{0,1} , ListingAgency{0,1} , Warranty{0,1} , EnergyStarRated{0,1} , WhereManufactured{0,1} , RatedCurrent
Children	Depth, Description, EnclosureMaterial, EnclosureNemaRating, EnergyStarRated, Length, ListingAgency, Manufacturer, ModelNumber, MountingStyle, ProductFamilyName, RatedCurrent, Warranty, Weight, WhereManufactured, Width

Instance

```
<ElectricalDistributionPanelDefinition Id="" xmlns="http://www.iepmodel.net">
  <Manufacturer>{1,1}</Manufacturer>
  <ModelNumber>{1,1}</ModelNumber>
  <ProductFamilyName>{0,1}</ProductFamilyName>
  <Description>{0,1}</Description>
  <MountingStyle>{0,1}</MountingStyle>
  <Length>{0,1}</Length>
  <Width>{0,1}</Width>
  <Depth>{0,1}</Depth>
  <Weight>{0,1}</Weight>
  <EnclosureMaterial>{0,1}</EnclosureMaterial>
  <EnclosureNemaRating>{0,1}</EnclosureNemaRating>
  <ListingAgency>{0,1}</ListingAgency>
  <Warranty>{0,1}</Warranty>
  <EnergyStarRated>{0,1}</EnergyStarRated>
  <WhereManufactured>{0,1}</WhereManufactured>
  <RatedCurrent>{1,1}</RatedCurrent>
</ElectricalDistributionPanelDefinition>
```

Attributes

QName	Type	Fixed	Default	Use
Id	xs:ID			required

Source

```
<xs:element maxOccurs="unbounded" name="ElectricalDistributionPanelDefinition"
 type="ElectricalPanelDefinitionType"/>
```

Element ElectricalPanelDefinitionType / RatedCurrent

Namespace	http://www.iepmodel.net
Annotations	Rating of the bus, in Amps.
Diagram	
Type	xs:integer
Properties	content: simple minOccurs: 1 maxOccurs: 1

Source

```
<xs:element name="RatedCurrent" type="xs:integer" minOccurs="1" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>Rating of the bus, in Amps.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element DerateFactorsType / SunTracking

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:double
Properties	content: simple minOccurs: 0

	maxOccurs: 1 default: 1.0
Source	<xs:element default="1.0" name="SunTracking" type="xs:double" form="qualified" maxOccurs="1" minOccurs="0"/>

Element DisconnectSwitchDefinitionType / DiscoRating

Namespace	http://www.iepmodel.net
Annotations	Rating in amps for disconnecting an AC or DC circuit.
Diagram	
Type	xs:integer
Properties	content: simple minOccurs: 1
Source	<xs:element minOccurs="1" name="DiscoRating" type="xs:integer"> <xs:annotation> <xs:documentation>Rating in amps for disconnecting an AC or DC circuit.</xs:documentation> </xs:annotation> </xs:element>

Element DisconnectSwitchDefinitionType / AcVoltageRating

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:integer
Properties	content: simple minOccurs: 0
Source	<xs:element minOccurs="0" name="AcVoltageRating" type="xs:integer"/>

Element DisconnectSwitchDefinitionType / DcVoltageRating

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:integer
Properties	content: simple minOccurs: 0
Source	<xs:element minOccurs="0" name="DcVoltageRating" type="xs:integer"/>

Element DisconnectSwitchDefinitionType / SwitchContact

Namespace	http://www.iepmodel.net
Annotations	The terms pole and throw are also used to describe switch contact variations. The number of "poles" is the number of separate circuits which are controlled by a switch. For example, a "2-pole" switch has two separate identical sets of contacts controlled by the same knob. The number of "throws" is the number of separate positions that the switch can adopt. A single-throw switch has one pair of contacts that can either be closed or open. A double-throw switch has a contact that can be connected to either of two other contacts, a triple-throw has a contact which can be connected to one of three other contacts, etc

Diagram	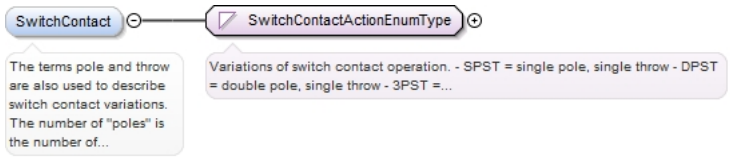
Type	SwitchContactActionEnumType
Properties	content: simple minOccurs: 0
Facets	enumeration: SPST enumeration: DPST enumeration: 3PST enumeration: SPDT
Source	<xs:element name="SwitchContact" minOccurs="0" type="SwitchContactActionEnumType"> <xs:annotation> <xs:documentation>The terms pole and throw are also used to describe switch contact variations. The number of "poles" is the number of separate circuits which are controlled by a switch. For example, a "2-pole" switch has two separate identical sets of contacts controlled by the same knob. The number of "throws" is the number of separate positions that the switch can adopt. A single-throw switch has one pair of contacts that can either be closed or open. A double-throw switch has a contact that can be connected to either of two other contacts, a triple-throw has a contact which can be connected to one of three other contacts, etc</xs:documentation> </xs:annotation> </xs:element>

Element DisconnectSwitchDefinitionType / Duty

Namespace	http://www.iepmodel.net
Diagram	
Type	SwitchDutyEnumType
Properties	content: simple minOccurs: 0
Facets	enumeration: General-Duty enumeration: Heavy-Duty
Source	<xs:element minOccurs="0" name="Duty" type="SwitchDutyEnumType"/>

Element DisconnectSwitchDefinitionType / VisibleLock

Namespace	http://www.iepmodel.net
Annotations	Does the switch have a visible locking mechnism?
Diagram	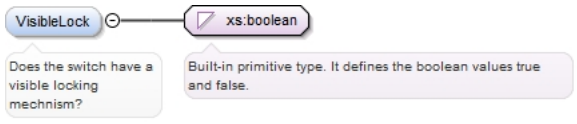
Type	xs:boolean
Properties	content: simple minOccurs: 0
Source	<xs:element minOccurs="0" name="VisibleLock" type="xs:boolean"> <xs:annotation> <xs:documentation>Does the switch have a visible locking mechnism?</xs:documentation> </xs:annotation> </xs:element>

Element DisconnectSwitchDefinitionType / Fusible

Namespace	http://www.iepmodel.net
Annotations	Do the switch circuits include fuses?

Diagram	
Type	xs:boolean
Properties	content: simple minOccurs: 0
Source	<xs:element minOccurs="0" name="Fusible" type="xs:boolean"> <xs:annotation> <xs:documentation>Do the switch circuits include fuses?</xs:documentation> </xs:annotation> </xs:element>

Element DisconnectSwitchDefinitionType / Fuse

Namespace	http://www.iepmodel.net
Annotations	If the switch includes fuses, this describes the fuses.
Diagram	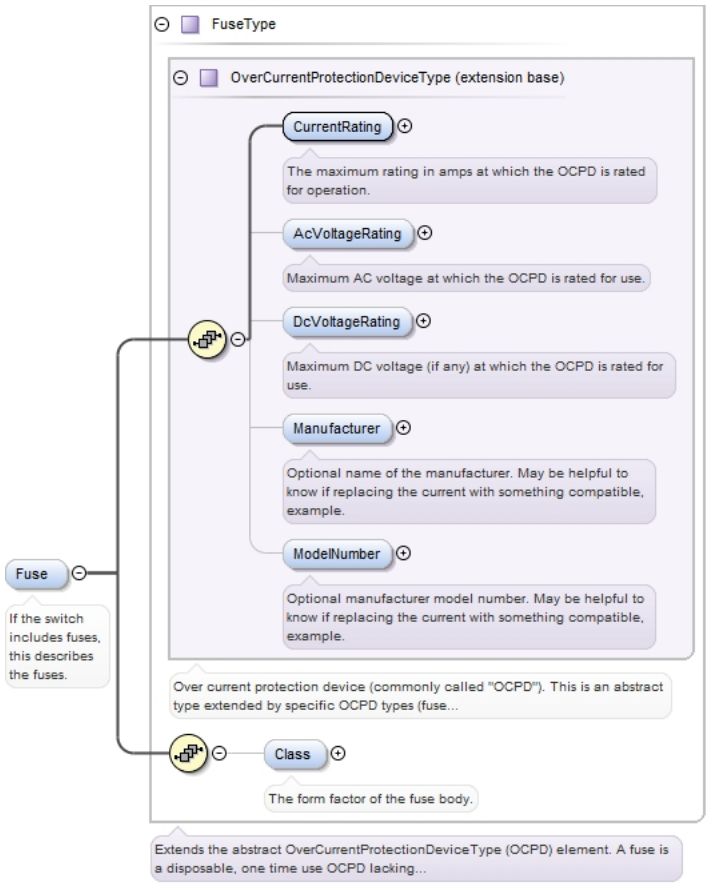
Type	FuseType
Type hierarchy	• OverCurrentProtectionDeviceType • FuseType
Properties	content: complex minOccurs: 0
Model	CurrentRating , AcVoltageRating{0,1} , DcVoltageRating{0,1} , Manufacturer{0,1} , ModelNumber{0,1} , Class{0,1}
Children	AcVoltageRating, Class, CurrentRating, DcVoltageRating, Manufacturer, ModelNumber
Instance	<Fuse xmlns="http://www.iepmodel.net"> <CurrentRating>{1,1}</CurrentRating> <AcVoltageRating>{0,1}</AcVoltageRating> <DcVoltageRating>{0,1}</DcVoltageRating> <Manufacturer>{0,1}</Manufacturer>

	<ModelNumber>{0,1}</ModelNumber> <Class>{0,1}</Class> </Fuse>
Source	<xs:element minOccurs="0" name="Fuse" type="FuseType"> <xs:annotation> <xs:documentation>If the switch includes fuses, this describes the fuses.</ xs:documentation> </xs:annotation> </xs:element>

Element FuseType / Class

Namespace	http://www.iepmodel.net
Annotations	The form factor of the fuse body.
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0
Source	<xs:element minOccurs="0" name="Class" type="xs:string"> <xs:annotation> <xs:documentation>The form factor of the fuse body.</xs:documentation> </xs:annotation> </xs:element>

Element GeoLocationType / Latitude

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:double
Properties	content: simple
Source	<xs:element name="Latitude" type="xs:double"/>

Element GeoLocationType / Longitude

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:double
Properties	content: simple
Source	<xs:element name="Longitude" type="xs:double"/>

Element GeoLocationType / Altitude

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:double
Properties	content: simple
Source	<xs:element name="Altitude" type="xs:double"/>

Element GeoLocationType / AltitudeReference

Namespace	http://www.iepmodel.net

Annotations	Reference for 'altitude' element.
Diagram	
Type	restriction of xs:string
Properties	content: simple default: Ground
Facets	enumeration Ground The altitude is measured from the ground. enumeration Ellipsoid The altitude is measured from the ellipsoid. enumeration SeaLevel The altitude is measured from sea level.
Source	

```
<xs:element name="AltitudeReference" default="Ground">
  <xs:annotation>
    <xs:documentation>Reference for 'altitude' element.</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:enumeration value="Ground">
        <xs:annotation>
          <xs:documentation>The altitude is measured from the ground.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="Ellipsoid">
        <xs:annotation>
          <xs:documentation>The altitude is measured from the ellipsoid.</
xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="SeaLevel">
        <xs:annotation>
          <xs:documentation>The altitude is measured from sea level.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element CostType / Cost

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:float
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	

```
<xs:element name="Cost" type="xs:float" minOccurs="1" maxOccurs="1"/>
```

Element CostType / Periodicity

Namespace	http://www.iepmodel.net
Diagram	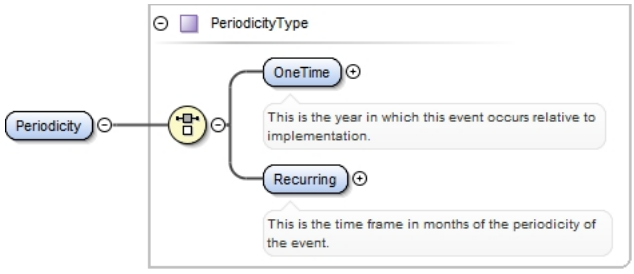
Type	PeriodicityType

Properties	content: complex minOccurs: 1 maxOccurs: 1
Model	OneTime | Recurring
Children	OneTime, Recurring
Instance	<Periodicity xmlns="http://www.iepmodel.net"> <OneTime>{1,1}</OneTime> <Recurring>{1,1}</Recurring> </Periodicity>
Source	<xs:element name="Periodicity" type="PeriodicityType" minOccurs="1" maxOccurs="1"/>

Element PeriodicityType / OneTime

Namespace	http://www.iepmodel.net
Annotations	This is the year in which this event occurs relative to implementation.
Diagram	
Type	xs:integer
Properties	content: simple
Source	<xs:element name="OneTime" type="xs:integer"> <xs:annotation> <xs:documentation>This is the year in which this event occurs relative to implementation.</xs:documentation> </xs:annotation> </xs:element>

Element PeriodicityType / Recurring

Namespace	http://www.iepmodel.net
Annotations	This is the time frame in months of the periodicity of the event.
Diagram	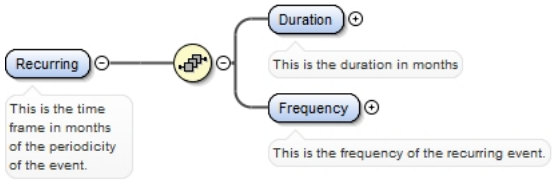
Properties	content: complex
Model	Duration , Frequency
Children	Duration, Frequency
Instance	<Recurring xmlns="http://www.iepmodel.net"> <Duration>{1,1}</Duration> <Frequency>{1,1}</Frequency> </Recurring>
Source	<xs:element name="Recurring"> <xs:annotation> <xs:documentation>This is the time frame in months of the periodicity of the event.</ xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element name="Duration" type="xs:integer"> <xs:annotation> <xs:documentation>This is the duration in months</xs:documentation> </xs:annotation> </xs:element> <xs:element maxOccurs="1" name="Frequency" type="FrequencyEnumType"> <xs:annotation> <xs:documentation>This is the frequency of the recurring event.</ xs:documentation> </xs:annotation> </xs:element>

```
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

Element PeriodicityType / Recurring / Duration

Namespace	http://www.iepmodel.net
Annotations	This is the duration in months
Diagram	
Type	xs:integer
Properties	content: simple

Source	`<xs:element name="Duration" type="xs:integer">`
	`  <xs:annotation>`
	`  <xs:documentation>This is the duration in months</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element PeriodicityType / Recurring / Frequency

Namespace	http://www.iepmodel.net
Annotations	This is the frequency of the recurring event.
Diagram	
Type	FrequencyEnumType
Properties	content: simple maxOccurs: 1
Facets	enumeration Daily enumeration Monthly enumeration Yearly

Source	`<xs:element maxOccurs="1" name="Frequency" type="FrequencyEnumType">`
	`  <xs:annotation>`
	`  <xs:documentation>This is the frequency of the recurring event.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element CostType / Description

Namespace	http://www.iepmodel.net
Annotations	This represents the description of the cost, i.e. maintenance costs, purchase costs, salvage costs, etc.
Diagram	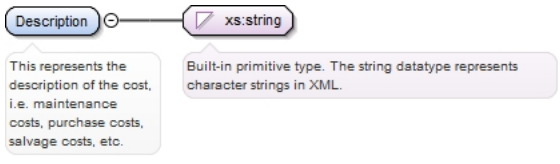
Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1

Source	`<xs:element name="Description" type="xs:string" minOccurs="1" maxOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>This represents the description of the cost, i.e. maintenance costs, purchase costs, salvage costs, etc.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element BenefitType / Name

Namespace	http://www.iepmodel.net
Annotations	This is used to define the specific benefit in the collection.
Diagram	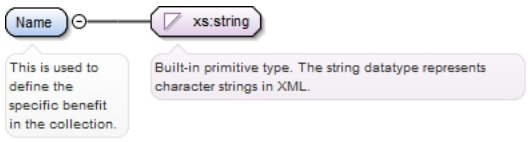
Type	xs:string
Properties	content: simple
Source	<xs:element name="Name" type="xs:string"> <xs:annotation> <xs:documentation>This is used to define the specific benefit in the collection.</xs:documentation> </xs:annotation> </xs:element>

Element BenefitType / Description

Namespace	http://www.iepmodel.net
Annotations	Place for user to include additional notes/description of the system.
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0
Source	<xs:element name="Description" type="xs:string" minOccurs="0"> <xs:annotation> <xs:documentation>Place for user to include additional notes/description of the system.</xs:documentation> </xs:annotation> </xs:element>

Element BenefitType / DeterminationMethod

Namespace	http://www.iepmodel.net
Annotations	How the benefit was calculated, either Estimated, Measured, or Incentive
Diagram	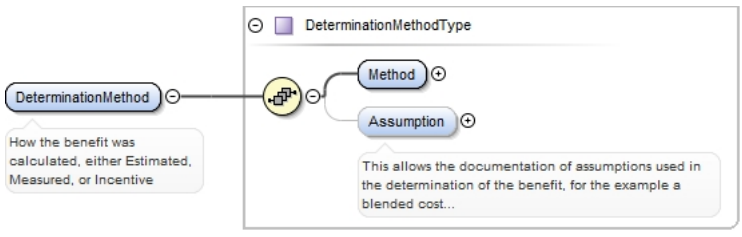
Type	DeterminationMethodType
Properties	content: complex minOccurs: 1 maxOccurs: 1
Model	Method , Assumption{0,1}
Children	Assumption, Method
Instance	<DeterminationMethod xmlns="http://www.iepmodel.net"> <Method>{1,1}</Method> <Assumption>{0,1}</Assumption> </DeterminationMethod>
Source	<xs:element name="DeterminationMethod" type="DeterminationMethodType" minOccurs="1" maxOccurs="1">

```
  <xs:annotation>
    <xs:documentation>How the benefit was calculated, either Estimated, Measured, or
 Incentive</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element DeterminationMethodType / Method

Namespace	http://www.iepmodel.net
Diagram	
Type	DeterminationMethodEnumType
Properties	content: simple
Facets	enumeration: Estimated enumeration: Measured enumeration: Incentive
Source	`<xs:element name="Method" type="DeterminationMethodEnumType"/>`

Element DeterminationMethodType / Assumption

Namespace	http://www.iepmodel.net
Annotations	This allows the documentation of assumptions used in the determination of the benefit, for the example a blended cost of energy instead of a detailed rate schedule analysis for determining energy cost savings
Diagram	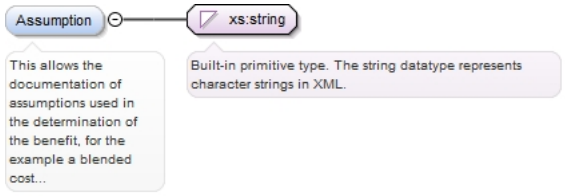
Type	xs:string
Properties	content: simple minOccurs: 0

Source	`<xs:element name="Assumption" type="xs:string" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>This allows the documentation of assumptions used in the determination of the benefit, for the example a blended cost of energy instead of a detailed rate schedule analysis for determining energy cost savings</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element BenefitType / DeterminationSource

Namespace	http://www.iepmodel.net
Annotations	Tool used to calculate the benefit.
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source	`<xs:element name="DeterminationSource" type="xs:string" minOccurs="0" maxOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>Tool used to calculate the benefit.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element BenefitType / DeterminationAuthor

Namespace	http://www.iepmodel.net

Annotations	Person, date and time that benefit was calculated.
Diagram	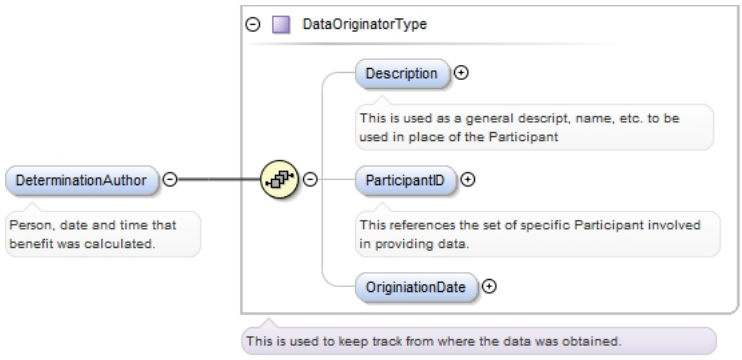
Type	DataOriginatorType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	Description{0,1} , ParticipantID{0,1} , OriginiationDate{0,1}
Children	Description, OriginiationDate, ParticipantID
Instance	<DeterminationAuthor xmlns="http://www.iepmodel.net"> <Description>{0,1}</Description> <ParticipantID ParticipantID="">{0,1}</ParticipantID> <OriginiationDate>{0,1}</OriginiationDate> </DeterminationAuthor>
Source	<xs:element name="DeterminationAuthor" type="DataOriginatorType" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Person, date and time that benefit was calculated.</xs:documentation> </xs:annotation> </xs:element>

Element BenefitType / Value

Namespace	http://www.iepmodel.net
Annotations	This contains a savings value type, i.e. Costs, Power, Energy, Emissions, etc. with requisite values and units
Diagram	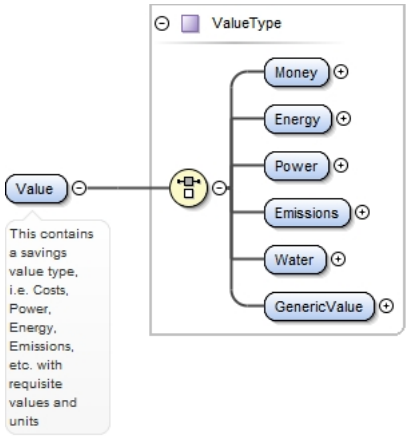
Type	ValueType
Properties	content: complex
Model	Money | Energy | Power | Emissions | Water | GenericValue
Children	Emissions, Energy, GenericValue, Money, Power, Water
Instance	<Value xmlns="http://www.iepmodel.net"> <Money Unit="">{1,1}</Money> <Energy Fuel="" FuelDesc="" Unit="" UnitDesc="">{1,1}</Energy> <Power Fuel="Electricity" FuelDesc="Electricity" TestCondition="" Unit="" UnitDesc="kwh">{1,1}</Power>

```
  <Emissions Emissions="" EmissionsDesc="" Unit="" UnitDesc="">{1,1}</Emissions>
  <Water Unit="" UnitDesc="">{1,1}</Water>
  <GenericValue Unit="">{1,1}</GenericValue>
</Value>
```

Source

```
<xs:element name="Value" type="ValueType">
  <xs:annotation>
    <xs:documentation>This contains a savings value type, i.e. Costs, Power, Energy,
 Emissions, etc. with requisite values and units</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element ValueType / Money

Namespace	http://www.iepmodel.net
Diagram	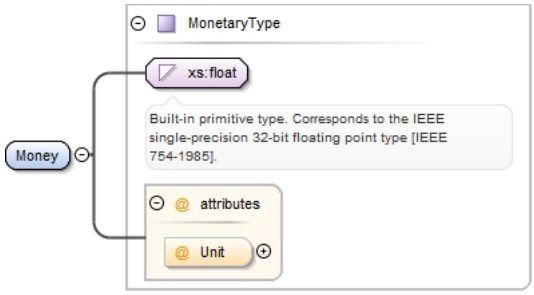
Type	MonetaryType
Properties	content: complex

Attributes

QName	Type	Fixed	Default	Use
Unit	MonetaryUnitEnumType			optional

Source

```
<xs:element name="Money" type="MonetaryType"/>
```

Element ValueType / Energy

Namespace	http://www.iepmodel.net
Diagram	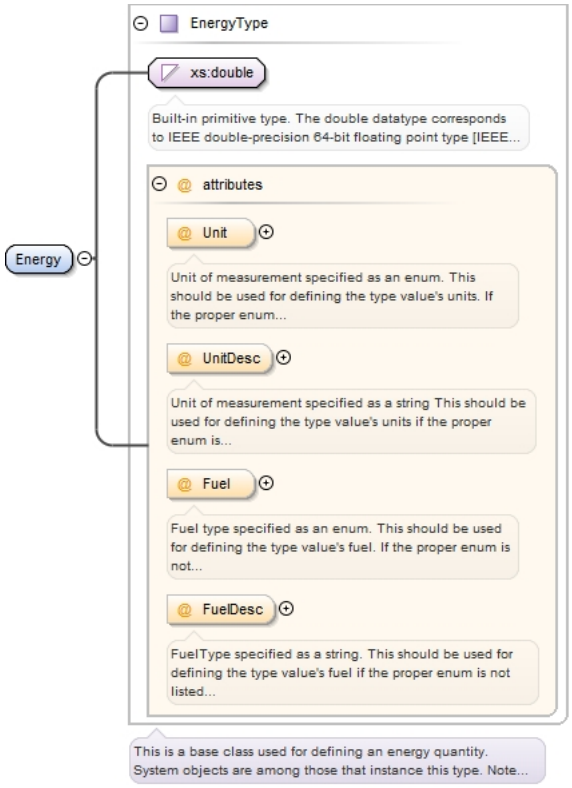
Type	EnergyType

Properties	content:	complex			
Attributes	**QName**	**Type**	**Fixed**	**Default**	**Use**
	Fuel	EnergyClassEnumType			optional
		Fuel type specified as an enum. This should be used for defining the type value's fuel. If the proper enum is not listed, please use the FuelDesc field to specify the units. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the FuelDesc may contain a default type.			
	FuelDesc	xs:string			optional
		FuelType specified as a string. This should be used for defining the type value's fuel if the proper enum is not listed in Fuel. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the FuelDesc may contain a default type.			
	Unit	EnergyUnitEnumType			optional
		Unit of measurement specified as an enum. This should be used for defining the type value's units. If the proper enum is not listed, please use the UnitDesc field to specify the units. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.			
	UnitDesc	xs:string			optional
		Unit of measurement specified as a string This should be used for defining the type value's units if the proper enum is not listed in Unit. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.			
Source	<xs:element name="Energy" type="EnergyType"/>				

Element ValueType / Power

Namespace	http://www.iepmodel.net
Diagram	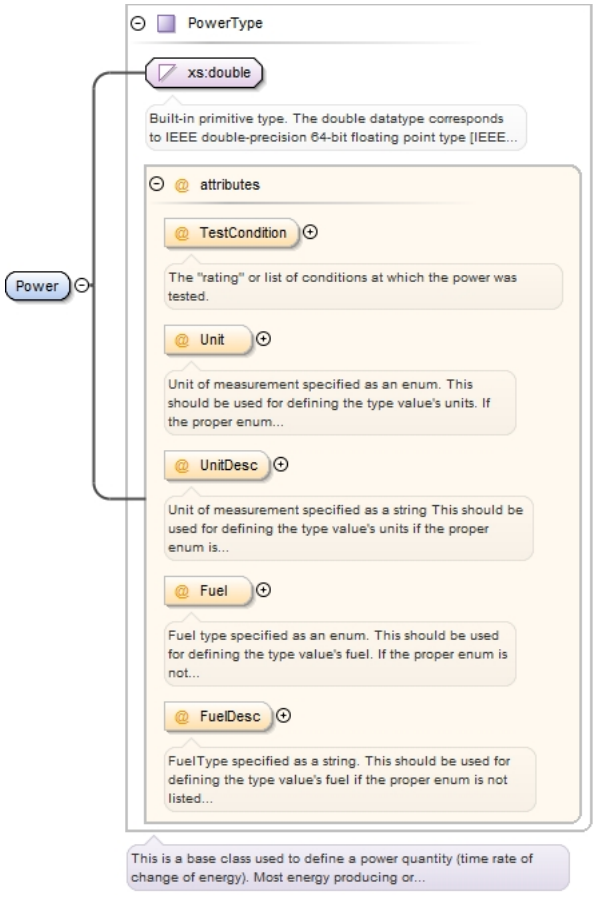

Type	PowerType				
Properties	content: complex				
Attributes	**QName**	**Type**	**Fixed**	**Default**	**Use**
	Fuel	EnergyClassEnumType		Electricity	optional
		Fuel type specified as an enum. This should be used for defining the type value's fuel. If the proper enum is not listed, please use the FuelDesc field to specify the units. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the FuelDesc may contain a default type.			
	FuelDesc	xs:string		Electricity	optional
		FuelType specified as a string. This should be used for defining the type value's fuel if the proper enum is not listed in Fuel. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the FuelDesc may contain a default type.			
	TestCondition	xs:string			optional
		The "rating" or list of conditions at which the power was tested.			
	Unit	PowerUnitEnumType			optional
		Unit of measurement specified as an enum. This should be used for defining the type value's units. If the proper enum is not listed, please use the UnitDesc field to specify the units. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.			
	UnitDesc	xs:string		kwh	optional
		Unit of measurement specified as a string This should be used for defining the type value's units if the proper enum is not listed in Unit. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.			
Source	<xs:element name="Power" type="PowerType"/>				

Element ValueType / Emissions

Namespace	http://www.iepmodel.net				
Diagram	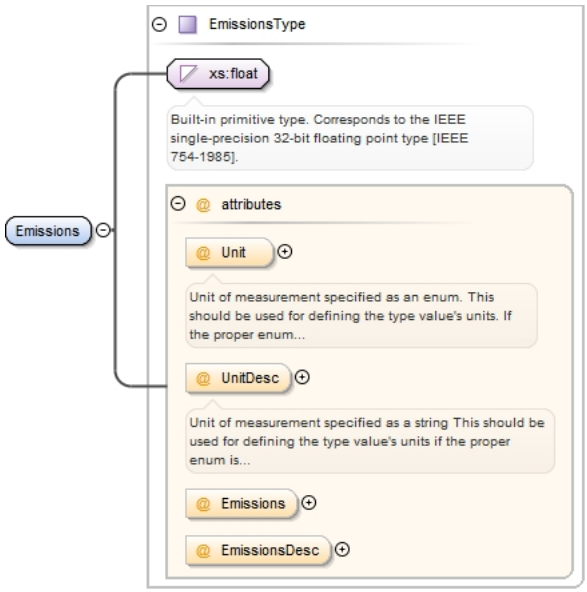				
Type	EmissionsType				
Properties	content: complex				
Attributes	**QName**	**Type**	**Fixed**	**Default**	**Use**
	Emissions	EmissionsEnumType			optional
	EmissionsDesc	xs:string			optional

	QName	Type	Fixed	Default	Use
	Unit	EmissionsUnitEnumType			optional
		Unit of measurement specified as an enum. This should be used for defining the type value's units. If the proper enum is not listed, please use the UnitDesc field to specify the units. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.			
	UnitDesc	xs:string			optional
		Unit of measurement specified as a string This should be used for defining the type value's units if the proper enum is not listed in Unit. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.			
Source	<xs:element name="Emissions" type="EmissionsType"/>				

Element ValueType / Water

Namespace	http://www.iepmodel.net
Diagram	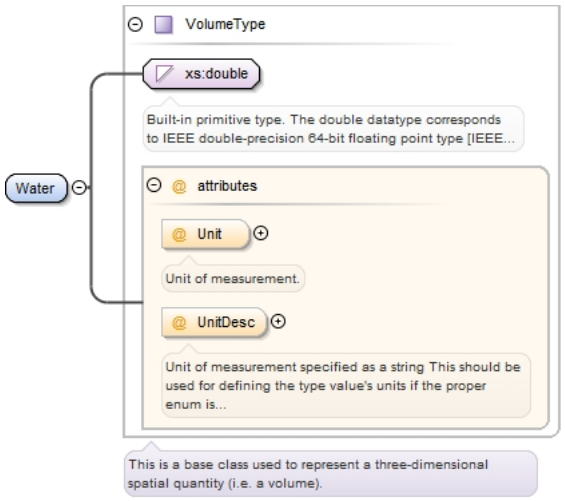
Type	VolumeType
Properties	content: complex

Attributes	QName	Type	Fixed	Default	Use
	Unit	VolumeUnitEnumType			optional
		Unit of measurement.			
	UnitDesc	xs:string			optional
		Unit of measurement specified as a string This should be used for defining the type value's units if the proper enum is not listed in Unit. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.			
Source	<xs:element name="Water" type="VolumeType"/>				

Element ValueType / GenericValue

Namespace	http://www.iepmodel.net
Diagram	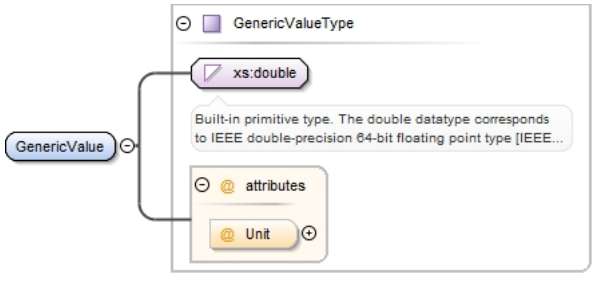

Type	GenericValueType
Properties	content: complex

Attributes	QName	Type	Fixed	Default	Use
	Unit	xs:string			optional

Source

```
<xs:element name="GenericValue" type="GenericValueType"/>
```

Element BenefitType / Periodicity

Namespace	http://www.iepmodel.net
Diagram	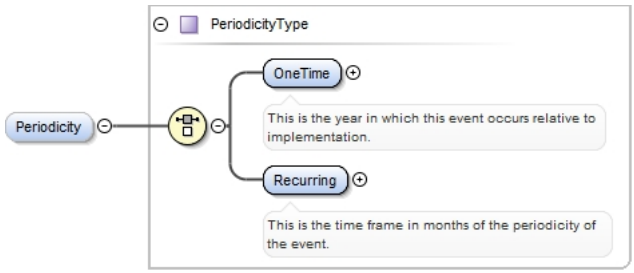

Type	PeriodicityType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	OneTime | Recurring
Children	OneTime, Recurring

Instance

```
<Periodicity xmlns="http://www.iepmodel.net">
  <OneTime>{1,1}</OneTime>
  <Recurring>{1,1}</Recurring>
</Periodicity>
```

Source

```
<xs:element name="Periodicity" type="PeriodicityType" minOccurs="0" maxOccurs="1"/>
```

Element DaySchedule

Namespace	http://www.iepmodel.net
Diagram	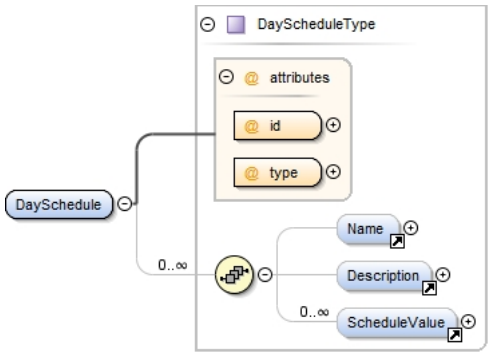

Type	DayScheduleType
Properties	content: complex
Used by	Element ProjectType/Schedules
Model	Name{0,1} , Description{0,1} , ScheduleValue*
Children	Description, Name, ScheduleValue

Instance

```
<DaySchedule id="" type="" xmlns="http://www.iepmodel.net">
  <Name>{0,1}</Name>
  <Description>{0,1}</Description>
  <ScheduleValue>{0,unbounded}</ScheduleValue>
</DaySchedule>
```

Attributes	QName	Type	Fixed	Default	Use
	id	xs:ID			required

	QName	Type	Fixed	Default	Use
	type	scheduleEnumType			required
Source	<xs:element name="DaySchedule" type="DayScheduleType"/>				

Element ScheduleValue

Namespace	http://www.iepmodel.net
Diagram	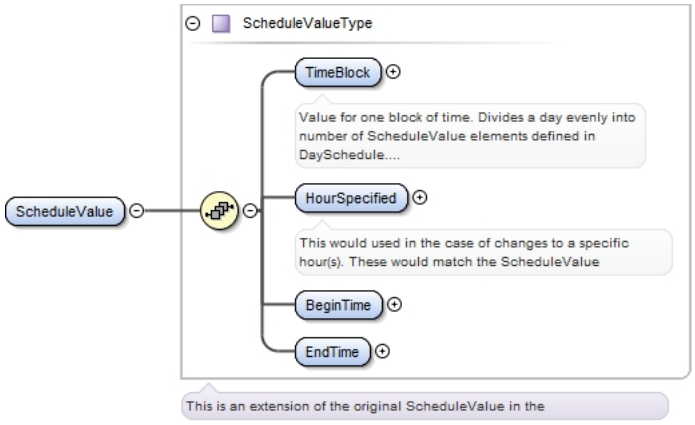
Type	ScheduleValueType
Properties	content: complex
Used by	Complex Type DayScheduleType
Model	TimeBlock , HourSpecified , BeginTime , EndTime
Children	BeginTime, EndTime, HourSpecified, TimeBlock
Instance	<ScheduleValue xmlns="http://www.iepmodel.net"> <TimeBlock>{1,1}</TimeBlock> <HourSpecified>{1,1}</HourSpecified> <BeginTime>{1,1}</BeginTime> <EndTime>{1,1}</EndTime> </ScheduleValue>
Source	<xs:element name="ScheduleValue" type="ScheduleValueType"/>

Element WeekSchedule

Namespace	http://www.iepmodel.net
Diagram	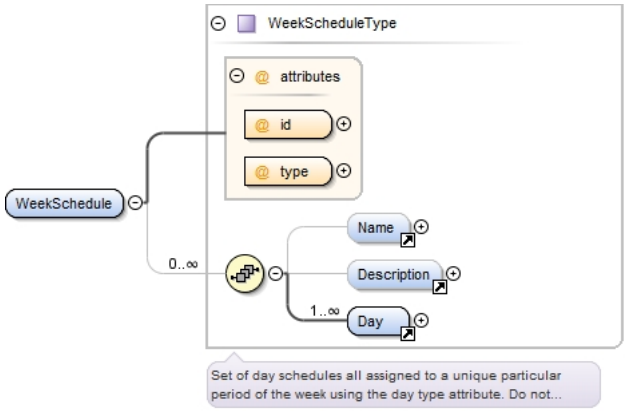
Type	WeekScheduleType
Properties	content: complex
Used by	Element ProjectType/Schedules
Model	Name{0,1} , Description{0,1} , Day+
Children	Day, Description, Name
Instance	<WeekSchedule id="" type="" xmlns="http://www.iepmodel.net">

```
  <Name>{0,1}</Name>
  <Description>{0,1}</Description>
  <Day dayScheduleIdRef="" dayType="">{1,unbounded}</Day>
</WeekSchedule>
```

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			required
type	scheduleEnumType			required

Source

```
<xs:element name="WeekSchedule" type="WeekScheduleType"/>
```

Element Day

Namespace	http://www.iepmodel.net
Diagram	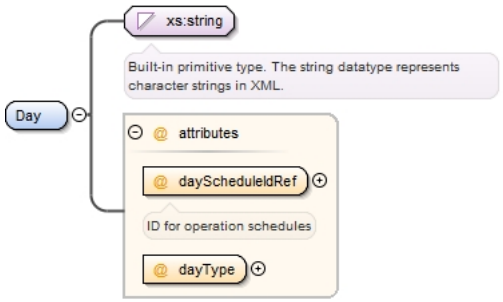
Type	extension of xs:string
Properties	content: complex
Used by	Complex Type WeekScheduleType

Attributes

QName	Type	Fixed	Default	Use
dayScheduleIdRef	xs:IDREF			required
	ID for operation schedules			
dayType	dayTypeEnum			required

Source

```
<xs:element name="Day">
  <xs:complexType>
    <xs:simpleContent>
      <xs:extension base="xs:string">
        <xs:attribute name="dayScheduleIdRef" type="xs:IDREF" use="required">
          <xs:annotation>
            <xs:documentation>ID for operation schedules</xs:documentation>
          </xs:annotation>
        </xs:attribute>
        <xs:attribute name="dayType" type="dayTypeEnum" use="required"/>
      </xs:extension>
    </xs:simpleContent>
  </xs:complexType>
</xs:element>
```

Element Schedule

Namespace	http://www.iepmodel.net
Diagram	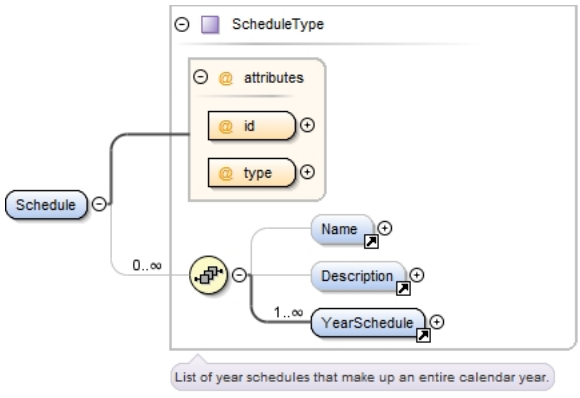

Type	ScheduleType
Properties	content: complex
Used by	Element ProjectType/Schedules
Model	Name{0,1} , Description{0,1} , YearSchedule+
Children	Description, Name, YearSchedule
Instance	<Schedule id="" type="" xmlns="http://www.iepmodel.net"> <Name>{0,1}</Name> <Description>{0,1}</Description> <YearSchedule id="">{1,unbounded}</YearSchedule> </Schedule>

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			required
type	scheduleEnumType			required

Source	<xs:element name="Schedule" type="ScheduleType"/>

Element Appliance

Namespace	http://www.iepmodel.net
Diagram	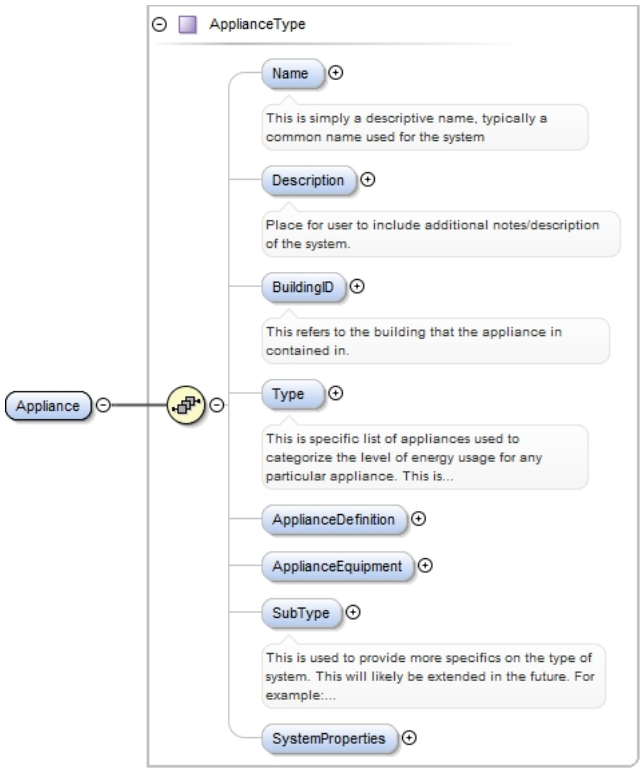

Type	ApplianceType
Properties	content: complex
Model	Name{0,1} , Description{0,1} , BuildingID{0,1} , Type{0,1} , ApplianceDefinition{0,1} , ApplianceEquipment{0,1} , SubType{0,1} , SystemProperties{0,1}
Children	ApplianceDefinition, ApplianceEquipment, BuildingID, Description, Name, SubType, SystemProperties, Type
Instance	<Appliance xmlns="http://www.iepmodel.net"> <Name>{0,1}</Name> <Description>{0,1}</Description> <BuildingID>{0,1}</BuildingID> <Type>{0,1}</Type> <ApplianceDefinition Id="">{0,1}</ApplianceDefinition> <ApplianceEquipment EquipmentDefinitionIdRef="" Id="">{0,1}</ApplianceEquipment> <SubType>{0,1}</SubType> <SystemProperties>{0,1}</SystemProperties> </Appliance>
Source	<xs:element name="Appliance" type="ApplianceType"/>

Element PointDoubleType / X

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:double
Properties	content: simple
Source	<xs:element name="X" type="xs:double"/>

Element PointDoubleType / Y

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:double
Properties	content: simple
Source	<xs:element name="Y" type="xs:double"/>

Element PointType / X

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:int
Properties	content: simple
Source	<xs:element name="X" type="xs:int"/>

Element PointType / Y

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:int
Properties	content: simple
Source	<xs:element name="Y" type="xs:int"/>

Element SizeDoubleType / Width

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:double
Properties	content: simple
Source	<xs:element name="Width" type="xs:double"/>

Element SizeDoubleType / Height

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:double
Properties	content: simple
Source	<xs:element name="Height" type="xs:double"/>

Element SizeType / Width

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:int
Properties	content: simple
Source	<xs:element name="Width" type="xs:int"/>

Element SizeType / Height

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:int
Properties	content: simple
Source	<xs:element name="Height" type="xs:int"/>

Element Location2dType / X

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:double
Properties	content: simple
Source	<xs:element name="X" type="xs:double"/>

Element Location2dType / Y

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:double
Properties	content: simple
Source	<xs:element name="Y" type="xs:double"/>

Element `InputPowerType / Power`

Namespace	http://www.iepmodel.net
Diagram	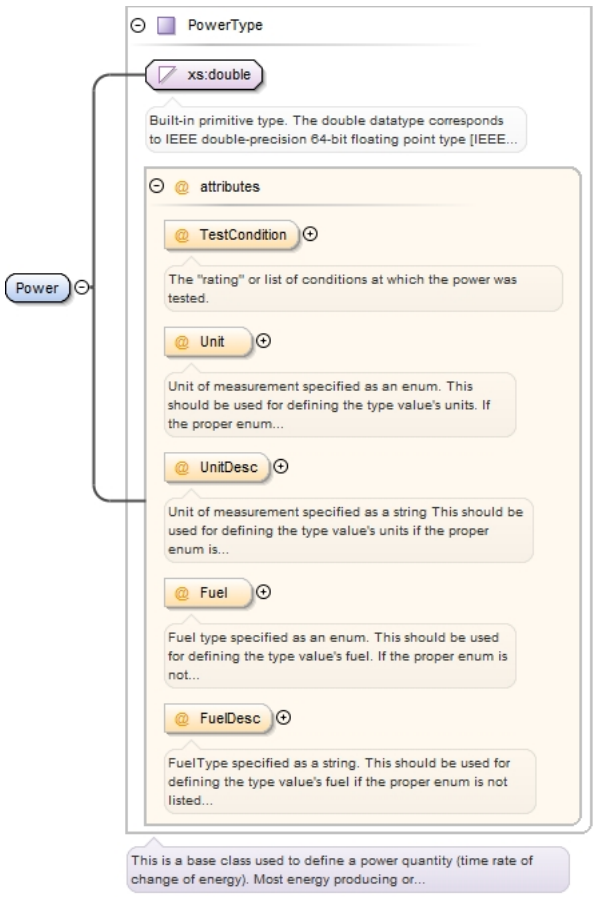
Type	PowerType

Properties

content:	`complex`
minOccurs:	`1`
maxOccurs:	`1`

Attributes

QName	Type	Fixed	Default	Use
Fuel	EnergyClassEnumType		Electricity	optional
	`Fuel type specified as an enum. This should be used for defining the type value's fuel. If the proper enum is not listed, please use the FuelDesc field to specify the units. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the FuelDesc may contain a default type.`			
FuelDesc	xs:string		Electricity	optional
	`FuelType specified as a string. This should be used for defining the type value's fuel if the proper enum is not listed in Fuel. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the FuelDesc may contain a default type.`			
TestCondition	xs:string			optional
	`The "rating" or list of conditions at which the power was tested.`			
Unit	PowerUnitEnumType			optional
	`Unit of measurement specified as an enum. This should be used for defining the type value's units. If the proper enum is not listed, please use the UnitDesc field to specify the units. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.`			
UnitDesc	xs:string		kwh	optional

	QName	Type	Fixed	Default	Use
		Unit of measurement specified as a string This should be used for defining the type value's units if the proper enum is not listed in Unit. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.			
Source	<xs:element name="Power" type="PowerType" minOccurs="1" maxOccurs="1"/>				

Element InputPowerType / FuelConnector

Namespace	http://www.iepmodel.net
Diagram	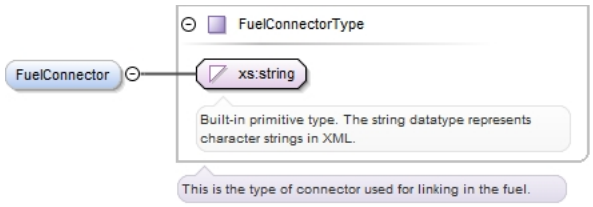
Type	FuelConnectorType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Source	<xs:element name="FuelConnector" type="FuelConnectorType" minOccurs="0" maxOccurs="1"/>

Element Condition

Namespace	http://www.iepmodel.net
Annotations	A description of the equipment's condition. Suggested values include: brand new, mal-functioning, non-functional, normal wear, other.
Diagram	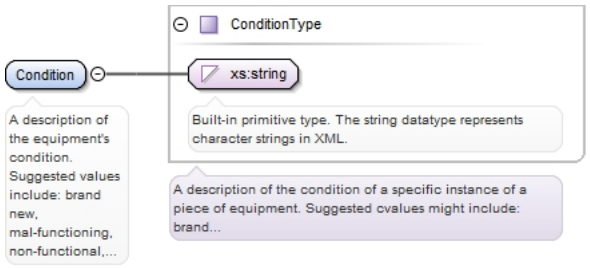
Type	ConditionType
Properties	content: complex
Source	<xs:element name="Condition" type="ConditionType"> <xs:annotation> <xs:documentation>A description of the equipment's condition. Suggested values include: brand new, mal-functioning, non-functional, normal wear, other.</xs:documentation> </xs:annotation> </xs:element>

Element DateManufactured

Namespace	http://www.iepmodel.net
Annotations	The calendar date on which the manufacturer completed manufacture of this specific piece of equipment. May be limited to the year.

Diagram	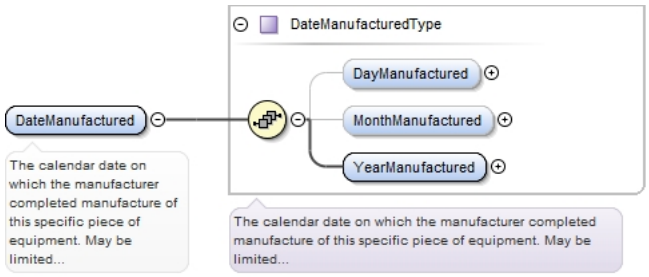
Type	DateManufacturedType
Properties	content: complex
Model	DayManufactured{0,1} , MonthManufactured{0,1} , YearManufactured
Children	DayManufactured, MonthManufactured, YearManufactured
Instance	<DateManufactured xmlns="http://www.iepmodel.net"> <DayManufactured>{0,1}</DayManufactured> <MonthManufactured>{0,1}</MonthManufactured> <YearManufactured>{1,1}</YearManufactured> </DateManufactured>
Source	<xs:element name="DateManufactured" type="DateManufacturedType"> <xs:annotation> <xs:documentation>The calendar date on which the manufacturer completed manufacture of this specific piece of equipment. May be limited to the year.</xs:documentation> </xs:annotation> </xs:element>

Element Location

Namespace	http://www.iepmodel.net
Annotations	A place where the equipment is located on the site or within the building.
Diagram	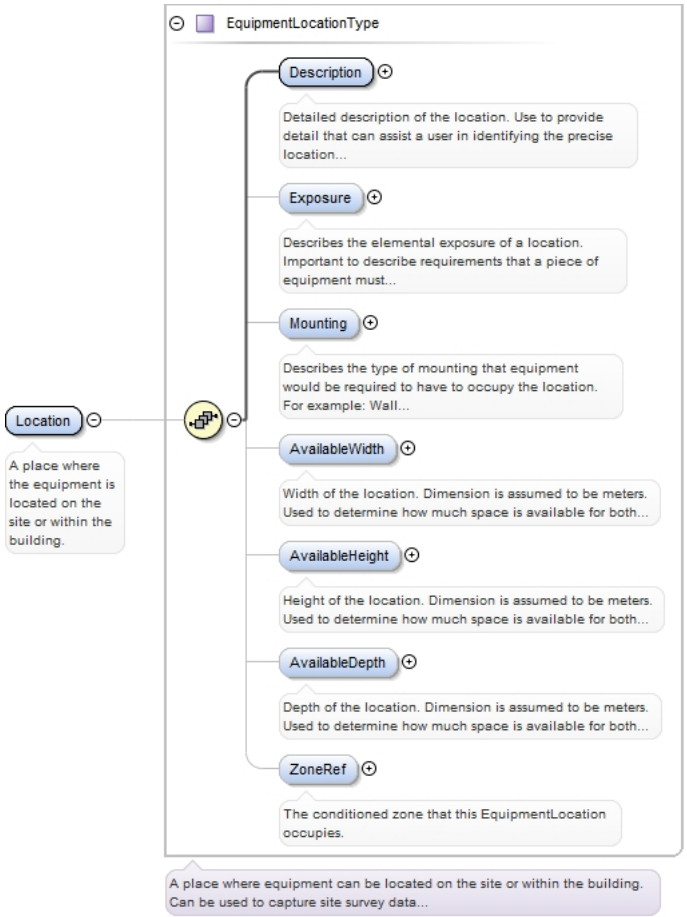
Type	EquipmentLocationType

Properties	content: complex
Model	Description , Exposure{0,1} , Mounting{0,1} , AvailableWidth{0,1} , AvailableHeight{0,1} , AvailableDepth{0,1} , ZoneRef{0,1}
Children	AvailableDepth, AvailableHeight, AvailableWidth, Description, Exposure, Mounting, ZoneRef
Instance	<Location xmlns="http://www.iepmodel.net"> <Description>{1,1}</Description> <Exposure>{0,1}</Exposure> <Mounting>{0,1}</Mounting> <AvailableWidth>{0,1}</AvailableWidth> <AvailableHeight>{0,1}</AvailableHeight> <AvailableDepth>{0,1}</AvailableDepth> <ZoneRef>{0,1}</ZoneRef> </Location>
Source	<xs:element name="Location" type="EquipmentLocationType"> <xs:annotation> <xs:documentation>A place where the equipment is located on the site or within the building.</xs:documentation> </xs:annotation> </xs:element>

Element LastServiced

Namespace	http://www.iepmodel.net
Annotations	The date that the equipment was last serviced, if applicable.
Diagram	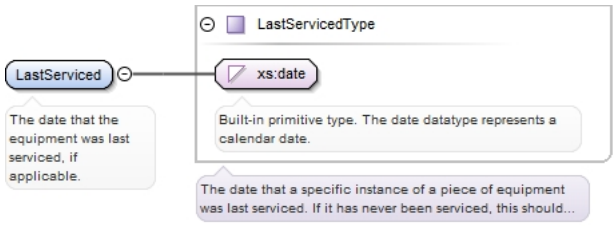
Type	LastServicedType
Properties	content: complex
Source	<xs:element name="LastServiced" type="LastServicedType"> <xs:annotation> <xs:documentation>The date that the equipment was last serviced, if applicable.</xs:documentation> </xs:annotation> </xs:element>

Element UsefulLife

Namespace	http://www.iepmodel.net
Annotations	A description of the expected remaining service life for the equipment.
Diagram	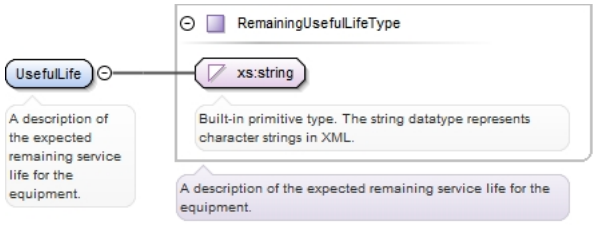
Type	RemainingUsefulLifeType
Properties	content: complex
Source	<xs:element name="UsefulLife" type="RemainingUsefulLifeType"> <xs:annotation> <xs:documentation>A description of the expected remaining service life for the equipment.</xs:documentation> </xs:annotation> </xs:element>

Element hourID

Namespace	http://www.iepmodel.net

Diagram	
Type	hourIDType
Properties	content: simple
Facets	maxInclusive 24 minInclusive 1
Source	`<xs:element name="hourID" type="hourIDType"/>`

Element DaylightSavings

Namespace	http://www.iepmodel.net
Diagram	
Type	DaylightSavingsType
Properties	content: simple
Source	`<xs:element name="DaylightSavings" type="DaylightSavingsType"/>`

Element Building

Namespace	http://www.iepmodel.net
Diagram	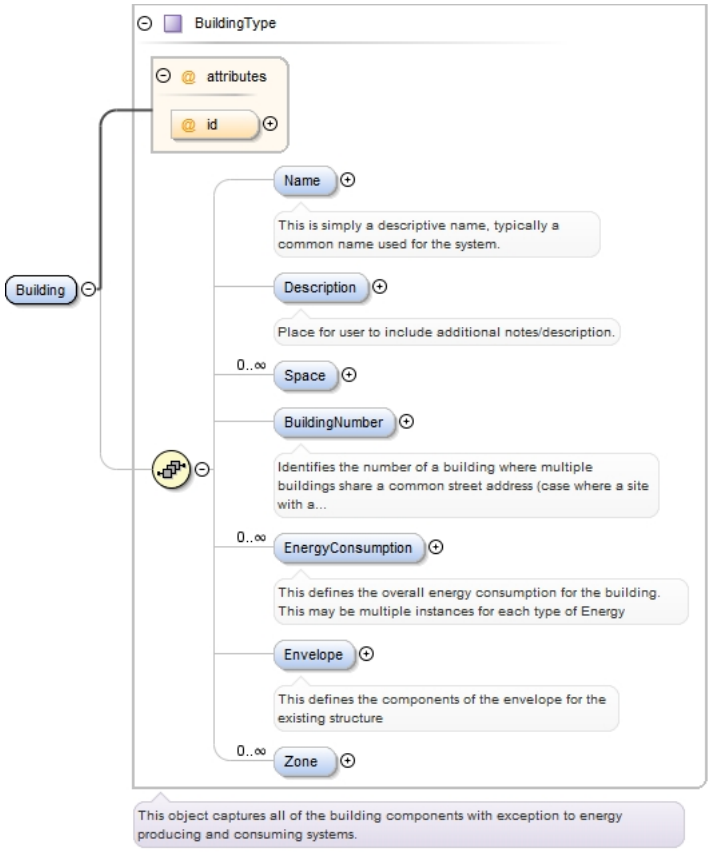
Type	BuildingType
Properties	content: complex
Model	Name{0,1} , Description{0,1} , Space* , BuildingNumber{0,1} , EnergyConsumption* , Envelope{0,1} , Zone*
Children	BuildingNumber, Description, EnergyConsumption, Envelope, Name, Space, Zone
Instance	`<Building id="" xmlns="http://www.iepmodel.net">` `  <Name>{0,1}</Name>`

```
  <Description>{0,1}</Description>
  <Space id="">{0,unbounded}</Space>
  <BuildingNumber>{0,1}</BuildingNumber>
  <EnergyConsumption>{0,unbounded}</EnergyConsumption>
  <Envelope id="">{0,1}</Envelope>
  <Zone id="">{0,unbounded}</Zone>
</Building>
```

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			optional

Source

```
<xs:element name="Building" type="BuildingType"/>
```

Element PolygonPlaneType / PlaneShape2d

Namespace	http://www.iepmodel.net
Annotations	2D polygon points to define an arbitrary plane shape.
Diagram	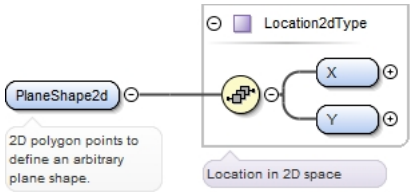
Type	Location2dType
Properties	content: complex minOccurs: 3 maxOccurs: unbounded nillable: true
Model	X , Y
Children	X, Y
Instance	<PlaneShape2d xmlns="http://www.iepmodel.net"> <X>{1,1}</X> <Y>{1,1}</Y> </PlaneShape2d>
Source	<xs:element name="PlaneShape2d" type="Location2dType" nillable="true" minOccurs="3" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>2D polygon points to define an arbitrary plane shape.</ xs:documentation> </xs:annotation> </xs:element>

Element RectangularPlaneType / Width

Namespace	http://www.iepmodel.net
Annotations	Width of rectangluar plane, in meters.
Diagram	
Type	xs:double
Properties	content: simple
Source	<xs:element name="Width" type="xs:double"> <xs:annotation> <xs:documentation>Width of rectangluar plane, in meters.</xs:documentation> </xs:annotation> </xs:element>

Element RectangularPlaneType / Height

Namespace	http://www.iepmodel.net
Annotations	Height of rectangular plane, in meters.

Diagram	
Type	xs:double
Properties	content: simple
Source	<xs:element name="Height" type="xs:double"> <xs:annotation> <xs:documentation>Height of rectangular plane, in meters.</xs:documentation> </xs:annotation> </xs:element>

Element DistributionSystem

Namespace	http://www.iepmodel.net
Annotations	A Distribution System describes the mechanical systems and equipment that transport air, water or another fluid. It consists of two components: Prime Mover (pump or fan) and Segment. A Distribution System (optionally) consists of one or many Prime Movers, which is a pump or fan that causes the fluid to flow. The Prime Mover has System and Equipment properties. A Distribution System (optionally) consists of one or many Segments, which is a duct or pipe that transports the fluid. The Segment has Equipment properties in addition to leakage and insulation properties (referenced from the Building schema). The Distribution Systems was chosen to stand alone because of how the other systems interact with it and because on distribution system may serve multiple purposes. It is be referenced by other systems such as an HVAC or WaterHeating system that interact with it. A Distribution System (particularly air or water) may be referenced by an HVAC system in one of three ways. A Distribution System may be referenced as the method of delivery of conditioning from the HVAC system (i.e. the ducting or piping that delivers conditioning). Alternatively, a Distribution System may be referenced as the source of heat or cold (fluid to reject heat to) for a Heating or Cooling system, respectively. Note that the Distribution System itself does not instance System Properties. A distribution system can only consume energy through its prime mover and thermal transfer. The Prime Mover object instances System Properties. Thermal transfer to or from the fluid through its segments will affect the system(s) that are connected to (reference) it (such as a Hot Water Heating or HVAC system). Thus, the thermal energy transferred through the segment surface should be captured by the zone in which the segment is located and the systems that reference it. Example 1. A water DistributionSystem may serve both space heating as well as domestic hot water for kitchen and bathroom fixtures (i.e. dishwasher, shower). Systems that may reference this DistributionSystem include: a WaterHeating system, a grey-water HeatRecovery system and an HVACSystem. Example 2 An air DistributionSystem may consist of supply and return ducting and a supply fan. An HVACSystem such as a furnace or air-source heat-pump would reference the DistributionSystem (through its DeliveryMethod element). Example 3 A Whole house fan would be modeled as an HVAC system with a DeliveryMethod that references a Distribution System. The Distribution System may include segments (inlet and exhaust ducting) and a fan (Prime Mover). The Ventilation properties in HVAC would further describe the rate of air exchange with outside. The zone(s) referencing the HVAC system would specify the temperature setpoint schedule and any additional thermal loads. Alternatively, if the fan is controlled by a time schedule, rather than temperature schedule, the schedule may defined in the Prime Mover system properties. Then, no HVAC system needs to be defined. Example 4 A bathroom or kitchen exhaust fan may be modeled as a Distribution System with just a Prime Mover (segments optional). The schedule in the System Properties of the Primer Mover may define the operating schedule of the fan.

Diagram	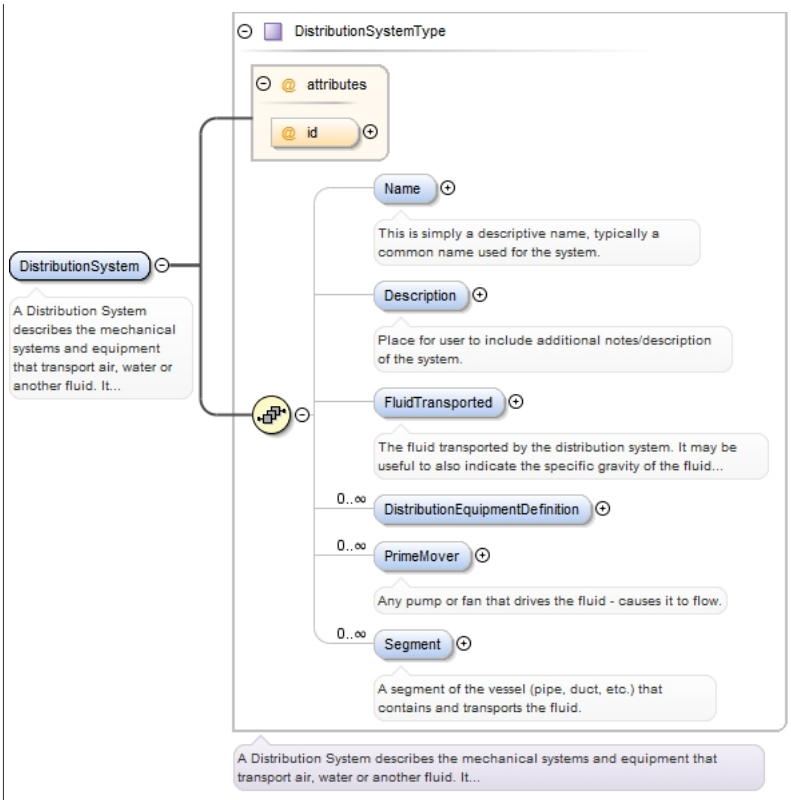
Type	DistributionSystemType
Properties	content: complex
Model	Name{0,1} , Description{0,1} , FluidTransported{0,1} , DistributionEquipmentDefinition* , PrimeMover* , Segment*
Children	Description, DistributionEquipmentDefinition, FluidTransported, Name, PrimeMover, Segment
Instance	<DistributionSystem id="" xmlns="http://www.iepmodel.net"> <Name>{0,1}</Name> <Description>{0,1}</Description> <FluidTransported>{0,1}</FluidTransported> <DistributionEquipmentDefinition Id="">{0,unbounded}</DistributionEquipmentDefinition> <PrimeMover id="">{0,unbounded}</PrimeMover> {0,unbounded} </DistributionSystem>

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			optional

Source

```
<xs:element name="DistributionSystem" type="DistributionSystemType">
  <xs:annotation>
    <xs:documentation>A Distribution System describes the mechanical systems and equipment
 that transport air, water or another fluid. It consists of two components: Prime Mover
 (pump or fan) and Segment. A Distribution System (optionally) consists of one or many
 Prime Movers, which is a pump or fan that causes the fluid to flow. The Prime Mover
 has System and Equipment properties. A Distribution System (optionally) consists of
 one or many Segments, which is a duct or pipe that transports the fluid. The Segment
 has Equipment properties in addition to leakage and insulation properties (referenced
 from the Building schema). The Distribution Systems was chosen to stand alone because
 of how the other systems interact with it and because on distribution system may serve
 multiple purposes. It is be referenced by other systems such as an HVAC or WaterHeating
 system that interact with it. A Distribution System (particularly air or water) may
 be referenced by an HVAC system in one of three ways. A Distribution System may be
 referenced as the method of delivery of conditioning from the HVAC system (i.e. the
 ducting or piping that delivers conditioning). Alternatively, a Distribution System
 may be referenced as the source of heat or cold (fluid to reject heat to) for a Heating
 or Cooling system, respectively. Note that the Distribution System itself does not
 instance System Properties. A distribution system can only consume energy through its
 prime mover and thermal transfer. The Prime Mover object instances System Properties.
 Thermal transfer to or from the fluid through its segments will affect the system(s)
 that are connected to (reference) it (such as a Hot Water Heating or HVAC system). Thus,
 the thermal energy transferred through the segment surface should be captured by the
 zone in which the segment is located and the systems that reference it. Example 1. A
 water DistributionSystem may serve both space heating as well as domestic hot water
 for kitchen and bathroom fixtures (i.e. dishwasher, shower). Systems that may reference
```

```
 this DistributionSystem include: a WaterHeating system, a grey-water HeatRecovery system
 and an HVACSystem. Example 2 An air DistributionSystem may consist of supply and return
 ducting and a supply fan. An HVACSystem such as a furnace or air-source heat-pump would
 reference the DistributionSystem (through its DeliveryMethod element). Example 3 A Whole
 house fan would be modeled as an HVAC system with a DeliveryMethod that references a
 Distribution System. The Distribution System may include segments (inlet and exhaust
 ducting) and a fan (Prime Mover). The Ventilation properties in HVAC would further
 describe the rate of air exchange with outside. The zone(s) referencing the HVAC system
 would specify the temperature setpoint schedule and any additional thermal loads.
 Alternatively, if the fan is controlled by a time schedule, rather than temperature
 schedule, the schedule may defined in the Prime Mover system properties. Then, no HVAC
 system needs to be defined. Example 4 A bathroom or kitchen exhaust fan may be modeled
 as a Distribution System with just a Prime Mover (segments optional). The schedule in
 the System Properties of the Primer Mover may define the operating schedule of the fan.</
xs:documentation>
  </xs:annotation>
</xs:element>
```

Element `CircuitConnection`

Namespace	http://www.iepmodel.net
Diagram	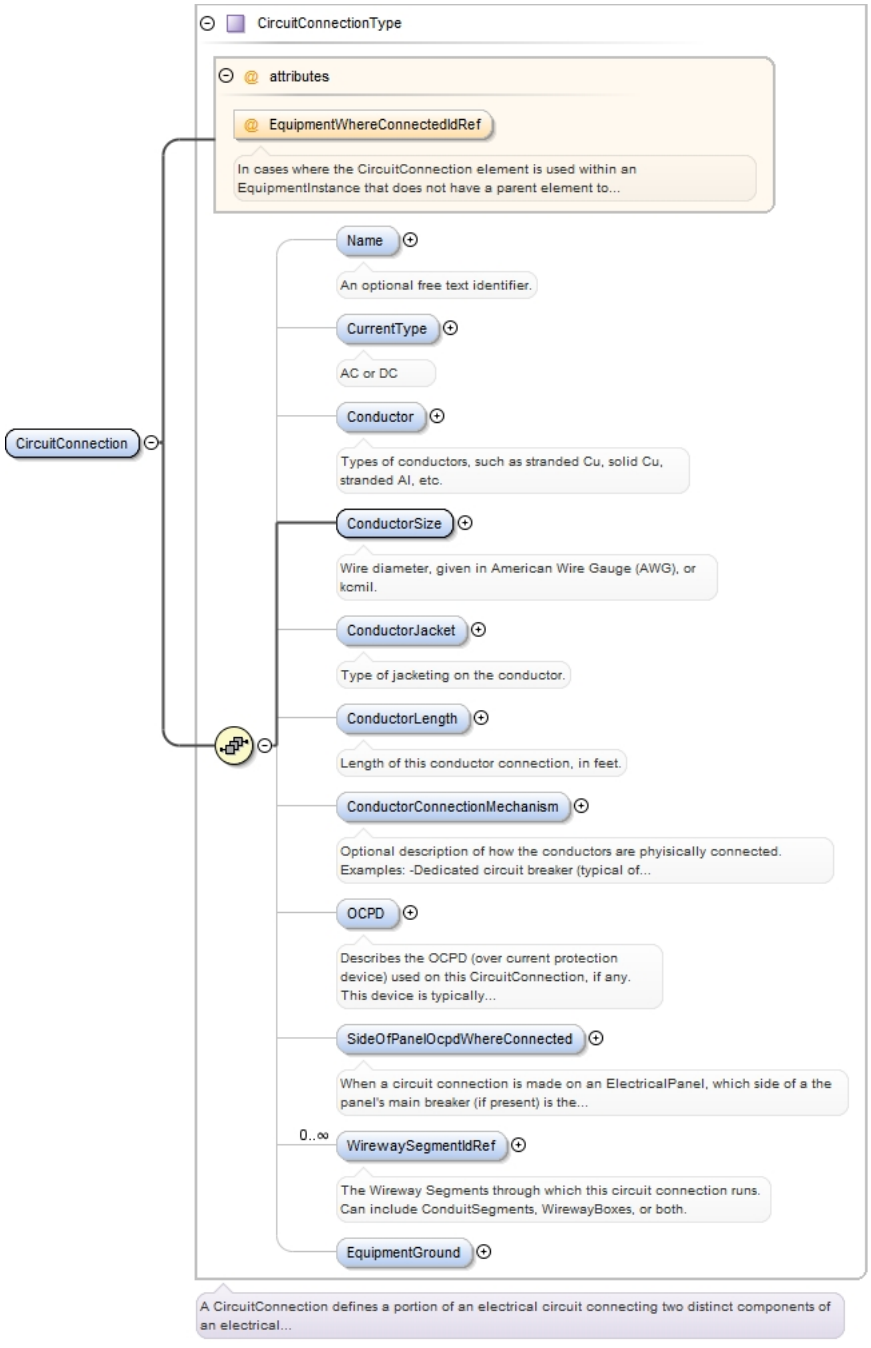

Type	CircuitConnectionType
Properties	content: complex
Model	Name{0,1} , CurrentType{0,1} , Conductor{0,1} , ConductorSize , ConductorJacket{0,1} , ConductorLength{0,1} , ConductorConnectionMechanism{0,1} , OCPD{0,1} , SideOfPanelOcpdWhereConnected{0,1} , WirewaySegmentIdRef* , EquipmentGround{0,1}
Children	Conductor, ConductorConnectionMechanism, ConductorJacket, ConductorLength, ConductorSize, CurrentType, EquipmentGround, Name, OCPD, SideOfPanelOcpdWhereConnected, WirewaySegmentIdRef

Instance

```
<CircuitConnection EquipmentWhereConnectedIdRef="" xmlns="http://www.iepmodel.net">
  <Name>{0,1}</Name>
  <CurrentType>{0,1}</CurrentType>
  <Conductor>{0,1}</Conductor>
  <ConductorSize>{1,1}</ConductorSize>
  <ConductorJacket>{0,1}</ConductorJacket>
  <ConductorLength>{0,1}</ConductorLength>
  <ConductorConnectionMechanism>{0,1}</ConductorConnectionMechanism>
  <OCPD>{0,1}</OCPD>
  <SideOfPanelOcpdWhereConnected>{0,1}</SideOfPanelOcpdWhereConnected>
  <WirewaySegmentIdRef>{0,unbounded}</WirewaySegmentIdRef>
  <EquipmentGround>{0,1}</EquipmentGround>
</CircuitConnection>
```

Attributes

QName	Type	Fixed	Default	Use
EquipmentWhereConnectedIdRef				optional

```
In cases where the CircuitConnection element is used within an
 EquipmentInstance that does not have a parent element to which the
 CircuitConnection is assumed to connect, a reference ID can be used
 to associate this CircuitConnection to another EquipmentInstance
 elsewhere in a document instance. For example, a PvSystem may have an
 AcPointOfConnection that uses a new ElectricalPanel as an AC combiner
 for more than one Inverter. The new electrical panel can be described
 by an ElectricalPanel element in the PvDesign (which in turn refers to
 an ElectricalPanelDefinition element).

in the AcPointOfConnection's EquipmentWhereConnected element.
 That ElectricPanel's EnergizingCircuitConnection element may
 reference another ElectricPanel in an instance of the Project's
 ExistingElectricalHierarchy element.
```

Source

```
<xs:element name="CircuitConnection" type="CircuitConnectionType"/>
```

Element ElectricalDistributionHierarchy

Namespace	http://www.iepmodel.net
Annotations	
Diagram	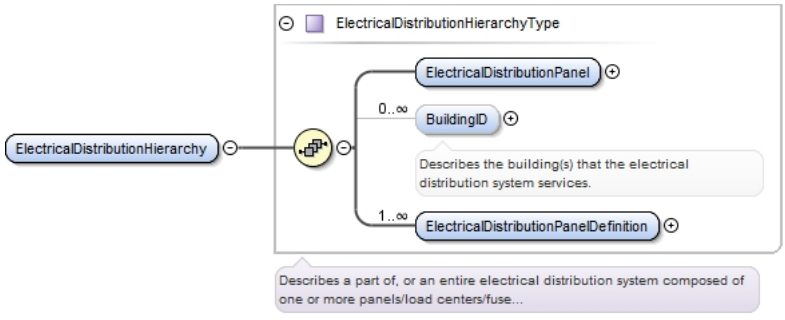

Type	ElectricalDistributionHierarchyType
Properties	content: complex
Model	ElectricalDistributionPanel , BuildingID* , ElectricalDistributionPanelDefinition+
Children	BuildingID, ElectricalDistributionPanel, ElectricalDistributionPanelDefinition

Instance

```
<ElectricalDistributionHierarchy xmlns="http://www.iepmodel.net">
  <ElectricalDistributionPanel EquipmentDefinitionIdRef="" Id="">{1,1}</
ElectricalDistributionPanel>
  <BuildingID>{0,unbounded}</BuildingID>
  <ElectricalDistributionPanelDefinition Id="">{1,unbounded}</
ElectricalDistributionPanelDefinition>
</ElectricalDistributionHierarchy>
```

Source

```
<xs:element name="ElectricalDistributionHierarchy"
 type="ElectricalDistributionHierarchyType">
```

```
  <xs:annotation>
    <xs:documentation/>
  </xs:annotation>
</xs:element>
```

Element WirewayBoxType / SegmentConnection

Namespace	http://www.iepmodel.net
Annotations	The ID Ref for another WirewaySegment. Boxes can have many WirewaySegment connections (e.g. multiple conduit segments can terminate at a box). Conduit is a pipe with 2 ends, so it has a maximum of two WirewaySegments to which it connects.
Diagram	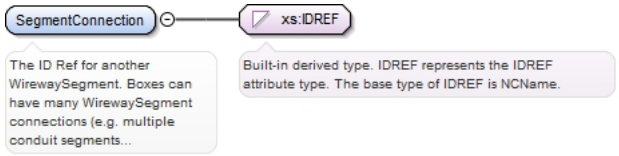
Type	xs:IDREF
Properties	content: simple minOccurs: 1 maxOccurs: unbounded
Source	<xs:element maxOccurs="unbounded" name="SegmentConnection" type="xs:IDREF" minOccurs="1"> <xs:annotation> <xs:documentation>The ID Ref for another WirewaySegment. Boxes can have many WirewaySegment connections (e.g. multiple conduit segments can terminate at a box). Conduit is a pipe with 2 ends, so it has a maximum of two WirewaySegments to which it connects.</xs:documentation> </xs:annotation> </xs:element>

Element ConduitSegmentType / ConduitType

Namespace	http://www.iepmodel.net
Diagram	
Type	TypeOfConduitEnumType
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	enumeration EMT enumeration PVC enumeration Rigid
Source	<xs:element name="ConduitType" type="TypeOfConduitEnumType" minOccurs="0" maxOccurs="1"/>

Element ConduitSegmentType / ConduitDiameter

Namespace	http://www.iepmodel.net
Diagram	
Type	ConduitDiameterEnumType
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	enumeration 1/2 enumeration 3/4 enumeration 1 enumeration 1 1/4

	enumeration	1 1/2
	enumeration	2
Source	<xs:element name="ConduitDiameter" type="ConduitDiameterEnumType" minOccurs="0" maxOccurs="1"/>	

Element ConduitSegmentType / ConduitLength

Namespace	http://www.iepmodel.net
Annotations	The length in feet of the conduit segment. Values should be rounded up to nearest foot.
Diagram	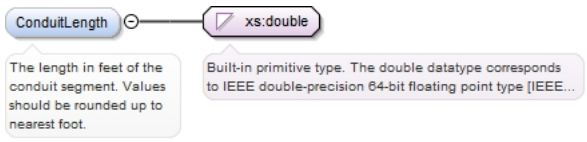
Type	xs:double
Properties	content: simple minOccurs: 0
Source	<xs:element name="ConduitLength" type="xs:double" minOccurs="0"> <xs:annotation> <xs:documentation>The length in feet of the conduit segment. Values should be rounded up to nearest foot.</xs:documentation> </xs:annotation> </xs:element>

Element ConduitSegmentType / SegmentConnection

Namespace	http://www.iepmodel.net
Annotations	The ID Ref for another WirewaySegment. Conduit is a pipe with 2 ends, so it has a maximum of two WirewaySegments to which it connects. Boxes can have many WirewaySegment connections.
Diagram	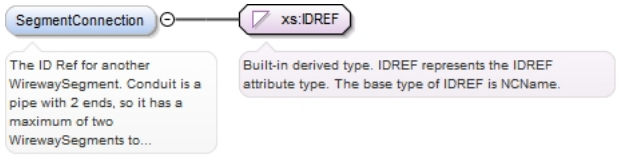
Type	xs:IDREF
Properties	content: simple minOccurs: 0 maxOccurs: 2
Source	<xs:element maxOccurs="2" name="SegmentConnection" type="xs:IDREF" minOccurs="0"> <xs:annotation> <xs:documentation>The ID Ref for another WirewaySegment. Conduit is a pipe with 2 ends, so it has a maximum of two WirewaySegments to which it connects. Boxes can have many WirewaySegment connections.</xs:documentation> </xs:annotation> </xs:element>

Element HVACSystem

Namespace	http://www.iepmodel.net
Annotations	This schema defines the parameters associated with an HVAC system. An HVAC system may contain any combination of the following: a heating system, a cooling system and ventilation properties. Ventilation is defined here as the exchange of air in the space/zone with air outside. An HVAC system references Distribution systems that serve one of three purposes: - deliver conditioning to a space/zone. - provide heat. - provide cold (a fluid to reject heat to). An HVAC system serves a zone, however, zones reference the HVAC systems that serve them. Note that parameters associated with the transport and movement of air and water are captured in a Distribution System.

Diagram	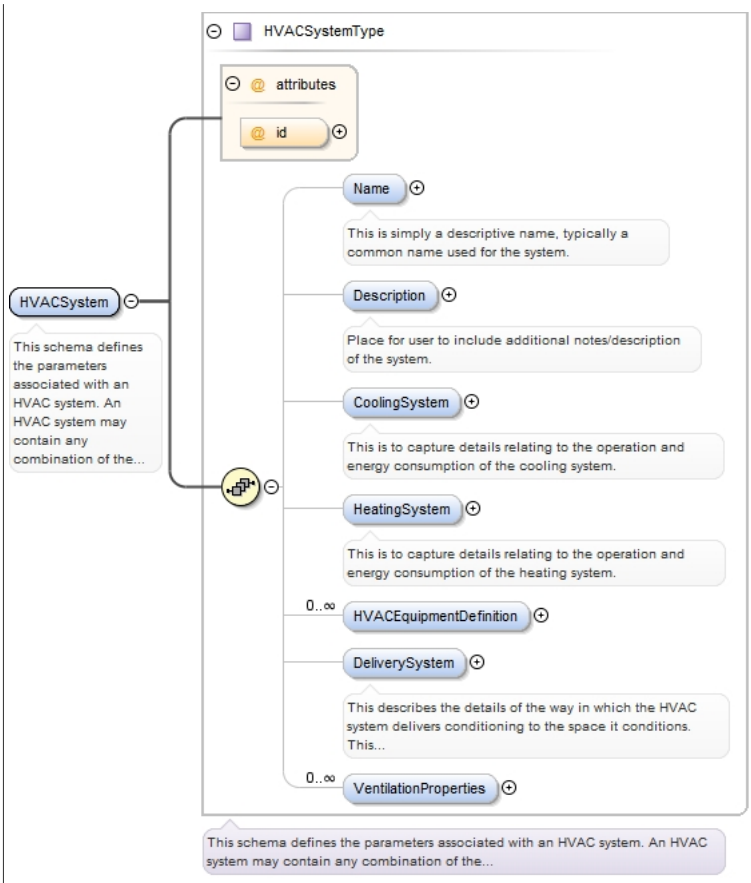
Type	HVACSystemType
Properties	content: complex
Model	Name{0,1} , Description{0,1} , CoolingSystem{0,1} , HeatingSystem{0,1} , HVACEquipmentDefinition* , DeliverySystem{0,1} , VentilationProperties*
Children	CoolingSystem, DeliverySystem, Description, HVACEquipmentDefinition, HeatingSystem, Name, VentilationProperties
Instance	<HVACSystem id="" xmlns="http://www.iepmodel.net"> <Name>{0,1}</Name> <Description>{0,1}</Description> <CoolingSystem>{0,1}</CoolingSystem> <HeatingSystem>{0,1}</HeatingSystem> <HVACEquipmentDefinition Id="">{0,unbounded}</HVACEquipmentDefinition> <DeliverySystem>{0,1}</DeliverySystem> <VentilationProperties>{0,unbounded}</VentilationProperties> </HVACSystem>
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **id** / xs:ID / / / optional
Source	<xs:element name="HVACSystem" type="HVACSystemType"> <xs:annotation> <xs:documentation>This schema defines the parameters associated with an HVAC system. An HVAC system may contain any combination of the following: a heating system, a cooling system and ventilation properties. Ventilation is defined here as the exchange of air in the space/zone with air outside. An HVAC system references Distribution systems that serve one of three purposes: - deliver conditioning to a space/zone. - provide heat. - provide cold (a fluid to reject heat to). An HVAC system serves a zone, however, zones reference the HVAC systems that serve them. Note that parameters associated with the transport and movement of air and water are captured in a Distribution System.</xs:documentation> </xs:annotation> </xs:element>

Element LightingSystem

Namespace	http://www.iepmodel.net
Annotations	

Diagram	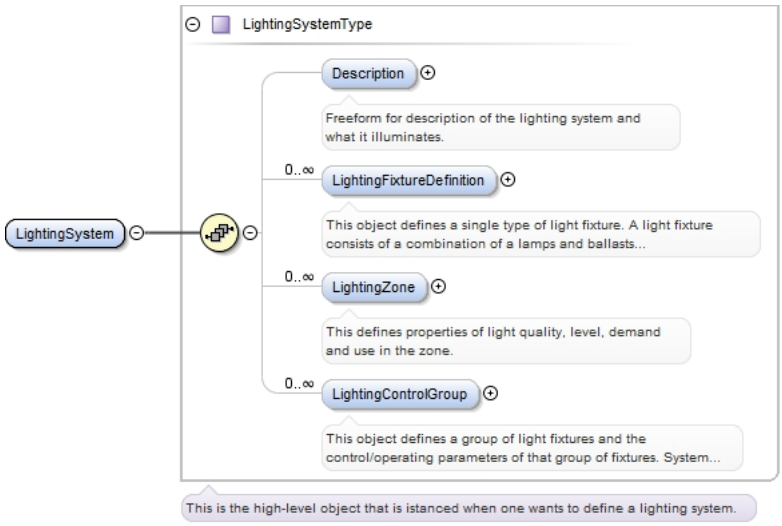
Type	LightingSystemType
Properties	content: complex
Model	Description{0,1} , LightingFixtureDefinition* , LightingZone* , LightingControlGroup*
Children	Description, LightingControlGroup, LightingFixtureDefinition, LightingZone
Instance	<LightingSystem xmlns="http://www.iepmodel.net"> <Description>{0,1}</Description> <LightingFixtureDefinition Id="">{0,unbounded}</LightingFixtureDefinition> <LightingZone id="">{0,unbounded}</LightingZone> <LightingControlGroup id="">{0,unbounded}</LightingControlGroup> </LightingSystem>
Source	<xs:element name="LightingSystem" type="LightingSystemType"> <xs:annotation> <xs:documentation> </xs:documentation> </xs:annotation> </xs:element>

Element Participant

Namespace	http://www.iepmodel.net

Diagram	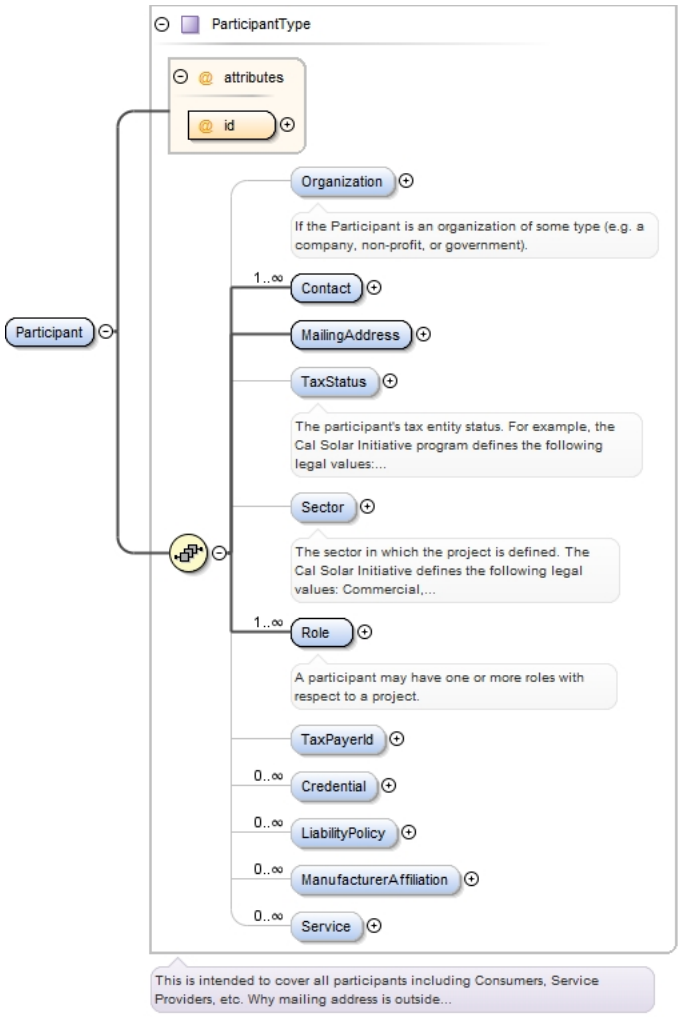
Type	ParticipantType
Properties	content: complex
Model	Organization{0,1} , Contact+ , MailingAddress , TaxStatus{0,1} , Sector{0,1} , Role+ , TaxPayerId{0,1} , Credential* , LiabilityPolicy* , ManufacturerAffiliation* , Service*
Children	Contact, Credential, LiabilityPolicy, MailingAddress, ManufacturerAffiliation, Organization, Role, Sector, Service, TaxPayerId, TaxStatus
Instance	<Participant id="" xmlns="http://www.iepmodel.net"> <Organization>{0,1}</Organization> <Contact>{1,unbounded}</Contact> <MailingAddress>{1,1}</MailingAddress> <TaxStatus>{0,1}</TaxStatus> <Sector>{0,1}</Sector> <Role>{1,unbounded}</Role> <TaxPayerId>{0,1}</TaxPayerId> <Credential>{0,unbounded}</Credential> <LiabilityPolicy>{0,unbounded}</LiabilityPolicy> <ManufacturerAffiliation>{0,unbounded}</ManufacturerAffiliation> <Service>{0,unbounded}</Service> </Participant>
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **id** / xs:ID / / / required
Source	<xs:element name="Participant" type="ParticipantType"/>

Element PvDesign

Namespace	http://www.iepmodel.net
Annotations	Root element of a PV system definition.

Diagram	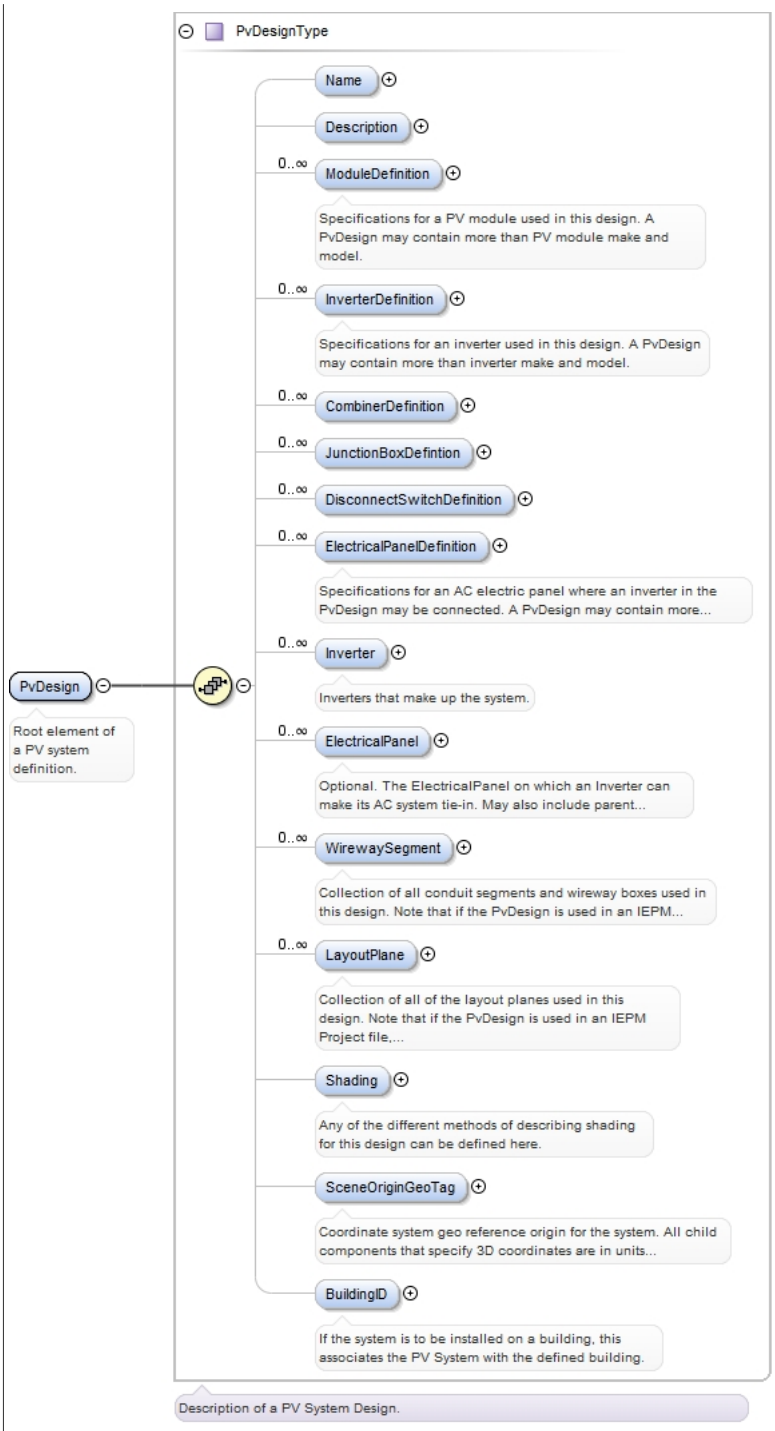
Type	PvDesignType
Properties	content: complex
Model	Name{0,1} , Description{0,1} , ModuleDefinition* , InverterDefinition* , CombinerDefinition* , JunctionBoxDefintion* , DisconnectSwitchDefinition* , ElectricalPanelDefinition* , Inverter* , ElectricalPanel* , WiresaySegment* , LayoutPlane* , Shading{0,1} , SceneOriginGeoTag{0,1} , BuildingID{0,1}
Children	BuildingID, CombinerDefinition, Description, DisconnectSwitchDefinition, ElectricalPanel, ElectricalPanelDefinition, Inverter, InverterDefinition, JunctionBoxDefintion, LayoutPlane, ModuleDefinition, Name, SceneOriginGeoTag, Shading, WiresaySegment
Instance	<PvDesign xmlns="http://www.iepmodel.net"> <Name>{0,1}</Name> <Description>{0,1}</Description> <ModuleDefinition Id="">{0,unbounded}</ModuleDefinition> <InverterDefinition Id="">{0,unbounded}</InverterDefinition> <CombinerDefinition Id="">{0,unbounded}</CombinerDefinition>

```
  <JunctionBoxDefintion Id="">{0,unbounded}</JunctionBoxDefintion>
  <DisconnectSwitchDefinition Id="">{0,unbounded}</DisconnectSwitchDefinition>
  <ElectricalPanelDefinition Id="">{0,unbounded}</ElectricalPanelDefinition>
  <Inverter EquipmentDefinitionIdRef="" Id="">{0,unbounded}</Inverter>
  <ElectricalPanel EquipmentDefinitionIdRef="" Id="">{0,unbounded}</ElectricalPanel>
  <WirewaySegment EquipmentDefinitionIdRef="" Id="">{0,unbounded}</WirewaySegment>
  <LayoutPlane id="">{0,unbounded}</LayoutPlane>
  <Shading>{0,1}</Shading>
  <SceneOriginGeoTag>{0,1}</SceneOriginGeoTag>
  <BuildingID>{0,1}</BuildingID>
</PvDesign>
```

Source

```
<xs:element name="PvDesign" type="PvDesignType">
  <xs:annotation>
    <xs:documentation>Root element of a PV system definition.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element PvSystemBasic

Namespace	http://www.iepmodel.net
Annotations	Root element of a basic PV System description
Diagram	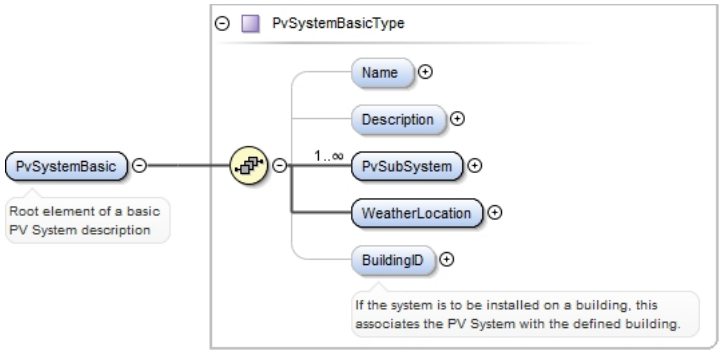
Type	PvSystemBasicType
Properties	content: complex
Model	Name{0,1} , Description{0,1} , PvSubSystem+ , WeatherLocation , BuildingID{0,1}
Children	BuildingID, Description, Name, PvSubSystem, WeatherLocation
Instance	


```
<PvSystemBasic xmlns="http://www.iepmodel.net">
  <Name>{0,1}</Name>
  <Description>{0,1}</Description>
  <PvSubSystem>{1,unbounded}</PvSubSystem>
  <WeatherLocation>{1,1}</WeatherLocation>
  <BuildingID>{0,1}</BuildingID>
</PvSystemBasic>
```

Source

```
<xs:element name="PvSystemBasic" type="PvSystemBasicType">
  <xs:annotation>
    <xs:documentation>Root element of a basic PV System description</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element UtilityAccount

Namespace	http://www.iepmodel.net
Diagram	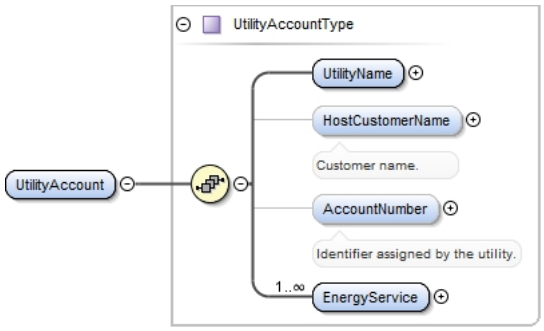
Type	UtilityAccountType

Properties	content: complex
Model	UtilityName , HostCustomerName{0,1} , AccountNumber{0,1} , EnergyService+
Children	AccountNumber, EnergyService, HostCustomerName, UtilityName
Instance	<UtilityAccount xmlns="http://www.iepmodel.net"> <UtilityName>{1,1}</UtilityName> <HostCustomerName>{0,1}</HostCustomerName> <AccountNumber>{0,1}</AccountNumber> <EnergyService>{1,unbounded}</EnergyService> </UtilityAccount>
Source	<xs:element name="UtilityAccount" type="UtilityAccountType"/>

Element WaterHeatingSystem

Namespace	http://www.iepmodel.net
Annotations	This system describes the properties of a water heating system. This object contains system properties as well as equipment properties.

Diagram	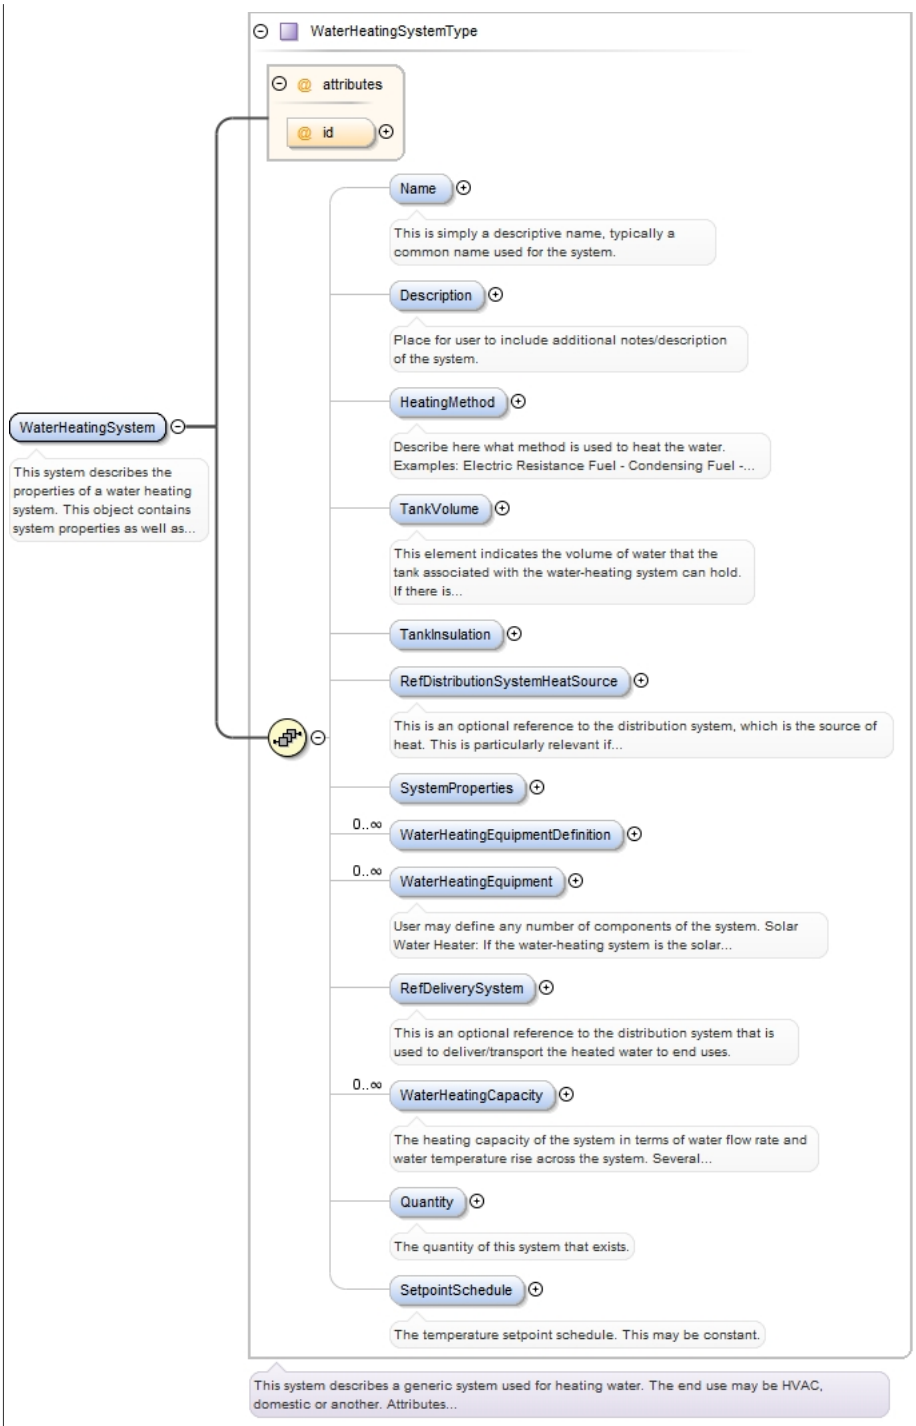
Type	WaterHeatingSystemType
Properties	content: complex
Model	Name{0,1} , Description{0,1} , HeatingMethod{0,1} , TankVolume{0,1} , TankInsulation{0,1} , RefDistributionSystemHeatSource{0,1} , SystemProperties{0,1} , WaterHeatingEquipmentDefinition* , WaterHeatingEquipment* , RefDeliverySystem{0,1} , WaterHeatingCapacity* , Quantity{0,1} , SetpointSchedule{0,1}
Children	Description, HeatingMethod, Name, Quantity, RefDeliverySystem, RefDistributionSystemHeatSource, SetpointSchedule, SystemProperties, TankInsulation, TankVolume, WaterHeatingCapacity, WaterHeatingEquipment, WaterHeatingEquipmentDefinition
Instance	<WaterHeatingSystem id="" xmlns="http://www.iepmodel.net"> <Name>{0,1}</Name> <Description>{0,1}</Description> <HeatingMethod>{0,1}</HeatingMethod> <TankVolume Unit="" UnitDesc="">{0,1}</TankVolume> <TankInsulation>{0,1}</TankInsulation>

<table>
<tr><td></td><td>

```
  <RefDistributionSystemHeatSource>{0,1}</RefDistributionSystemHeatSource>
  <SystemProperties>{0,1}</SystemProperties>
  <WaterHeatingEquipmentDefinition Id="">{0,unbounded}</WaterHeatingEquipmentDefinition>
  <WaterHeatingEquipment EquipmentDefinitionIdRef="" Id="">{0,unbounded}</
WaterHeatingEquipment>
  <RefDeliverySystem>{0,1}</RefDeliverySystem>
  <WaterHeatingCapacity>{0,unbounded}</WaterHeatingCapacity>
  <Quantity>{0,1}</Quantity>
  <SetpointSchedule>{0,1}</SetpointSchedule>
</WaterHeatingSystem>
```

</td></tr>
<tr><td>Attributes</td><td>
<table>
<tr><th>QName</th><th>Type</th><th>Fixed</th><th>Default</th><th>Use</th></tr>
<tr><td>id</td><td>xs:ID</td><td></td><td></td><td>optional</td></tr>
</table>
</td></tr>
<tr><td>Source</td><td>

```
<xs:element name="WaterHeatingSystem" type="WaterHeatingSystemType">
  <xs:annotation>
    <xs:documentation>This system describes the properties of a water heating system. This
 object contains system properties as well as equipment properties.</xs:documentation>
  </xs:annotation>
</xs:element>
```

</td></tr>
</table>

Complex Type(s)

Complex Type `ProjectType`

<table>
<tr><td>Namespace</td><td>http://www.iepmodel.net</td></tr>
<tr><td>Annotations</td><td>

```
Project is intended to consolidate at a high level all of the necessary information
 required to complete a project.

Can be used for multiple use cases where data is passed between parties/tools, including:
 project leads, collection of site audit data, proposing a set of measures, proposing a
 scope of work based on defined measures, etc.

Included reference to Utility Service here instead of in Building since Project
 encapsulates building
```

</td></tr>
</table>

Diagram

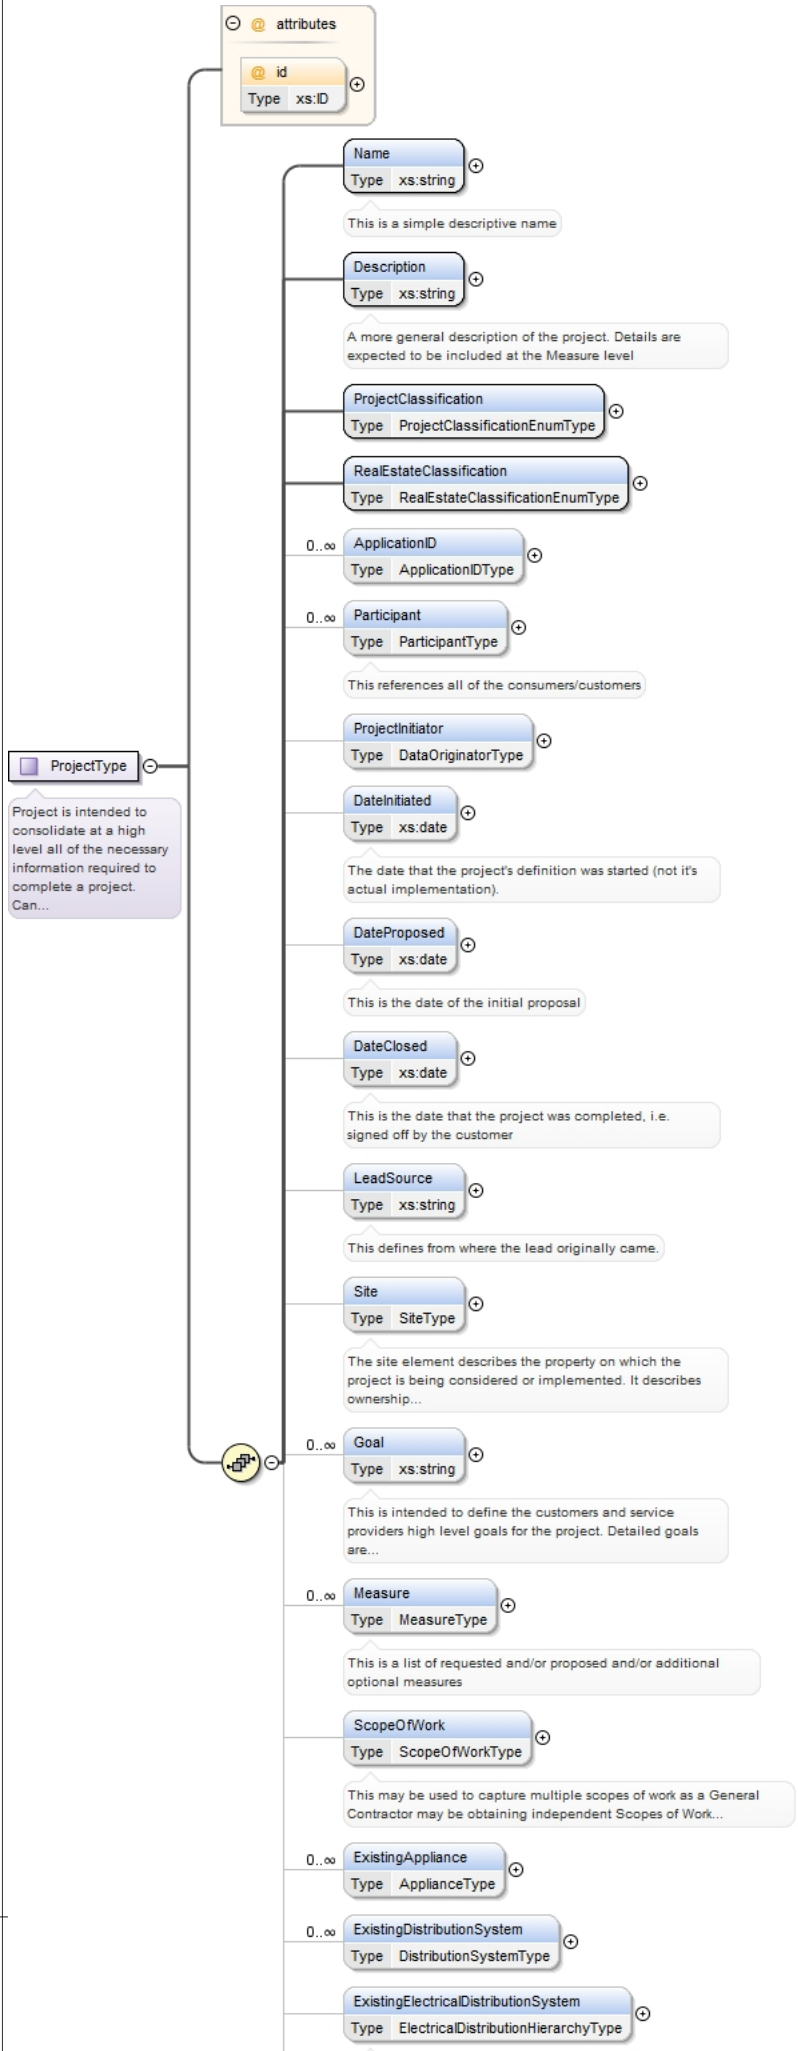
attributes
id
Type xs:ID
ProjectType
Project is intended to consolidate at a high level all of the necessary information required to complete a project. Can...
Name
Type xs:string
This is a simple descriptive name
Description
Type xs:string
A more general description of the project. Details are expected to be included at the Measure level
ProjectClassification
Type ProjectClassificationEnumType
RealEstateClassification
Type RealEstateClassificationEnumType
0..∞
ApplicationID
Type ApplicationIDType
0..∞
Participant
Type ParticipantType
This references all of the consumers/customers
ProjectInitiator
Type DataOriginatorType
DateInitiated
Type xs:date
The date that the project's definition was started (not it's actual implementation).
DateProposed
Type xs:date
This is the date of the initial proposal
DateClosed
Type xs:date
This is the date that the project was completed, i.e. signed off by the customer
LeadSource
Type xs:string
This defines from where the lead originally came.
Site
Type SiteType
The site element describes the property on which the project is being considered or implemented. It describes ownership...
0..∞
Goal
Type xs:string
This is intended to define the customers and service providers high level goals for the project. Detailed goals are...
0..∞
Measure
Type MeasureType
This is a list of requested and/or proposed and/or additional optional measures
ScopeOfWork
Type ScopeOfWorkType
This may be used to capture multiple scopes of work as a General Contractor may be obtaining independent Scopes of Work...
0..∞
ExistingAppliance
Type ApplianceType
0..∞
ExistingDistributionSystem
Type DistributionSystemType
ExistingElectricalDistributionSystem
Type ElectricalDistributionHierarchyType

Used by	Element Project
Model	Name , Description , ProjectClassification , RealEstateClassification , ApplicationID* , Participant* , ProjectInitiator{0,1} , DateInitiated{0,1} , DateProposed{0,1} , DateClosed{0,1} , LeadSource{0,1} , Site{0,1} , Goal* , Measure* , ScopeOfWork{0,1} , ExistingAppliance* , ExistingDistributionSystem* , ExistingElectricalDistributionSystem{0,1} , ExistingHVAC* , ExistingLighting* , ExistingPvSystem* , ExistingWaterHeatingSystem* , Schedules{0,1} , UtilityService* , OccupantConstraints* , ConsumerFeedback*
Children	ApplicationID, ConsumerFeedback, DateClosed, DateInitiated, DateProposed, Description, ExistingAppliance, ExistingDistributionSystem, ExistingElectricalDistributionSystem, ExistingHVAC, ExistingLighting, ExistingPvSystem, ExistingWaterHeatingSystem, Goal, LeadSource, Measure, Name, OccupantConstraints, Participant, ProjectClassification, ProjectInitiator, RealEstateClassification, Schedules, ScopeOfWork, Site, UtilityService

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			optional

Source

```
<xs:complexType name="ProjectType">
  <xs:annotation>
    <xs:documentation>Project is intended to consolidate at a high level all of the
 necessary information required to complete a project. Can be used for multiple use cases
 where data is passed between parties/tools, including: project leads, collection of
 site audit data, proposing a set of measures, proposing a scope of work based on defined
 measures, etc. Included reference to Utility Service here instead of in Building since
 Project encapsulates building</xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="Name" type="xs:string" minOccurs="1" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is a simple descriptive name</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Description" type="xs:string" minOccurs="1" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>A more general description of the project. Details are expected
 to be included at the Measure level</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="ProjectClassification" type="ProjectClassificationEnumType"
 minOccurs="1" maxOccurs="1"/>
    <xs:element name="RealEstateClassification" type="RealEstateClassificationEnumType"
 maxOccurs="1" minOccurs="1"/>
    <xs:element maxOccurs="unbounded" minOccurs="0" name="ApplicationID"
 type="ApplicationIDType"/>
    <xs:element name="Participant" type="ParticipantType" minOccurs="0"
 maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>This references all of the consumers/customers</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="ProjectInitiator" type="DataOriginatorType" maxOccurs="1"
 minOccurs="0"/>
    <xs:element name="DateInitiated" type="xs:date" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>The date that the project's definition was started (not it's
 actual implementation).</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="DateProposed" type="xs:date" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is the date of the initial proposal</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="DateClosed" type="xs:date" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is the date that the project was completed, i.e. signed off
 by the customer</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="LeadSource" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This defines from where the lead originally came.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Site" type="SiteType" minOccurs="0">
      <xs:annotation>
        <xs:documentation>The site element describes the property on which the project is
 being considered or implemented. It describes ownership and jurisdictional information,
 as well as physical attributes. It inlcudes elements describing both buildings and
```

```
grounds. The Site element is particularly useful for capturing site audit data prior to
defining specific measures, including relevant data about locations for where proposed
energy system equipment can be placed.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Goal" type="xs:string" minOccurs="0" maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>This is intended to define the customers and service providers
high level goals for the project. Detailed goals are expected to be recorded at the
Measure level</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="unbounded" minOccurs="0" name="Measure" type="MeasureType">
      <xs:annotation>
        <xs:documentation>This is a list of requested and/or proposed and/or additional
optional measures</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="ScopeOfWork" type="ScopeOfWorkType" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This may be used to capture multiple scopes of work as a General
Contractor may be obtaining independent Scopes of Work from multiple contractors. Each of
those scopes of work would be captured in an independent Project.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="unbounded" minOccurs="0" name="ExistingAppliance"
type="ApplianceType"/>
    <xs:element name="ExistingDistributionSystem" type="DistributionSystemType"
minOccurs="0" maxOccurs="unbounded"/>
    <xs:element minOccurs="0" name="ExistingElectricalDistributionSystem"
type="ElectricalDistributionHierarchyType" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This defines the hierarchy of existing panels and their
subpanels</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="ExistingHVAC" type="HVACSystemType" minOccurs="0"
maxOccurs="unbounded"/>
    <xs:element name="ExistingLighting" type="LightingSystemType" minOccurs="0"
maxOccurs="unbounded"/>
    <xs:element name="ExistingPvSystem" nillable="false" minOccurs="0"
maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>An existing photovoltaic (PV) system on the site. Generates
electrical energy from sunlight.</xs:documentation>
      </xs:annotation>
      <xs:complexType>
        <xs:choice>
          <xs:element name="Basic" type="PvSystemBasicType">
            <xs:annotation>
              <xs:documentation>A basic PV system description. Does not call out specific
equipment, rather only generic system ratings.</xs:documentation>
            </xs:annotation>
          </xs:element>
          <xs:element name="Complex" type="PvDesignType">
            <xs:annotation>
              <xs:documentation>A full PV system design using specific equipment.</
xs:documentation>
            </xs:annotation>
          </xs:element>
        </xs:choice>
      </xs:complexType>
    </xs:element>
    <xs:element name="ExistingWaterHeatingSystem" type="WaterHeatingSystemType"
minOccurs="0" maxOccurs="unbounded"/>
    <xs:element maxOccurs="1" minOccurs="0" name="Schedules">
      <xs:annotation>
        <xs:documentation>This is a container for all schedule definitions for the systems
within the project.</xs:documentation>
      </xs:annotation>
      <xs:complexType>
        <xs:sequence>
          <xs:element maxOccurs="unbounded" minOccurs="1" ref="DaySchedule"/>
          <xs:element maxOccurs="unbounded" minOccurs="1" ref="WeekSchedule"/>
          <xs:element maxOccurs="unbounded" minOccurs="1" ref="Schedule"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:element name="UtilityService" type="UtilityAccountType" minOccurs="0"
maxOccurs="unbounded">
      <xs:annotation>
```

```
        <xs:documentation>This references the Utility company providing energy to the
 site. Included reference to Utility Service here instead of in Building since Project
 encapsulates building</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="OccupantConstraints" type="OccupantConstraintType" minOccurs="0"
 maxOccurs="unbounded"/>
    <xs:element name="ConsumerFeedback" type="ConsumerFeedbackType" minOccurs="0"
 maxOccurs="unbounded"/>
  </xs:sequence>
  <xs:attribute name="id" type="xs:ID"/>
</xs:complexType>
```

Complex Type `ApplicationIDType`

Namespace	http://www.iepmodel.net
Annotations	This is used to tag schemas elements with a specific application ID. Any element may have multiple application IDs
Diagram	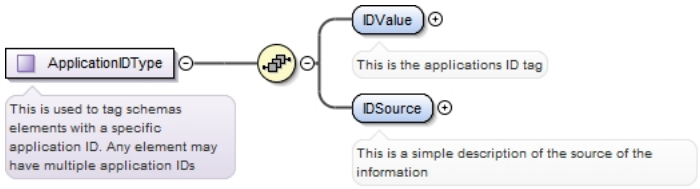
Used by	Element ProjectType/ApplicationID
Model	IDValue , IDSource
Children	IDSource, IDValue
Source	

```
<xs:complexType name="ApplicationIDType">
  <xs:annotation>
    <xs:documentation>This is used to tag schemas elements with a specific application ID.
 Any element may have multiple application IDs</xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="IDValue" type="xs:string" minOccurs="1" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is the applications ID tag</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="IDSource" type="xs:string" minOccurs="1" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is a simple description of the source of the information</
xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

Complex Type `ParticipantType`

Namespace	http://www.iepmodel.net
Annotations	This is intended to cover all participants including Consumers, Service Providers, etc. Why mailing address is outside the Contact? mailing addresses are closely associated with the role of the participant, not the individual contacts within a participant.

Diagram	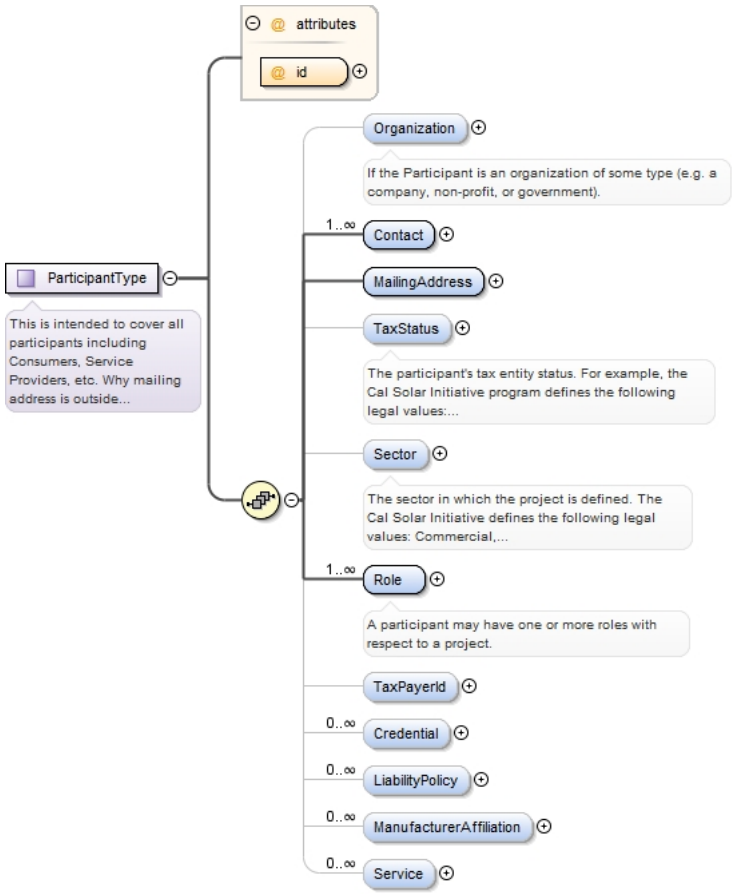
Used by	Elements Participant, ProjectType/Participant
Model	Organization{0,1} , Contact+ , MailingAddress , TaxStatus{0,1} , Sector{0,1} , Role+ , TaxPayerId{0,1} , Credential* , LiabilityPolicy* , ManufacturerAffiliation* , Service*
Children	Contact, Credential, LiabilityPolicy, MailingAddress, ManufacturerAffiliation, Organization, Role, Sector, Service, TaxPayerId, TaxStatus

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			required

Source

```
<xs:complexType name="ParticipantType">
  <xs:annotation>
    <xs:documentation>This is intended to cover all participants including Consumers,
 Service Providers, etc. Why mailing address is outside the Contact? mailing addresses are
 closely associated with the role of the participant, not the individual contacts within a
 participant.</xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="Organization" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>If the Participant is an organization of some type (e.g. a
 company, non-profit, or government).</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Contact" type="ContactType" minOccurs="1" maxOccurs="unbounded"/>
    <xs:element name="MailingAddress" type="AddressType" minOccurs="1" maxOccurs="1"/>
    <xs:element name="TaxStatus" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>The participant's tax entity status. For example, the Cal Solar
 Initiative program defines the following legal values: Corporation, Individual, LLC
 (Corporation), LLC (Non-Corporation), Partnership, Sole Proprietor, Tax Exempt. This may
 hold other values depending on the needs of the user.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Sector" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>The sector in which the project is defined. The Cal Solar
 Initiative defines the following legal values: Commercial, Government, Non-Profit,
 Residential. Other values can be used to support defined sectors used by other
 programs.</xs:documentation>
```

```
      </xs:annotation>
    </xs:element>
    <xs:element name="Role" type="ParticipantRoleEnumType" minOccurs="1"
 maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>A participant may have one or more roles with respect to a
 project.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="TaxPayerId" type="xs:string" minOccurs="0" maxOccurs="1"/>
    <xs:element name="Credential" type="CredentialType" minOccurs="0"
 maxOccurs="unbounded"/>
    <xs:element name="LiabilityPolicy" type="LiabilityPolicyType" minOccurs="0"
 maxOccurs="unbounded"/>
    <xs:element name="ManufacturerAffiliation" type="ManufacturerAffiliationType"
 minOccurs="0" maxOccurs="unbounded"/>
    <xs:element name="Service" type="ServiceType" minOccurs="0" maxOccurs="unbounded"/>
  </xs:sequence>
  <xs:attribute name="id" use="required" type="xs:ID"/>
</xs:complexType>
```

Complex Type `ContactType`

Namespace	http://www.iepmodel.net
Annotations	This schema has been extended from one of the components in the Clean Power Research schema included in their PowerClerk schema. It's intended use is to define the contacts in a particular project for customers, contractors, service providers, etc.
Diagram	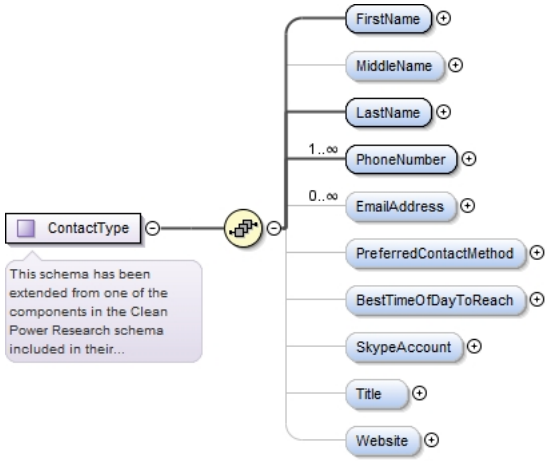
Used by	Elements CertifyingAuthority/Contact, ParticipantType/Contact
Model	FirstName , MiddleName{0,1} , LastName , PhoneNumber+ , EmailAddress* , PreferredContactMethod{0,1} , BestTimeOfDayToReach{0,1} , SkypeAccount{0,1} , Title{0,1} , Website{0,1}
Children	BestTimeOfDayToReach, EmailAddress, FirstName, LastName, MiddleName, PhoneNumber, PreferredContactMethod, SkypeAccount, Title, Website
Source	

```
<xs:complexType name="ContactType">
  <xs:annotation>
    <xs:documentation>This schema has been extended from one of the components in the
 Clean Power Research schema included in their PowerClerk schema. It's intended use
 is to define the contacts in a particular project for customers, contractors, service
 providers, etc.</xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="FirstName" type="xs:string" minOccurs="1" maxOccurs="1"/>
    <xs:element name="MiddleName" type="xs:string" minOccurs="0" maxOccurs="1"/>
    <xs:element name="LastName" type="xs:string" minOccurs="1" maxOccurs="1"/>
    <xs:element name="PhoneNumber" type="PhoneNumberType" minOccurs="1"
 maxOccurs="unbounded"/>
    <xs:element name="EmailAddress" type="EmailAddressType" minOccurs="0"
 maxOccurs="unbounded"/>
    <xs:element name="PreferredContactMethod" type="PreferredContactMethodEnumType"
 minOccurs="0" maxOccurs="1"/>
    <xs:element name="BestTimeOfDayToReach" type="xs:string" minOccurs="0" maxOccurs="1"/>
    <xs:element name="SkypeAccount" type="xs:string" minOccurs="0" maxOccurs="1"/>
    <xs:element name="Title" type="xs:string" minOccurs="0" maxOccurs="1"/>
    <xs:element name="Website" type="xs:string" minOccurs="0" maxOccurs="1"/>
  </xs:sequence>
</xs:complexType>
```

Complex Type PhoneNumberType

Namespace	http://www.iepmodel.net
Diagram	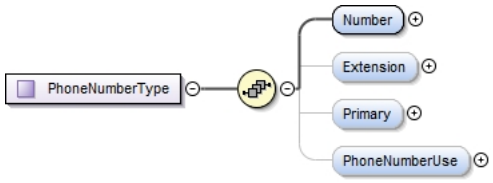
Used by	Element ContactType/PhoneNumber
Model	Number , Extension{0,1} , Primary{0,1} , PhoneNumberUse{0,1}
Children	Extension, Number, PhoneNumberUse, Primary
Source	<xs:complexType name="PhoneNumberType"> <xs:sequence> <xs:element name="Number" type="xs:string" minOccurs="1" maxOccurs="1"/> <xs:element name="Extension" type="xs:int" minOccurs="0" maxOccurs="1" nillable="true"/> <xs:element name="Primary" type="xs:boolean" minOccurs="0" maxOccurs="1"/> <xs:element name="PhoneNumberUse" type="PhoneNumberEnumType" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

Complex Type EmailAddressType

Namespace	http://www.iepmodel.net
Diagram	
Used by	Element ContactType/EmailAddress
Model	Address{0,1} , Primary{0,1} , EmailAddressUse{0,1}
Children	Address, EmailAddressUse, Primary
Source	<xs:complexType name="EmailAddressType"> <xs:sequence> <xs:element name="Address" type="xs:string" minOccurs="0" maxOccurs="1"/> <xs:element name="Primary" type="xs:boolean" minOccurs="0" maxOccurs="1"/> <xs:element name="EmailAddressUse" type="EmailAddressEnumType" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

Complex Type AddressType

Namespace	http://www.iepmodel.net

Diagram	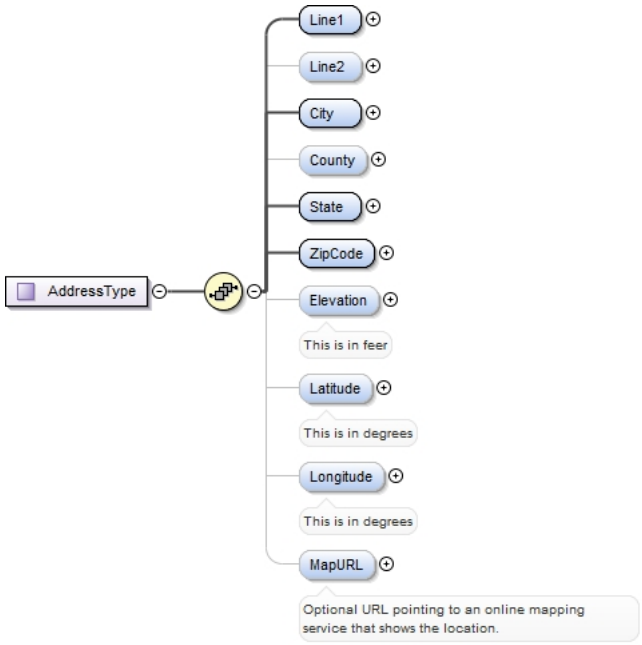
Used by	Elements CertifyingAuthority/MailingAddress, ParticipantType/MailingAddress, SiteType/Location
Model	Line1 , Line2{0,1} , City , County{0,1} , State , ZipCode , Elevation{0,1} , Latitude{0,1} , Longitude{0,1} , MapURL{0,1}
Children	City, County, Elevation, Latitude, Line1, Line2, Longitude, MapURL, State, ZipCode
Source	

```
<xs:complexType name="AddressType">
  <xs:sequence>
    <xs:element name="Line1" type="xs:string"/>
    <xs:element name="Line2" type="xs:string" minOccurs="0" maxOccurs="1"/>
    <xs:element name="City" type="xs:string"/>
    <xs:element name="County" type="xs:string" minOccurs="0" maxOccurs="1"/>
    <xs:element name="State" type="xs:string" minOccurs="1"/>
    <xs:element name="ZipCode" type="ZipCodeType"/>
    <xs:element name="Elevation" type="xs:float" minOccurs="0" nillable="true">
      <xs:annotation>
        <xs:documentation>This is in feer</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Latitude" type="xs:float" minOccurs="0" nillable="true">
      <xs:annotation>
        <xs:documentation>This is in degrees</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Longitude" type="xs:float" minOccurs="0" nillable="true">
      <xs:annotation>
        <xs:documentation>This is in degrees</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="MapURL" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Optional URL pointing to an online mapping service that shows
 the location.</xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

Complex Type `CredentialType`

Namespace	http://www.iepmodel.net
Annotations	Credential Validation describes a way for software and service developers using the IEP model to verify that a particular individual (typically a contractor, home energy rater, or similar professional) has a credential issued by a certifying authority (“CA”, such as a contractor licensing board, HERS provider, or similar authority). It also specifies a way to describe credential metadata, such as status and dates.

Diagram	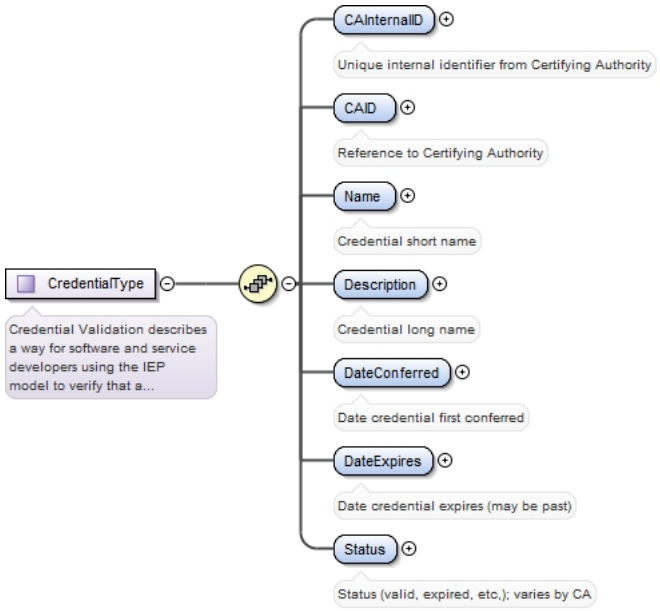
Used by	Element ParticipantType/Credential
Model	CAInternalID , CAID , Name , Description , DateConferred , DateExpires , Status
Children	CAID, CAInternalID, DateConferred, DateExpires, Description, Name, Status
Source	`<xs:complexType name="CredentialType">` `<xs:annotation>` `<xs:documentation>Credential Validation describes a way for software and service developers using the IEP model to verify that a particular individual (typically a contractor, home energy rater, or similar professional) has a credential issued by a certifying authority (“CA”, such as a contractor licensing board, HERS provider, or similar authority). It also specifies a way to describe credential metadata, such as status and dates.</xs:documentation>` `</xs:annotation>` `<xs:sequence>` `<xs:element name="CAInternalID" type="xs:string" minOccurs="1" maxOccurs="1">` `<xs:annotation>` `<xs:documentation>Unique internal identifier from Certifying Authority</xs:documentation>` `</xs:annotation>` `</xs:element>` `<xs:element name="CAID" type="xs:int" minOccurs="1" maxOccurs="1">` `<xs:annotation>` `<xs:documentation>Reference to Certifying Authority</xs:documentation>` `</xs:annotation>` `</xs:element>` `<xs:element name="Name" type="xs:string" minOccurs="1" maxOccurs="1">` `<xs:annotation>` `<xs:documentation>Credential short name</xs:documentation>` `</xs:annotation>` `</xs:element>` `<xs:element name="Description" type="xs:string" minOccurs="1" maxOccurs="1">` `<xs:annotation>` `<xs:documentation>Credential long name</xs:documentation>` `</xs:annotation>` `</xs:element>` `<xs:element name="DateConferred" type="xs:date" minOccurs="1" maxOccurs="1">` `<xs:annotation>` `<xs:documentation>Date credential first conferred</xs:documentation>` `</xs:annotation>` `</xs:element>` `<xs:element name="DateExpires" type="xs:date" minOccurs="1" maxOccurs="1">` `<xs:annotation>` `<xs:documentation>Date credential expires (may be past)</xs:documentation>` `</xs:annotation>` `</xs:element>` `<xs:element name="Status" type="xs:string" minOccurs="1" maxOccurs="1">` `<xs:annotation>` `<xs:documentation>Status (valid, expired, etc,); varies by CA</xs:documentation>` `</xs:annotation>` `</xs:element>` `</xs:sequence>` `</xs:complexType>`

Complex Type `LiabilityPolicyType`

Namespace	http://www.iepmodel.net
Annotations	This is only used for Service Providers(i.e. Seller, Installer, Referrer, etc.)
Diagram	
Used by	Element ParticipantType/LiabilityPolicy
Model	Issuer , Number
Children	Issuer, Number

Source	`<xs:complexType name="LiabilityPolicyType">`
	`  <xs:annotation>`
	`  <xs:documentation>This is only used for Service Providers(i.e. Seller, Installer, Referrer, etc.)</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:sequence>`
	`  <xs:element name="Issuer" type="xs:string" minOccurs="1" maxOccurs="1"/>`
	`  <xs:element name="Number" type="xs:int" minOccurs="1" maxOccurs="1"/>`
	`  </xs:sequence>`
	`</xs:complexType>`

Complex Type `ManufacturerAffiliationType`

Namespace	http://www.iepmodel.net
Annotations	This is for recording formal Manufacturer affiliations This is only used for Service Providers(i.e. Seller, Installer, Referrer, etc.)
Diagram	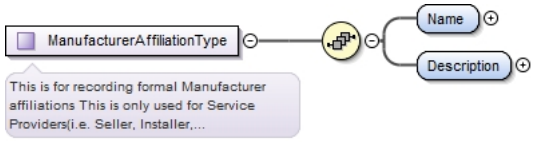
Used by	Element ParticipantType/ManufacturerAffiliation
Model	Name , Description
Children	Description, Name

Source	`<xs:complexType name="ManufacturerAffiliationType">`
	`  <xs:annotation>`
	`  <xs:documentation>This is for recording formal Manufacturer affiliations This is only used for Service Providers(i.e. Seller, Installer, Referrer, etc.)</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:sequence>`
	`  <xs:element name="Name" type="xs:string" minOccurs="1" maxOccurs="1"/>`
	`  <xs:element name="Description" type="xs:string" minOccurs="1" maxOccurs="1"/>`
	`  </xs:sequence>`
	`</xs:complexType>`

Complex Type `ServiceType`

Namespace	http://www.iepmodel.net
Annotations	A Description of the types of services provided. For instance: Heating, cooling, (installation/repair), duct sealing, asbestos removal, etc. This is only used for Service Providers(i.e. Seller, Installer, Referrer, etc.)
Diagram	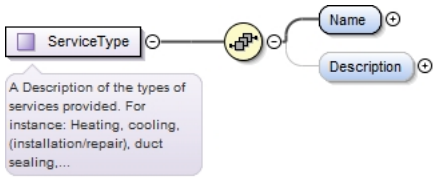
Used by	Element ParticipantType/Service

Model	Name , Description{0,1}
Children	Description, Name
Source	<xs:complexType name="ServiceType"> <xs:annotation> <xs:documentation>A Description of the types of services provided. For instance: Heating, cooling, (installation/repair), duct sealing, asbestos removal, etc. This is only used for Service Providers(i.e. Seller, Installer, Referrer, etc.)</ xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="Name" type="xs:string" minOccurs="1" maxOccurs="1"/> <xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

Complex Type DataOriginatorType

Namespace	http://www.iepmodel.net
Annotations	This is used to keep track from where the data was obtained.
Diagram	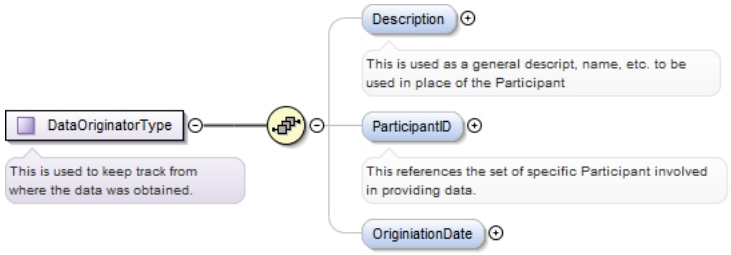
Used by	Elements BenefitType/DeterminationAuthor, MeasureType/Author, ProjectType/ProjectInitiator
Model	Description{0,1} , ParticipantID{0,1} , OriginiationDate{0,1}
Children	Description, OriginiationDate, ParticipantID
Source	<xs:complexType name="DataOriginatorType"> <xs:annotation> <xs:documentation>This is used to keep track from where the data was obtained.</ xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This is used as a general descript, name, etc. to be used in place of the Participant</xs:documentation> </xs:annotation> </xs:element> <xs:element name="ParticipantID" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This references the set of specific Participant involved in providing data.</xs:documentation> </xs:annotation> <xs:complexType> <xs:attribute name="ParticipantID" type="xs:IDREF"> <xs:annotation> <xs:documentation>This references the specific Participant</xs:documentation> </xs:annotation> </xs:attribute> </xs:complexType> </xs:element> <xs:element minOccurs="0" name="OriginiationDate" type="xs:date"/> </xs:sequence> </xs:complexType>

Complex Type SiteType

Namespace	http://www.iepmodel.net

Diagram

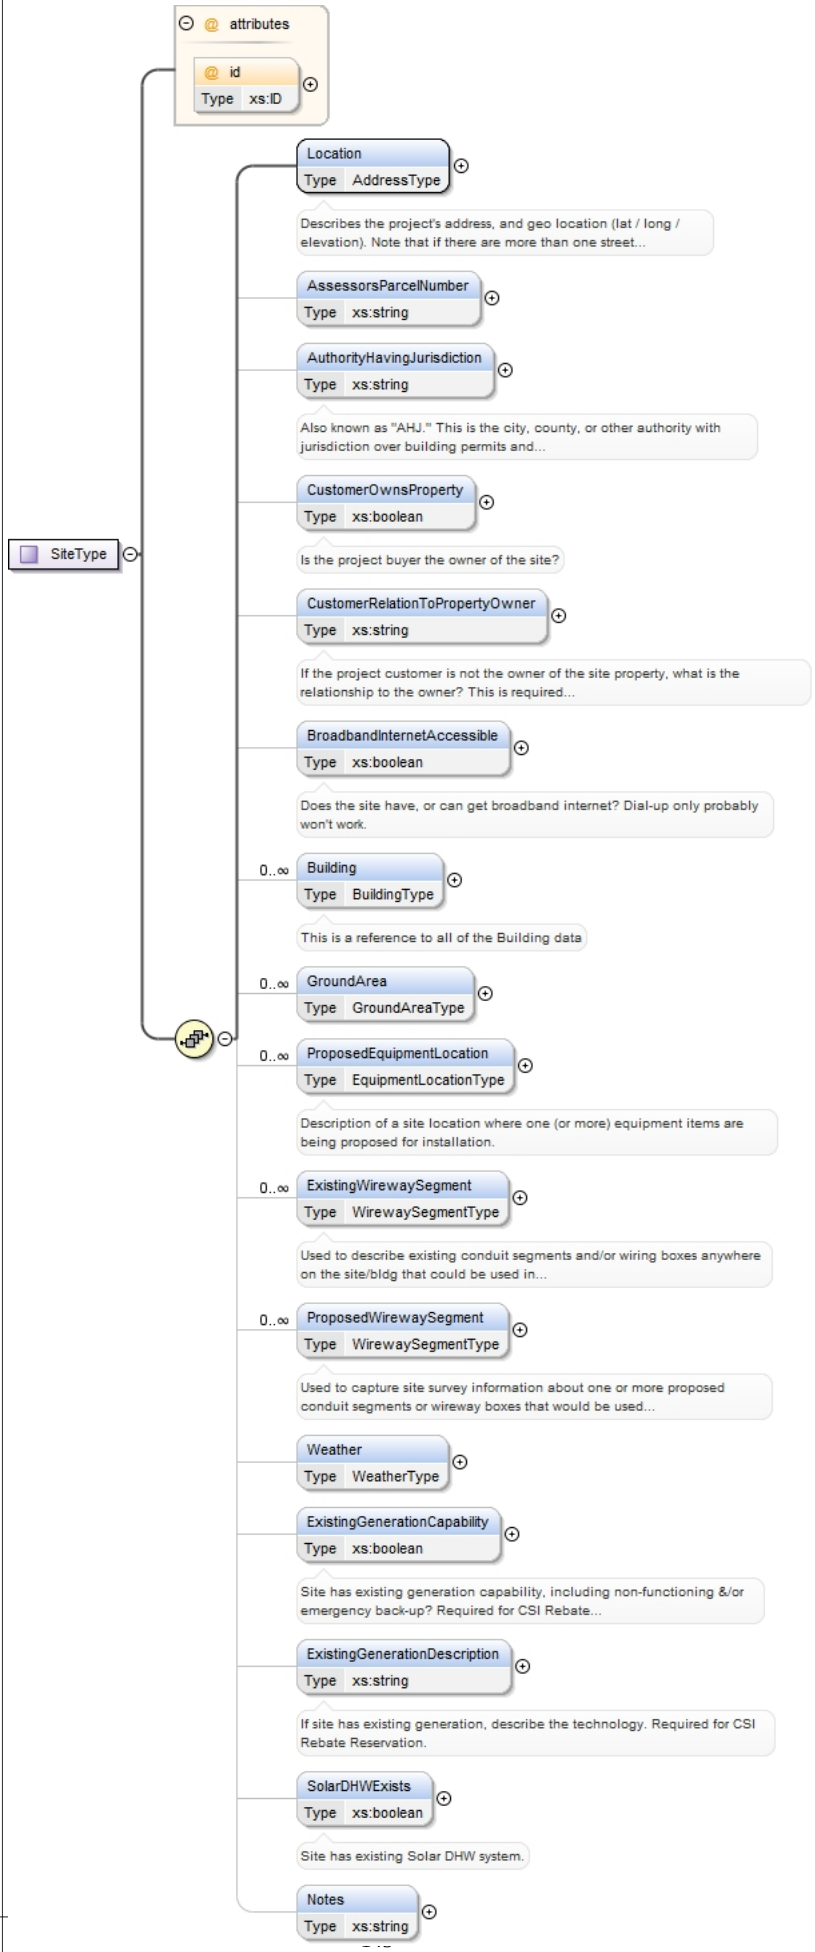
attributes
id
Type xs:ID
SiteType
Location
Type AddressType
Describes the project's address, and geo location (lat / long / elevation). Note that if there are more than one street...
AssessorsParcelNumber
Type xs:string
AuthorityHavingJurisdiction
Type xs:string
Also known as "AHJ." This is the city, county, or other authority with jurisdiction over building permits and...
CustomerOwnsProperty
Type xs:boolean
Is the project buyer the owner of the site?
CustomerRelationToPropertyOwner
Type xs:string
If the project customer is not the owner of the site property, what is the relationship to the owner? This is required...
BroadbandInternetAccessible
Type xs:boolean
Does the site have, or can get broadband internet? Dial-up only probably won't work.
0..∞
Building
Type BuildingType
This is a reference to all of the Building data
0..∞
GroundArea
Type GroundAreaType
0..∞
ProposedEquipmentLocation
Type EquipmentLocationType
Description of a site location where one (or more) equipment items are being proposed for installation.
0..∞
ExistingWirewaySegment
Type WirewaySegmentType
Used to describe existing conduit segments and/or wiring boxes anywhere on the site/bldg that could be used in...
0..∞
ProposedWirewaySegment
Type WirewaySegmentType
Used to capture site survey information about one or more proposed conduit segments or wireway boxes that would be used...
Weather
Type WeatherType
ExistingGenerationCapability
Type xs:boolean
Site has existing generation capability, including non-functioning &/or emergency back-up? Required for CSI Rebate...
ExistingGenerationDescription
Type xs:string
If site has existing generation, describe the technology. Required for CSI Rebate Reservation.
SolarDHWExists
Type xs:boolean
Site has existing Solar DHW system.
Notes
Type xs:string

Used by	Element ProjectType/Site
Model	Location , AssessorsParcelNumber{0,1} , AuthorityHavingJurisdiction{0,1} , CustomerOwnsProperty{0,1} , CustomerRelationToPropertyOwner{0,1} , BroadbandInternetAccessible{0,1} , Building* , GroundArea* , ProposedEquipmentLocation* , ExistingWirewaySegment* , ProposedWirewaySegment* , Weather{0,1} , ExistingGenerationCapability{0,1} , ExistingGenerationDescription{0,1} , SolarDHWExists{0,1} , Notes{0,1}
Children	AssessorsParcelNumber, AuthorityHavingJurisdiction, BroadbandInternetAccessible, Building, CustomerOwnsProperty, CustomerRelationToPropertyOwner, ExistingGenerationCapability, ExistingGenerationDescription, ExistingWirewaySegment, GroundArea, Location, Notes, ProposedEquipmentLocation, ProposedWirewaySegment, SolarDHWExists, Weather

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			optional

Source

```
<xs:complexType name="SiteType">
  <xs:sequence>
    <xs:element maxOccurs="1" minOccurs="1" name="Location" type="AddressType">
      <xs:annotation>
        <xs:documentation>Describes the project's address, and geo location (lat / long / elevation). Note that if there are more than one street address, the model forces these to be separate Sites/Projects. If a Building on the project site has more than one street address, only one is required to identify the location.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="1" minOccurs="0" name="AssessorsParcelNumber" type="xs:string"/>
    <xs:element maxOccurs="1" minOccurs="0" name="AuthorityHavingJurisdiction" type="xs:string">
      <xs:annotation>
        <xs:documentation>Also known as "AHJ." This is the city, county, or other authority with jurisdiction over building permits and inspections.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="1" minOccurs="0" name="CustomerOwnsProperty" type="xs:boolean">
      <xs:annotation>
        <xs:documentation>Is the project buyer the owner of the site?</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="1" minOccurs="0" name="CustomerRelationToPropertyOwner" type="xs:string">
      <xs:annotation>
        <xs:documentation>If the project customer is not the owner of the site property, what is the relationship to the owner? This is required for CSI incentive application.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="1" minOccurs="0" name="BroadbandInternetAccessible" type="xs:boolean">
      <xs:annotation>
        <xs:documentation>Does the site have, or can get broadband internet? Dial-up only probably won't work.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Building" type="BuildingType" minOccurs="0" maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>This is a reference to all of the Building data</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="unbounded" minOccurs="0" name="GroundArea" type="GroundAreaType"/>
    <xs:element maxOccurs="unbounded" minOccurs="0" name="ProposedEquipmentLocation" type="EquipmentLocationType">
      <xs:annotation>
        <xs:documentation>Description of a site location where one (or more) equipment items are being proposed for installation.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="unbounded" minOccurs="0" name="ExistingWirewaySegment" type="WirewaySegmentType">
      <xs:annotation>
        <xs:documentation>Used to describe existing conduit segments and/or wiring boxes anywhere on the site/bldg that could be used in implementation of one or more measures.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="unbounded" minOccurs="0" name="ProposedWirewaySegment" type="WirewaySegmentType">
      <xs:annotation>
```

```
        <xs:documentation>Used to capture site survey information about one or more
 proposed conduit segments or wireway boxes that would be used to support a new system.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="1" minOccurs="0" name="Weather" type="WeatherType"/>
    <xs:element maxOccurs="1" minOccurs="0" name="ExistingGenerationCapability"
 type="xs:boolean">
      <xs:annotation>
        <xs:documentation>Site has existing generation capability, including
 non-functioning &/or emergency back-up? Required for CSI Rebate Reservation.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="1" minOccurs="0" name="ExistingGenerationDescription"
 type="xs:string">
      <xs:annotation>
        <xs:documentation>If site has existing generation, describe the technology.
 Required for CSI Rebate Reservation.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="1" minOccurs="0" name="SolarDHWExists" type="xs:boolean">
      <xs:annotation>
        <xs:documentation>Site has existing Solar DHW system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="1" minOccurs="0" name="Notes" type="xs:string"/>
  </xs:sequence>
  <xs:attribute name="id" type="xs:ID"/>
</xs:complexType>
```

Complex Type `BuildingType`

Namespace	http://www.iepmodel.net
Annotations	`This object captures all of the building components with exception to energy producing and consuming systems.`
Diagram	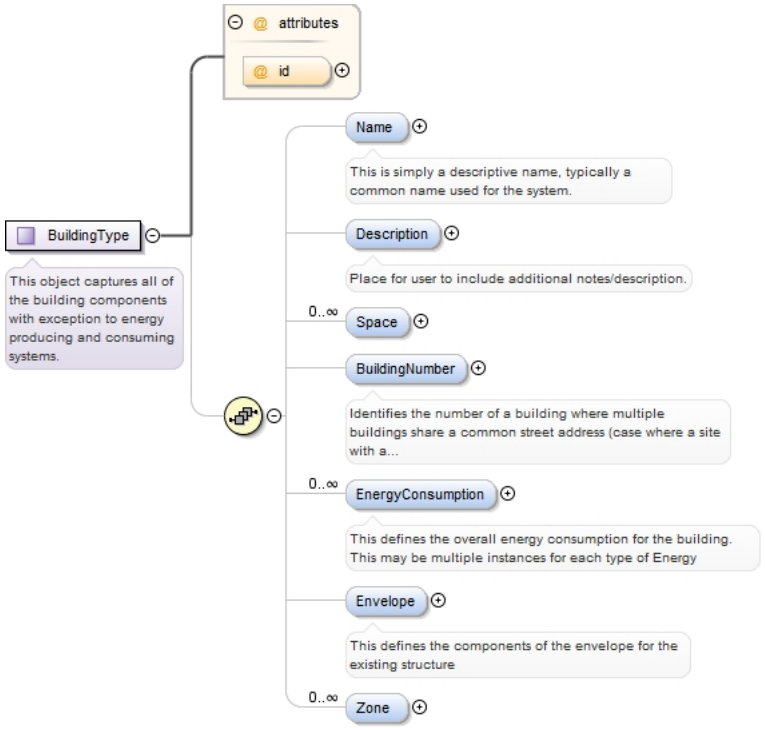
Used by	Elements Building, SiteType/Building
Model	Name{0,1} , Description{0,1} , Space* , BuildingNumber{0,1} , EnergyConsumption* , Envelope{0,1} , Zone*
Children	BuildingNumber, Description, EnergyConsumption, Envelope, Name, Space, Zone

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			optional

Source

```
<xs:complexType name="BuildingType">
  <xs:annotation>
```

```
    <xs:documentation>This object captures all of the building components with exception
 to energy producing and consuming systems.</xs:documentation>
  </xs:annotation>
  <xs:sequence minOccurs="0" maxOccurs="1">
    <xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is simply a descriptive name, typically a common name used
 for the system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="1" minOccurs="0" name="Description" type="xs:string">
      <xs:annotation>
        <xs:documentation>Place for user to include additional notes/description.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Space" type="SpaceType" minOccurs="0" maxOccurs="unbounded"/>
    <xs:element minOccurs="0" name="BuildingNumber" type="xs:string">
      <xs:annotation>
        <xs:documentation>Identifies the number of a building where multiple buildings
 share a common street address (case where a site with a single address contains multiple
 buildings). Note that if a single Building has more than one street address, only one is
 required to identify the location.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="EnergyConsumption" type="EnergyConsumptionType" minOccurs="0"
 maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>This defines the overall energy consumption for the building.
 This may be multiple instances for each type of Energy</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Envelope" type="EnvelopeType" maxOccurs="1" minOccurs="0">
      <xs:annotation>
        <xs:documentation>This defines the components of the envelope for the existing
 structure</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Zone" type="ZoneType" minOccurs="0" maxOccurs="unbounded"/>
  </xs:sequence>
  <xs:attribute name="id" type="xs:ID"/>
</xs:complexType>
```

Complex Type SpaceType

Namespace	http://www.iepmodel.net
Annotations	A building consists of one or many spaces. This object provides a high level specification of the building space profile intended for use with Projects and simulations such as SaveEnergy123 and Portfolio Manager. https://saveenergy123.com/ http://www.energystar.gov/index.cfm?c=evaluate_performance.bus_portfoliomanager ISSUES / TO DO: 2) get Space documentation from Portfolio Manager 3) To use for benchmarking, need to add in additional operational attributes per space. The set of attributes differs based on PortfolioMgrSpaceType.

Diagram

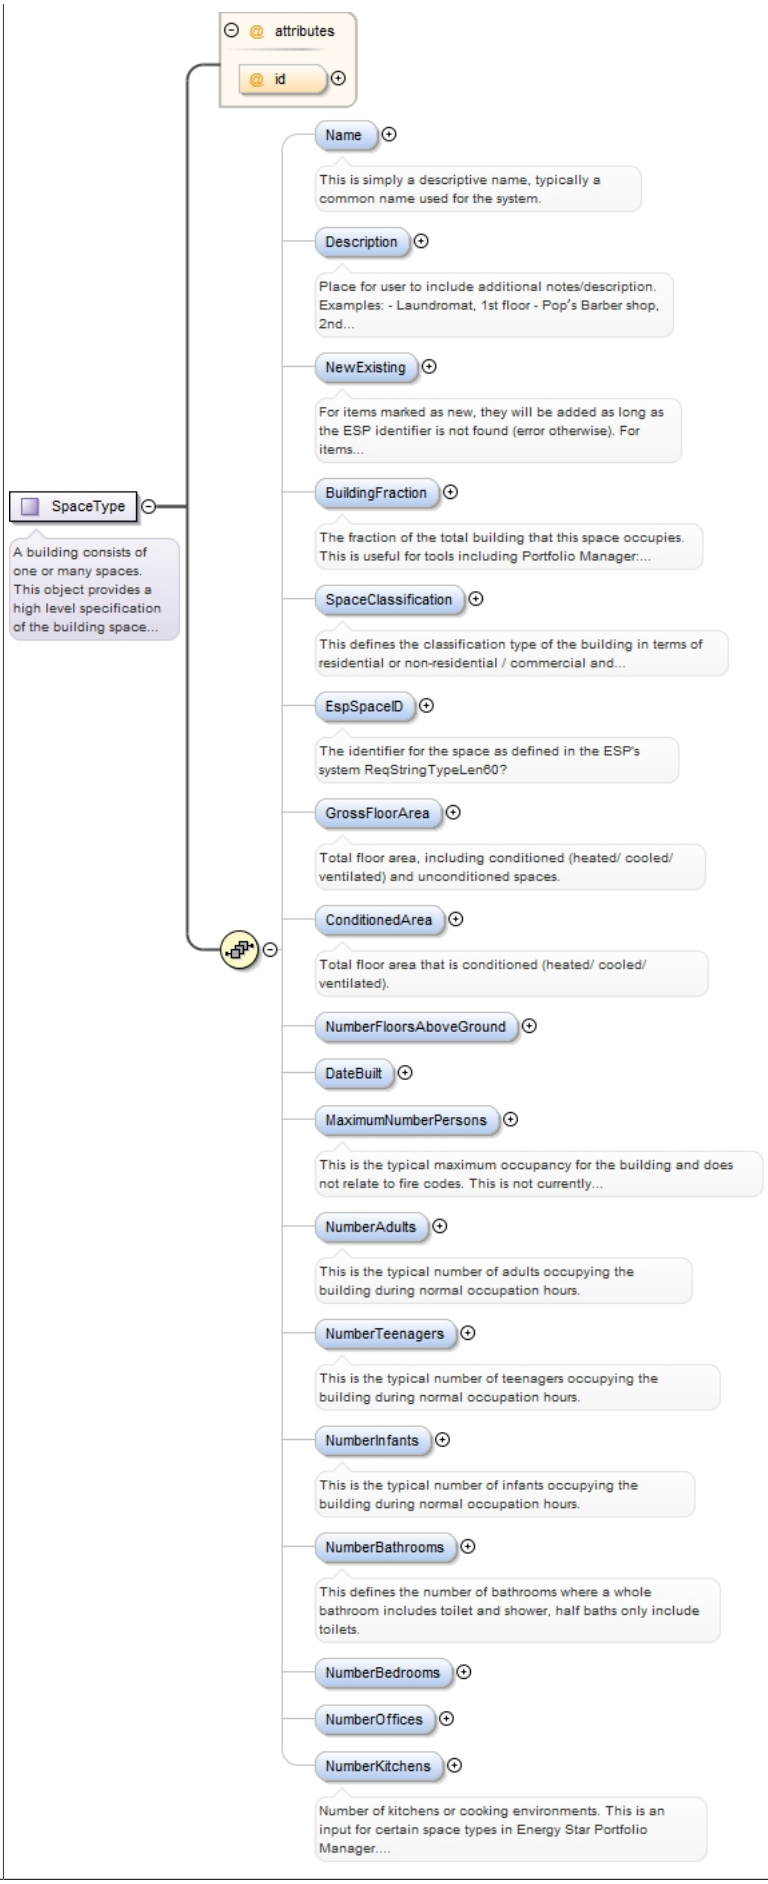
attributes
id
SpaceType
A building consists of one or many spaces. This object provides a high level specification of the building space...
Name
This is simply a descriptive name, typically a common name used for the system.
Description
Place for user to include additional notes/description. Examples: - Laundromat, 1st floor - Pop's Barber shop, 2nd...
NewExisting
For items marked as new, they will be added as long as the ESP identifier is not found (error otherwise). For items...
BuildingFraction
The fraction of the total building that this space occupies. This is useful for tools including Portfolio Manager:...
SpaceClassification
This defines the classification type of the building in terms of residential or non-residential / commercial and...
EspSpaceID
The identifier for the space as defined in the ESP's system ReqStringTypeLen60?
GrossFloorArea
Total floor area, including conditioned (heated/ cooled/ ventilated) and unconditioned spaces.
ConditionedArea
Total floor area that is conditioned (heated/ cooled/ ventilated).
NumberFloorsAboveGround
DateBuilt
MaximumNumberPersons
This is the typical maximum occupancy for the building and does not relate to fire codes. This is not currently...
NumberAdults
This is the typical number of adults occupying the building during normal occupation hours.
NumberTeenagers
This is the typical number of teenagers occupying the building during normal occupation hours.
NumberInfants
This is the typical number of infants occupying the building during normal occupation hours.
NumberBathrooms
This defines the number of bathrooms where a whole bathroom includes toilet and shower, half baths only include toilets.
NumberBedrooms
NumberOffices
NumberKitchens
Number of kitchens or cooking environments. This is an input for certain space types in Energy Star Portfolio Manager....

Used by	Element BuildingType/Space
Model	Name{0,1} , Description{0,1} , NewExisting{0,1} , BuildingFraction{0,1} , SpaceClassification{0,1} , EspSpaceID{0,1} , GrossFloorArea{0,1} , ConditionedArea{0,1} , NumberFloorsAboveGround{0,1} , DateBuilt{0,1} , MaximumNumberPersons{0,1} , NumberAdults{0,1} , NumberTeenagers{0,1} , NumberInfants{0,1} , NumberBathrooms{0,1} , NumberBedrooms{0,1} , NumberOffices{0,1} , NumberKitchens{0,1}
Children	BuildingFraction, ConditionedArea, DateBuilt, Description, EspSpaceID, GrossFloorArea, MaximumNumberPersons, Name, NewExisting, NumberAdults, NumberBathrooms, NumberBedrooms, NumberFloorsAboveGround, NumberInfants, NumberKitchens, NumberOffices, NumberTeenagers, SpaceClassification

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			optional

Source

```
<xs:complexType name="SpaceType">
  <xs:annotation>
    <xs:documentation>A building consists of one or many spaces. This object provides a
 high level specification of the building space profile intended for use with Projects
 and simulations such as SaveEnergy123 and Portfolio Manager. https://saveenergy123.com/
 http://www.energystar.gov/index.cfm?c=evaluate_performance.bus_portfoliomanager ISSUES /
 TO DO: 2) get Space documentation from Portfolio Manager 3) To use for benchmarking,
 need to add in additional operational attributes per space. The set of attributes differs
 based on PortfolioMgrSpaceType.</xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is simply a descriptive name, typically a common name used
 for the system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="1" minOccurs="0" name="Description" type="xs:string">
      <xs:annotation>
        <xs:documentation>Place for user to include additional notes/description.
 Examples: - Laundromat, 1st floor - Pop's Barber shop, 2nd floor - Apartments, floors
 3-6</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="NewExisting" type="ExistenceEnumType">
      <xs:annotation>
        <xs:documentation>For items marked as new, they will be added as long as the ESP
 identifier is not found (error otherwise). For items marked as existing, only updates
 will be performed if the ESP identifier is found (error otherwise). For items marked
 unknown, they will be created if the ESP identifier is not found and updated if the ESP
 identifier is found (similar to ABS 1.0)</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="BuildingFraction">
      <xs:annotation>
        <xs:documentation>The fraction of the total building that this space occupies.
 This is useful for tools including Portfolio Manager: http://www.energystar.gov/
index.cfm?c=evaluate_performance.bus_portfoliomanager</xs:documentation>
      </xs:annotation>
      <xs:simpleType>
        <xs:restriction base="xs:float">
          <xs:minInclusive value="0"/>
          <xs:maxInclusive value="1"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="SpaceClassification" type="BuildingClassType" minOccurs="0"
 maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This defines the classification type of the building in terms
 of residential or non-residential / commercial and further details where relevant.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="EspSpaceID" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>The identifier for the space as defined in the ESP's system
 ReqStringTypeLen60?</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="GrossFloorArea" type="AreaType" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Total floor area, including conditioned (heated/ cooled/
 ventilated) and unconditioned spaces.</xs:documentation>
      </xs:annotation>
```

```
    </xs:element>
    <xs:element name="ConditionedArea" type="AreaType" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Total floor area that is conditioned (heated/ cooled/
ventilated).</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="NumberFloorsAboveGround" minOccurs="0" maxOccurs="1">
      <xs:simpleType>
        <xs:restriction base="xs:int">
          <xs:minInclusive value="0"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="DateBuilt" type="xs:date" minOccurs="0" maxOccurs="1"/>
    <xs:element name="MaximumNumberPersons" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is the typical maximum occupancy for the building and
does not relate to fire codes. This is not currently validated against the NumberAdults,
NumberInfants and NumberTeenagers.</xs:documentation>
      </xs:annotation>
      <xs:simpleType>
        <xs:restriction base="xs:int">
          <xs:minInclusive value="0"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="NumberAdults" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is the typical number of adults occupying the building
during normal occupation hours.</xs:documentation>
      </xs:annotation>
      <xs:simpleType>
        <xs:restriction base="xs:int">
          <xs:minInclusive value="0"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="NumberTeenagers" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is the typical number of teenagers occupying the building
during normal occupation hours.</xs:documentation>
      </xs:annotation>
      <xs:simpleType>
        <xs:restriction base="xs:int">
          <xs:minInclusive value="0"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="NumberInfants" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is the typical number of infants occupying the building
during normal occupation hours.</xs:documentation>
      </xs:annotation>
      <xs:simpleType>
        <xs:restriction base="xs:int">
          <xs:minInclusive value="0"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="NumberBathrooms" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This defines the number of bathrooms where a whole bathroom
includes toilet and shower, half baths only include toilets.</xs:documentation>
      </xs:annotation>
      <xs:simpleType>
        <xs:restriction base="xs:float">
          <xs:minInclusive value="0"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="NumberBedrooms" minOccurs="0" maxOccurs="1">
      <xs:simpleType>
        <xs:restriction base="xs:int">
          <xs:minInclusive value="0"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="NumberOffices" minOccurs="0" maxOccurs="1">
      <xs:simpleType>
        <xs:restriction base="xs:int">
          <xs:minInclusive value="0"/>
        </xs:restriction>
```

```
      </xs:simpleType>
    </xs:element>
    <xs:element minOccurs="0" name="NumberKitchens">
      <xs:annotation>
        <xs:documentation>Number of kitchens or cooking environments. This is an input
 for certain space types in Energy Star Portfolio Manager. http://www.energystar.gov/
index.cfm?c=eligibility.bus_portfoliomanager_space_types#hotel</xs:documentation>
      </xs:annotation>
      <xs:simpleType>
        <xs:restriction base="xs:int">
          <xs:minInclusive value="0"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
  </xs:sequence>
  <xs:attribute name="id" type="xs:ID"/>
</xs:complexType>
```

Complex Type `BuildingClassType`

Namespace	http://www.iepmodel.net
Annotations	The building classification indicates the type of Residential or Commercial property. Each of those types also involve multiple classifications. Residential consists of Single-Family and Multi-Family. Commercial consists of enumerations of common commercial property classifications from three organizations: CEUS, DEER and EnergyStar (US DOE). This is contained in Common to allow for use in both Building.xsd and UtilityService.xsd
Diagram	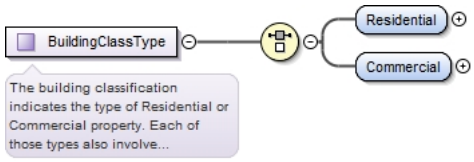
Used by	Element SpaceType/SpaceClassification
Model	Residential | Commercial
Children	Commercial, Residential
Source	

```
<xs:complexType name="BuildingClassType">
  <xs:annotation>
    <xs:documentation>The building classification indicates the type of Residential
 or Commercial property. Each of those types also involve multiple classifications.
 Residential consists of Single-Family and Multi-Family. Commercial consists of
 enumerations of common commercial property classifications from three organizations:
 CEUS, DEER and EnergyStar (US DOE). This is contained in Common to allow for use in both
 Building.xsd and UtilityService.xsd</xs:documentation>
  </xs:annotation>
  <xs:choice>
    <xs:element name="Residential" type="ResidentialEnumType">
    </xs:element>
    <xs:element name="Commercial" type="CommercialBuildingClassType"/>
  </xs:choice>
</xs:complexType>
```

Complex Type `CommercialBuildingClassType`

Namespace	http://www.iepmodel.net
Diagram	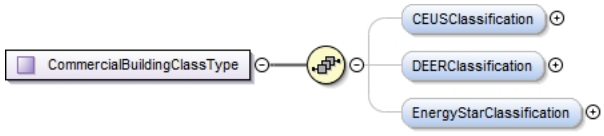
Used by	Element BuildingClassType/Commercial
Model	CEUSClassification{0,1} , DEERClassification{0,1} , EnergyStarClassification{0,1}
Children	CEUSClassification, DEERClassification, EnergyStarClassification
Source	

```
<xs:complexType name="CommercialBuildingClassType">
  <xs:sequence>
    <xs:element name="CEUSClassification" minOccurs="0" type="CEUSBuildingEnumType">
    </xs:element>
    <xs:element name="DEERClassification" minOccurs="0" type="DEERBuildingEnumType">
```

```
    </xs:element>
    <xs:element minOccurs="0" name="EnergyStarClassification"
 type="EnergyStarBuildingEnumType">
      <xs:annotation>
        <xs:documentation/>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

Complex Type `AreaType`

Namespace	http://www.iepmodel.net
Annotations	This is a base class used to represent a two-dimensional spatial quantity (i.e. an area).
Diagram	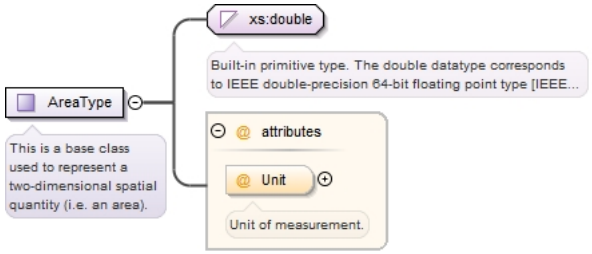
Type	extension of xs:double
Used by	Elements: AtticType/Area, CeilingType/Area, DoorType/Area, FenestrationType/Area, FoundationType/Area, GroundAreaType/ApproxArea, LeakageType/LeakageArea, RoofType/Area, SpaceType/ConditionedArea, SpaceType/GrossFloorArea, WallType/Area, WindowType/Area

Attributes

QName	Type	Fixed	Default	Use
Unit	AreaUnitEnumType		SquareMeters	optional
	Unit of measurement.			

Source

```
<xs:complexType name="AreaType">
  <xs:annotation>
    <xs:documentation>This is a base class used to represent a two-dimensional spatial
 quantity (i.e. an area).</xs:documentation>
  </xs:annotation>
  <xs:simpleContent>
    <xs:extension base="xs:double">
      <xs:attribute name="Unit" type="AreaUnitEnumType" use="optional"
 default="SquareMeters">
        <xs:annotation>
          <xs:documentation>Unit of measurement.</xs:documentation>
        </xs:annotation>
      </xs:attribute>
    </xs:extension>
  </xs:simpleContent>
</xs:complexType>
```

Complex Type `EnergyConsumptionType`

Namespace	http://www.iepmodel.net
Annotations	A collection of energy consumption records. Note that if we want to associate consumption with a meter, EnergyConsumption is included as an optional element of a meter within the UtilityService schema.
Diagram	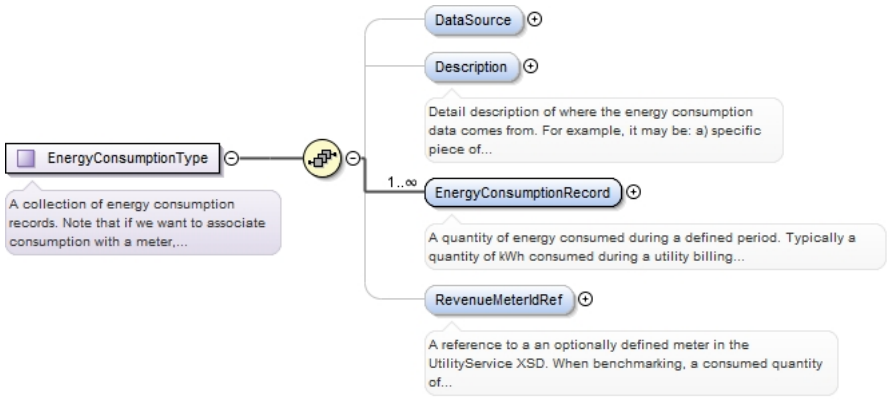

Used by	Elements BuildingType/EnergyConsumption, CommonSystemPropertiesType/EnergyConsumption, EnergyServiceType/EnergyConsumption, EnergyServiceType/TypicalMonthlyUse
Model	DataSource{0,1} , Description{0,1} , EnergyConsumptionRecord+ , RevenueMeterIdRef{0,1}
Children	DataSource, Description, EnergyConsumptionRecord, RevenueMeterIdRef
Source	

```
<xs:complexType name="EnergyConsumptionType">
  <xs:annotation>
    <xs:documentation>A collection of energy consumption records. Note that if we want to
 associate consumption with a meter, EnergyConsumption is included as an optional element
 of a meter within the UtilityService schema.</xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="DataSource" type="ConsumptionDataSourceEnumType" minOccurs="0"
 maxOccurs="1"/>
    <xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Detail description of where the energy consumption data comes
 from. For example, it may be: a) specific piece of software, b) customer's bill, c)
 measurements, d) etc. This field may contain information about who captured the data.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="EnergyConsumptionRecord" type="EnergyConsumptionRecordType"
 minOccurs="1" maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>A quantity of energy consumed during a defined period. Typically
 a quantity of kWh consumed during a utility billing period.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="1" minOccurs="0" name="RevenueMeterIdRef" type="xs:IDREF">
      <xs:annotation>
        <xs:documentation>A reference to a an optionally defined meter in the
 UtilityService XSD. When benchmarking, a consumed quantity of energy must be associated
 to a defined revenue meter.</xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

Complex Type `EnergyConsumptionRecordType`

Namespace	http://www.iepmodel.net
Annotations	An energy consumption record for a defined period of time, and optionally, the time of use "bin" in which it was consumed.
Diagram	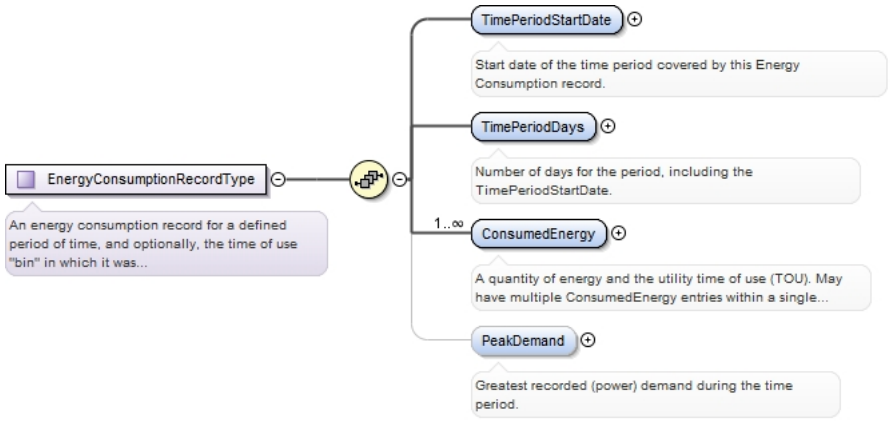
Used by	Element EnergyConsumptionType/EnergyConsumptionRecord
Model	TimePeriodStartDate , TimePeriodDays , ConsumedEnergy+ , PeakDemand{0,1}
Children	ConsumedEnergy, PeakDemand, TimePeriodDays, TimePeriodStartDate
Source	


```
<xs:complexType name="EnergyConsumptionRecordType">
  <xs:annotation>
    <xs:documentation>An energy consumption record for a defined period of time, and
 optionally, the time of use "bin" in which it was consumed.</xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="TimePeriodStartDate" type="xs:date" minOccurs="1" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Start date of the time period covered by this Energy Consumption
 record.</xs:documentation>
```

```
      </xs:annotation>
    </xs:element>
    <xs:element name="TimePeriodDays" type="xs:int" minOccurs="1" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Number of days for the period, including the
 TimePeriodStartDate.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="ConsumedEnergy" type="ConsumedEnergyType" minOccurs="1"
 maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>A quantity of energy and the utility time of use (TOU). May
 have multiple ConsumedEnergy entries within a single EnergyConsumptionRecord to account
 for different types of energy (for example, electrcity and natural gas), as well as to
 account for multiple time periods.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="PeakDemand" type="PeakPowerType" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Greatest recorded (power) demand during the time period.</
xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

Complex Type ConsumedEnergyType

Namespace	http://www.iepmodel.net
Annotations	Defines the quantity, type, and unit of energy consumped in addition to a time of use (TOU). The TOU corresponds to commonly used time-periods defined by several major utilities and energy providers know by the authors. Typically, the rate structure (cost per unit of energy) varies with TOU. Note that if no energy type or units are included, the amount is considered to be kilowatt-hours of Electricity.
Diagram	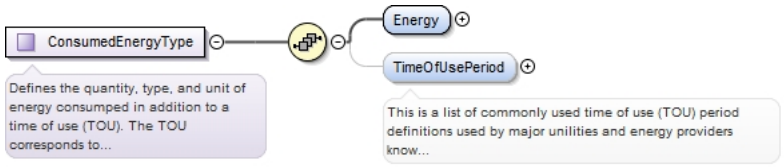
Used by	Element EnergyConsumptionRecordType/ConsumedEnergy
Model	Energy , TimeOfUsePeriod{0,1}
Children	Energy, TimeOfUsePeriod
Source	

```
<xs:complexType name="ConsumedEnergyType">
  <xs:annotation>
    <xs:documentation>Defines the quantity, type, and unit of energy consumped in addition
 to a time of use (TOU). The TOU corresponds to commonly used time-periods defined by
 several major utilities and energy providers know by the authors. Typically, the rate
 structure (cost per unit of energy) varies with TOU. Note that if no energy type or
 units are included, the amount is considered to be kilowatt-hours of Electricity.</
xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="Energy" type="EnergyType" minOccurs="1" maxOccurs="1"/>
    <xs:element name="TimeOfUsePeriod" type="TOUPeriodsEnumType" minOccurs="0"
 maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is a list of commonly used time of use (TOU) period
 definitions used by major unilities and energy providers know by the authors. Typically,
 the rate structure (cost per unit of energy) varies with TOU.</xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

Complex Type EnergyType

Namespace	http://www.iepmodel.net
Annotations	This is a base class used for defining an energy quantity. System objects are among those that instance this type. Note that Title24 & HPXML uses "EnergyType" as their Enums name so we followed suit.

Diagram

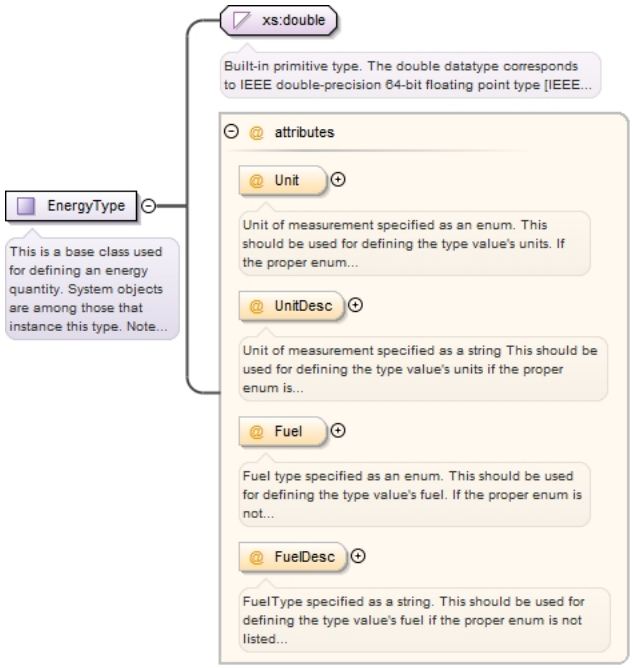

Type: extension of xs:double

Used by: Elements — ConsumedEnergyType/Energy, ValueType/Energy

Attributes

QName	Type	Fixed	Default	Use
Fuel	EnergyClassEnumType			optional
	Fuel type specified as an enum. This should be used for defining the type value's fuel. If the proper enum is not listed, please use the FuelDesc field to specify the units. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the FuelDesc may contain a default type.			
FuelDesc	xs:string			optional
	FuelType specified as a string. This should be used for defining the type value's fuel if the proper enum is not listed in Fuel. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the FuelDesc may contain a default type.			
Unit	EnergyUnitEnumType			optional
	Unit of measurement specified as an enum. This should be used for defining the type value's units. If the proper enum is not listed, please use the UnitDesc field to specify the units. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.			
UnitDesc	xs:string			optional
	Unit of measurement specified as a string This should be used for defining the type value's units if the proper enum is not listed in Unit. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.			

Source

```
<xs:complexType name="EnergyType">
  <xs:annotation>
    <xs:documentation>This is a base class used for defining an energy quantity.
 System objects are among those that instance this type. Note that Title24 & HPXML uses
 "EnergyType" as their Enums name so we followed suit.</xs:documentation>
  </xs:annotation>
  <xs:simpleContent>
    <xs:extension base="xs:double">
      <xs:attribute name="Unit" type="EnergyUnitEnumType" use="optional">
        <xs:annotation>
          <xs:documentation>Unit of measurement specified as an enum. This should be used
 for defining the type value's units. If the proper enum is not listed, please use the
 UnitDesc field to specify the units. These are all optional attributes in order to allow
 for a simplified value descriptions since these are used throughout the IEP schemas.
 Additionally the UnitDesc may contain a default type.</xs:documentation>
```

```
        </xs:annotation>
      </xs:attribute>
      <xs:attribute name="UnitDesc" type="xs:string">
        <xs:annotation>
          <xs:documentation>Unit of measurement specified as a string This should be used
 for defining the type value's units if the proper enum is not listed in Unit. These are
 all optional attributes in order to allow for a simplified value descriptions since these
 are used throughout the IEP schemas. Additionally the UnitDesc may contain a default
 type.</xs:documentation>
        </xs:annotation>
      </xs:attribute>
      <xs:attribute name="Fuel" type="EnergyClassEnumType" use="optional">
        <xs:annotation>
          <xs:documentation>Fuel type specified as an enum. This should be used for
 defining the type value's fuel. If the proper enum is not listed, please use the
 FuelDesc field to specify the units. These are all optional attributes in order to allow
 for a simplified value descriptions since these are used throughout the IEP schemas.
 Additionally the FuelDesc may contain a default type.</xs:documentation>
        </xs:annotation>
      </xs:attribute>
      <xs:attribute name="FuelDesc" type="xs:string">
        <xs:annotation>
          <xs:documentation>FuelType specified as a string. This should be used for
 defining the type value's fuel if the proper enum is not listed in Fuel. These are all
 optional attributes in order to allow for a simplified value descriptions since these are
 used throughout the IEP schemas. Additionally the FuelDesc may contain a default type.</
xs:documentation>
        </xs:annotation>
      </xs:attribute>
    </xs:extension>
  </xs:simpleContent>
</xs:complexType>
```

Complex Type PeakPowerType

Namespace	http://www.iepmodel.net
Annotations	For cases where Demand charges are relevant, this optional element can be used to capture the Peak power demand during the period defined.
Diagram	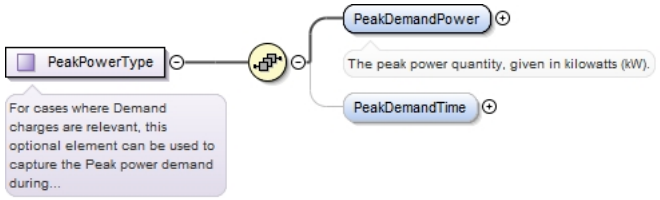
Used by	Element EnergyConsumptionRecordType/PeakDemand
Model	PeakDemandPower , PeakDemandTime{0,1}
Children	PeakDemandPower, PeakDemandTime
Source	

```
<xs:complexType name="PeakPowerType">
  <xs:annotation>
    <xs:documentation>For cases where Demand charges are relevant, this optional
 element can be used to capture the Peak power demand during the period defined.</
xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="PeakDemandPower" minOccurs="1" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>The peak power quantity, given in kilowatts (kW).</
xs:documentation>
      </xs:annotation>
      <xs:simpleType>
        <xs:restriction base="xs:float">
          <xs:minInclusive value="0"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="PeakDemandTime" type="xs:dateTime" minOccurs="0" maxOccurs="1"/>
  </xs:sequence>
</xs:complexType>
```

Complex Type EnvelopeType

Namespace	http://www.iepmodel.net

Diagram	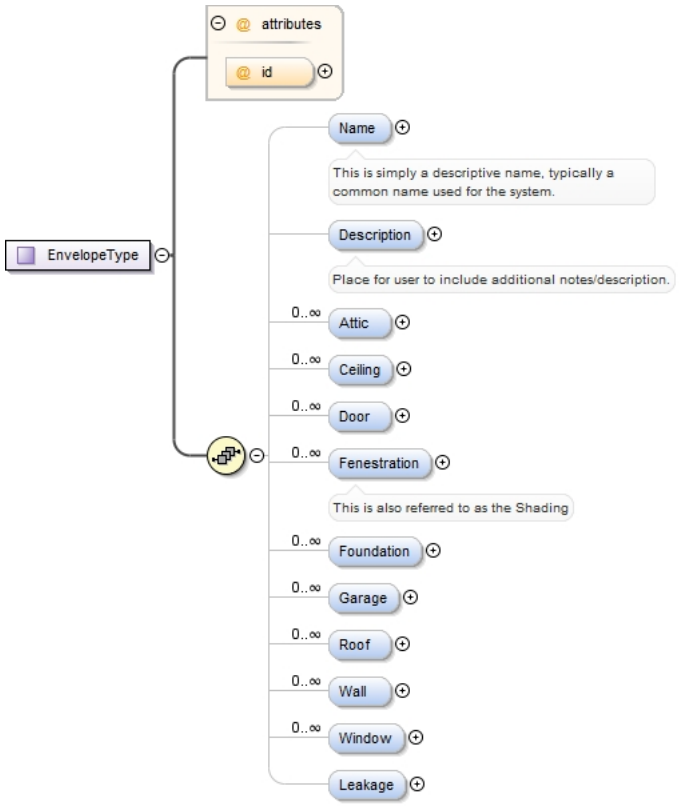
Used by	Elements BuildingType/Envelope, SystemChoiceType/Envelope
Model	Name{0,1} , Description{0,1} , Attic* , Ceiling* , Door* , Fenestration* , Foundation* , Garage* , Roof* , Wall* , Window* , Leakage{0,1}
Children	Attic, Ceiling, Description, Door, Fenestration, Foundation, Garage, Leakage, Name, Roof, Wall, Window

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			optional

Source

```
<xs:complexType name="EnvelopeType">
  <xs:sequence>
    <xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is simply a descriptive name, typically a common name used
 for the system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="1" minOccurs="0" name="Description" type="xs:string">
      <xs:annotation>
        <xs:documentation>Place for user to include additional notes/description.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Attic" type="AtticType" minOccurs="0" maxOccurs="unbounded"/>
    <xs:element name="Ceiling" type="CeilingType" minOccurs="0" maxOccurs="unbounded"/>
    <xs:element name="Door" type="DoorType" minOccurs="0" maxOccurs="unbounded"/>
    <xs:element name="Fenestration" type="FenestrationType" minOccurs="0"
 maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>This is also referred to as the Shading</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Foundation" type="FoundationType" minOccurs="0"
 maxOccurs="unbounded"/>
    <xs:element name="Garage" type="GarageType" minOccurs="0" maxOccurs="unbounded"/>
    <xs:element name="Roof" type="RoofType" minOccurs="0" maxOccurs="unbounded"/>
    <xs:element name="Wall" type="WallType" minOccurs="0" maxOccurs="unbounded"/>
    <xs:element name="Window" type="WindowType" minOccurs="0" maxOccurs="unbounded"/>
    <xs:element minOccurs="0" name="Leakage" type="LeakageType"/>
  </xs:sequence>
  <xs:attribute name="id" type="xs:ID"/>
</xs:complexType>
```

Complex Type `AtticType`

Namespace	http://www.iepmodel.net
Diagram	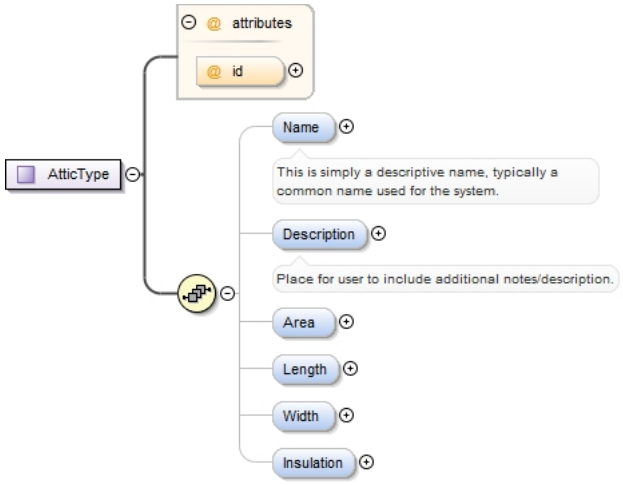
Used by	Element EnvelopeType/Attic
Model	Name{0,1} , Description{0,1} , Area{0,1} , Length{0,1} , Width{0,1} , Insulation{0,1}
Children	Area, Description, Insulation, Length, Name, Width

Attributes

QName	Type	Fixed	Default	Use
id	xs:IDREF			optional

Source

```
<xs:complexType name="AtticType">
  <xs:sequence>
    <xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is simply a descriptive name, typically a common name used
 for the system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="1" minOccurs="0" name="Description" type="xs:string">
      <xs:annotation>
        <xs:documentation>Place for user to include additional notes/description.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Area" type="AreaType" minOccurs="0"/>
    <xs:element name="Length" type="DimensionType" minOccurs="0" maxOccurs="1"/>
    <xs:element name="Width" type="DimensionType" minOccurs="0" maxOccurs="1"/>
    <xs:element name="Insulation" type="InsulationType" minOccurs="0" maxOccurs="1"/>
  </xs:sequence>
  <xs:attribute name="id" type="xs:IDREF"/>
</xs:complexType>
```

Complex Type `DimensionType`

Namespace	http://www.iepmodel.net
Annotations	This is a base class used to represent a linear spatial quantity (i.e. a length or distance). Default units are meters.
Diagram	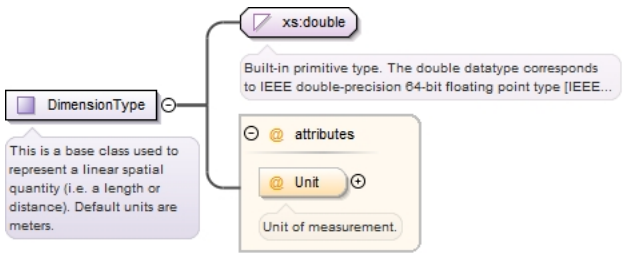
Type	extension of xs:double
Used by	Elements AtticType/Length, AtticType/Width, CeilingType/Length, CeilingType/Width, DoorType/Height, DoorType/Width, FenestrationType/Height, FenestrationType/Overhang/Depth,

	FenestrationType/Overhang/Distance, FenestrationType/Overhang/LeftExtension, FenestrationType/Overhang/RightExtension, FenestrationType/SideFin/LeftDepth, FenestrationType/SideFin/LeftDistance, FenestrationType/SideFin/RightDepth, FenestrationType/SideFin/RightDistance, FenestrationType/Width, FoundationType/Length, FoundationType/Width, GarageType/Height, GarageType/Length, GarageType/Width, RoofType/ParapetWallHeight, WallType/Height, WallType/Width, WindowType/Height, WindowType/Width

Attributes

QName	Type	Fixed	Default	Use
Unit	DimensionUnitEnumType		Meters	optional
	Unit of measurement.			

Source

```
<xs:complexType name="DimensionType">
  <xs:annotation>
    <xs:documentation>This is a base class used to represent a linear spatial quantity
 (i.e. a length or distance). Default units are meters.</xs:documentation>
  </xs:annotation>
  <xs:simpleContent>
    <xs:extension base="xs:double">
      <xs:attribute name="Unit" type="DimensionUnitEnumType" use="optional"
 default="Meters">
        <xs:annotation>
          <xs:documentation>Unit of measurement.</xs:documentation>
        </xs:annotation>
      </xs:attribute>
    </xs:extension>
  </xs:simpleContent>
</xs:complexType>
```

Complex Type `InsulationType`

Namespace	http://www.iepmodel.net
Diagram	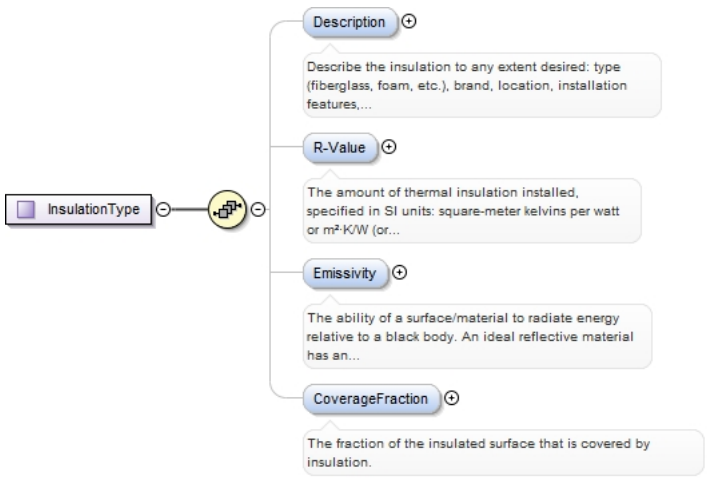
Used by	Elements: AtticType/Insulation, CeilingType/Insulation, DistributionSegmentType/Insulation, FoundationType/Insulation, GarageType/Insulation, RoofType/DeckInsulationLevel, WallType/Insulation, WaterHeatingSystemType/TankInsulation
Model	Description{0,1} , R-Value{0,1} , Emissivity{0,1} , CoverageFraction{0,1}
Children	CoverageFraction, Description, Emissivity, R-Value

Source

```
<xs:complexType name="InsulationType">
  <xs:sequence>
    <xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Describe the insulation to any extent desired: type (fiberglass,
 foam, etc.), brand, location, installation features, etc. It is important to specify the
 units of measurement for R-value if one intends to use non-SI units. This is discouraged,
 as SI units are expected and indicated in the annotation of R-Value.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="R-Value" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>The amount of thermal insulation installed, specified in SI
 units: square-meter kelvins per watt or m²·K/W (or equivalently to m²·°C/W). Note that
 if you intend to use different units then this should be noted in the Description.</
xs:documentation>
      </xs:annotation>
```

```
      <xs:simpleType>
        <xs:restriction base="xs:float">
          <xs:minInclusive value="0"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="Emissivity" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>The ability of a surface/material to radiate energy relative
 to a black body. An ideal reflective material has an emissivity close to zero. An ideal
 black body has an emissivity of one.</xs:documentation>
      </xs:annotation>
      <xs:simpleType>
        <xs:restriction base="xs:float">
          <xs:minInclusive value="0"/>
          <xs:maxInclusive value="1"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="CoverageFraction" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>The fraction of the insulated surface that is covered by
 insulation.</xs:documentation>
      </xs:annotation>
      <xs:simpleType>
        <xs:restriction base="xs:float">
          <xs:minInclusive value="0"/>
          <xs:maxInclusive value="1"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

Complex Type `CeilingType`

Namespace	http://www.iepmodel.net
Diagram	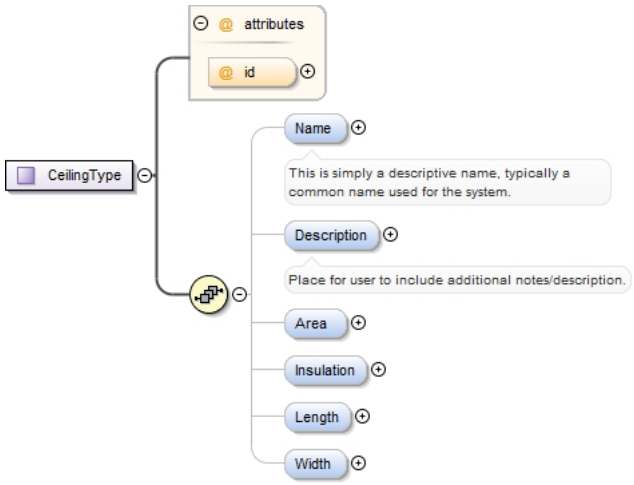
Used by	Element EnvelopeType/Ceiling
Model	Name{0,1} , Description{0,1} , Area{0,1} , Insulation{0,1} , Length{0,1} , Width{0,1}
Children	Area, Description, Insulation, Length, Name, Width

Attributes

QName	Type	Fixed	Default	Use
id	xs:IDREF			optional

Source

```
<xs:complexType name="CeilingType">
  <xs:sequence>
    <xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is simply a descriptive name, typically a common name used
 for the system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="1" minOccurs="0" name="Description" type="xs:string">
      <xs:annotation>
        <xs:documentation>Place for user to include additional notes/description.</
xs:documentation>
```

```
      </xs:annotation>
    </xs:element>
    <xs:element name="Area" type="AreaType" minOccurs="0" maxOccurs="1"/>
    <xs:element name="Insulation" type="InsulationType" minOccurs="0" maxOccurs="1"/>
    <xs:element name="Length" type="DimensionType" minOccurs="0" maxOccurs="1"/>
    <xs:element name="Width" type="DimensionType" minOccurs="0" maxOccurs="1"/>
  </xs:sequence>
  <xs:attribute name="id" type="xs:IDREF"/>
</xs:complexType>
```

Complex Type `DoorType`

Namespace	http://www.iepmodel.net
Diagram	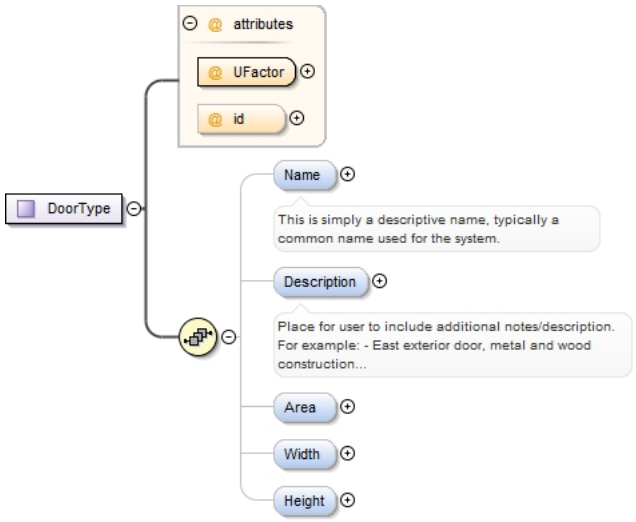
Used by	Element EnvelopeType/Door
Model	Name{0,1} , Description{0,1} , Area{0,1} , Width{0,1} , Height{0,1}
Children	Area, Description, Height, Name, Width

Attributes

QName	Type	Fixed	Default	Use
UFactor	xs:double			required
id	xs:IDREF			optional

Source

```
<xs:complexType name="DoorType">
  <xs:sequence>
    <xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is simply a descriptive name, typically a common name used
 for the system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="1" minOccurs="0" name="Description" type="xs:string">
      <xs:annotation>
        <xs:documentation>Place for user to include additional notes/description. For
 example: - East exterior door, metal and wood construction - Interior, upstairs bathroom
 door, wood construction</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Area" type="AreaType" minOccurs="0" maxOccurs="1"/>
    <xs:element name="Width" type="DimensionType" minOccurs="0" maxOccurs="1"/>
    <xs:element name="Height" type="DimensionType" minOccurs="0" maxOccurs="1"/>
  </xs:sequence>
  <xs:attribute name="UFactor" use="required" type="xs:double"/>
  <xs:attribute name="id" type="xs:IDREF"/>
</xs:complexType>
```

Complex Type `FenestrationType`

Namespace	http://www.iepmodel.net

Diagram

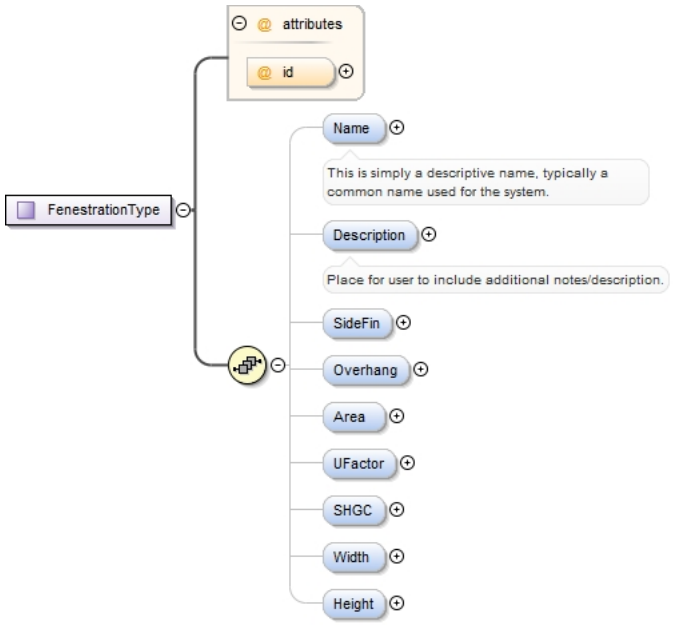

Used by

Element EnvelopeType/Fenestration

Model

Name{0,1} , Description{0,1} , SideFin{0,1} , Overhang{0,1} , Area{0,1} , UFactor{0,1} , SHGC{0,1} , Width{0,1} , Height{0,1}

Children

Area, Description, Height, Name, Overhang, SHGC, SideFin, UFactor, Width

Attributes

QName	Type	Fixed	Default	Use
id	xs:IDREF			optional

Source

```
<xs:complexType name="FenestrationType">
  <xs:sequence>
    <xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is simply a descriptive name, typically a common name used
 for the system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="1" minOccurs="0" name="Description" type="xs:string">
      <xs:annotation>
        <xs:documentation>Place for user to include additional notes/description.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="SideFin" minOccurs="0">
      <xs:complexType>
        <xs:sequence>
          <xs:element name="LeftDistance" type="DimensionType"/>
          <xs:element name="LeftDepth" type="DimensionType"/>
          <xs:element name="RightDistance" type="DimensionType"/>
          <xs:element name="RightDepth" type="DimensionType"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:element name="Overhang" minOccurs="0">
      <xs:complexType>
        <xs:sequence>
          <xs:element name="Depth" type="DimensionType"/>
          <xs:element name="Distance" type="DimensionType"/>
          <xs:element name="LeftExtension" type="DimensionType"/>
          <xs:element name="RightExtension" type="DimensionType"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:element name="Area" type="AreaType" minOccurs="0"/>
    <xs:element name="UFactor" type="xs:double" minOccurs="0"/>
    <xs:element name="SHGC" type="xs:double" minOccurs="0"/>
    <xs:element name="Width" type="DimensionType" minOccurs="0"/>
    <xs:element name="Height" type="DimensionType" minOccurs="0"/>
  </xs:sequence>
  <xs:attribute name="id" type="xs:IDREF"/>
</xs:complexType>
```

Complex Type FoundationType

Namespace	http://www.iepmodel.net
Diagram	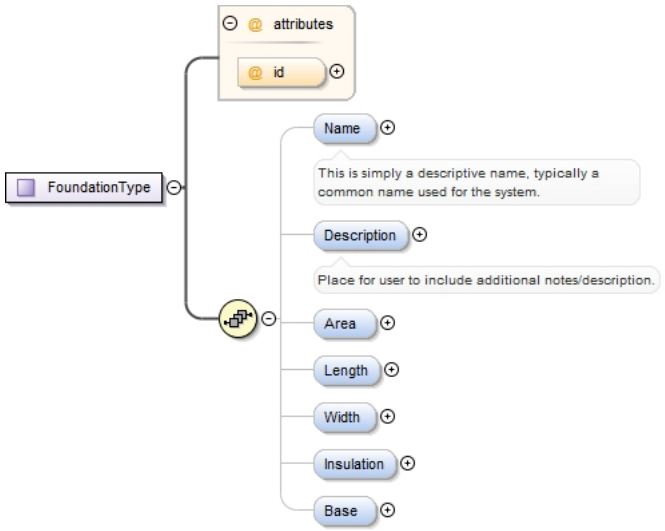
Used by	Element EnvelopeType/Foundation
Model	Name{0,1} , Description{0,1} , Area{0,1} , Length{0,1} , Width{0,1} , Insulation{0,1} , Base{0,1}
Children	Area, Base, Description, Insulation, Length, Name, Width

Attributes

QName	Type	Fixed	Default	Use
id	xs:IDREF			optional

Source

```
<xs:complexType name="FoundationType">
  <xs:sequence>
    <xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is simply a descriptive name, typically a common name used
 for the system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="1" minOccurs="0" name="Description" type="xs:string">
      <xs:annotation>
        <xs:documentation>Place for user to include additional notes/description.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Area" type="AreaType" minOccurs="0" maxOccurs="1"/>
    <xs:element name="Length" type="DimensionType" minOccurs="0" maxOccurs="1"/>
    <xs:element name="Width" type="DimensionType" minOccurs="0" maxOccurs="1"/>
    <xs:element name="Insulation" type="InsulationType" minOccurs="0" maxOccurs="1"/>
    <xs:element name="Base" type="FoundationBaseEnumType" minOccurs="0" maxOccurs="1"/>
  </xs:sequence>
  <xs:attribute name="id" type="xs:IDREF"/>
</xs:complexType>
```

Complex Type GarageType

Namespace	http://www.iepmodel.net

Diagram	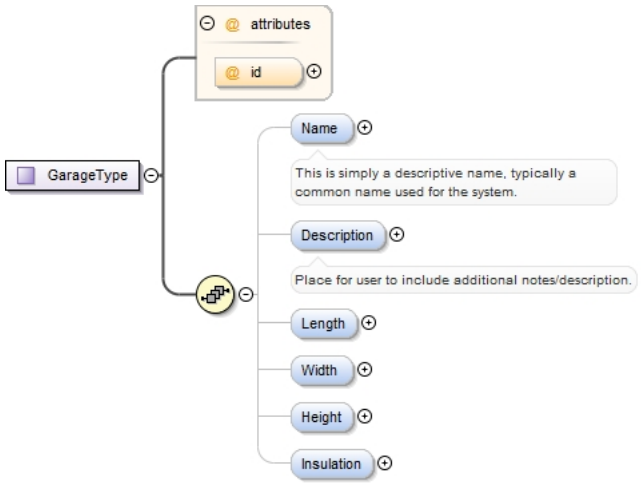
Used by	Element EnvelopeType/Garage
Model	Name{0,1} , Description{0,1} , Length{0,1} , Width{0,1} , Height{0,1} , Insulation{0,1}
Children	Description, Height, Insulation, Length, Name, Width

Attributes

QName	Type	Fixed	Default	Use
id	xs:IDREF			optional

Source

```
<xs:complexType name="GarageType">
  <xs:sequence>
    <xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is simply a descriptive name, typically a common name used
 for the system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="1" minOccurs="0" name="Description" type="xs:string">
      <xs:annotation>
        <xs:documentation>Place for user to include additional notes/description.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Length" type="DimensionType" minOccurs="0" maxOccurs="1"/>
    <xs:element name="Width" type="DimensionType" minOccurs="0" maxOccurs="1"/>
    <xs:element name="Height" type="DimensionType" minOccurs="0" maxOccurs="1"/>
    <xs:element name="Insulation" type="InsulationType" minOccurs="0" maxOccurs="1"/>
  </xs:sequence>
  <xs:attribute name="id" type="xs:IDREF"/>
</xs:complexType>
```

Complex Type RoofType

Namespace	http://www.iepmodel.net

Diagram

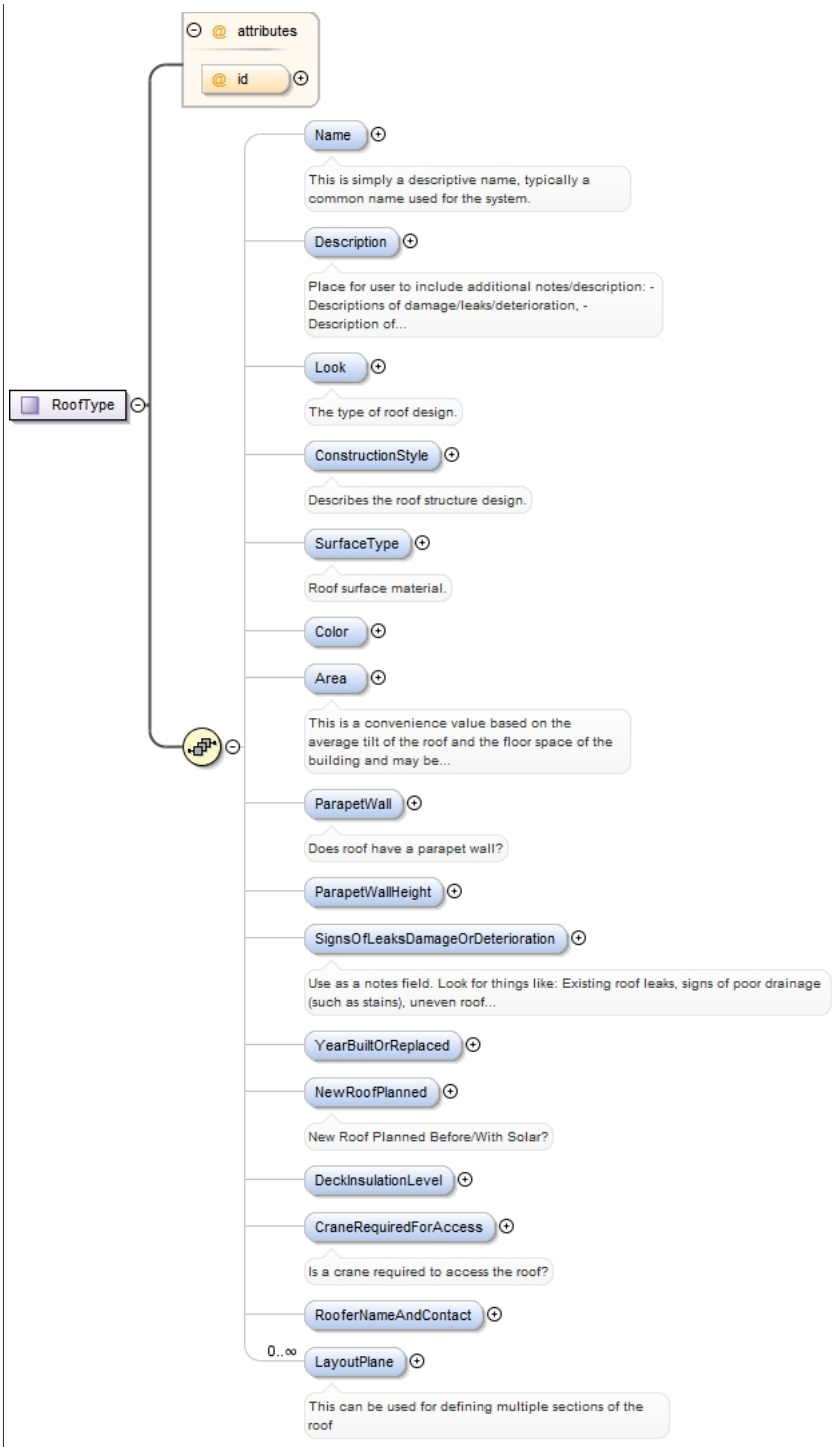

Used by

Element EnvelopeType/Roof

Model

Name{0,1} , Description{0,1} , Look{0,1} , ConstructionStyle{0,1} , SurfaceType{0,1} , Color{0,1} , Area{0,1} , ParapetWall{0,1} , ParapetWallHeight{0,1} , SignsOfLeaksDamageOrDeterioration{0,1} , YearBuiltOrReplaced{0,1} , NewRoofPlanned{0,1} , DeckInsulationLevel{0,1} , CraneRequiredForAccess{0,1} , RooferNameAndContact{0,1} , LayoutPlane*

Children

Area, Color, ConstructionStyle, CraneRequiredForAccess, DeckInsulationLevel, Description, LayoutPlane, Look, Name, NewRoofPlanned, ParapetWall, ParapetWallHeight, RooferNameAndContact, SignsOfLeaksDamageOrDeterioration, SurfaceType, YearBuiltOrReplaced

Attributes

QName	Type	Fixed	Default	Use
id	xs:IDREF			optional

Source

```
<xs:complexType name="RoofType">
  <xs:sequence>
```

```
    <xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is simply a descriptive name, typically a common name used
 for the system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="1" minOccurs="0" name="Description" type="xs:string">
      <xs:annotation>
        <xs:documentation>Place for user to include additional notes/description:
 - Descriptions of damage/leaks/deterioration, - Description of access requirements
 to chillers / air handlers / etc. - Was the customer told of their options if solar
 will outlive roof? - Attic accessibility - special requirements? Crane? Key?</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Look" type="RoofLookEnumType" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>The type of roof design.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="ConstructionStyle" type="RoofConstructionEnumType" minOccurs="0"
 maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Describes the roof structure design.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="SurfaceType" type="RoofSurfaceEnumType" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Roof surface material.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Color" type="xs:string" minOccurs="0" maxOccurs="1"/>
    <xs:element name="Area" type="AreaType" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is a convenience value based on the average tilt of
 the roof and the floor space of the building and may be overridden by the LayoutPlane
 dimensions</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="ParapetWall" type="xs:boolean" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Does roof have a parapet wall?</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="ParapetWallHeight" type="DimensionType" minOccurs="0" maxOccurs="1"/
>
    <xs:element name="SignsOfLeaksDamageOrDeterioration" type="xs:string" minOccurs="0"
 maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Use as a notes field. Look for things like: Existing roof leaks,
 signs of poor drainage (such as stains), uneven roof decks, etc</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="YearBuiltOrReplaced" minOccurs="0" maxOccurs="1">
      <xs:simpleType>
        <xs:restriction base="xs:int">
          <xs:minInclusive value="0"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="NewRoofPlanned" type="xs:boolean" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>New Roof Planned Before/With Solar?</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="DeckInsulationLevel" type="InsulationType" minOccurs="0"
 maxOccurs="1"/>
    <xs:element name="CraneRequiredForAccess" type="xs:boolean" minOccurs="0"
 maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Is a crane required to access the roof?</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="RooferNameAndContact" type="xs:string" minOccurs="0" maxOccurs="1"/>
    <xs:element name="LayoutPlane" type="LayoutPlaneType" minOccurs="0"
 maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>This can be used for defining multiple sections of the roof</
xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
  <xs:attribute name="id" type="xs:IDREF"/>
```

```
</xs:complexType>
```

Complex Type `LayoutPlaneType`

Namespace	http://www.iepmodel.net
Annotations	`Definition of a plane on which solar panels are attached. Typically it is a roof plane. A roof plane can have modules directly laid out on it, or can have a mounting structure (for example a tilt up) which is represented as a child plane.`
Diagram	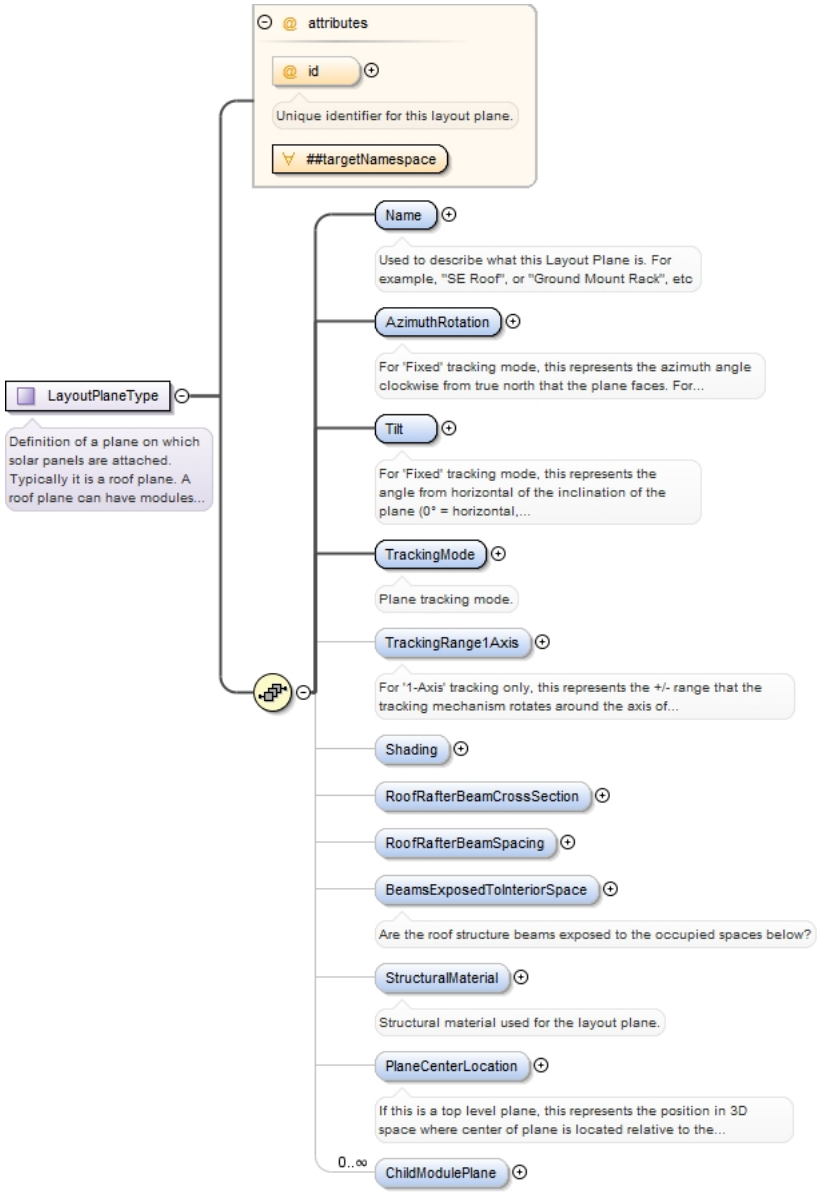
Properties	abstract: `true`
Used by	Elements: LayoutPlaneType/ChildModulePlane, PvDesignType/LayoutPlane, RoofType/LayoutPlane Complex Types: PolygonPlaneType, RectangularPlaneType
Model	Name , AzimuthRotation , Tilt , TrackingMode , TrackingRange1Axis{0,1} , Shading{0,1} , RoofRafterBeamCrossSection{0,1} , RoofRafterBeamSpacing{0,1} , BeamsExposedToInteriorSpace{0,1} , StructuralMaterial{0,1} , PlaneCenterLocation{0,1} , ChildModulePlane*
Children	AzimuthRotation, BeamsExposedToInteriorSpace, ChildModulePlane, Name, PlaneCenterLocation, RoofRafterBeamCrossSection, RoofRafterBeamSpacing, Shading, StructuralMaterial, Tilt, TrackingMode, TrackingRange1Axis

Attributes

QName	Type	Fixed	Default	Use
ANY attribute from TARGET				

QName	Type	Fixed	Default	Use
namespace 'http://www.iepmodel.net'				
id	xs:ID			optional
	Unique identifier for this layout plane.			

Source

```
<xs:complexType name="LayoutPlaneType" abstract="true">
  <xs:annotation>
    <xs:documentation>Definition of a plane on which solar panels are attached. Typically
 it is a roof plane. A roof plane can have modules directly laid out on it, or can have
 a mounting structure (for example a tilt up) which is represented as a child plane.</
xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="Name" type="xs:string">
      <xs:annotation>
        <xs:documentation>Used to describe what this Layout Plane is. For example, "SE
 Roof", or "Ground Mount Rack", etc</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="AzimuthRotation" nillable="true" maxOccurs="1" minOccurs="1">
      <xs:annotation>
        <xs:documentation>For 'Fixed' tracking mode, this represents the azimuth angle
 clockwise from true north that the plane faces. For '1-Axis' tracking, this represents
 the azimuth angle clockwise from true north of the axis of rotation. If this is a child
 plane, instead of the angle representing azimuth relative to world space north, this
 represent the angle rotation about the z-axis relative to the parent plane of this child
 plane.</xs:documentation>
      </xs:annotation>
      <xs:simpleType>
        <xs:restriction base="xs:double">
          <xs:minInclusive value="0"/>
          <xs:maxInclusive value="360"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="Tilt" nillable="true" maxOccurs="1" minOccurs="1">
      <xs:annotation>
        <xs:documentation>For 'Fixed' tracking mode, this represents the angle from
 horizontal of the inclination of the plane (0° = horizontal, 90° = vertical). For '1-
Axis' tracking, this represents the angle from horizontal of the inclination of the
 tracker axis. Units are degrees. If this is a child plane, instead of this angle being
 relative to the horizontal, it is relative to its parent plane.</xs:documentation>
      </xs:annotation>
      <xs:simpleType>
        <xs:restriction base="xs:double">
          <xs:minInclusive value="0"/>
          <xs:maxInclusive value="90"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="TrackingMode" default="Fixed" maxOccurs="1" minOccurs="1"
 type="TrackingModeEnumType">
      <xs:annotation>
        <xs:documentation>Plane tracking mode.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="TrackingRange1Axis" type="xs:double" default="45" nillable="true"
 maxOccurs="1" minOccurs="0">
      <xs:annotation>
        <xs:documentation>For '1-Axis' tracking only, this represents the +/- range that
 the tracking mechanism rotates around the axis of rotation.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Shading" type="ShadingMeasurementsType" minOccurs="0"/>
    <!--
                TODO: this causes ambiguity with derived class polygonLayoutPlane
            <xs:any namespace="##targetNamespace" processContents="lax" minOccurs="0"
 maxOccurs="unbounded"/>
                -->
    <xs:element maxOccurs="1" minOccurs="0" name="RoofRafterBeamCrossSection"
 type="RafterBeamCrossSectionEnumType"/>
    <xs:element maxOccurs="1" minOccurs="0" name="RoofRafterBeamSpacing"
 type="RafterBeamSpacingEnumType"/>
    <xs:element maxOccurs="1" minOccurs="0" name="BeamsExposedToInteriorSpace"
 type="xs:boolean">
      <xs:annotation>
        <xs:documentation>Are the roof structure beams exposed to the occupied spaces
 below?</xs:documentation>
      </xs:annotation>
    </xs:element>
```

```
    <xs:element maxOccurs="1" minOccurs="0" name="StructuralMaterial"
 type="StructuralMaterialEnumType">
      <xs:annotation>
        <xs:documentation>Structural material used for the layout plane.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="PlaneCenterLocation" type="Location3dType" maxOccurs="1"
 minOccurs="0">
      <xs:annotation>
        <xs:documentation>If this is a top level plane, this represents the position in 3D
 space where center of plane is located relative to the scene origin. If this a child of
 another plane, this represents the center of this plane relative to its parent plane.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="unbounded" minOccurs="0" name="ChildModulePlane"
 type="LayoutPlaneType"/>
  </xs:sequence>
  <xs:attribute name="id" type="xs:ID">
    <xs:annotation>
      <xs:documentation>Unique identifier for this layout plane.</xs:documentation>
    </xs:annotation>
  </xs:attribute>
  <xs:anyAttribute namespace="##targetNamespace" processContents="lax"/>
</xs:complexType>
```

Complex Type ShadingMeasurementsType

Namespace	http://www.iepmodel.net
Annotations	A place holder to allow a description of all different representations of shading.
Diagram	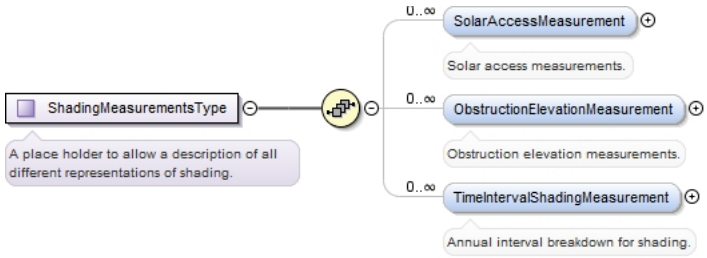
Used by	Elements LayoutPlaneType/Shading, PvDesignType/Shading
Model	SolarAccessMeasurement* , ObstructionElevationMeasurement* , TimeIntervalShadingMeasurement*
Children	ObstructionElevationMeasurement, SolarAccessMeasurement, TimeIntervalShadingMeasurement
Source	

```
<xs:complexType name="ShadingMeasurementsType">
  <xs:annotation>
    <xs:documentation>A place holder to allow a description of all different
 representations of shading.</xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="SolarAccessMeasurement" type="BasicSolarAccessMeasurementType"
 minOccurs="0" maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>Solar access measurements.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="ObstructionElevationMeasurement"
 type="ObstructionElevationsMeasurementType" minOccurs="0" maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>Obstruction elevation measurements.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="TimeIntervalShadingMeasurement"
 type="TimeIntervalShadingMeasurmentType" minOccurs="0" maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>Annual interval breakdown for shading.</xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

Complex Type BasicSolarAccessMeasurementType

Namespace	http://www.iepmodel.net
Annotations	Represents an instance of a solar access measurement.

Diagram	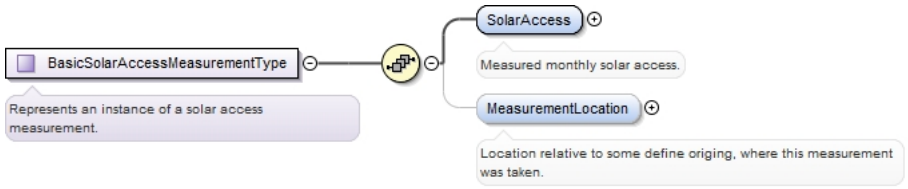
Used by	Element ShadingMeasurementsType/SolarAccessMeasurement
Model	SolarAccess , MeasurementLocation{0,1}
Children	MeasurementLocation, SolarAccess

Source	`<xs:complexType name="BasicSolarAccessMeasurementType">`
	`  <xs:annotation>`
	`  <xs:documentation>Represents an instance of a solar access measurement.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:sequence>`
	`  <xs:element name="SolarAccess" type="BasicSolarAccessType" maxOccurs="1" minOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>Measured monthly solar access.</xs:documentation>`
	`  </xs:annotation>`
	`  </xs:element>`
	`  <xs:element name="MeasurementLocation" type="Location3dType" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Location relative to some define origing, where this measurement was taken.</xs:documentation>`
	`  </xs:annotation>`
	`  </xs:element>`
	`  </xs:sequence>`
	`</xs:complexType>`

Complex Type `BasicSolarAccessType`

Namespace	http://www.iepmodel.net
Annotations	Monthly solar access values.
Diagram	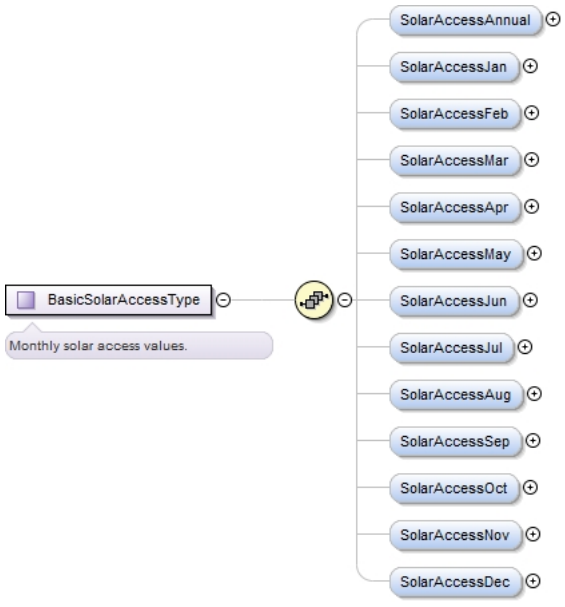
Used by	Element BasicSolarAccessMeasurementType/SolarAccess
Model	SolarAccessAnnual{0,1} , SolarAccessJan{0,1} , SolarAccessFeb{0,1} , SolarAccessMar{0,1} , SolarAccessApr{0,1} , SolarAccessMay{0,1} , SolarAccessJun{0,1} , SolarAccessJul{0,1} , SolarAccessAug{0,1} , SolarAccessSep{0,1} , SolarAccessOct{0,1} , SolarAccessNov{0,1} , SolarAccessDec{0,1}
Children	SolarAccessAnnual, SolarAccessApr, SolarAccessAug, SolarAccessDec, SolarAccessFeb, SolarAccessJan, SolarAccessJul, SolarAccessJun, SolarAccessMar, SolarAccessMay, SolarAccessNov, SolarAccessOct, SolarAccessSep

Source	`<xs:complexType name="BasicSolarAccessType">`
	`  <xs:annotation>`
	`  <xs:documentation>Monthly solar access values.</xs:documentation>`

```
  </xs:annotation>
  <xs:sequence minOccurs="0" maxOccurs="1">
    <xs:element name="SolarAccessAnnual" type="xs:int" minOccurs="0" maxOccurs="1"/>
    <xs:element name="SolarAccessJan" type="xs:int" minOccurs="0" maxOccurs="1"/>
    <xs:element name="SolarAccessFeb" type="xs:int" minOccurs="0" maxOccurs="1"/>
    <xs:element name="SolarAccessMar" type="xs:int" minOccurs="0" maxOccurs="1"/>
    <xs:element name="SolarAccessApr" type="xs:int" minOccurs="0" maxOccurs="1"/>
    <xs:element name="SolarAccessMay" type="xs:int" minOccurs="0" maxOccurs="1"/>
    <xs:element name="SolarAccessJun" type="xs:int" minOccurs="0" maxOccurs="1"/>
    <xs:element name="SolarAccessJul" type="xs:int" minOccurs="0" maxOccurs="1"/>
    <xs:element name="SolarAccessAug" type="xs:int" minOccurs="0" maxOccurs="1"/>
    <xs:element name="SolarAccessSep" type="xs:int" minOccurs="0" maxOccurs="1"/>
    <xs:element name="SolarAccessOct" type="xs:int" minOccurs="0" maxOccurs="1"/>
    <xs:element name="SolarAccessNov" type="xs:int" minOccurs="0" maxOccurs="1"/>
    <xs:element name="SolarAccessDec" type="xs:int" minOccurs="0" maxOccurs="1"/>
  </xs:sequence>
</xs:complexType>
```

Complex Type `Location3dType`

Namespace	http://www.iepmodel.net
Annotations	`Location in 3D space`
Diagram	
Used by	Elements BasicSolarAccessMeasurementType/MeasurementLocation, LayoutPlaneType/PlaneCenterLocation, ObstructionElevationsMeasurementType/MeasurementLocation, PvModuleType/LocationOnPlane, TimeIntervalShadingMeasurmentType/MeasurementLocation
Model	X , Y , Z
Children	X, Y, Z
Source	

```
<xs:complexType name="Location3dType">
  <xs:annotation>
    <xs:documentation>Location in 3D space</xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="X" type="xs:double"/>
    <xs:element name="Y" type="xs:double"/>
    <xs:element name="Z" type="xs:double"/>
  </xs:sequence>
</xs:complexType>
```

Complex Type `ObstructionElevationsMeasurementType`

Namespace	http://www.iepmodel.net
Diagram	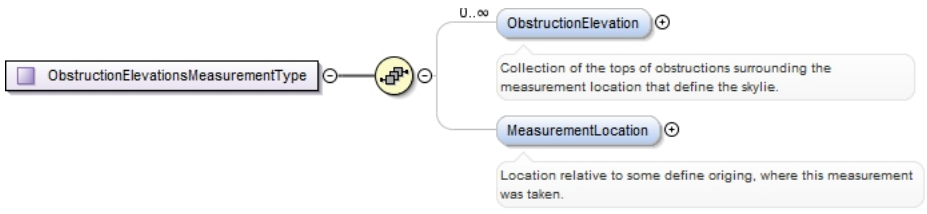
Used by	Element ShadingMeasurementsType/ObstructionElevationMeasurement
Model	ObstructionElevation* , MeasurementLocation{0,1}
Children	MeasurementLocation, ObstructionElevation
Source	

```
<xs:complexType name="ObstructionElevationsMeasurementType">
  <xs:sequence>
    <xs:element name="ObstructionElevation" type="ObstructionElevationsType" minOccurs="0"
 maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>Collection of the tops of obstructions surrounding the
 measurement location that define the skylie.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="MeasurementLocation" type="Location3dType" minOccurs="0"
 maxOccurs="1">
```

```
      <xs:annotation>
        <xs:documentation>Location relative to some define origing, where this measurement
 was taken.</xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

Complex Type `ObstructionElevationsType`

Namespace	http://www.iepmodel.net
Annotations	A description of the top of an obstruction relative to a define location. At that location, the obstruction is in the direction define by Azimuth, and the top of that obstruction is at the elevation angle define by Elevation.
Diagram	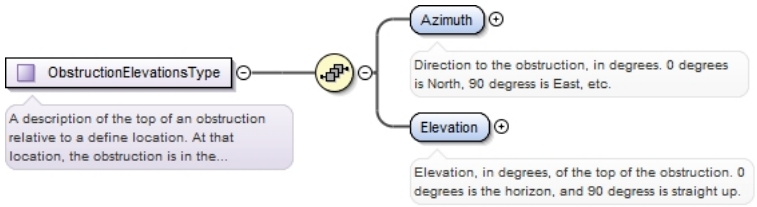
Used by	Element ObstructionElevationsMeasurementType/ObstructionElevation
Model	Azimuth , Elevation
Children	Azimuth, Elevation
Source	

```
<xs:complexType name="ObstructionElevationsType">
  <xs:annotation>
    <xs:documentation>A description of the top of an obstruction relative to a define
 location. At that location, the obstruction is in the direction define by Azimuth,
 and the top of that obstruction is at the elevation angle define by Elevation.</
xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="Azimuth" maxOccurs="1" minOccurs="1">
      <xs:annotation>
        <xs:documentation>Direction to the obstruction, in degrees. 0 degrees is North, 90
 degress is East, etc.</xs:documentation>
      </xs:annotation>
      <xs:simpleType>
        <xs:restriction base="xs:double">
          <xs:minInclusive value="0"/>
          <xs:maxInclusive value="359"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="Elevation" maxOccurs="1" minOccurs="1">
      <xs:annotation>
        <xs:documentation>Elevation, in degrees, of the top of the obstruction. 0 degrees
 is the horizon, and 90 degress is straight up.</xs:documentation>
      </xs:annotation>
      <xs:simpleType>
        <xs:restriction base="xs:double">
          <xs:minInclusive value="0"/>
          <xs:maxInclusive value="90"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

Complex Type `TimeIntervalShadingMeasurmentType`

Namespace	http://www.iepmodel.net
Annotations	A description of the shade for an entire year at the measurement locThe year is broken into equal increments (i.e. 1 hour increments) and for each increment the data value is 1 if at that location it is not shaded for that hour, and 0 if at that location it is shaded for that hour.
Diagram	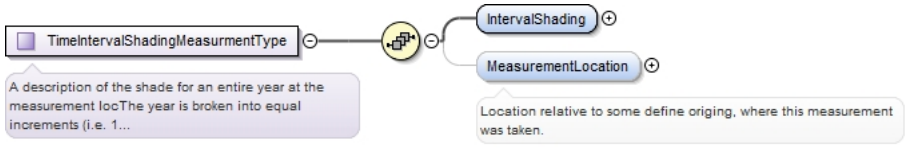

Used by	Element ShadingMeasurementsType/TimeIntervalShadingMeasurement
Model	IntervalShading , MeasurementLocation{0,1}
Children	IntervalShading, MeasurementLocation
Source	

```
<xs:complexType name="TimeIntervalShadingMeasurmentType">
  <xs:annotation>
    <xs:documentation>A description of the shade for an entire year at the measurement
 locThe year is broken into equal increments (i.e. 1 hour increments) and for each
 increment the data value is 1 if at that location it is not shaded for that hour, and 0
 if at that location it is shaded for that hour.</xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="IntervalShading" type="YearIntervalDataDoubleType" maxOccurs="1"
 minOccurs="1"/>
    <xs:element name="MeasurementLocation" type="Location3dType" minOccurs="0"
 maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Location relative to some define origing, where this measurement
 was taken.</xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

Complex Type `YearIntervalDataDoubleType`

Namespace	http://www.iepmodel.net
Annotations	Breaks down an entire year into equal intervals of time, with the ability to associate a value of type double for each time interval. TODO: Look at consiolidating with the Schedule schema
Diagram	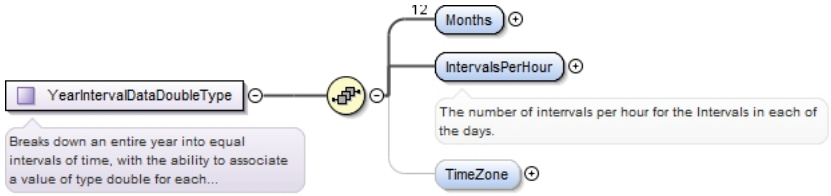
Used by	Element TimeIntervalShadingMeasurmentType/IntervalShading
Model	Months{12,12} , IntervalsPerHour , TimeZone{0,1}
Children	IntervalsPerHour, Months, TimeZone
Source	


```
<xs:complexType name="YearIntervalDataDoubleType">
  <xs:annotation>
    <xs:documentation>Breaks down an entire year into equal intervals of time, with
 the ability to associate a value of type double for each time interval. TODO: Look at
 consiolidating with the Schedule schema</xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="Months" type="MonthlyIntervalDataType" minOccurs="12"
 maxOccurs="12"/>
    <xs:element name="IntervalsPerHour" type="xs:int" maxOccurs="1" minOccurs="1">
      <xs:annotation>
        <xs:documentation>The number of interrvals per hour for the Intervals in each of
 the days.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="TimeZone" type="xs:double" minOccurs="0" maxOccurs="1"/>
  </xs:sequence>
</xs:complexType>
```

Complex Type `MonthlyIntervalDataType`

Namespace	http://www.iepmodel.net
Diagram	
Used by	Element YearIntervalDataDoubleType/Months
Model	Days{1,31}
Children	Days

Source	<xs:complexType name="MonthlyIntervalDataType"> <xs:sequence> <xs:element name="Days" type="DailyInvervalDataType" maxOccurs="31" minOccurs="1"/> </xs:sequence> </xs:complexType>

Complex Type `DailyInvervalDataType`

Namespace	http://www.iepmodel.net
Diagram	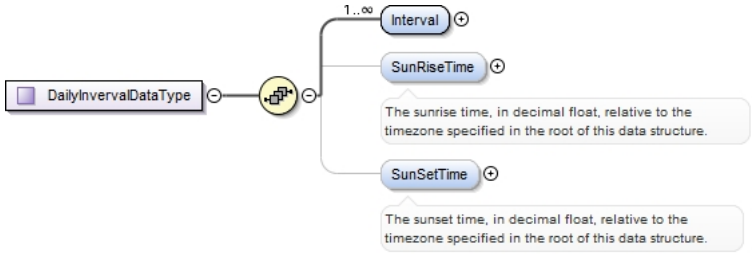
Used by	Element MonthlyIntervalDataType/Days
Model	Interval+ , SunRiseTime{0,1} , SunSetTime{0,1}
Children	Interval, SunRiseTime, SunSetTime
Source	<xs:complexType name="DailyInvervalDataType"> <xs:sequence> <xs:element name="Interval" type="IntervalDataDoubleType" maxOccurs="unbounded" minOccurs="1"/> <xs:element name="SunRiseTime" type="xs:double" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>The sunrise time, in decimal float, relative to the timezone specified in the root of this data structure.</xs:documentation> </xs:annotation> </xs:element> <xs:element name="SunSetTime" type="xs:double" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>The sunset time, in decimal float, relative to the timezone specified in the root of this data structure.</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType>

Complex Type `IntervalDataDoubleType`

Namespace	http://www.iepmodel.net
Diagram	
Used by	Element DailyInvervalDataType/Interval
Model	Data
Children	Data
Source	<xs:complexType name="IntervalDataDoubleType"> <xs:sequence> <xs:element name="Data" type="xs:double" maxOccurs="1" minOccurs="1"/> </xs:sequence> </xs:complexType>

Complex Type `WallType`

Namespace	http://www.iepmodel.net

Diagram	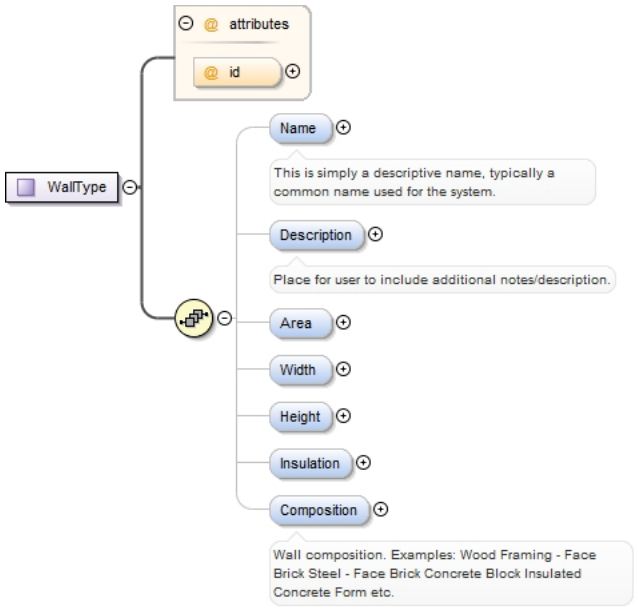
Used by	Element EnvelopeType/Wall
Model	Name{0,1} , Description{0,1} , Area{0,1} , Width{0,1} , Height{0,1} , Insulation{0,1} , Composition{0,1}
Children	Area, Composition, Description, Height, Insulation, Name, Width

Attributes

QName	Type	Fixed	Default	Use
id	xs:IDREF			optional

Source

```
<xs:complexType name="WallType">
  <xs:sequence>
    <xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is simply a descriptive name, typically a common name used
 for the system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="1" minOccurs="0" name="Description" type="xs:string">
      <xs:annotation>
        <xs:documentation>Place for user to include additional notes/description.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Area" type="AreaType" minOccurs="0"/>
    <xs:element name="Width" type="DimensionType" minOccurs="0" maxOccurs="1"/>
    <xs:element name="Height" type="DimensionType" minOccurs="0" maxOccurs="1"/>
    <xs:element name="Insulation" type="InsulationType" minOccurs="0" maxOccurs="1"/>
    <xs:element name="Composition" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Wall composition. Examples: Wood Framing - Face Brick Steel -
 Face Brick Concrete Block Insulated Concrete Form etc.</xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
  <xs:attribute name="id" type="xs:IDREF"/>
</xs:complexType>
```

Complex Type `WindowType`

Namespace	http://www.iepmodel.net

Diagram

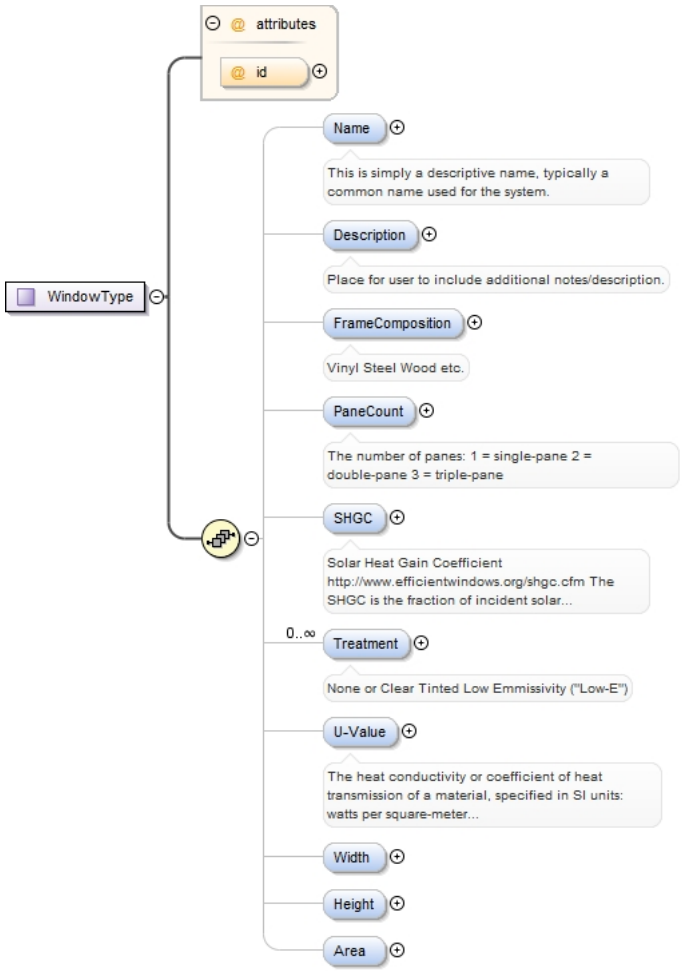

Used by

Element EnvelopeType/Window

Model

Name{0,1} , Description{0,1} , FrameComposition{0,1} , PaneCount{0,1} , SHGC{0,1} , Treatment* , U-Value{0,1} , Width{0,1} , Height{0,1} , Area{0,1}

Children

Area, Description, FrameComposition, Height, Name, PaneCount, SHGC, Treatment, U-Value, Width

Attributes

QName	Type	Fixed	Default	Use
id	xs:IDREF			optional

Source

```
<xs:complexType name="WindowType">
  <xs:sequence>
    <xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is simply a descriptive name, typically a common name used
 for the system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="1" minOccurs="0" name="Description" type="xs:string">
      <xs:annotation>
        <xs:documentation>Place for user to include additional notes/description.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="FrameComposition" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Vinyl Steel Wood etc.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="PaneCount" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>The number of panes: 1 = single-pane 2 = double-pane 3 = triple-
pane</xs:documentation>
      </xs:annotation>
      <xs:simpleType>
        <xs:restriction base="xs:int">
          <xs:minInclusive value="1"/>
        </xs:restriction>
```

```
      </xs:simpleType>
    </xs:element>
    <xs:element name="SHGC" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Solar Heat Gain Coefficient http://www.efficientwindows.org/
shgc.cfm The SHGC is the fraction of incident solar radiation admitted through a window,
 both directly transmitted and absorbed and subsequently released inward. SHGC is
 expressed as a number between 0 and 1. The lower a window's solar heat gain coefficient,
 the less solar heat it transmits.</xs:documentation>
      </xs:annotation>
      <xs:simpleType>
        <xs:restriction base="xs:float">
          <xs:minInclusive value="0"/>
          <xs:maxInclusive value="1"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="Treatment" type="xs:string" minOccurs="0" maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>None or Clear Tinted Low Emmissivity ("Low-E")</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="U-Value" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>The heat conductivity or coefficient of heat transmission of a
 material, specified in SI units: watts per square-meter kelvins W/(m²·K) or equivalently
 W/(m²·°C). Note that if you intend to use different units then this should be noted in
 the Description.</xs:documentation>
      </xs:annotation>
      <xs:simpleType>
        <xs:restriction base="xs:float">
          <xs:minInclusive value="0"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="Width" type="DimensionType" minOccurs="0" maxOccurs="1"/>
    <xs:element name="Height" type="DimensionType" minOccurs="0" maxOccurs="1"/>
    <xs:element name="Area" type="AreaType" minOccurs="0"/>
  </xs:sequence>
  <xs:attribute name="id" type="xs:IDREF"/>
</xs:complexType>
```

Complex Type LeakageType

Namespace	http://www.iepmodel.net
Diagram	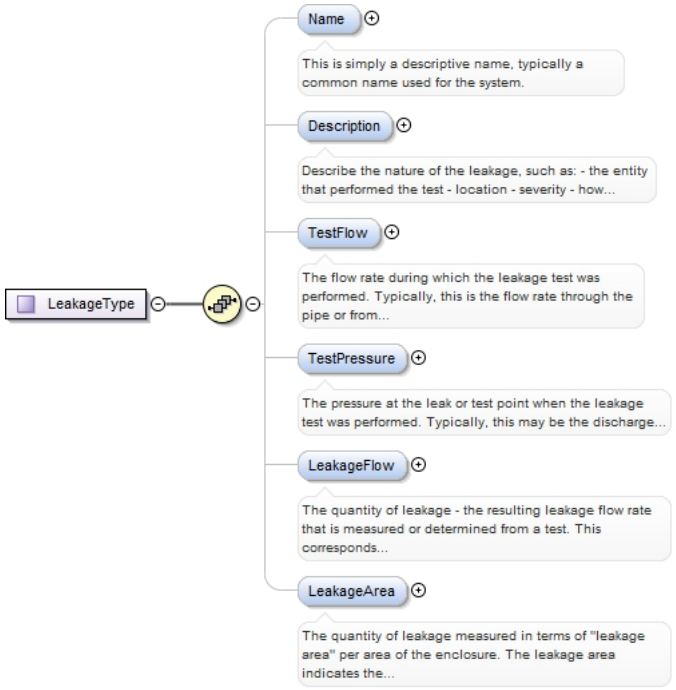
Used by	Elements DistributionSegmentType/Leakage, EnvelopeType/Leakage
Model	Name{0,1} , Description{0,1} , TestFlow{0,1} , TestPressure{0,1} , LeakageFlow{0,1} , LeakageArea{0,1}

Children	Description, LeakageArea, LeakageFlow, Name, TestFlow, TestPressure
Source	<xs:complexType name="LeakageType"> <xs:sequence> <xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This is simply a descriptive name, typically a common name used for the system.</xs:documentation> </xs:annotation> </xs:element> <xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Describe the nature of the leakage, such as: - the entity that performed the test - location - severity - how discovered - systems, equipment affected - etc.</xs:documentation> </xs:annotation> </xs:element> <xs:element minOccurs="0" name="TestFlow" type="FlowType"> <xs:annotation> <xs:documentation>The flow rate during which the leakage test was performed. Typically, this is the flow rate through the pipe or from the fan if a blower door or duct leakage test is performed. This flow rate correspondes to the Leakage Value.</xs:documentation> </xs:annotation> </xs:element> <xs:element minOccurs="0" name="TestPressure" type="PressureType"> <xs:annotation> <xs:documentation>The pressure at the leak or test point when the leakage test was performed. Typically, this may be the discharge pressure of the fan if a blower door or duct leakage test is performed. This pressure corresponds to the Leakage Value.</xs:documentation> </xs:annotation> </xs:element> <xs:element minOccurs="0" name="LeakageFlow" type="FlowType"> <xs:annotation> <xs:documentation>The quantity of leakage - the resulting leakage flow rate that is measured or determined from a test. This corresponds to the Test Flow and Pressure.</xs:documentation> </xs:annotation> </xs:element> <xs:element minOccurs="0" name="LeakageArea" type="AreaType"> <xs:annotation> <xs:documentation>The quantity of leakage measured in terms of "leakage area" per area of the enclosure. The leakage area indicates the effective net size (area) of the leak. The area of the enclosure typically refers to the floor-area of the enclosure being tested. This corresponds to the Test Flow and Pressure.</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType>

Complex Type FlowType

Namespace	http://www.iepmodel.net
Annotations	This is a base class used for defining the flow rate of a fluid (volumetric rate of change with respect to time). Distribution system is a example of an object that instances this type.
Diagram	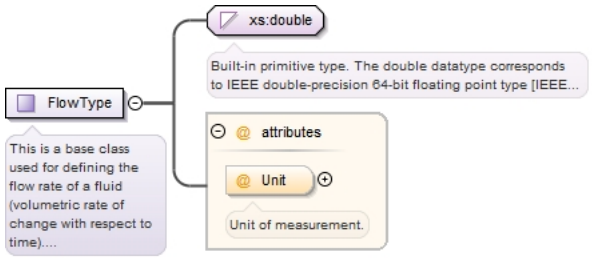
Type	extension of xs:double
Used by	Elements: DistributionSegmentType/FlowRated, LeakageType/LeakageFlow, LeakageType/TestFlow, PrimeMoverSystemType/DesignFlow, WaterHeatingCapacityType/RatedFlowRate
Attributes	**QName**: **Unit**; **Type**: FlowUnitEnumType; **Fixed**: ; **Default**: ; **Use**: optional Unit of measurement.
Source	<xs:complexType name="FlowType">

```
  <xs:annotation>
    <xs:documentation>This is a base class used for defining the flow rate of a fluid
 (volumetric rate of change with respect to time). Distribution system is a example of an
 object that instances this type.</xs:documentation>
  </xs:annotation>
  <xs:simpleContent>
    <xs:extension base="xs:double">
      <xs:attribute name="Unit" type="FlowUnitEnumType" use="optional">
        <xs:annotation>
          <xs:documentation>Unit of measurement.</xs:documentation>
        </xs:annotation>
      </xs:attribute>
    </xs:extension>
  </xs:simpleContent>
</xs:complexType>
```

Complex Type PressureType

Namespace	http://www.iepmodel.net
Annotations	This is a base class used to represent a pressure quantity.
Diagram	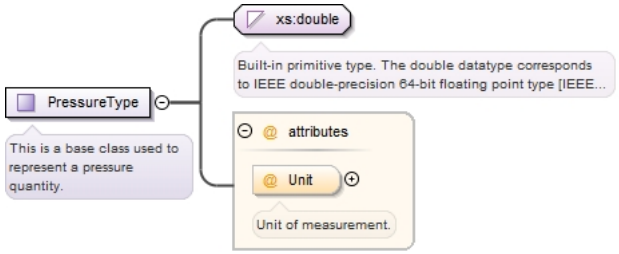
Type	extension of xs:double
Used by	Elements: DistributionSegmentType/PressureRated, LeakageType/TestPressure, PrimeMoverSystemType/DesignPressure
Attributes	**QName**: **Unit**; **Type**: PressureUnitEnumType; **Fixed**: ; **Default**: ; **Use**: optional Unit of measurement.

Source	`<xs:complexType name="PressureType">`
	`  <xs:annotation>`
	`    <xs:documentation>This is a base class used to represent a pressure quantity.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleContent>`
	`    <xs:extension base="xs:double">`
	`      <xs:attribute name="Unit" type="PressureUnitEnumType" use="optional">`
	`        <xs:annotation>`
	`          <xs:documentation>Unit of measurement.</xs:documentation>`
	`        </xs:annotation>`
	`      </xs:attribute>`
	`    </xs:extension>`
	`  </xs:simpleContent>`
	`</xs:complexType>`

Complex Type ZoneType

Namespace	http://www.iepmodel.net
Annotations	These are heat loads.

Diagram

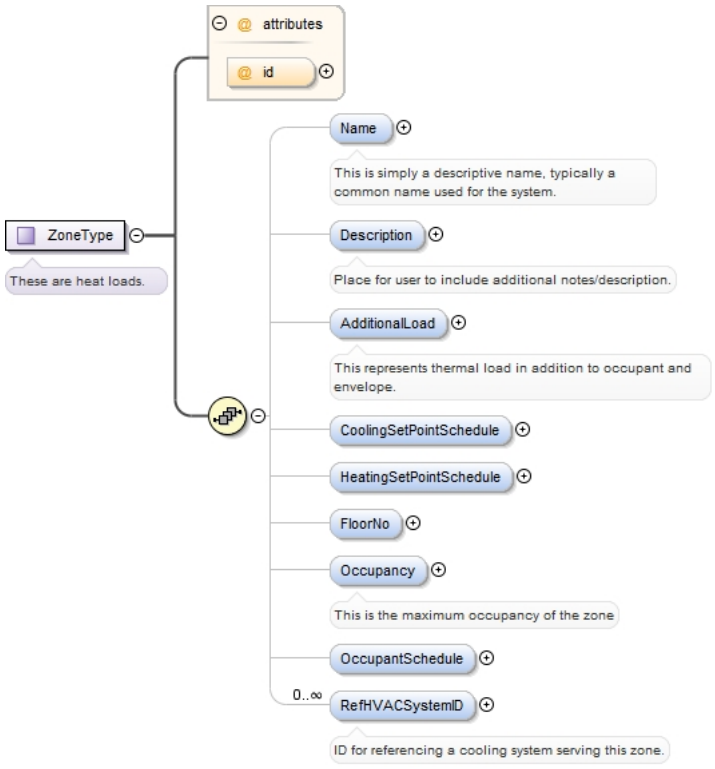

Used by

Element BuildingType/Zone

Model

Name{0,1} , Description{0,1} , AdditionalLoad{0,1} , CoolingSetPointSchedule{0,1} , HeatingSetPointSchedule{0,1} , FloorNo{0,1} , Occupancy{0,1} , OccupantSchedule{0,1} , RefHVACSystemID*

Children

AdditionalLoad, CoolingSetPointSchedule, Description, FloorNo, HeatingSetPointSchedule, Name, Occupancy, OccupantSchedule, RefHVACSystemID

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			optional

Source

```
<xs:complexType name="ZoneType">
  <xs:annotation>
    <xs:documentation>These are heat loads.</xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is simply a descriptive name, typically a common name used
 for the system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Place for user to include additional notes/description.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="AdditionalLoad" type="PowerType" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This represents thermal load in addition to occupant and
 envelope.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="CoolingSetPointSchedule" type="ScheduleType" minOccurs="0"
 maxOccurs="1"/>
    <xs:element name="HeatingSetPointSchedule" type="ScheduleType" minOccurs="0"
 maxOccurs="1"/>
    <xs:element name="FloorNo" type="xs:int" minOccurs="0" maxOccurs="1"/>
    <xs:element name="Occupancy" type="xs:int" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is the maximum occupancy of the zone</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="OccupantSchedule" type="ScheduleType" minOccurs="0" maxOccurs="1"/>
    <xs:element name="RefHVACSystemID" type="xs:IDREF" minOccurs="0"
 maxOccurs="unbounded">
```

```
      <xs:annotation>
        <xs:documentation>ID for referencing a cooling system serving this zone.</
xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
  <xs:attribute name="id" type="xs:ID" use="optional"/>
</xs:complexType>
```

Complex Type PowerType

Namespace	http://www.iepmodel.net
Annotations	This is a base class used to define a power quantity (time rate of change of energy). Most energy producing or consuming systems and equipment instance this type.
Diagram	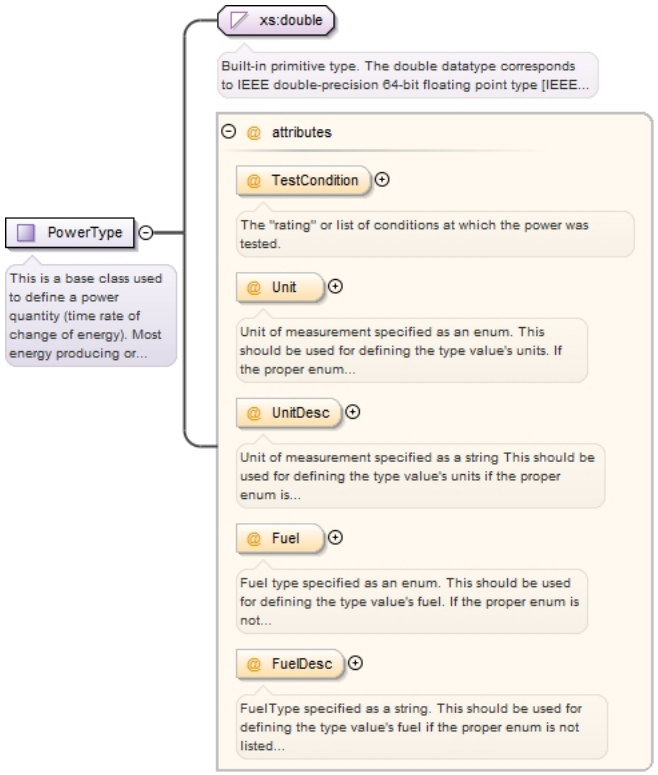
Type	extension of xs:double
Used by	Elements: CommonSystemPropertiesType/DesignInput, CommonSystemPropertiesType/DesignOutput, CommonSystemPropertiesType/MaxInput, InputPowerType/Power, ValueType/Power, ZoneType/AdditionalLoad

Attributes

QName	Type	Fixed	Default	Use
Fuel	EnergyClassEnumType		Electricity	optional
	Fuel type specified as an enum. This should be used for defining the type value's fuel. If the proper enum is not listed, please use the FuelDesc field to specify the units. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the FuelDesc may contain a default type.			
FuelDesc	xs:string		Electricity	optional
	FuelType specified as a string. This should be used for defining the type value's fuel if the proper enum is not listed in Fuel. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the FuelDesc may contain a default type.			
TestCondition	xs:string			optional
	The "rating" or list of conditions at which the power was tested.			
Unit	PowerUnitEnumType			optional
	Unit of measurement specified as an enum. This should be used for defining the type value's units. If the proper enum is not listed, please use the UnitDesc field to specify the units. These are			

QName	Type	Fixed	Default	Use
	all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.			
UnitDesc	xs:string		kwh	optional
	Unit of measurement specified as a string This should be used for defining the type value's units if the proper enum is not listed in Unit. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.			

Source

```
<xs:complexType name="PowerType">
  <xs:annotation>
    <xs:documentation>This is a base class used to define a power quantity (time rate of change of energy). Most energy producing or consuming systems and equipment instance this type.</xs:documentation>
  </xs:annotation>
  <xs:simpleContent>
    <xs:extension base="xs:double">
      <xs:attribute name="TestCondition" type="xs:string" use="optional">
        <xs:annotation>
          <xs:documentation>The "rating" or list of conditions at which the power was tested.</xs:documentation>
        </xs:annotation>
      </xs:attribute>
      <xs:attribute name="Unit" type="PowerUnitEnumType" use="optional">
        <xs:annotation>
          <xs:documentation>Unit of measurement specified as an enum. This should be used for defining the type value's units. If the proper enum is not listed, please use the UnitDesc field to specify the units. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.</xs:documentation>
        </xs:annotation>
      </xs:attribute>
      <xs:attribute default="kwh" name="UnitDesc" type="xs:string">
        <xs:annotation>
          <xs:documentation>Unit of measurement specified as a string This should be used for defining the type value's units if the proper enum is not listed in Unit. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.</xs:documentation>
        </xs:annotation>
      </xs:attribute>
      <xs:attribute name="Fuel" type="EnergyClassEnumType" use="optional" default="Electricity">
        <xs:annotation>
          <xs:documentation>Fuel type specified as an enum. This should be used for defining the type value's fuel. If the proper enum is not listed, please use the FuelDesc field to specify the units. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the FuelDesc may contain a default type.</xs:documentation>
        </xs:annotation>
      </xs:attribute>
      <xs:attribute default="Electricity" name="FuelDesc" type="xs:string">
        <xs:annotation>
          <xs:documentation>FuelType specified as a string. This should be used for defining the type value's fuel if the proper enum is not listed in Fuel. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the FuelDesc may contain a default type.</xs:documentation>
        </xs:annotation>
      </xs:attribute>
    </xs:extension>
  </xs:simpleContent>
</xs:complexType>
```

Complex Type ScheduleType

Namespace	http://www.iepmodel.net
Annotations	List of year schedules that make up an entire calendar year.

Diagram	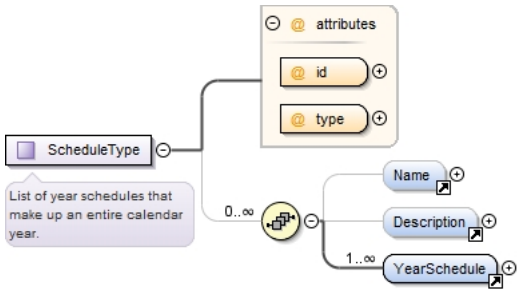
Used by	Elements Schedule, ZoneType/CoolingSetPointSchedule, ZoneType/HeatingSetPointSchedule, ZoneType/OccupantSchedule
Model	Name{0,1} , Description{0,1} , YearSchedule+
Children	Description, Name, YearSchedule

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			required
type	scheduleEnumType			required

Source

```
<xs:complexType name="ScheduleType">
  <xs:annotation>
    <xs:documentation>List of year schedules that make up an entire calendar year.</
xs:documentation>
  </xs:annotation>
  <xs:sequence minOccurs="0" maxOccurs="unbounded">
    <xs:element ref="Name" minOccurs="0" maxOccurs="1"/>
    <xs:element ref="Description" minOccurs="0" maxOccurs="1"/>
    <xs:element ref="YearSchedule" minOccurs="1" maxOccurs="unbounded"/>
  </xs:sequence>
  <xs:attribute name="id" use="required" type="xs:ID"/>
  <xs:attribute name="type" use="required" type="scheduleEnumType"/>
</xs:complexType>
```

Complex Type YearScheduleType

Namespace	http://www.iepmodel.net
Annotations	Set of week schedules all assigned for a particular time period during the year defined by the begin and end date elements. These must not span more than one calendar year.
Diagram	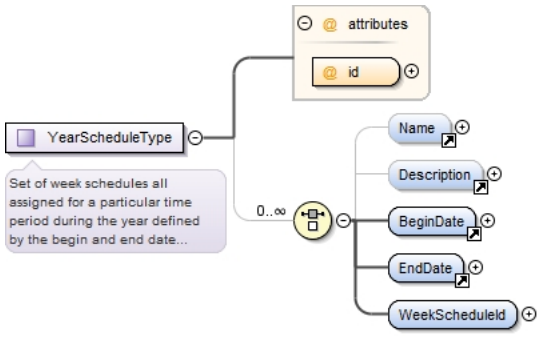
Used by	Element YearSchedule
Model	Name{0,1} | Description{0,1} | BeginDate | EndDate | WeekScheduleId
Children	BeginDate, Description, EndDate, Name, WeekScheduleId

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			required

Source

```
<xs:complexType name="YearScheduleType">
  <xs:annotation>
    <xs:documentation>Set of week schedules all assigned for a particular time period
 during the year defined by the begin and end date elements. These must not span more than
 one calendar year.</xs:documentation>
  </xs:annotation>
  <xs:choice minOccurs="0" maxOccurs="unbounded">
    <xs:element ref="Name" minOccurs="0" maxOccurs="1"/>
    <xs:element ref="Description" minOccurs="0" maxOccurs="1"/>
    <xs:element ref="BeginDate" minOccurs="1" maxOccurs="1"/>
```

```
    <xs:element ref="EndDate" minOccurs="1" maxOccurs="1"/>
    <xs:element minOccurs="1" maxOccurs="1" name="WeekScheduleId">
      <xs:complexType>
        <xs:attribute name="weekScheduleIdRef" type="xs:IDREF" use="required"/>
      </xs:complexType>
    </xs:element>
  </xs:choice>
  <xs:attribute name="id" use="required" type="xs:ID"/>
</xs:complexType>
```

Complex Type `GroundAreaType`

Namespace	http://www.iepmodel.net
Annotations	A description of the ground area of a site. Helps describe areas that may be used for ground mount PV Systems.
Diagram	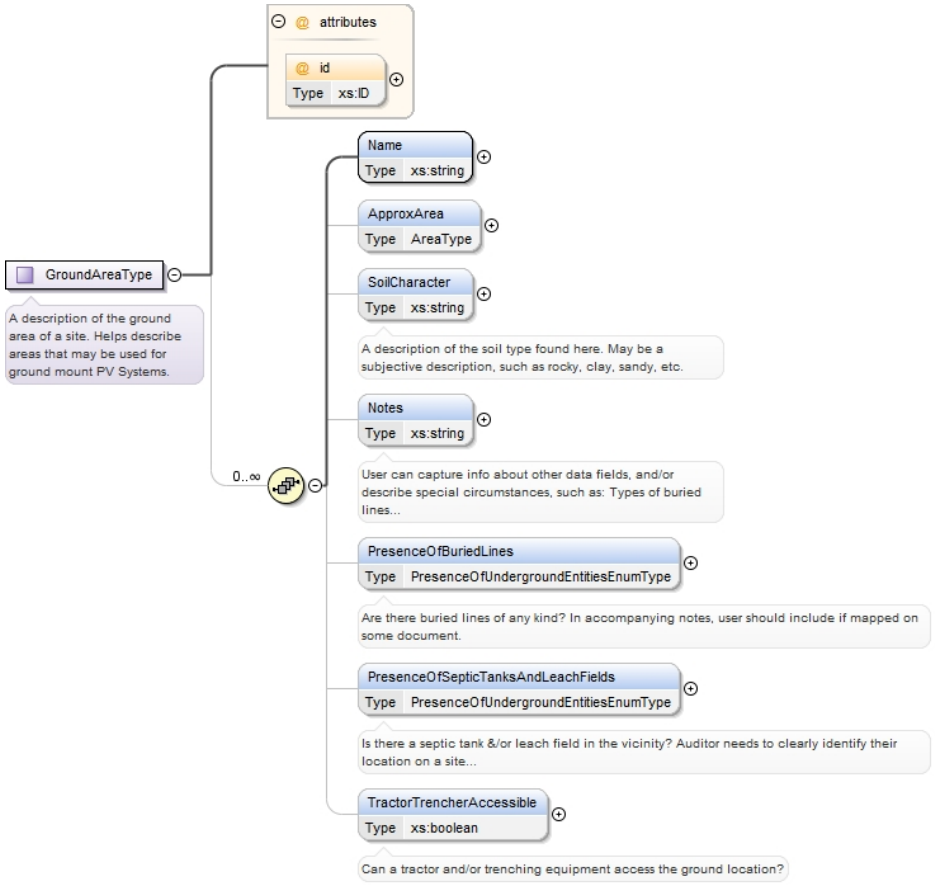
Used by	Element SiteType/GroundArea
Model	Name , ApproxArea{0,1} , SoilCharacter{0,1} , Notes{0,1} , PresenceOfBuriedLines{0,1} , PresenceOfSepticTanksAndLeachFields{0,1} , TractorTrencherAccessible{0,1}
Children	ApproxArea, Name, Notes, PresenceOfBuriedLines, PresenceOfSepticTanksAndLeachFields, SoilCharacter, TractorTrencherAccessible

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			optional

Source

```
<xs:complexType name="GroundAreaType">
  <xs:annotation>
    <xs:documentation>A description of the ground area of a site. Helps describe areas
 that may be used for ground mount PV Systems.</xs:documentation>
  </xs:annotation>
  <xs:sequence maxOccurs="unbounded" minOccurs="0">
    <xs:element name="Name" type="xs:string"/>
    <xs:element minOccurs="0" name="ApproxArea" type="AreaType"/>
    <xs:element maxOccurs="1" minOccurs="0" name="SoilCharacter" type="xs:string">
      <xs:annotation>
        <xs:documentation>A description of the soil type found here. May be a subjective
 description, such as rocky, clay, sandy, etc.</xs:documentation>
      </xs:annotation>
```

```
    </xs:element>
    <xs:element maxOccurs="1" minOccurs="0" name="Notes" type="xs:string">
      <xs:annotation>
        <xs:documentation>User can capture info about other data fields, and/or describe
 special circumstances, such as: Types of buried lines and how marked, Equipment &/or
 materials access issues, whether there is an existing professional soils report, if
 the site is in a biotic reserve (when applicable), &/or whether an environmental impact
 report has been done</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="1" minOccurs="0" name="PresenceOfBuriedLines"
 type="PresenceOfUndergroundEntitiesEnumType">
      <xs:annotation>
        <xs:documentation>Are there buried lines of any kind? In accompanying notes, user
 should include if mapped on some document.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="1" minOccurs="0" name="PresenceOfSepticTanksAndLeachFields"
 type="PresenceOfUndergroundEntitiesEnumType">
      <xs:annotation>
        <xs:documentation>Is there a septic tank &/or leach field in the vicinity? Auditor
 needs to clearly identify their location on a site schematic.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="1" minOccurs="0" name="TractorTrencherAccessible"
 type="xs:boolean">
      <xs:annotation>
        <xs:documentation>Can a tractor and/or trenching equipment access the ground
 location?</xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
  <xs:attribute name="id" type="xs:ID"/>
</xs:complexType>
```

Complex Type `EquipmentLocationType`

Namespace	http://www.iepmodel.net
Annotations	A place where equipment can be located on the site or within the building. Can be used to capture site survey data before any systems are designed, and can be used to specify where specific proposed equipment will be placed during implementation. Note, it can be used to describe an existing equipment location in cases of remove and replace scenarios.
Diagram	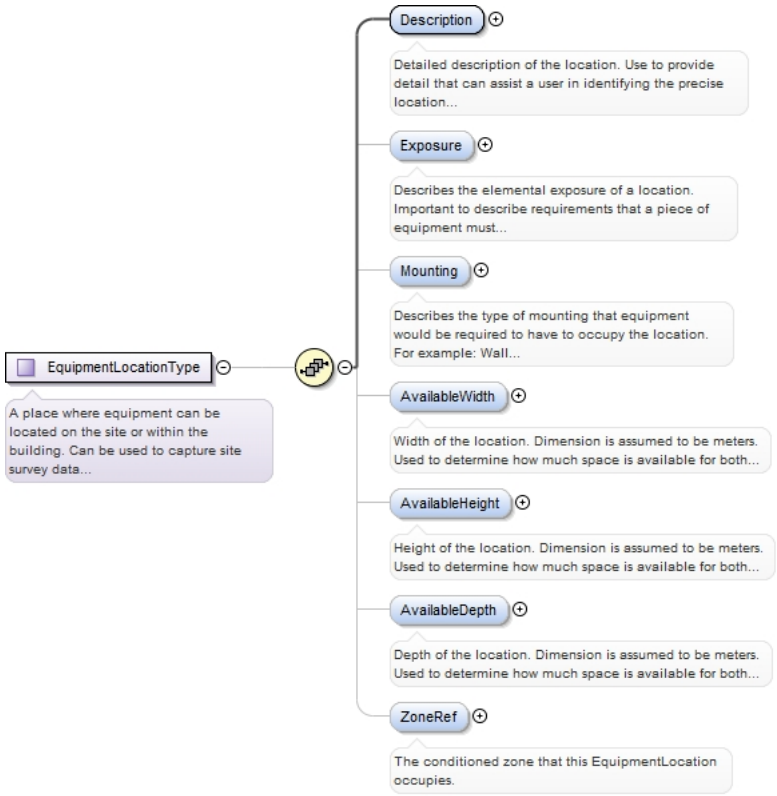
Used by	Elements EquipmentInstanceType/Location, Location, SiteType/ProposedEquipmentLocation

Model	Description , Exposure{0,1} , Mounting{0,1} , AvailableWidth{0,1} , AvailableHeight{0,1} , AvailableDepth{0,1} , ZoneRef{0,1}
Children	AvailableDepth, AvailableHeight, AvailableWidth, Description, Exposure, Mounting, ZoneRef
Source	

```
<xs:complexType name="EquipmentLocationType">
  <xs:annotation>
    <xs:documentation>A place where equipment can be located on the site or within the
 building. Can be used to capture site survey data before any systems are designed,
 and can be used to specify where specific proposed equipment will be placed during
 implementation. Note, it can be used to describe an existing equipment location in cases
 of remove and replace scenarios.</xs:documentation>
  </xs:annotation>
  <xs:sequence minOccurs="0" maxOccurs="1">
    <xs:element name="Description" type="xs:string" minOccurs="1" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Detailed description of the location. Use to provide detail that
 can assist a user in identifying the precise location on a site, access information, etc.
 Typically use room names, compass directions, etc to identify the location to users.
 When used for site surveys, should include what types of equipment are envisioned to be
 placed here. For eaxample, in PV Systems, equipment might include: DC transition box, DC
 Combiner, DC Disconnect, Inverter.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Exposure" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Describes the elemental exposure of a location. Important to
 describe requirements that a piece of equipment must fulfill. Suggested values include:
 Indoor-Conditioned, Indoor-Unconditioned, Outdoor-Covered, Outdoor-Uncovered, Rooftop.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Mounting" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Describes the type of mounting that equipment would be required
 to have to occupy the location. For example: Wall Mount, Wall Mount-Surface, Wall Mount-
Flush, Pad Mount.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="AvailableWidth" type="xs:float" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Width of the location. Dimension is assumed to be meters.
 Used to determine how much space is available for both equipment and code mandated
 clearances.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="AvailableHeight" type="xs:float" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Height of the location. Dimension is assumed to be meters.
 Used to determine how much space is available for both equipment and code mandated
 clearances.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="AvailableDepth" type="xs:float" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Depth of the location. Dimension is assumed to be meters.
 Used to determine how much space is available for both equipment and code mandated
 clearances.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="ZoneRef" type="xs:IDREF">
      <xs:annotation>
        <xs:documentation>The conditioned zone that this EquipmentLocation occupies.</
xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

Complex Type `WirewaySegmentType`

Namespace	http://www.iepmodel.net
Annotations	Base definition of a WirewaySegment, which is a distinct piece of wireway through which electrical wiring is housed for its prtotection and the protection of people and property. Wireway segments can be either electrical conduit or boxes. Multiple segments are connected to form a single continuous path for one or more CircuitConnections. Each segment is distinct by its characteristics.

Diagram

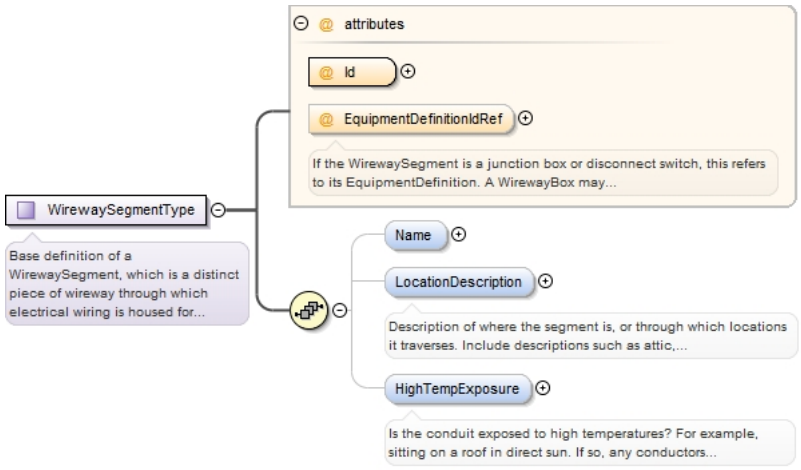

Properties

abstract:	true

Used by

Elements	PvDesignType/WirewaySegment, SiteType/ExistingWirewaySegment, SiteType/ProposedWirewaySegment
Complex Types	ConduitSegmentType, WirewayBoxType

Model

Name{0,1} , LocationDescription{0,1} , HighTempExposure{0,1}

Children

HighTempExposure, LocationDescription, Name

Attributes

QName	Type	Fixed	Default	Use
EquipmentDefinitionIdRef	IDREF			optional
	If the WirewaySegment is a junction box or disconnect switch, this refers to its EquipmentDefinition. A WirewayBox may be a pass through where multiple ConduitSegments are combined into a single ConduitSegment for example. A disconnect switch box may also be modeled as a WirewayBox, provided that the circuit(s) involved are simply disoconnected and not combined in any way. DO NOT use WirewayBox to represent a combiner, or distribution panel.			
Id	xs:ID			required

Source

```
<xs:complexType name="WirewaySegmentType" abstract="true">
  <xs:annotation>
    <xs:documentation>Base definition of a WirewaySegment, which is a distinct piece
 of wireway through which electrical wiring is housed for its prtotection and the
 protection of people and property. Wireway segments can be either electrical conduit or
 boxes. Multiple segments are connected to form a single continuous path for one or more
 CircuitConnections. Each segment is distinct by its characteristics.</xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="Name" type="xs:string" minOccurs="0"/>
    <xs:element minOccurs="0" name="LocationDescription" type="xs:string">
      <xs:annotation>
        <xs:documentation>Description of where the segment is, or through which locations
 it traverses. Include descriptions such as attic, interior, exterior, roof, or trench.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="HighTempExposure" type="xs:boolean" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Is the conduit exposed to high temperatures? For example,
 sitting on a roof in direct sun. If so, any conductors contained within the segment may
 have to have their rated current carrying capacity derated.</xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
  <xs:attribute name="Id" type="xs:ID" use="required"/>
  <xs:attribute name="EquipmentDefinitionIdRef" type="xs:IDREF">
    <xs:annotation>
      <xs:documentation>If the WirewaySegment is a junction box or disconnect switch, this
 refers to its EquipmentDefinition. A WirewayBox may be a pass through where multiple
 ConduitSegments are combined into a single ConduitSegment for example. A disconnect
 switch box may also be modeled as a WirewayBox, provided that the circuit(s) involved are
 simply disoconnected and not combined in any way. DO NOT use WirewayBox to represent a
 combiner, or distribution panel.</xs:documentation>
    </xs:annotation>
  </xs:attribute>
</xs:complexType>
```

Complex Type `WeatherType`

Namespace	http://www.iepmodel.net
Annotations	This is intended as a reference to any weather data used for modeling. contains “typical” data; for example NOAA “actual year” weather data that may be needed for inverse modeling (cf. HERS II Technical Manual, Ch 5), or energy bill calibration as required for some IPMVP-based evaluation studies.
Diagram	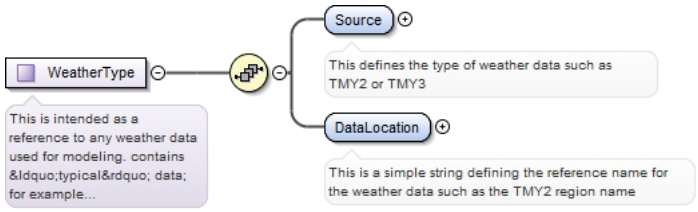
Used by	Element SiteType/Weather
Model	Source , DataLocation
Children	DataLocation, Source

`Source`	`<xs:complexType name="WeatherType">`
	`<xs:annotation>`
	`<xs:documentation>`This is intended as a reference to any weather data used for modeling. contains “typical” data; for example NOAA “actual year” weather data that may be needed for inverse modeling (cf. HERS II Technical Manual, Ch 5), or energy bill calibration as required for some IPMVP-based evaluation studies.`</xs:documentation>`
	`</xs:annotation>`
	`<xs:sequence>`
	`<xs:element name="Source" type="xs:string" minOccurs="1" maxOccurs="1">`
	`<xs:annotation>`
	`<xs:documentation>`This defines the type of weather data such as TMY2 or TMY3`</xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`
	`<xs:element name="DataLocation" type="xs:string" minOccurs="1" maxOccurs="1">`
	`<xs:annotation>`
	`<xs:documentation>`This is a simple string defining the reference name for the weather data such as the TMY2 region name`</xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`
	`</xs:sequence>`
	`</xs:complexType>`

Complex Type `MeasureType`

Namespace	http://www.iepmodel.net
Annotations	Measure is intended to define a single specific measure to be taken in a scope of work.

Diagram	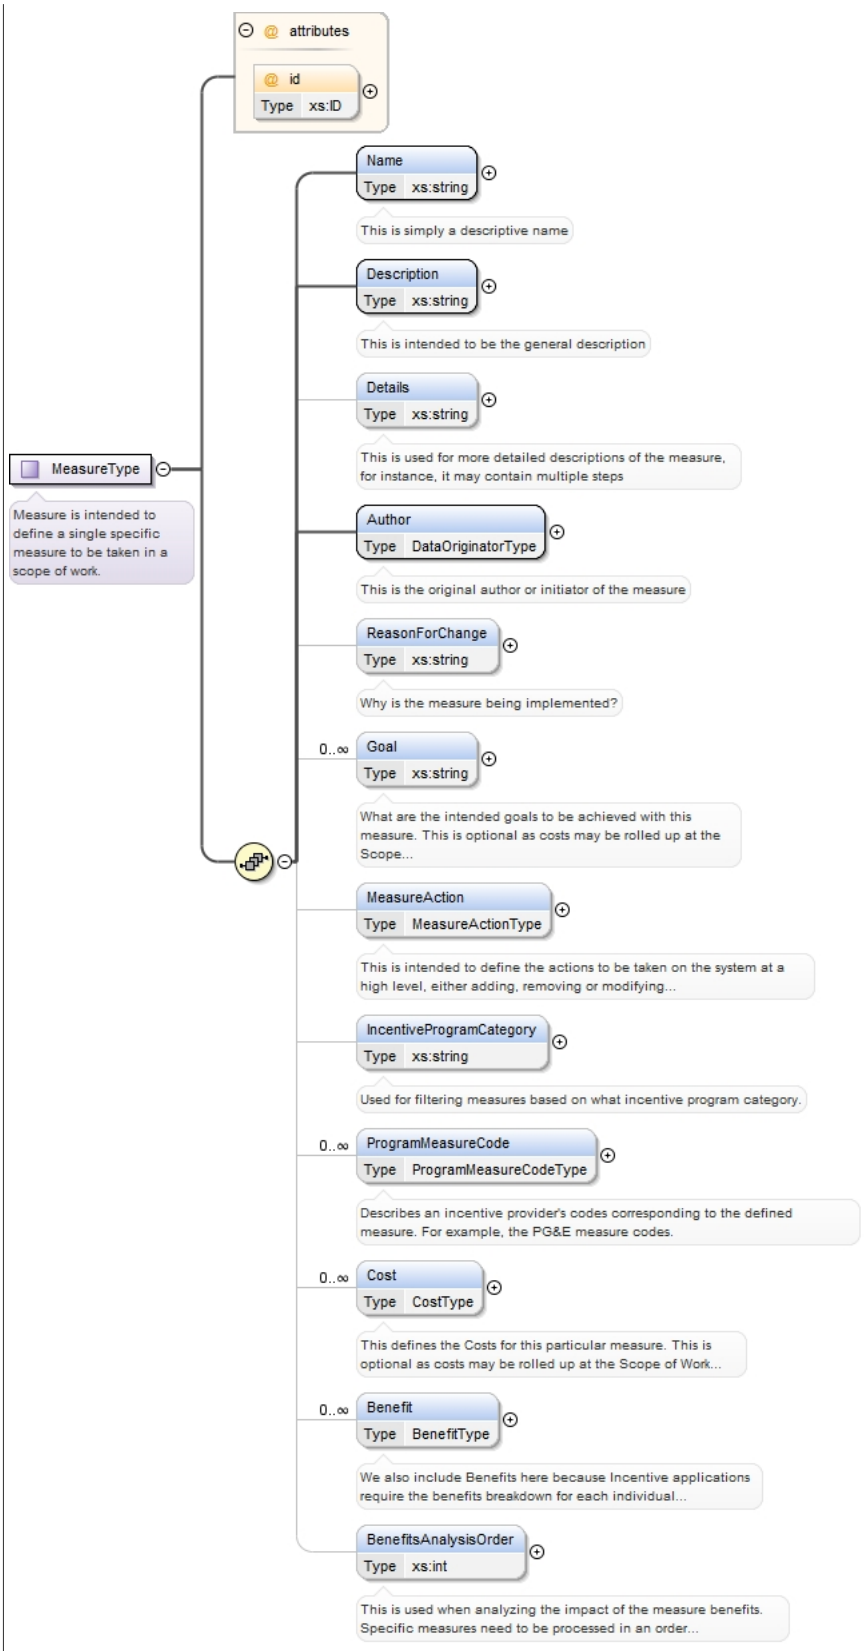
Used by	Element ProjectType/Measure
Model	Name , Description , Details{0,1} , Author , ReasonForChange{0,1} , Goal* , MeasureAction{0,1} , IncentiveProgramCategory{0,1} , ProgramMeasureCode* , Cost* , Benefit* , BenefitsAnalysisOrder{0,1}
Children	Author, Benefit, BenefitsAnalysisOrder, Cost, Description, Details, Goal, IncentiveProgramCategory, MeasureAction, Name, ProgramMeasureCode, ReasonForChange

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			optional

Source

```
<xs:complexType name="MeasureType">
  <xs:annotation>
    <xs:documentation>Measure is intended to define a single specific measure to be taken
 in a scope of work.</xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="Name" type="xs:string" minOccurs="1" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is simply a descriptive name</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Description" type="xs:string" minOccurs="1" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is intended to be the general description</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Details" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is used for more detailed descriptions of the measure, for
 instance, it may contain multiple steps</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Author" type="DataOriginatorType">
      <xs:annotation>
        <xs:documentation>This is the original author or initiator of the measure</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="ReasonForChange" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Why is the measure being implemented?</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Goal" type="xs:string" minOccurs="0" maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>What are the intended goals to be achieved with this measure.
 This is optional as costs may be rolled up at the Scope of Work level</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="MeasureAction" type="MeasureActionType" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is intended to define the actions to be taken on the system
 at a high level, either adding, removing or modifying the system</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="IncentiveProgramCategory" type="xs:string" minOccurs="0"
 maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Used for filtering measures based on what incentive program
 category.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="ProgramMeasureCode" type="ProgramMeasureCodeType" minOccurs="0"
 maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>Describes an incentive provider's codes corresponding to the
 defined measure. For example, the PG&E measure codes.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Cost" type="CostType" minOccurs="0" maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>This defines the Costs for this particular measure. This is
 optional as costs may be rolled up at the Scope of Work level</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Benefit" type="BenefitType" minOccurs="0" maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>We also include Benefits here because Incentive applications
 require the benefits breakdown for each individual measure. This is optional as costs
 may be rolled up at the Scope of Work level. If BenefitsAnalysisOrder is defined then
 benefits are incremental relative to that order.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="BenefitsAnalysisOrder" type="xs:int" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is used when analyzing the impact of the measure benefits.
 Specific measures need to be processed in an order based on the load priority of the
```

```
 system, i.e. efficiency change of a furnace and then apply the leakage of the ducts.</
xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
  <xs:attribute name="id" type="xs:ID"/>
</xs:complexType>
```

Complex Type `MeasureActionType`

Namespace	http://www.iepmodel.net
Annotations	`Independent actions that make up a measure implementation (i.e. removing one piece of equipment, and adding another piece would be seperate MeasureActions within a single measure).`
Diagram	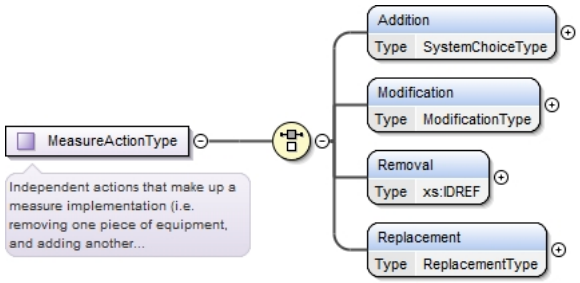
Used by	Element MeasureType/MeasureAction
Model	Addition | Modification | Removal | Replacement
Children	Addition, Modification, Removal, Replacement
`Source`	

```
<xs:complexType name="MeasureActionType">
  <xs:annotation>
    <xs:documentation>Independent actions that make up a measure implementation
 (i.e. removing one piece of equipment, and adding another piece would be seperate
 MeasureActions within a single measure).</xs:documentation>
  </xs:annotation>
  <xs:choice>
    <xs:element name="Addition" type="SystemChoiceType" maxOccurs="1" minOccurs="1"/>
    <xs:element name="Modification" type="ModificationType" maxOccurs="1" minOccurs="1"
 nillable="false"/>
    <xs:element name="Removal" type="xs:IDREF" maxOccurs="1" minOccurs="1"/>
    <xs:element name="Replacement" type="ReplacementType" maxOccurs="1" minOccurs="1"/>
  </xs:choice>
</xs:complexType>
```

Complex Type `SystemChoiceType`

Namespace	http://www.iepmodel.net
Annotations	`This contains a list of the all of the accessible systems within the specification.`

Diagram	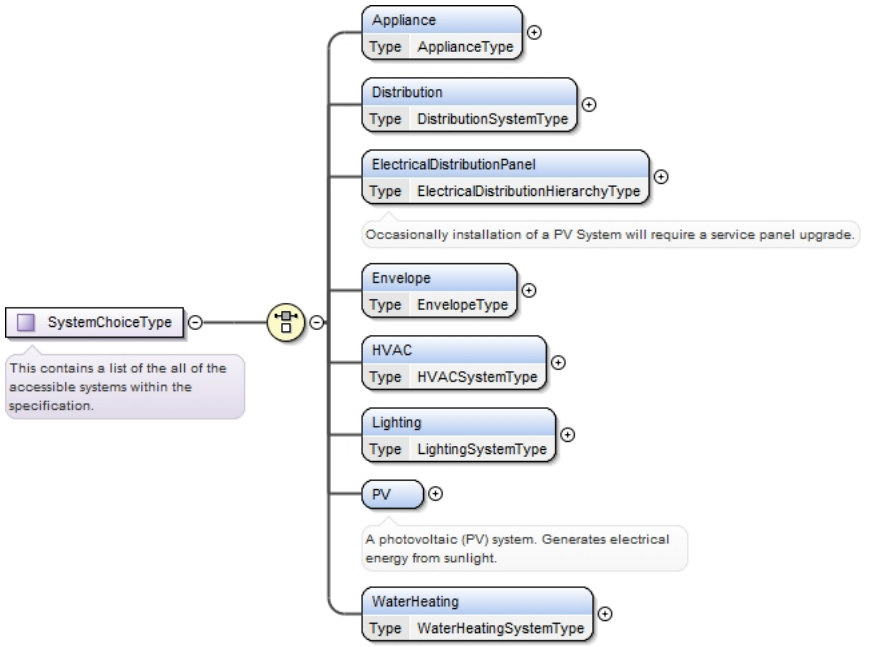
Used by	Elements — MeasureActionType/Addition, ModificationType/CodeCompliantSystemReference, ModificationType/SystemModificationData, ReplacementType/CodeCompliantSystemReference, ReplacementType/ProposedSystem
Model	Appliance | Distribution | ElectricalDistributionPanel | Envelope | HVAC | Lighting | PV | WaterHeating
Children	Appliance, Distribution, ElectricalDistributionPanel, Envelope, HVAC, Lighting, PV, WaterHeating

Source

```
<xs:complexType name="SystemChoiceType">
  <xs:annotation>
    <xs:documentation>This contains a list of the all of the accessible systems within the
 specification.</xs:documentation>
  </xs:annotation>
  <xs:choice>
    <xs:element minOccurs="1" name="Appliance" type="ApplianceType"/>
    <xs:element form="unqualified" name="Distribution" type="DistributionSystemType"/>
    <xs:element maxOccurs="1" name="ElectricalDistributionPanel"
 type="ElectricalDistributionHierarchyType">
      <xs:annotation>
        <xs:documentation>Occasionally installation of a PV System will require a service
 panel upgrade.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Envelope" nillable="false" type="EnvelopeType"/>
    <xs:element name="HVAC" type="HVACSystemType"/>
    <xs:element name="Lighting" nillable="false" type="LightingSystemType"/>
    <xs:element name="PV" minOccurs="1">
      <xs:annotation>
        <xs:documentation>A photovoltaic (PV) system. Generates electrical energy from
 sunlight.</xs:documentation>
      </xs:annotation>
      <xs:complexType>
        <xs:choice>
          <xs:element name="Basic" type="PvSystemBasicType">
            <xs:annotation>
              <xs:documentation>A basic PV system description. Does not call out specific
 equipment, rather only generic system ratings.</xs:documentation>
            </xs:annotation>
          </xs:element>
          <xs:element name="Complex" type="PvDesignType">
            <xs:annotation>
              <xs:documentation>A full PV system design using specific equipment.</
xs:documentation>
            </xs:annotation>
          </xs:element>
        </xs:choice>
      </xs:complexType>
    </xs:element>
    <xs:element name="WaterHeating" type="WaterHeatingSystemType"/>
  </xs:choice>
</xs:complexType>
```

Complex Type `ApplianceType`

Namespace	http://www.iepmodel.net
Diagram	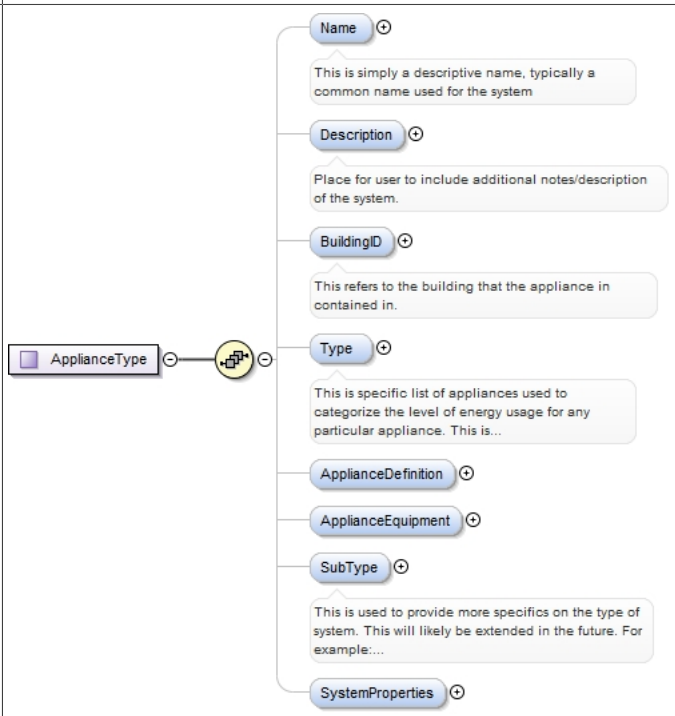
Used by	Elements Appliance, ProjectType/ExistingAppliance, SystemChoiceType/Appliance
Model	Name{0,1} , Description{0,1} , BuildingID{0,1} , Type{0,1} , ApplianceDefinition{0,1} , ApplianceEquipment{0,1} , SubType{0,1} , SystemProperties{0,1}
Children	ApplianceDefinition, ApplianceEquipment, BuildingID, Description, Name, SubType, SystemProperties, Type

Source	`<xs:complexType name="ApplianceType">`
	`  <xs:sequence>`
	`  <xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>This is simply a descriptive name, typically a common name used for the system</xs:documentation>`
	`  </xs:annotation>`
	`  </xs:element>`
	`  <xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>Place for user to include additional notes/description of the system.</xs:documentation>`
	`  </xs:annotation>`
	`  </xs:element>`
	`  <xs:element minOccurs="0" name="BuildingID" nillable="false" type="xs:IDREF">`
	`  <xs:annotation>`
	`  <xs:documentation>This refers to the building that the appliance in contained in.</xs:documentation>`
	`  </xs:annotation>`
	`  </xs:element>`
	`  <xs:element name="Type" type="ApplianceEnumType" minOccurs="0" maxOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>This is specific list of appliances used to categorize the level of energy usage for any particular appliance. This is intended to be used as a simple description of the system and is suited for use with the SaveEnergy123 tool: https://saveenergy123.com/</xs:documentation>`
	`  </xs:annotation>`
	`  </xs:element>`
	`  <xs:element name="ApplianceDefinition" type="EquipmentDefinitionType" minOccurs="0"/>`
	`  <xs:element minOccurs="0" name="ApplianceEquipment" type="EquipmentInstanceType"/>`
	`  <xs:element name="SubType" type="xs:string" minOccurs="0" maxOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>This is used to provide more specifics on the type of system. This will likely be extended in the future. For example: type of computer, type of TV, etc.</xs:documentation>`
	`  </xs:annotation>`
	`  </xs:element>`
	`  <xs:element name="SystemProperties" type="CommonSystemPropertiesType" minOccurs="0" maxOccurs="1"/>`

```
  </xs:sequence>
</xs:complexType>
```

Complex Type `EquipmentDefinitionType`

Namespace	http://www.iepmodel.net
Annotations	Base definition of an equipment item. An equipment defintion does not contain any data about a specific instance of a piece of equipment (for example, SerialNumber, DataManufactured, Location, or Condition). Equipment definitions are extended from this base type (for example "PvModuleDefinition").

Diagram	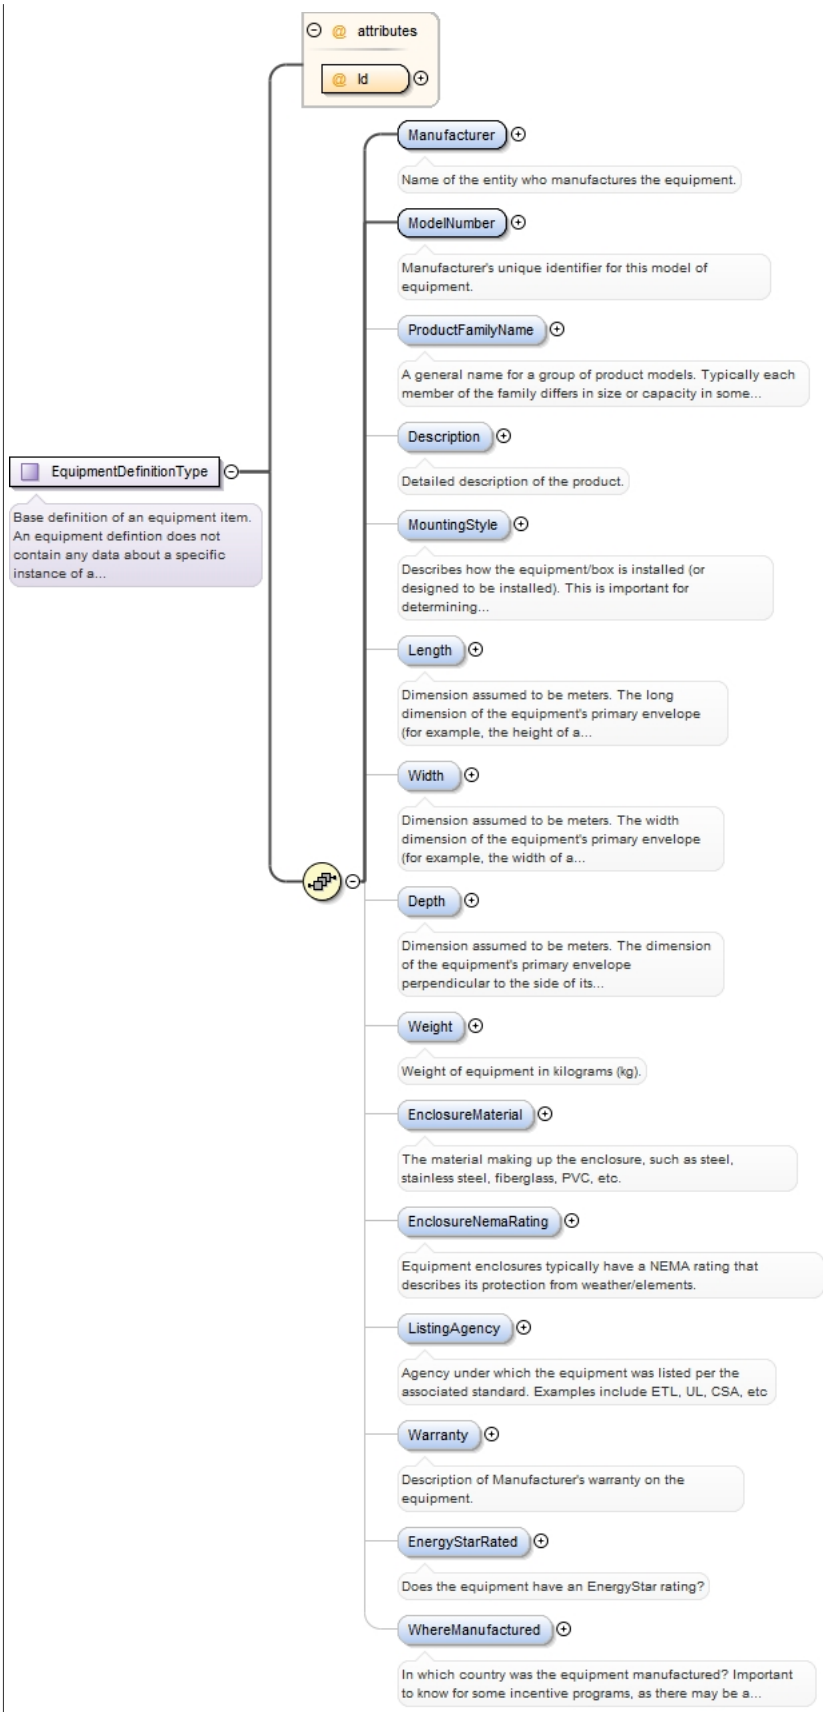
Properties	abstract: `true`

Used by	**Elements**: ApplianceType/ApplianceDefinition, DistributionSystemType/DistributionEquipmentDefinition, HVACSystemType/HVACEquipmentDefinition, WaterHeatingSystemType/WaterHeatingEquipmentDefinition **Complex Types**: BallastPropertiesType, CombinerDefinitionType, DisconnectSwitchDefinitionType, ElectricalPanelDefinitionType, InverterDefinitionType, JunctionBoxDefinitionType, LampPropertiesType, LightingFixtureDefintionType, PvModuleDefinitionType, RevenueMeterType
Model	Manufacturer , ModelNumber , ProductFamilyName{0,1} , Description{0,1} , MountingStyle{0,1} , Length{0,1} , Width{0,1} , Depth{0,1} , Weight{0,1} , EnclosureMaterial{0,1} , EnclosureNemaRating{0,1} , ListingAgency{0,1} , Warranty{0,1} , EnergyStarRated{0,1} , WhereManufactured{0,1}
Children	Depth, Description, EnclosureMaterial, EnclosureNemaRating, EnergyStarRated, Length, ListingAgency, Manufacturer, ModelNumber, MountingStyle, ProductFamilyName, Warranty, Weight, WhereManufactured, Width

Attributes

QName	Type	Fixed	Default	Use
Id	xs:ID			required

Source

```
<xs:complexType abstract="true" name="EquipmentDefinitionType">
  <xs:annotation>
    <xs:documentation>Base definition of an equipment item. An equipment defintion does
 not contain any data about a specific instance of a piece of equipment (for example,
 SerialNumber, DataManufactured, Location, or Condition). Equipment definitions are
 extended from this base type (for example "PvModuleDefinition").</xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="Manufacturer" type="xs:string">
      <xs:annotation>
        <xs:documentation>Name of the entity who manufactures the equipment.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="ModelNumber" type="xs:string">
      <xs:annotation>
        <xs:documentation>Manufacturer's unique identifier for this model of equipment.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="ProductFamilyName" type="xs:string">
      <xs:annotation>
        <xs:documentation>A general name for a group of product models. Typically each
 member of the family differs in size or capacity in some way.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="Description" type="xs:string">
      <xs:annotation>
        <xs:documentation>Detailed description of the product.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="MountingStyle" type="xs:string">
      <xs:annotation>
        <xs:documentation>Describes how the equipment/box is installed (or designed to
 be installed). This is important for determining components required for interfacing
 with it. Suggested values include: Wall Mount, Wall Mount-Surface, Wall Mount-Flush, Pad
 Mount.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="Length" type="xs:double">
      <xs:annotation>
        <xs:documentation>Dimension assumed to be meters. The long dimension of the
 equipment's primary envelope (for example, the height of a wall mounted inverter, or the
 long edge of a PV Module frame).</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="Width" type="xs:double">
      <xs:annotation>
        <xs:documentation>Dimension assumed to be meters. The width dimension of the
 equipment's primary envelope (for example, the width of a wall mounted inverter, or the
 short edge of a PV Module frame).</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="Depth" type="xs:double">
      <xs:annotation>
        <xs:documentation>Dimension assumed to be meters. The dimension of the equipment's
 primary envelope perpendicular to the side of its primary interface (for example the
 thickness of a PV module's frame, or the thickness of a wall mounted inverter from the
 wall to the front of the inverter.) Note: PV Module thickness with J-box would be given
 as part of PvModuleDefintion.</xs:documentation>
      </xs:annotation>
    </xs:element>
```

```
    <xs:element minOccurs="0" name="Weight" type="xs:double">
      <xs:annotation>
        <xs:documentation>Weight of equipment in kilograms (kg).</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="EnclosureMaterial" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>The material making up the enclosure, such as steel, stainless
 steel, fiberglass, PVC, etc.</xs:documentation>
      </xs:annotation>
      <xs:simpleType>
        <xs:restriction base="xs:string">
          <xs:maxLength value="255"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element minOccurs="0" name="EnclosureNemaRating" type="NemaRatingEnumType">
      <xs:annotation>
        <xs:documentation>Equipment enclosures typically have a NEMA rating that describes
 its protection from weather/elements.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="ListingAgency" type="xs:string">
      <xs:annotation>
        <xs:documentation>Agency under which the equipment was listed per the associated
 standard. Examples include ETL, UL, CSA, etc</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Warranty" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Description of Manufacturer's warranty on the equipment.</
xs:documentation>
      </xs:annotation>
      <xs:simpleType>
        <xs:restriction base="xs:string">
          <xs:maxLength value="255"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element minOccurs="0" name="EnergyStarRated" type="xs:boolean">
      <xs:annotation>
        <xs:documentation>Does the equipment have an EnergyStar rating?</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="WhereManufactured" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>In which country was the equipment manufactured? Important to
 know for some incentive programs, as there may be a requirement for rebates to only be
 paid on domestically manufactured equipment.</xs:documentation>
      </xs:annotation>
      <xs:simpleType>
        <xs:restriction base="xs:string">
          <xs:maxLength value="255"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
  </xs:sequence>
  <xs:attribute name="Id" type="xs:ID" use="required"/>
</xs:complexType>
```

Complex Type `EquipmentInstanceType`

Namespace	http://www.iepmodel.net
Annotations	Base class for any instance of equipment. Provides a base set of elements common to any single instance of a piece of equipment. Extend with other elements that are specific to the type of equipment instance being defined.

Diagram

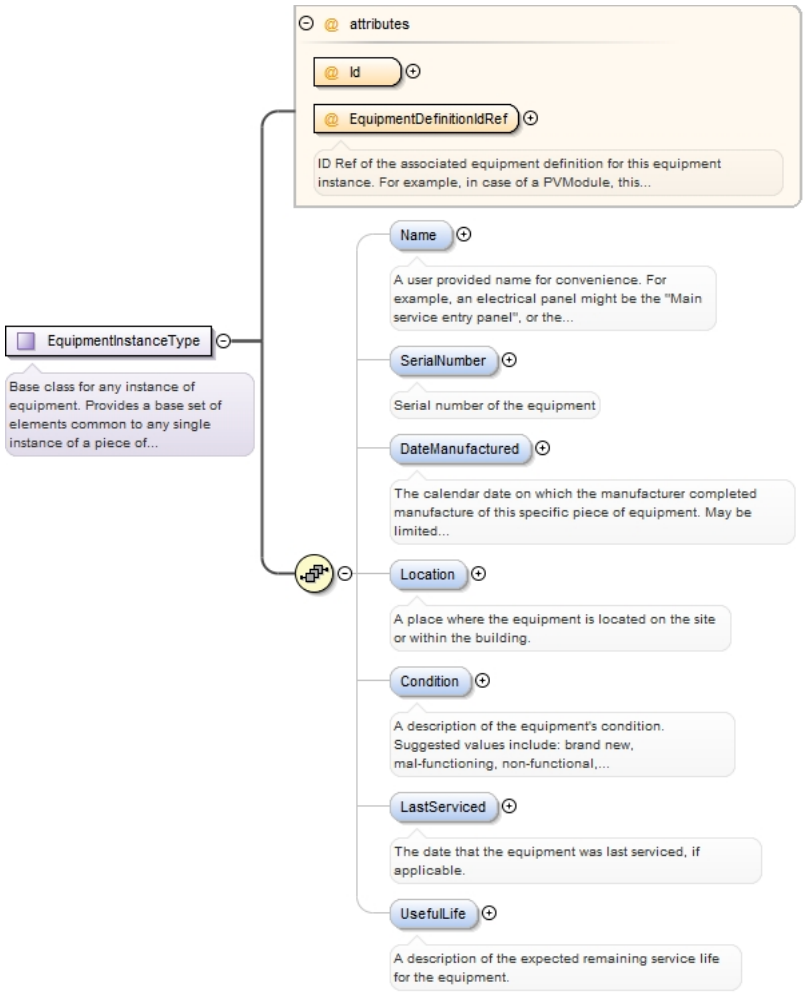

Properties

abstract:	`true`

Used by

Elements	ApplianceType/ApplianceEquipment, CoolingSystemType/CoolingInstance, DistributionSegmentType/SegmentEquipment, HeatingSystemType/HeatingEquipment, PrimeMoverSystemType/PrimeMoverEquipment, WaterHeatingSystemType/WaterHeatingEquipment
Complex Types	CombinerType, ElectricalPanelType, InverterType, LightingFixtureGroupType, PvModuleType

Model

Name{0,1} , SerialNumber{0,1} , DateManufactured{0,1} , Location{0,1} , Condition{0,1} , LastServiced{0,1} , UsefulLife{0,1}

Children

Condition, DateManufactured, LastServiced, Location, Name, SerialNumber, UsefulLife

Attributes

QName	Type	Fixed	Default	Use
EquipmentDefinitionIdRef	IDREF			required
	`ID Ref of the associated equipment definition for this equipment instance. For example, in case of a PVModule, this would be the ID of the PvModuleDefinition element that describes this particular PV module instance.`			
Id	xs:ID			required

Source

```
<xs:complexType abstract="true" name="EquipmentInstanceType">
  <xs:annotation>
    <xs:documentation>Base class for any instance of equipment. Provides a base
 set of elements common to any single instance of a piece of equipment. Extend with
 other elements that are specific to the type of equipment instance being defined.</
xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element minOccurs="0" name="Name" type="xs:string">
      <xs:annotation>
```

```
        <xs:documentation>A user provided name for convenience. For example, an
 electrical panel might be the "Main service entry panel", or the "AC combiner panel."</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="SerialNumber" type="SerialNumberType" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Serial number of the equipment</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="DateManufactured" type="DateManufacturedType">
      <xs:annotation>
        <xs:documentation>The calendar date on which the manufacturer completed
 manufacture of this specific piece of equipment. May be limited to the year.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="Location" type="EquipmentLocationType">
      <xs:annotation>
        <xs:documentation>A place where the equipment is located on the site or within the
 building.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="Condition" type="ConditionType">
      <xs:annotation>
        <xs:documentation>A description of the equipment's condition. Suggested
 values include: brand new, mal-functioning, non-functional, normal wear, other.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="LastServiced" type="LastServicedType">
      <xs:annotation>
        <xs:documentation>The date that the equipment was last serviced, if applicable.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="UsefulLife" type="RemainingUsefulLifeType">
      <xs:annotation>
        <xs:documentation>A description of the expected remaining service life for the
 equipment.</xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
  <xs:attribute name="Id" type="xs:ID" use="required"/>
  <xs:attribute name="EquipmentDefinitionIdRef" type="xs:IDREF" use="required">
    <xs:annotation>
      <xs:documentation>ID Ref of the associated equipment definition for this
 equipment instance. For example, in case of a PVModule, this would be the ID of
 the PvModuleDefinition element that describes this particular PV module instance.</
xs:documentation>
    </xs:annotation>
  </xs:attribute>
</xs:complexType>
```

Complex Type `SerialNumberType`

Namespace	http://www.iepmodel.net
Annotations	`Manufacturer's assigned identifier for a specific instance of a piece of equipment.`
Diagram	
Type	extension of xs:string
Used by	Element EquipmentInstanceType/SerialNumber
`Source`	

```
<xs:complexType name="SerialNumberType">
  <xs:annotation>
    <xs:documentation>Manufacturer's assigned identifier for a specific instance of a
 piece of equipment.</xs:documentation>
  </xs:annotation>
  <xs:simpleContent>
    <xs:extension base="xs:string">
    </xs:extension>
  </xs:simpleContent>
</xs:complexType>
```

Complex Type `DateManufacturedType`

Namespace	http://www.iepmodel.net
Annotations	The calendar date on which the manufacturer completed manufacture of this specific piece of equipment. May be limited to the year.
Diagram	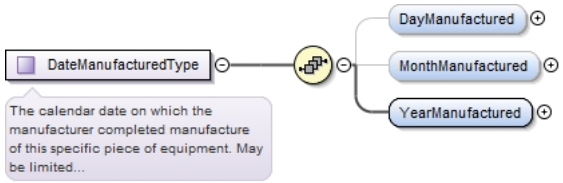
Used by	Elements DateManufactured, EquipmentInstanceType/DateManufactured
Model	DayManufactured{0,1} , MonthManufactured{0,1} , YearManufactured
Children	DayManufactured, MonthManufactured, YearManufactured

Source	`<xs:complexType name="DateManufacturedType">`
	`  <xs:annotation>`
	`  <xs:documentation>The calendar date on which the manufacturer completed manufacture of this specific piece of equipment. May be limited to the year.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:sequence>`
	`  <xs:element minOccurs="0" name="DayManufactured" type="xs:gDay"/>`
	`  <xs:element minOccurs="0" name="MonthManufactured" type="xs:gMonth"/>`
	`  <xs:element name="YearManufactured" type="xs:gYear"/>`
	`  </xs:sequence>`
	`</xs:complexType>`

Complex Type `ConditionType`

Namespace	http://www.iepmodel.net
Annotations	A description of the condition of a specific instance of a piece of equipment. Suggested cvalues might include: brand new, mal-functioning, non-functional, normal wear, other.
Diagram	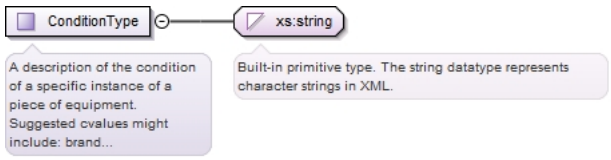
Type	extension of xs:string
Used by	Elements Condition, EquipmentInstanceType/Condition

Source	`<xs:complexType name="ConditionType">`
	`  <xs:annotation>`
	`  <xs:documentation>A description of the condition of a specific instance of a piece of equipment. Suggested cvalues might include: brand new, mal-functioning, non-functional, normal wear, other.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleContent>`
	`  <xs:extension base="xs:string">`
	`  </xs:extension>`
	`  </xs:simpleContent>`
	`</xs:complexType>`

Complex Type `LastServicedType`

Namespace	http://www.iepmodel.net
Annotations	The date that a specific instance of a piece of equipment was last serviced. If it has never been serviced, this should be "N/A".
Diagram	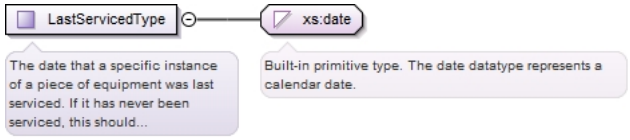
Type	extension of xs:date

Used by	Elements EquipmentInstanceType/LastServiced, LastServiced
Source	<xs:complexType name="LastServicedType"> <xs:annotation> <xs:documentation>The date that a specific instance of a piece of equipment was last serviced. If it has never been serviced, this should be "N/A".</xs:documentation> </xs:annotation> <xs:simpleContent> <xs:extension base="xs:date"> </xs:extension> </xs:simpleContent> </xs:complexType>

Complex Type RemainingUsefulLifeType

Namespace	http://www.iepmodel.net
Annotations	A description of the expected remaining service life for the equipment.
Diagram	
Type	extension of xs:string
Used by	Elements EquipmentInstanceType/UsefulLife, UsefulLife
Source	<xs:complexType name="RemainingUsefulLifeType"> <xs:annotation> <xs:documentation>A description of the expected remaining service life for the equipment.</xs:documentation> </xs:annotation> <xs:simpleContent> <xs:extension base="xs:string"/> </xs:simpleContent> </xs:complexType>

Complex Type CommonSystemPropertiesType

Namespace	http://www.iepmodel.net
Annotations	These are common attributes of a system that are shared by the various system types used in this model. The idea is to capture here, high-level properties related to the operation and energy consumption of various systems. Details of actual hardware not required for a 1st level analysis are not included here (these are located in CommonEquipmentAttributes).

Diagram	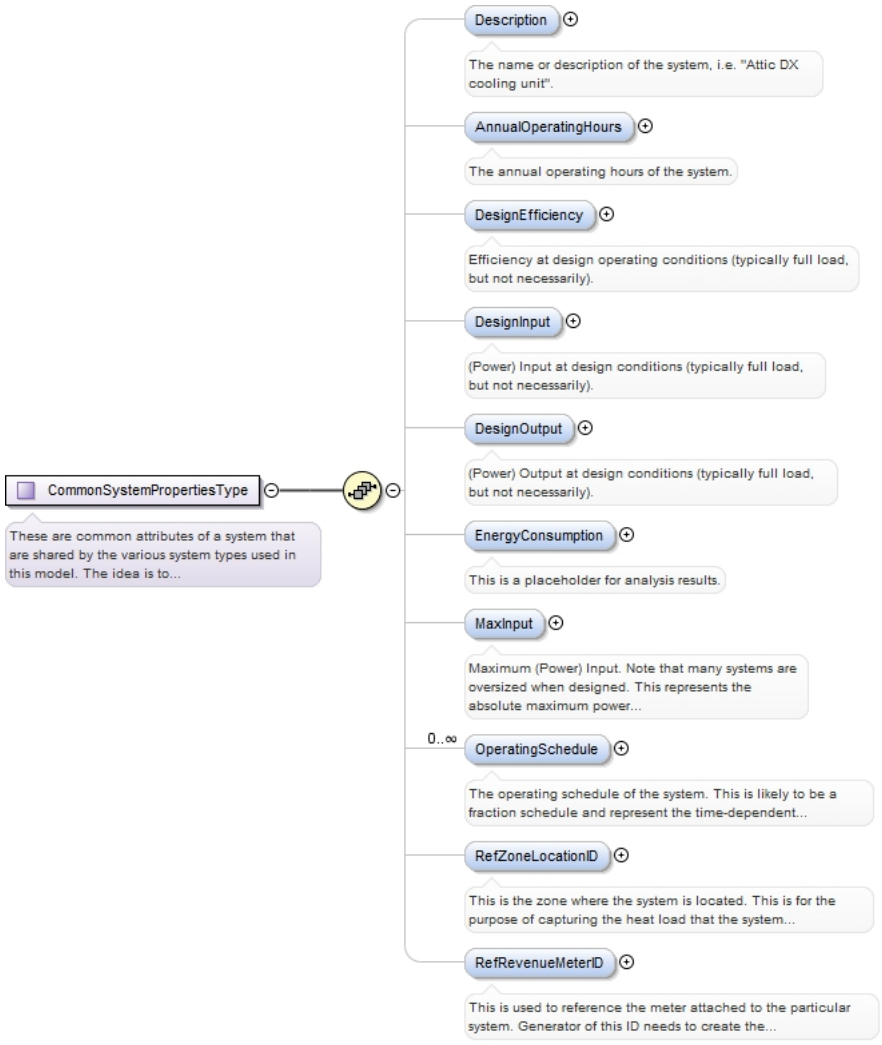
Used by	Elements ApplianceType/SystemProperties, CoolingSystemType/SystemProperties, HeatingSystemType/SystemProperties, LightingControlGroupType/SystemProperties, PrimeMoverSystemType/SystemProperties, WaterHeatingSystemType/SystemProperties
Model	Description{0,1} , AnnualOperatingHours{0,1} , DesignEfficiency{0,1} , DesignInput{0,1} , DesignOutput{0,1} , EnergyConsumption{0,1} , MaxInput{0,1} , OperatingSchedule* , RefZoneLocationID{0,1} , RefRevenueMeterID{0,1}
Children	AnnualOperatingHours, Description, DesignEfficiency, DesignInput, DesignOutput, EnergyConsumption, MaxInput, OperatingSchedule, RefRevenueMeterID, RefZoneLocationID
Source	

```
<xs:complexType name="CommonSystemPropertiesType">
  <xs:annotation>
    <xs:documentation>These are common attributes of a system that are shared by the
 various system types used in this model. The idea is to capture here, high-level
 properties related to the operation and energy consumption of various systems. Details
 of actual hardware not required for a 1st level analysis are not included here (these are
 located in CommonEquipmentAttributes).</xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>The name or description of the system, i.e. "Attic DX cooling
 unit".</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="AnnualOperatingHours" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>The annual operating hours of the system.</xs:documentation>
      </xs:annotation>
      <xs:simpleType>
        <xs:restriction base="xs:int">
          <xs:minInclusive value="0"/>
        </xs:restriction>
      </xs:simpleType>
```

```
    </xs:element>
    <xs:element name="DesignEfficiency" type="EfficiencyType" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Efficiency at design operating conditions (typically full load,
 but not necessarily).</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="DesignInput" type="PowerType" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>(Power) Input at design conditions (typically full load, but not
 necessarily).</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="DesignOutput" type="PowerType" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>(Power) Output at design conditions (typically full load, but
 not necessarily).</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="EnergyConsumption" type="EnergyConsumptionType" minOccurs="0"
 maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is a placeholder for analysis results.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="MaxInput" type="PowerType" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Maximum (Power) Input. Note that many systems are oversized
 when designed. This represents the absolute maximum power consumption of the equipment.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="OperatingSchedule" type="xs:IDREF" minOccurs="0"
 maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>The operating schedule of the system. This is likely to be a
 fraction schedule and represent the time-dependent capacity of the system. Note that
 particular systems, such as HVAC system, have additional schedules such as temperature
 schedules. This references the IDREF of a complete Schedules element at the Project
 level</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="RefZoneLocationID" type="xs:IDREF" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is the zone where the system is located. This is for the
 purpose of capturing the heat load that the system introduces to its environment.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="RefRevenueMeterID" type="xs:IDREF">
      <xs:annotation>
        <xs:documentation>This is used to reference the meter attached to the particular
 system. Generator of this ID needs to create the RevenueMeter first in the UtilityService
 schema in order to link back here.</xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

Complex Type `EfficiencyType`

Namespace	http://www.iepmodel.net
Annotations	This is a base class used for the efficiency of a system, typically an HVAC system. Most energy producing and consuming systems and equipment instance this type.

Diagram

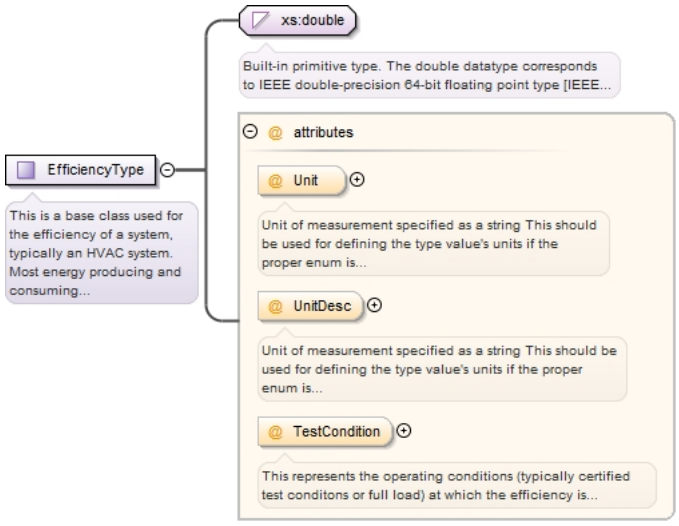

Type: extension of xs:double

Used by: Element CommonSystemPropertiesType/DesignEfficiency

Attributes

QName	Type	Fixed	Default	Use
TestCondition	TestConditionEnumType			optional
	This represents the operating conditions (typically certified test conditons or full load) at which the efficiency is realized. Note that at other conditions, the efficiency may be a different value.			
Unit	EfficiencyUnitEnumType			optional
	Unit of measurement specified as a string This should be used for defining the type value's units if the proper enum is not listed in Unit. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.			
UnitDesc	xs:string			optional
	Unit of measurement specified as a string This should be used for defining the type value's units if the proper enum is not listed in Unit. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.			

Source

```
<xs:complexType name="EfficiencyType">
  <xs:annotation>
    <xs:documentation>This is a base class used for the efficiency of a system, typically
an HVAC system. Most energy producing and consuming systems and equipment instance this
type.</xs:documentation>
  </xs:annotation>
  <xs:simpleContent>
    <xs:extension base="xs:double">
      <xs:attribute name="Unit" type="EfficiencyUnitEnumType" use="optional">
        <xs:annotation>
          <xs:documentation>Unit of measurement specified as a string This should be used
for defining the type value's units if the proper enum is not listed in Unit. These are
all optional attributes in order to allow for a simplified value descriptions since these
are used throughout the IEP schemas. Additionally the UnitDesc may contain a default
type.</xs:documentation>
        </xs:annotation>
      </xs:attribute>
      <xs:attribute name="UnitDesc" type="xs:string">
        <xs:annotation>
          <xs:documentation>Unit of measurement specified as a string This should be used
for defining the type value's units if the proper enum is not listed in Unit. These are
all optional attributes in order to allow for a simplified value descriptions since these
are used throughout the IEP schemas. Additionally the UnitDesc may contain a default
type.</xs:documentation>
        </xs:annotation>
      </xs:attribute>
      <xs:attribute name="TestCondition" type="TestConditionEnumType" use="optional">
        <xs:annotation>
          <xs:documentation>This represents the operating conditions (typically certified
test conditons or full load) at which the efficiency is realized. Note that at other
conditions, the efficiency may be a different value.</xs:documentation>
        </xs:annotation>
      </xs:attribute>
```

```
    </xs:extension>
  </xs:simpleContent>
</xs:complexType>
```

Complex Type `DistributionSystemType`

Namespace	http://www.iepmodel.net
Annotations	A Distribution System describes the mechanical systems and equipment that transport air, water or another fluid. It consists of two components: Prime Mover (pump or fan) and Segment. A Distribution System (optionally) consists of one or many Prime Movers, which are pumps or fans that causes the fluid to flow. The Prime Mover has System and Equipment properties. A Distribution System (optionally) consists of one or many Segments, which is a duct or pipe that transports the fluid. The Segment has Equipment properties in addition to leakage and insulation properties (referenced from the Building schema). The Distribution Systems was chosen to stand alone because of how the other systems interact with it and because one distribution system may serve multiple purposes. It is be referenced by other systems such as an HVAC or WaterHeating system that interact with it. A Distribution System (particularly air or water) may be referenced by an HVAC system in one of three ways. A Distribution System may be referenced as the method of delivery of conditioning from the HVAC system (i.e. the ducting or piping that delivers conditioning). Alternatively, a Distribution System may be referenced as the source of heat or cold (fluid to reject heat to) for a Heating or Cooling system, respectively. Note that the Distribution System itself does not instance System Properties. A distribution system can only consume energy through its prime mover and thermal transfer with the environment. The Prime Mover object instances System Properties. Thermal transfer to or from the fluid through its segments will affect the system(s) that are connected to (reference) it (such as a Hot Water Heating or HVAC system). Thus, the thermal energy transferred through the segment surface should be captured by the zone in which the segment is located and the systems that reference it. Example 1. A water DistributionSystem may serve both space heating as well as domestic hot water for kitchen and bathroom fixtures (i.e. dishwasher, shower). Systems that may reference this DistributionSystem include: a WaterHeating system, a grey-water HeatRecovery system and an HVACSystem. Example 2. An air DistributionSystem may consist of supply and return ducting and a supply fan. An HVACSystem such as a furnace or air-source heat-pump would reference the DistributionSystem (through its DeliveryMethod element). Example 3. A whole-house fan would be modeled as an HVAC system with a DeliveryMethod that references a Distribution System. The Distribution System may include segments (inlet and exhaust ducting) and a fan (Prime Mover). The Ventilation properties in HVAC would further describe the rate of air exchange with outside. The zone(s) referencing the HVAC system would specify the temperature setpoint schedule and any additional thermal loads. Alternatively, if the fan is controlled by a time schedule, rather than temperature schedule, the schedule may defined in the Prime Mover system properties. Then, no HVAC system needs to be defined. Example 4. A bathroom or kitchen exhaust fan may be modeled as a Distribution System with just a Prime Mover (segments optional). The schedule in the System Properties of the Primer Mover may define the operating schedule of the fan.

Diagram	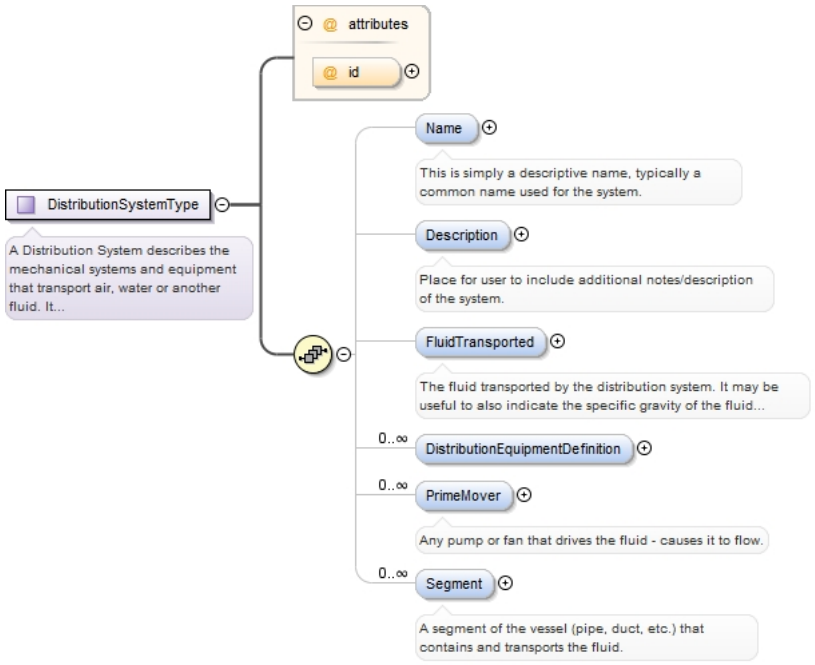
Used by	Elements: DistributionSystem, ProjectType/ExistingDistributionSystem, SystemChoiceType/Distribution
Model	Name{0,1} , Description{0,1} , FluidTransported{0,1} , DistributionEquipmentDefinition* , PrimeMover* , Segment*
Children	Description, DistributionEquipmentDefinition, FluidTransported, Name, PrimeMover, Segment

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			optional

Source

```
<xs:complexType name="DistributionSystemType">
  <xs:annotation>
    <xs:documentation>A Distribution System describes the mechanical systems and equipment
 that transport air, water or another fluid. It consists of two components: Prime Mover
 (pump or fan) and Segment. A Distribution System (optionally) consists of one or many
 Prime Movers, which are pumps or fans that causes the fluid to flow. The Prime Mover
 has System and Equipment properties. A Distribution System (optionally) consists of
 one or many Segments, which is a duct or pipe that transports the fluid. The Segment
 has Equipment properties in addition to leakage and insulation properties (referenced
 from the Building schema). The Distribution Systems was chosen to stand alone because
 of how the other systems interact with it and because one distribution system may serve
 multiple purposes. It is be referenced by other systems such as an HVAC or WaterHeating
 system that interact with it. A Distribution System (particularly air or water) may
 be referenced by an HVAC system in one of three ways. A Distribution System may be
 referenced as the method of delivery of conditioning from the HVAC system (i.e. the
 ducting or piping that delivers conditioning). Alternatively, a Distribution System
 may be referenced as the source of heat or cold (fluid to reject heat to) for a Heating
 or Cooling system, respectively. Note that the Distribution System itself does not
 instance System Properties. A distribution system can only consume energy through its
 prime mover and thermal transfer with the environment. The Prime Mover object instances
 System Properties. Thermal transfer to or from the fluid through its segments will
 affect the system(s) that are connected to (reference) it (such as a Hot Water Heating
 or HVAC system). Thus, the thermal energy transferred through the segment surface
 should be captured by the zone in which the segment is located and the systems that
 reference it. Example 1. A water DistributionSystem may serve both space heating as
 well as domestic hot water for kitchen and bathroom fixtures (i.e. dishwasher, shower).
 Systems that may reference this DistributionSystem include: a WaterHeating system, a
 grey-water HeatRecovery system and an HVACSystem. Example 2. An air DistributionSystem
 may consist of supply and return ducting and a supply fan. An HVACSystem such as a
 furnace or air-source heat-pump would reference the DistributionSystem (through its
 DeliveryMethod element). Example 3. A whole-house fan would be modeled as an HVAC system
 with a DeliveryMethod that references a Distribution System. The Distribution System may
 include segments (inlet and exhaust ducting) and a fan (Prime Mover). The Ventilation
 properties in HVAC would further describe the rate of air exchange with outside. The
 zone(s) referencing the HVAC system would specify the temperature setpoint schedule and
 any additional thermal loads. Alternatively, if the fan is controlled by a time schedule,
 rather than temperature schedule, the schedule may defined in the Prime Mover system
 properties. Then, no HVAC system needs to be defined. Example 4. A bathroom or kitchen
 exhaust fan may be modeled as a Distribution System with just a Prime Mover (segments
```

```
 optional). The schedule in the System Properties of the Primer Mover may define the
 operating schedule of the fan.</xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is simply a descriptive name, typically a common name used
 for the system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Place for user to include additional notes/description of the
 system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="FluidTransported" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>The fluid transported by the distribution system. It may
 be useful to also indicate the specific gravity of the fluid if it is not a common
 one. Examples: Air Water Glycol Oil, specific gravity = 0.8 Heat Transfer Fluid</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="unbounded" minOccurs="0" name="DistributionEquipmentDefinition"
 type="EquipmentDefinitionType"/>
    <xs:element name="PrimeMover" type="PrimeMoverSystemType" minOccurs="0"
 maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>Any pump or fan that drives the fluid - causes it to flow.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="unbounded" minOccurs="0" name="Segment"
 type="DistributionSegmentType">
      <xs:annotation>
        <xs:documentation>A segment of the vessel (pipe, duct, etc.) that contains and
 transports the fluid.</xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
  <xs:attribute name="id" type="xs:ID"/>
</xs:complexType>
```

Complex Type `PrimeMoverSystemType`

Namespace	http://www.iepmodel.net
Annotations	A prime mover is a device that causes a fluid to flow, i.e. a pump or fan. The properties of this device are captured here. This object includes System and Equipment properties.

Diagram

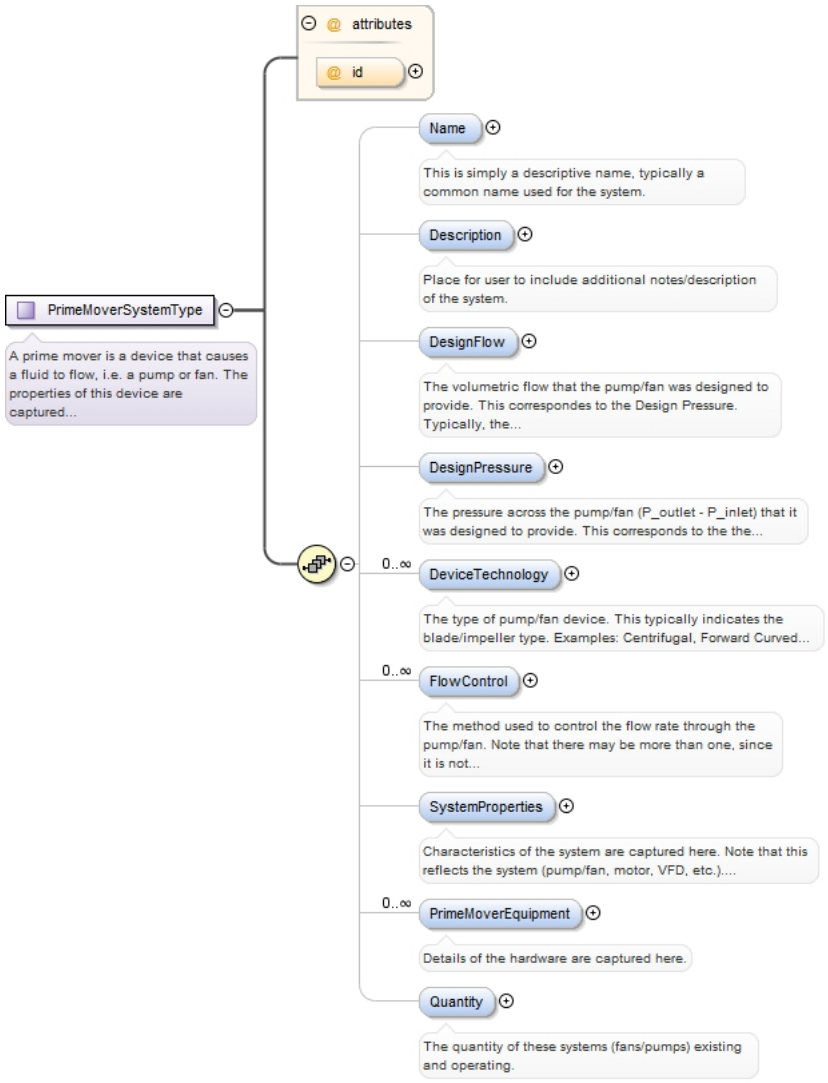

Used by

Element DistributionSystemType/PrimeMover

Model

Name{0,1} , Description{0,1} , DesignFlow{0,1} , DesignPressure{0,1} , DeviceTechnology* , FlowControl* , SystemProperties{0,1} , PrimeMoverEquipment* , Quantity{0,1}

Children

Description, DesignFlow, DesignPressure, DeviceTechnology, FlowControl, Name, PrimeMoverEquipment, Quantity, SystemProperties

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			optional

Source

```
<xs:complexType name="PrimeMoverSystemType">
  <xs:annotation>
    <xs:documentation>A prime mover is a device that causes a fluid to flow, i.e. a pump
 or fan. The properties of this device are captured here. This object includes System and
 Equipment properties.</xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is simply a descriptive name, typically a common name used
 for the system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Place for user to include additional notes/description of the
 system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="DesignFlow" type="FlowType" minOccurs="0" maxOccurs="1">
      <xs:annotation>
```

```
        <xs:documentation>The volumetric flow that the pump/fan was designed to provide.
 This correspondes to the Design Pressure. Typically, the design pressure and design flow
 represent the maximum efficiency point on the manufacturer fan/pump curve. Typically,
 this is not the maximum flow that the device can provide.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="DesignPressure" type="PressureType" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>The pressure across the pump/fan (P_outlet - P_inlet) that it
 was designed to provide. This corresponds to the the Design Flow. Typically, the design
 pressure and design flow represent the maximum efficiency point on the manufacturer
 fan/pump curve. Typically, this is not the maximum pressure across the device.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="DeviceTechnology" type="xs:string" minOccurs="0"
 maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>The type of pump/fan device. This typically indicates the
 blade/impeller type. Examples: Centrifugal, Forward Curved Centrifugal, Backward Curved
 Centrifugal, Radial Blade Centrifugal, Airfoil Centrifugal, Plenum Axial, Propeller
 Axial, Turbine</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="FlowControl" type="xs:string" minOccurs="0" maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>The method used to control the flow rate through the pump/
fan. Note that there may be more than one, since it is not uncommon (though somewhat
 inefficient) to find a VFD and throttle used. Examples: Valve-Manual/Automatic Damper-
Manual/Automatic Variable Speed Variable Pitch Blade Inlet Guide Vane Outlet Damper</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="SystemProperties" type="CommonSystemPropertiesType" minOccurs="0"
 maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Characteristics of the system are captured here. Note that this
 reflects the system (pump/fan, motor, VFD, etc.). Properties of the individual components
 may be captured in equipment attributes.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="PrimeMoverEquipment" type="EquipmentInstanceType" minOccurs="0"
 maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>Details of the hardware are captured here.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Quantity" type="xs:int" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>The quantity of these systems (fans/pumps) existing and
 operating.</xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
  <xs:attribute name="id" type="xs:ID"/>
</xs:complexType>
```

Complex Type `DistributionSegmentType`

Namespace	http://www.iepmodel.net
Annotations	User may define the details of a pipe or duct segment in the distribution system. One or many segments may defined as necessary to describe the system in detail.

Diagram

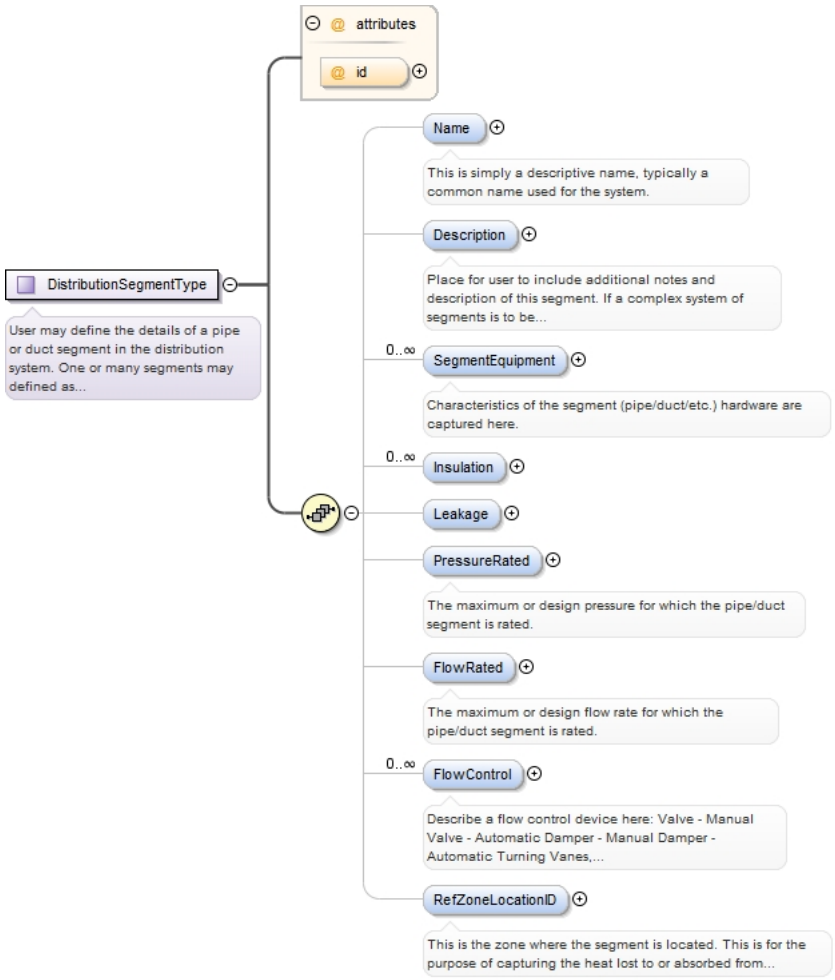

Used by

Element DistributionSystemType/Segment

Model

Name{0,1} , Description{0,1} , SegmentEquipment* , Insulation* , Leakage{0,1} , PressureRated{0,1} , FlowRated{0,1} , FlowControl* , RefZoneLocationID{0,1}

Children

Description, FlowControl, FlowRated, Insulation, Leakage, Name, PressureRated, RefZoneLocationID, SegmentEquipment

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			optional

Source

```
<xs:complexType name="DistributionSegmentType">
  <xs:annotation>
    <xs:documentation>User may define the details of a pipe or duct segment in the
 distribution system. One or many segments may defined as necessary to describe the system
 in detail.</xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is simply a descriptive name, typically a common name used
 for the system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Place for user to include additional notes and description of
 this segment. If a complex system of segments is to be defined, it would be useful to
 describe the system here. Other quantities or features may also be described here, such
 as the loss coefficient (i.e. pressure drop due to fluid friction).</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="SegmentEquipment" type="EquipmentInstanceType" minOccurs="0"
 maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>Characteristics of the segment (pipe/duct/etc.) hardware are
 captured here.</xs:documentation>
```

```
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="unbounded" minOccurs="0" name="Insulation"
 type="InsulationType"/>
    <xs:element minOccurs="0" name="Leakage" type="LeakageType"/>
    <xs:element name="PressureRated" type="PressureType" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>The maximum or design pressure for which the pipe/duct segment
 is rated.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="FlowRated" type="FlowType" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>The maximum or design flow rate for which the pipe/duct segment
 is rated.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="unbounded" minOccurs="0" name="FlowControl" type="xs:string">
      <xs:annotation>
        <xs:documentation>Describe a flow control device here: Valve - Manual Valve -
 Automatic Damper - Manual Damper - Automatic Turning Vanes, loss coefficient 0.24</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="1" minOccurs="0" name="RefZoneLocationID" type="xs:IDREF">
      <xs:annotation>
        <xs:documentation>This is the zone where the segment is located. This is for the
 purpose of capturing the heat lost to or absorbed from the environment by the fluid in
 the segment.</xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
  <xs:attribute name="id" type="xs:ID"/>
</xs:complexType>
```

Complex Type `ElectricalDistributionHierarchyType`

Namespace	http://www.iepmodel.net
Annotations	Describes a part of, or an entire electrical distribution system composed of one or more panels/load centers/fuse boxes/switches in a hierarchical tree arrangement. ISSUE to consider: perhaps combining disconnect into circuit connection.
Diagram	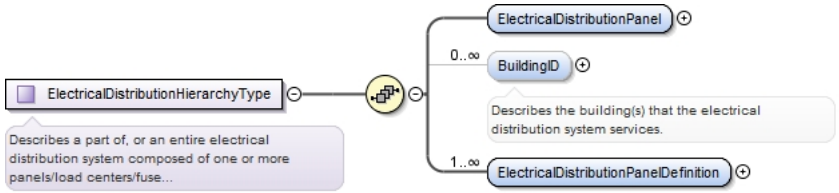
Used by	Elements: ElectricalDistributionHierarchy, ProjectType/ExistingElectricalDistributionSystem, SystemChoiceType/ElectricalDistributionPanel
Model	ElectricalDistributionPanel , BuildingID* , ElectricalDistributionPanelDefinition+
Children	BuildingID, ElectricalDistributionPanel, ElectricalDistributionPanelDefinition
Source	

```
<xs:complexType name="ElectricalDistributionHierarchyType">
  <xs:annotation>
    <xs:documentation>Describes a part of, or an entire electrical distribution system
 composed of one or more panels/load centers/fuse boxes/switches in a hierarchical tree
 arrangement. ISSUE to consider: perhaps combining disconnect into circuit connection.</
xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="ElectricalDistributionPanel" type="ElectricalPanelType"/>
    <xs:element maxOccurs="unbounded" minOccurs="0" name="BuildingID" type="xs:IDREF">
      <xs:annotation>
        <xs:documentation>Describes the building(s) that the electrical distribution
 system services.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="unbounded" name="ElectricalDistributionPanelDefinition"
 type="ElectricalPanelDefinitionType"/>
  </xs:sequence>
</xs:complexType>
```

Complex Type `ElectricalPanelType`

Namespace	http://www.iepmodel.net
Annotations	Describes any sort of electrical distribution panel, for example a fused panel, a breaker panel, etc. Can be a main or sub-panel.

Diagram

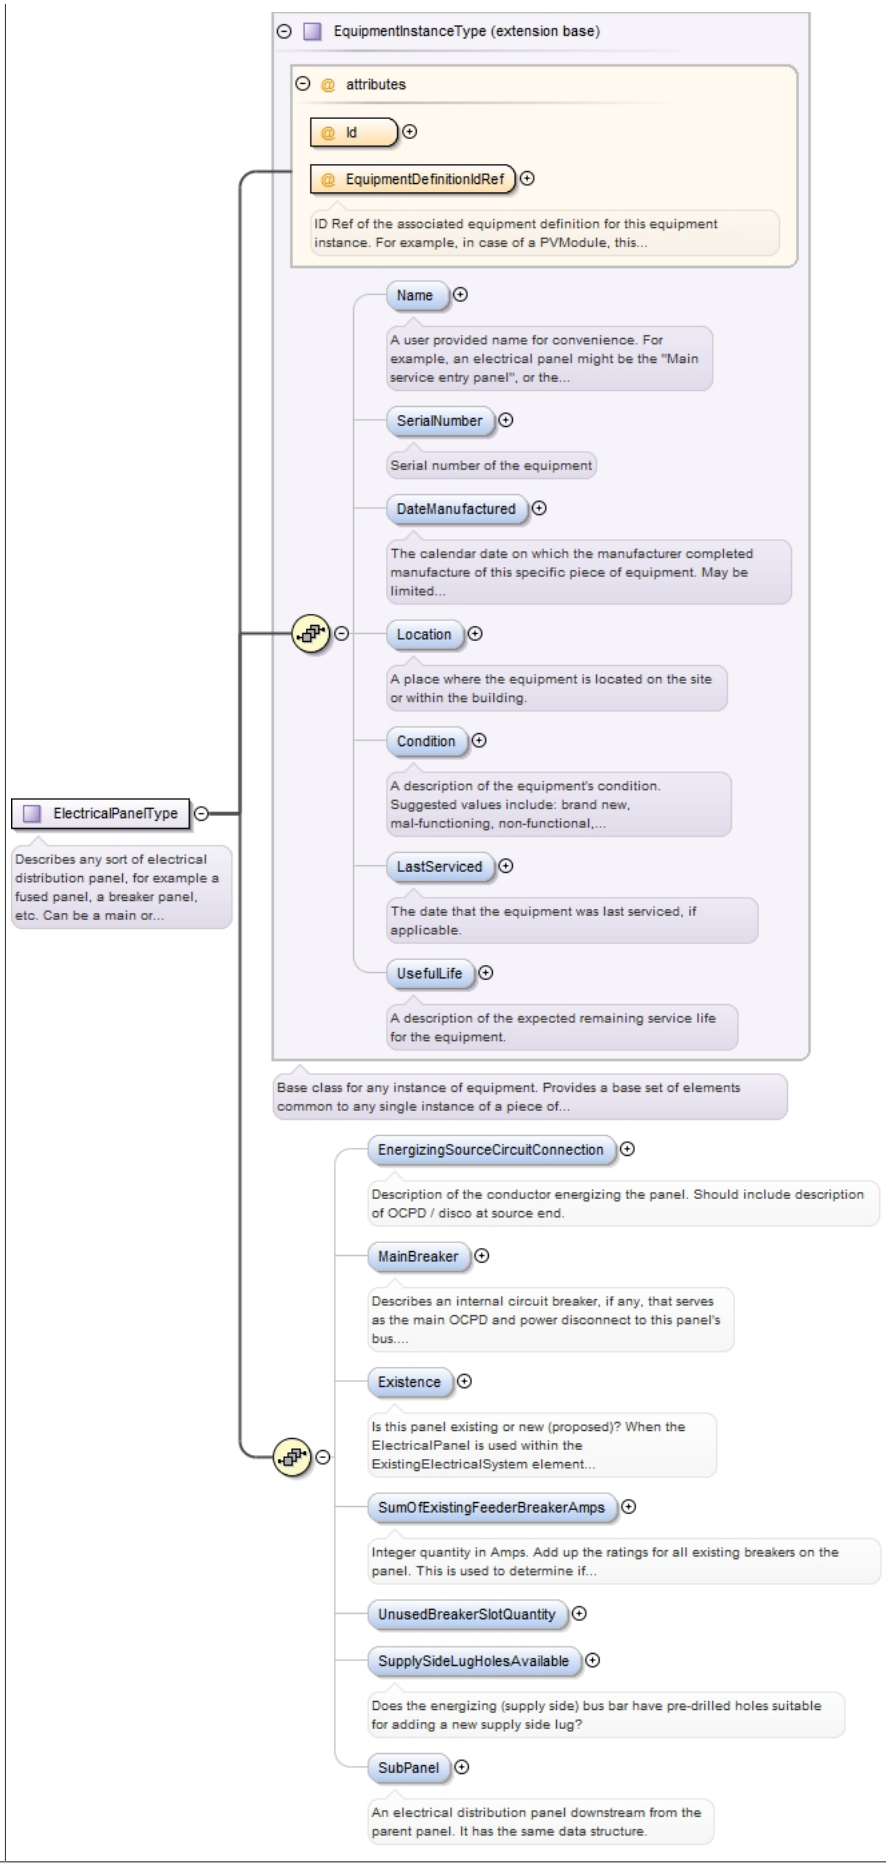
EquipmentInstanceType (extension base)
attributes
Id
EquipmentDefinitionIdRef
ID Ref of the associated equipment definition for this equipment instance. For example, in case of a PVModule, this...
Name
A user provided name for convenience. For example, an electrical panel might be the "Main service entry panel", or the...
SerialNumber
Serial number of the equipment
DateManufactured
The calendar date on which the manufacturer completed manufacture of this specific piece of equipment. May be limited...
Location
A place where the equipment is located on the site or within the building.
Condition
A description of the equipment's condition. Suggested values include: brand new, mal-functioning, non-functional,...
LastServiced
The date that the equipment was last serviced, if applicable.
UsefulLife
A description of the expected remaining service life for the equipment.
Base class for any instance of equipment. Provides a base set of elements common to any single instance of a piece of...
ElectricalPanelType
Describes any sort of electrical distribution panel, for example a fused panel, a breaker panel, etc. Can be a main or...
EnergizingSourceCircuitConnection
Description of the conductor energizing the panel. Should include description of OCPD / disco at source end.
MainBreaker
Describes an internal circuit breaker, if any, that serves as the main OCPD and power disconnect to this panel's bus....
Existence
Is this panel existing or new (proposed)? When the ElectricalPanel is used within the ExistingElectricalSystem element...
SumOfExistingFeederBreakerAmps
Integer quantity in Amps. Add up the ratings for all existing breakers on the panel. This is used to determine if...
UnusedBreakerSlotQuantity
SupplySideLugHolesAvailable
Does the energizing (supply side) bus bar have pre-drilled holes suitable for adding a new supply side lug?
SubPanel
An electrical distribution panel downstream from the parent panel. It has the same data structure.

Type	extension of EquipmentInstanceType
Type hierarchy	• EquipmentInstanceType • ElectricalPanelType
Used by	Elements: ElectricalDistributionHierarchyType/ElectricalDistributionPanel, ElectricalPanelType/SubPanel, PvDesignType/ElectricalPanel
Model	Name{0,1} , SerialNumber{0,1} , DateManufactured{0,1} , Location{0,1} , Condition{0,1} , LastServiced{0,1} , UsefulLife{0,1} , EnergizingSourceCircuitConnection{0,1} , MainBreaker{0,1} , Existence{0,1} , SumOfExistingFeederBreakerAmps{0,1} , UnusedBreakerSlotQuantity{0,1} , SupplySideLugHolesAvailable{0,1} , SubPanel{0,1}
Children	Condition, DateManufactured, EnergizingSourceCircuitConnection, Existence, LastServiced, Location, MainBreaker, Name, SerialNumber, SubPanel, SumOfExistingFeederBreakerAmps, SupplySideLugHolesAvailable, UnusedBreakerSlotQuantity, UsefulLife

Attributes

QName	Type	Fixed	Default	Use
EquipmentDefinitionIdREF	IDREF			required
	ID Ref of the associated equipment definition for this equipment instance. For example, in case of a PVModule, this would be the ID of the PvModuleDefinition element that describes this particular PV module instance.			
Id	xs:ID			required

Source

```
<xs:complexType name="ElectricalPanelType">
  <xs:annotation>
    <xs:documentation>Describes any sort of electrical distribution panel, for example a
fused panel, a breaker panel, etc. Can be a main or sub-panel.</xs:documentation>
  </xs:annotation>
  <xs:complexContent>
    <xs:extension base="EquipmentInstanceType">
      <xs:sequence>
        <xs:element minOccurs="0" name="EnergizingSourceCircuitConnection"
type="CircuitConnectionType" maxOccurs="1">
          <xs:annotation>
            <xs:documentation>Description of the conductor energizing the panel. Should
include description of OCPD / disco at source end.</xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element minOccurs="0" name="MainBreaker" type="CircuitBreakerType"
maxOccurs="1">
          <xs:annotation>
            <xs:documentation>Describes an internal circuit breaker, if any, that serves
as the main OCPD and power disconnect to this panel's bus. Note that the ElectricPanel
may or may not have an internal main breaker. Panels with or without a main internal
breaker may also have an OCPD on the ElectricPanel's CircuitConnection element which
serves as the energizing source for this panel.</xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element minOccurs="0" name="Existence" type="xs:string">
          <xs:annotation>
            <xs:documentation>Is this panel existing or new (proposed)? When the
ElectricalPanel is used within the ExistingElectricalSystem element inside of a Project's
Site element, this is assumed to be an existing panel. However, if the panel is just
being defined within a PvDesign's AcTie-InPanel element, then its important to know if
the panel being described already exists or is new (and therefore part of the scope of
work).</xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element maxOccurs="1" minOccurs="0" name="SumOfExistingFeederBreakerAmps"
type="xs:integer">
          <xs:annotation>
            <xs:documentation>Integer quantity in Amps. Add up the ratings for all
existing breakers on the panel. This is used to determine if existing panel configuration
meets code, and if additional breakers can be added.</xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element minOccurs="0" name="UnusedBreakerSlotQuantity" type="xs:integer"
maxOccurs="1"/>
        <xs:element minOccurs="0" name="SupplySideLugHolesAvailable" type="xs:boolean">
          <xs:annotation>
            <xs:documentation>Does the energizing (supply side) bus bar have pre-drilled
holes suitable for adding a new supply side lug?</xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element minOccurs="0" name="SubPanel" type="ElectricalPanelType">
          <xs:annotation>
```

```
            <xs:documentation>An electrical distribution panel downstream from the parent
 panel. It has the same data structure.</xs:documentation>
          </xs:annotation>
        </xs:element>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

Complex Type `CircuitConnectionType`

Namespace	http://www.iepmodel.net
Annotations	A CircuitConnection defines a portion of an electrical circuit connecting two distinct components of an electrical system (for example, the connection of a PV String to a CombinerBox). A CircuitConnection is made by conductors. One end of the CircuitConnection is the element in which the CircuitConnection exists, and the other end is typically the parent element of the element in which the CircuitConnection element resides. For example, a CombinerBox element can have multiple PvString elements within it. Each PvString element contains a CircuitConnection element which defines its connection to the CombinerBox. A CombinerBox has a CircuitConnection element which defines its connection to an InverterDcInput, for example. Optionally, the CircuitConnectionType contains an optional EquipmentWhereConnectedIdRef attribute which can be used to reference another electrical equipment element in another part of a document. For example, a PvDesign's Inverter has no parent element. Instead, it's AcTie-InCircuitConnection uses the EquipmentWhereConnectedIdRef attribute to reference either an ElectricalPanel within the PvDesign, or an ElectricalPanel within a Project's ExistingElectricalDistributionHierarchy element may exist.

Diagram

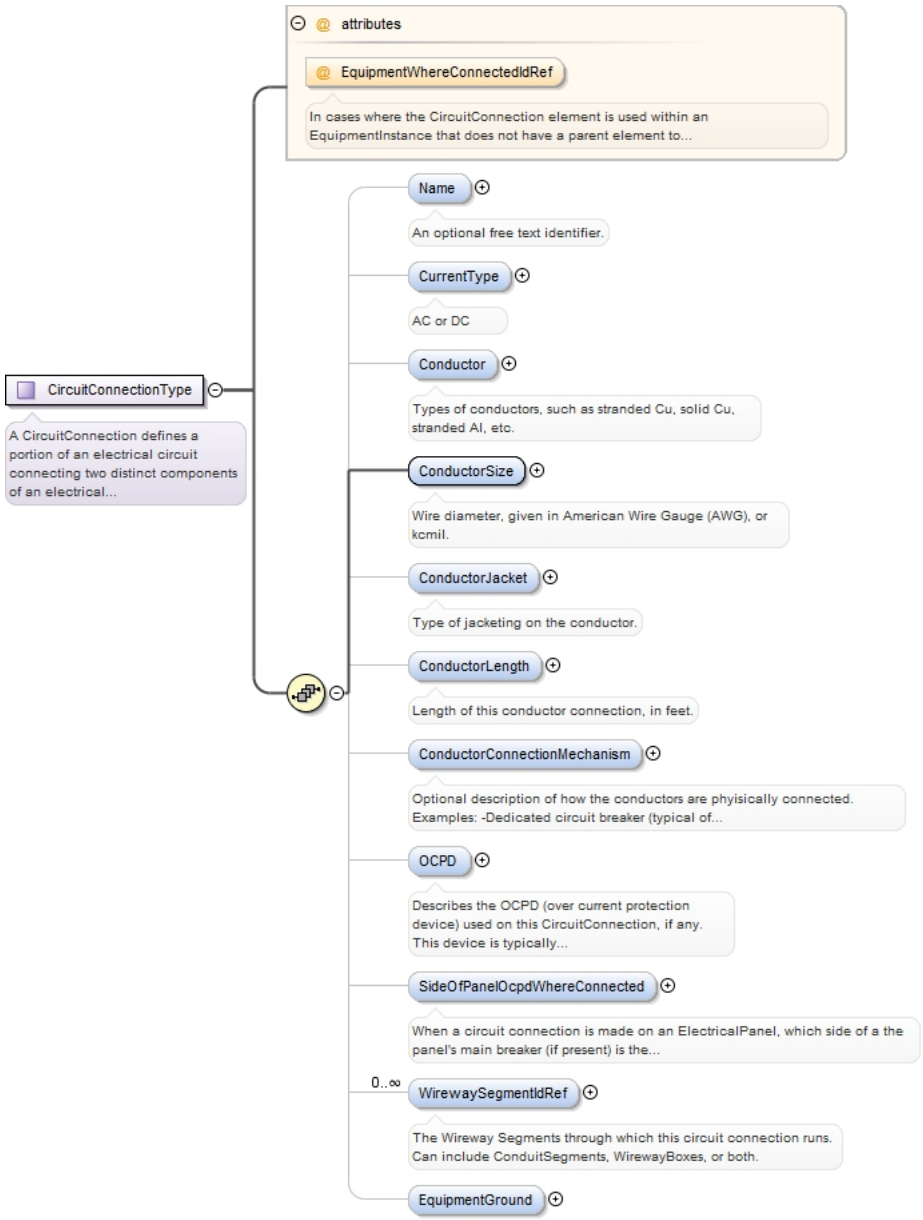

Used by	Elements — CircuitConnection, CombinerType/OutputCircuit, ElectricalPanelType/EnergizingSourceCircuitConnection, InverterType/AcTie-InCircuitConnection, PvArrayType/TypicalCircuitConnection, PvStringType/CircuitConnection
Model	Name{0,1} , CurrentType{0,1} , Conductor{0,1} , ConductorSize , ConductorJacket{0,1} , ConductorLength{0,1} , ConductorConnectionMechanism{0,1} , OCPD{0,1} , SideOfPanelOcpdWhereConnected{0,1} , WirewaySegmentIdRef* , EquipmentGround{0,1}
Children	Conductor, ConductorConnectionMechanism, ConductorJacket, ConductorLength, ConductorSize, CurrentType, EquipmentGround, Name, OCPD, SideOfPanelOcpdWhereConnected, WirewaySegmentIdRef

Attributes

QName	Type	Fixed	Default	Use
EquipmentWhereConnectedIdRef				optional

```
In cases where the CircuitConnection element is used within an
 EquipmentInstance that does not have a parent element to which the
 CircuitConnection is assumed to connect, a reference ID can be used
 to associate this CircuitConnection to another EquipmentInstance
 elsewhere in a document instance. For example, a PvSystem may have an
 AcPointOfConnection that uses a new ElectricalPanel as an AC combiner
 for more than one Inverter. The new electrical panel can be described
 by an ElectricalPanel element in the PvDesign (which in turn refers to
 an ElectricalPanelDefinition element).

in the AcPointOfConnection's EquipmentWhereConnected element.
 That ElectricPanel's EnergizingCircuitConnection element may
```

	QName	Type	Fixed	Default	Use
		reference another ElectricPanel in an instance of the Project's ExistingElectricalHierarchy element.			

Source

```
<xs:complexType name="CircuitConnectionType">
  <xs:annotation>
    <xs:documentation>A CircuitConnection defines a portion of an electrical circuit
 connecting two distinct components of an electrical system (for example, the connection
 of a PV String to a CombinerBox). A CircuitConnection is made by conductors. One end
 of the CircuitConnection is the element in which the CircuitConnection exists, and the
 other end is typically the parent element of the element in which the CircuitConnection
 element resides. For example, a CombinerBox element can have multiple PvString elements
 within it. Each PvString element contains a CircuitConnection element which defines
 its connection to the CombinerBox. A CombinerBox has a CircuitConnection element
 which defines its connection to an InverterDcInput, for example. Optionally, the
 CircuitConnectionType contains an optional EquipmentWhereConnectedIdRef attribute
 which can be used to reference another electrical equipment element in another part
 of a document. For example, a PvDesign's Inverter has no parent element. Instead, it's
 AcTie-InCircuitConnection uses the EquipmentWhereConnectedIdRef attribute to reference
 either an ElectricalPanel within the PvDesign, or an ElectricalPanel within a Project's
 ExistingElectricalDistributionHierarchy element may exist.</xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element minOccurs="0" name="Name" type="xs:string">
      <xs:annotation>
        <xs:documentation>An optional free text identifier.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="CurrentType" minOccurs="0" type="CurrentEnumType">
      <xs:annotation>
        <xs:documentation>AC or DC</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="Conductor" type="ConductorEnumType">
      <xs:annotation>
        <xs:documentation>Types of conductors, such as stranded Cu, solid Cu, stranded Al,
 etc.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="ConductorSize" type="ConductorSizeEnumType">
      <xs:annotation>
        <xs:documentation>Wire diameter, given in American Wire Gauge (AWG), or kcmil.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="ConductorJacket" type="ConductorJacketEnumType">
      <xs:annotation>
        <xs:documentation>Type of jacketing on the conductor.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="ConductorLength" type="xs:double" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Length of this conductor connection, in feet.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="ConductorConnectionMechanism" type="xs:string">
      <xs:annotation>
        <xs:documentation>Optional description of how the conductors are phyisically
 connected. Examples: -Dedicated circuit breaker (typical of load side, but breaker-can
 also be on service side if hot-bussed panel has breaker slot on the service side) -lugs
 (supply side typical) -wire taps (supply side typical)</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="OCPD" minOccurs="0" type="OverCurrentProtectionDeviceType">
      <xs:annotation>
        <xs:documentation>Describes the OCPD (over current protection device) used
 on this CircuitConnection, if any. This device is typically housed within the
 electrical equipment that is the parent element of the element which contains this
 CircuitConnection. For example, if this CircuitConnection is part of a PvString element
 that is a child of a CombinerBox, the OCPD will be housed within the CombinerBox.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element default="load-side" minOccurs="0" name="SideOfPanelOcpdWhereConnected"
 type="SideOfPanelOcpdWhereConnectedEnumType">
      <xs:annotation>
        <xs:documentation>When a circuit connection is made on an ElectricalPanel, which
 side of a the panel's main breaker (if present) is the interconnection made (supply
 or load side)? This is a very important consideration, as the NEC dictates the maximum
 allowable interconnected current, and it is very different for each side of the OCPD. For
 example, when tied to the load side of a panel's bus, the total of all circuits amperage
 can sum to 120% of the bus's current rating when using a backfed breaker. If tied to the
```

```
supply side, the allowable PV circuit amperage can go up to the maximum rated amperage of
the bus (as the main breaker protects the load side). Note that this also differs between
residential and commercial systems. Most residential systems are interconnected on the
load side. Conversely, most commercial systems are interconnected on the supply side
because NEC 690 currently has no 120% rule on commercial load side tie-in (significantly
limiting possible size), and also commercial system equipment is more likely to have
connections available on the supply side (e.g. lugs).</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="WirewaySegmentIdRef" type="xs:IDREF" minOccurs="0"
maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>The Wireway Segments through which this circuit connection runs.
Can include ConduitSegments, WirewayBoxes, or both.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="EquipmentGround" type="EquipmentGroundType"/>
  </xs:sequence>
  <xs:attribute name="EquipmentWhereConnectedIdRef">
    <xs:annotation>
      <xs:documentation>In cases where the CircuitConnection element is used within an
EquipmentInstance that does not have a parent element to which the CircuitConnection
is assumed to connect, a reference ID can be used to associate this CircuitConnection
to another EquipmentInstance elsewhere in a document instance. For example, a PvSystem
may have an AcPointOfConnection that uses a new ElectricalPanel as an AC combiner for
more than one Inverter. The new electrical panel can be described by an ElectricalPanel
element in the PvDesign (which in turn refers to an ElectricalPanelDefinition element).
in the AcPointOfConnection's EquipmentWhereConnected element. That ElectricPanel's
EnergizingCircuitConnection element may reference another ElectricPanel in an instance of
the Project's ExistingElectricalHierarchy element.</xs:documentation>
    </xs:annotation>
  </xs:attribute>
</xs:complexType>
```

Complex Type `OverCurrentProtectionDeviceType`

Namespace	http://www.iepmodel.net
Annotations	Over current protection device (commonly called "OCPD"). This is an abstract type extended by specific OCPD types (fuse or circuit breaker). Note that this type does not extend EquipmentDefinition nor EquipmentInstance. It is not a piece of equipment, but rather a component within a piece of equipment. It is not necessary to include a mfr and model in most cases; knowing the type and rating is required.
Diagram	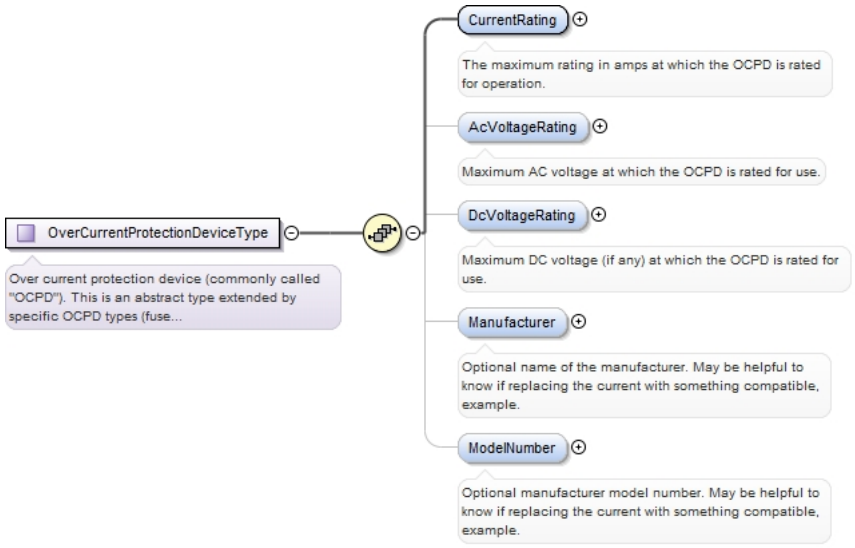
Properties	abstract: `true`
Used by	Element: CircuitConnectionType/OCPD Complex Types: CircuitBreakerType, FuseType
Model	CurrentRating , AcVoltageRating{0,1} , DcVoltageRating{0,1} , Manufacturer{0,1} , ModelNumber{0,1}
Children	AcVoltageRating, CurrentRating, DcVoltageRating, Manufacturer, ModelNumber
Source	

```
<xs:complexType name="OverCurrentProtectionDeviceType" abstract="true">
  <xs:annotation>
    <xs:documentation>Over current protection device (commonly called "OCPD"). This is
an abstract type extended by specific OCPD types (fuse or circuit breaker). Note that
```

```
 this type does not extend EquipmentDefinition nor EquipmentInstance. It is not a piece
 of equipment, but rather a component within a piece of equipment. It is not necessary
 to include a mfr and model in most cases; knowing the type and rating is required.</
xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="CurrentRating" type="xs:integer" minOccurs="1" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>The maximum rating in amps at which the OCPD is rated for
 operation.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="AcVoltageRating" type="xs:integer" minOccurs="0">
      <xs:annotation>
        <xs:documentation>Maximum AC voltage at which the OCPD is rated for use.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="DcVoltageRating" type="xs:integer">
      <xs:annotation>
        <xs:documentation>Maximum DC voltage (if any) at which the OCPD is rated for
 use.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="Manufacturer" type="xs:string">
      <xs:annotation>
        <xs:documentation>Optional name of the manufacturer. May be helpful to know if
 replacing the current with something compatible, example.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="ModelNumber" type="xs:string">
      <xs:annotation>
        <xs:documentation>Optional manufacturer model number. May be helpful to know if
 replacing the current with something compatible, example.</xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

Complex Type `EquipmentGroundType`

Namespace	http://www.iepmodel.net
Diagram	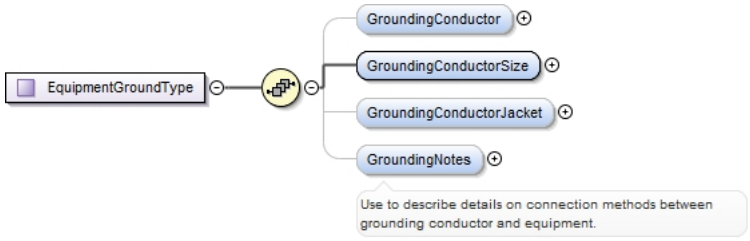
Used by	Element CircuitConnectionType/EquipmentGround
Model	GroundingConductor{0,1} , GroundingConductorSize , GroundingConductorJacket{0,1} , GroundingNotes{0,1}
Children	GroundingConductor, GroundingConductorJacket, GroundingConductorSize, GroundingNotes
Source	

```
<xs:complexType name="EquipmentGroundType">
  <xs:sequence>
    <xs:element minOccurs="0" name="GroundingConductor" type="ConductorEnumType"/>
    <xs:element name="GroundingConductorSize" type="ConductorSizeEnumType"/>
    <xs:element minOccurs="0" name="GroundingConductorJacket"
 type="ConductorJacketEnumType"/>
    <xs:element minOccurs="0" name="GroundingNotes" type="xs:string">
      <xs:annotation>
        <xs:documentation>Use to describe details on connection methods between grounding
 conductor and equipment.</xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

Complex Type `CircuitBreakerType`

Namespace	http://www.iepmodel.net
Annotations	Extends the abstract OverCurrentProtectionDeviceType (OCPD) element. A circuit breaker is a re-usable OCPD which can also act as a disconnecting means.

Diagram	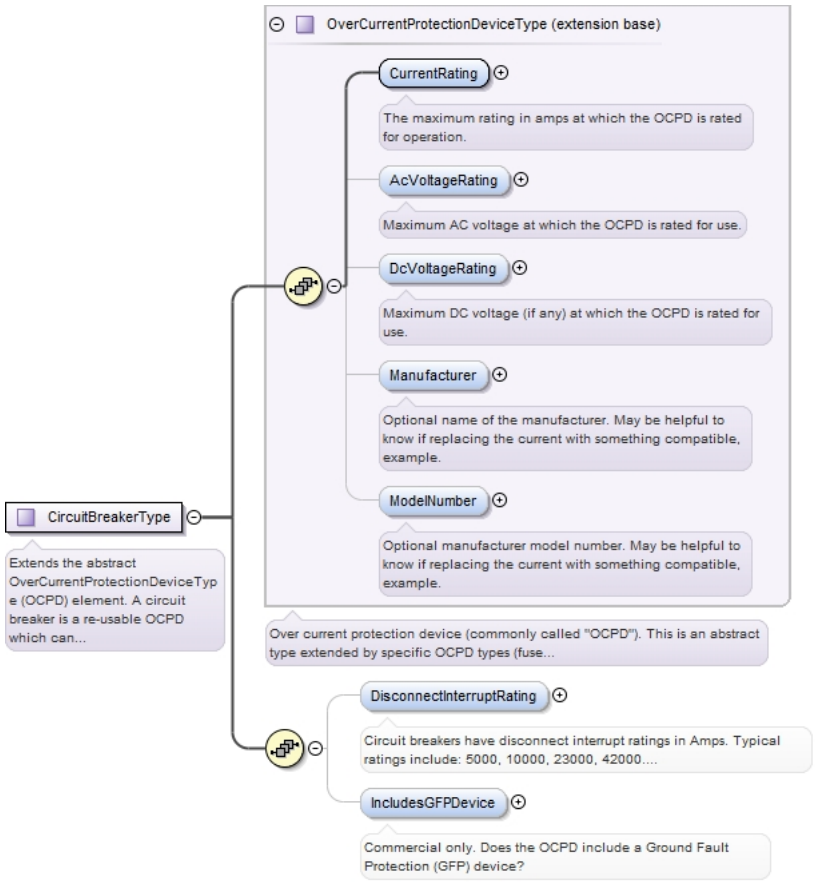
Type	extension of OverCurrentProtectionDeviceType
Type hierarchy	• OverCurrentProtectionDeviceType • CircuitBreakerType
Used by	Element ElectricalPanelType/MainBreaker
Model	CurrentRating , AcVoltageRating{0,1} , DcVoltageRating{0,1} , Manufacturer{0,1} , ModelNumber{0,1} , DisconnectInterruptRating{0,1} , IncludesGFPDevice{0,1}
Children	AcVoltageRating, CurrentRating, DcVoltageRating, DisconnectInterruptRating, IncludesGFPDevice, Manufacturer, ModelNumber
Source	<xs:complexType name="CircuitBreakerType"> <xs:annotation> <xs:documentation>Extends the abstract OverCurrentProtectionDeviceType (OCPD) element. A circuit breaker is a re-usable OCPD which can also act as a disconnecting means.</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="OverCurrentProtectionDeviceType"> <xs:sequence> <xs:element minOccurs="0" name="DisconnectInterruptRating" type="xs:integer" maxOccurs="1"> <xs:annotation> <xs:documentation>Circuit breakers have disconnect interrupt ratings in Amps. Typical ratings include: 5000, 10000, 23000, 42000. Typically if rating is not listed on a breaker, it is 5000.</xs:documentation> </xs:annotation> </xs:element> <xs:element minOccurs="0" name="IncludesGFPDevice" type="xs:boolean" maxOccurs="1"> <xs:annotation> <xs:documentation>Commercial only. Does the OCPD include a Ground Fault Protection (GFP) device?</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType>

Complex Type `ElectricalPanelDefinitionType`

Namespace	http://www.iepmodel.net
Annotations	A description of an electrical distribution device. Typically also known as "load centers" that house multiple circuit breakers. A switch can also be modeled.

Diagram

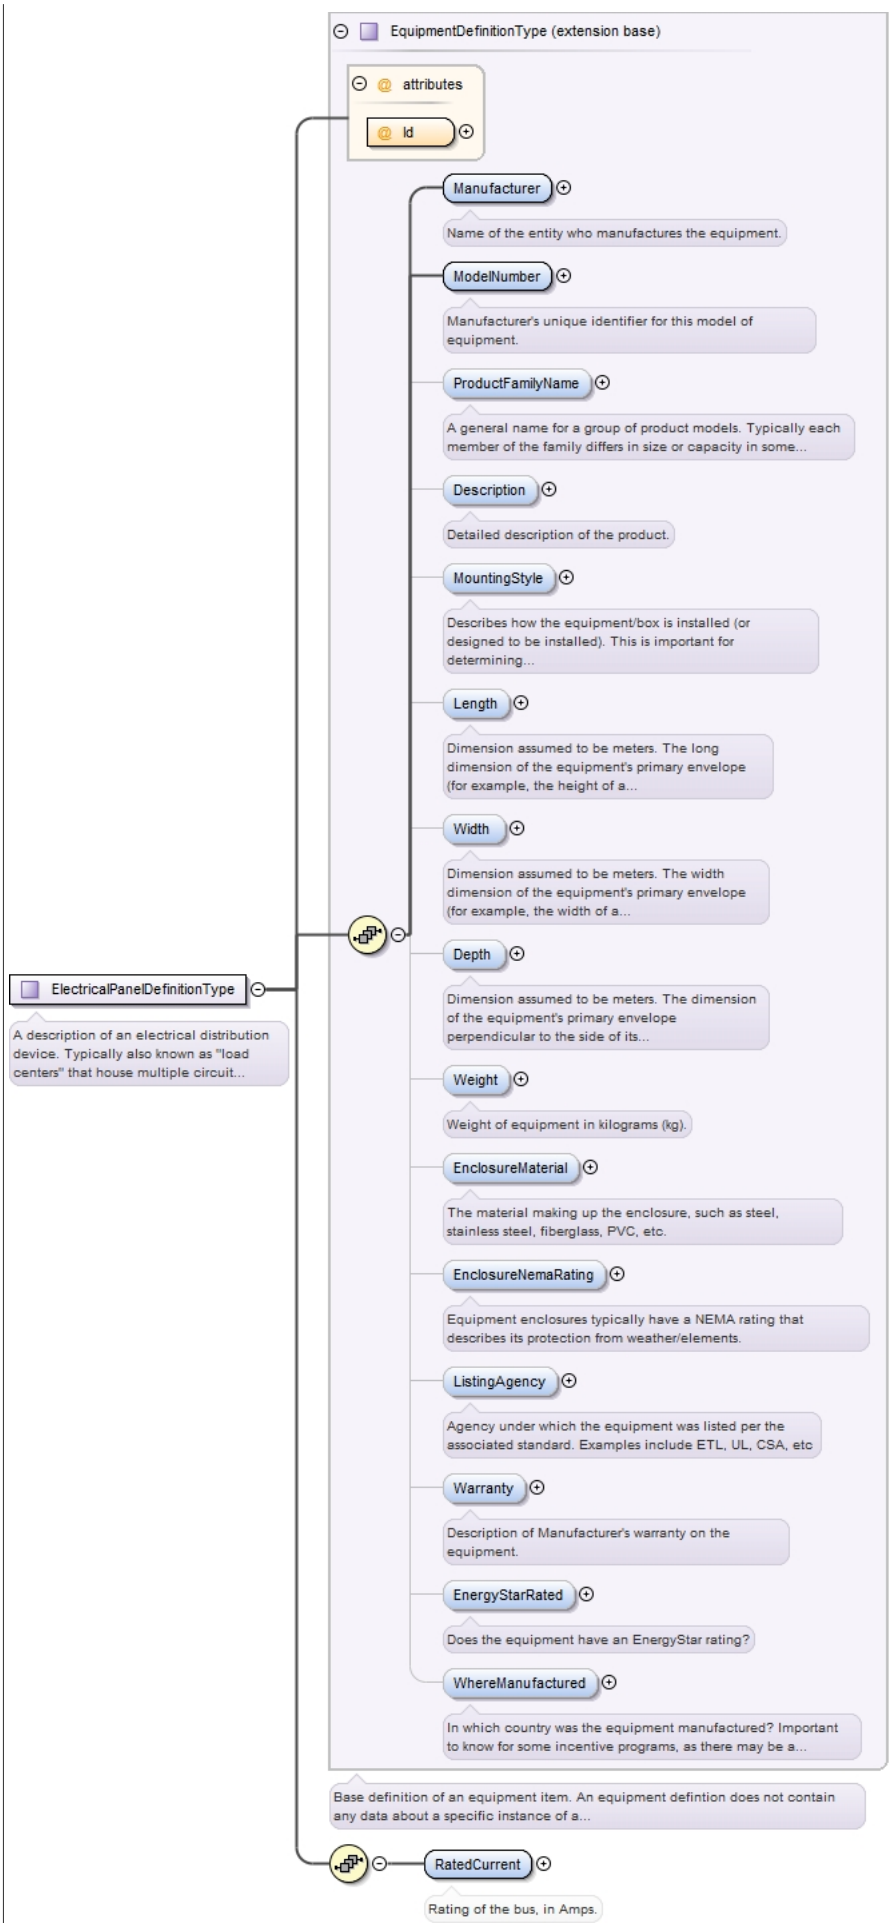
EquipmentDefinitionType (extension base)
attributes
Id
Manufacturer
Name of the entity who manufactures the equipment.
ModelNumber
Manufacturer's unique identifier for this model of equipment.
ProductFamilyName
A general name for a group of product models. Typically each member of the family differs in size or capacity in some...
Description
Detailed description of the product.
MountingStyle
Describes how the equipment/box is installed (or designed to be installed). This is important for determining...
Length
Dimension assumed to be meters. The long dimension of the equipment's primary envelope (for example, the height of a...
Width
Dimension assumed to be meters. The width dimension of the equipment's primary envelope (for example, the width of a...
Depth
Dimension assumed to be meters. The dimension of the equipment's primary envelope perpendicular to the side of its...
Weight
Weight of equipment in kilograms (kg).
EnclosureMaterial
The material making up the enclosure, such as steel, stainless steel, fiberglass, PVC, etc.
EnclosureNemaRating
Equipment enclosures typically have a NEMA rating that describes its protection from weather/elements.
ListingAgency
Agency under which the equipment was listed per the associated standard. Examples include ETL, UL, CSA, etc
Warranty
Description of Manufacturer's warranty on the equipment.
EnergyStarRated
Does the equipment have an EnergyStar rating?
WhereManufactured
In which country was the equipment manufactured? Important to know for some incentive programs, as there may be a...
Base definition of an equipment item. An equipment defintion does not contain any data about a specific instance of a...
ElectricalPanelDefinitionType
A description of an electrical distribution device. Typically also known as "load centers" that house multiple circuit...
RatedCurrent
Rating of the bus, in Amps.

Type	extension of EquipmentDefinitionType
Type hierarchy	• EquipmentDefinitionType • ElectricalPanelDefinitionType
Used by	Elements: ElectricalDistributionHierarchyType/ElectricalDistributionPanelDefinition, PvDesignType/ElectricalPanelDefinition
Model	Manufacturer , ModelNumber , ProductFamilyName{0,1} , Description{0,1} , MountingStyle{0,1} , Length{0,1} , Width{0,1} , Depth{0,1} , Weight{0,1} , EnclosureMaterial{0,1} , EnclosureNemaRating{0,1} , ListingAgency{0,1} , Warranty{0,1} , EnergyStarRated{0,1} , WhereManufactured{0,1} , RatedCurrent
Children	Depth, Description, EnclosureMaterial, EnclosureNemaRating, EnergyStarRated, Length, ListingAgency, Manufacturer, ModelNumber, MountingStyle, ProductFamilyName, RatedCurrent, Warranty, Weight, WhereManufactured, Width

Attributes

QName	Type	Fixed	Default	Use
Id	xs:ID			required

Source

```
<xs:complexType name="ElectricalPanelDefinitionType">
  <xs:annotation>
    <xs:documentation>A description of an electrical distribution device. Typically also
 known as "load centers" that house multiple circuit breakers. A switch can also be
 modeled.</xs:documentation>
  </xs:annotation>
  <xs:complexContent>
    <xs:extension base="EquipmentDefinitionType">
      <xs:sequence>
        <xs:element name="RatedCurrent" type="xs:integer" minOccurs="1" maxOccurs="1">
          <xs:annotation>
            <xs:documentation>Rating of the bus, in Amps.</xs:documentation>
          </xs:annotation>
        </xs:element>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

Complex Type `HVACSystemType`

Namespace	http://www.iepmodel.net
Annotations	This schema defines the parameters associated with an HVAC system. An HVAC system may contain any combination of the following: a heating system, a cooling system and ventilation properties. Ventilation is defined here as the exchange of air in the space/zone with air outside. An HVAC system references Distribution systems that serve one of three purposes: - deliver conditioning to a space/zone. - provide heat. - provide cold (a fluid to reject heat to). An HVAC system serves a zone, however, zones reference the HVAC systems that serve them. Note that parameters associated with the transport and movement of air and water are captured in a Distribution System.

Diagram

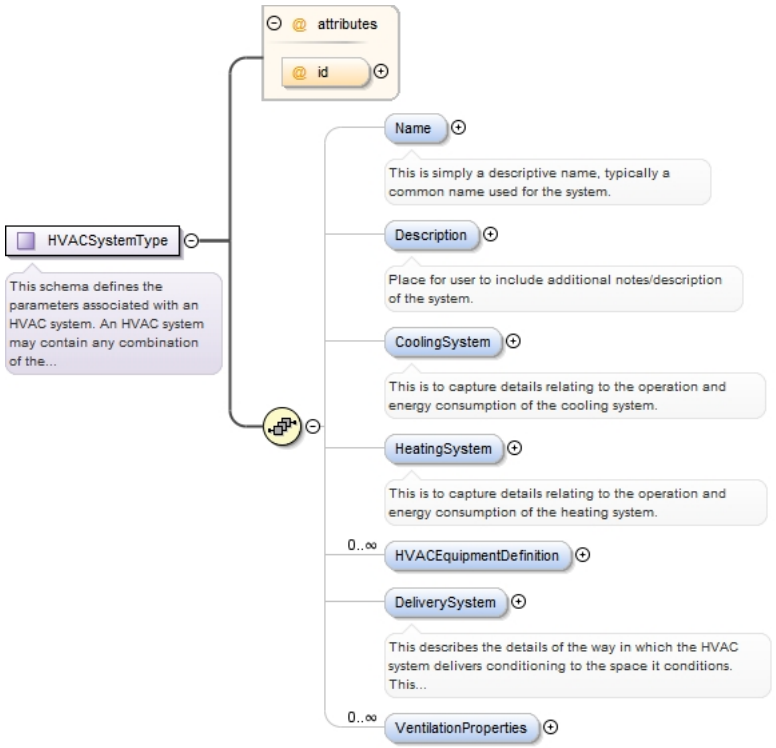

Used by

Elements HVACSystem, ProjectType/ExistingHVAC, SystemChoiceType/HVAC

Model

Name{0,1} , Description{0,1} , CoolingSystem{0,1} , HeatingSystem{0,1} , HVACEquipmentDefinition* , DeliverySystem{0,1} , VentilationProperties*

Children

CoolingSystem, DeliverySystem, Description, HVACEquipmentDefinition, HeatingSystem, Name, VentilationProperties

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			optional

Source

```
<xs:complexType name="HVACSystemType">
  <xs:annotation>
    <xs:documentation>This schema defines the parameters associated with an HVAC system.
 An HVAC system may contain any combination of the following: a heating system, a cooling
 system and ventilation properties. Ventilation is defined here as the exchange of air
 in the space/zone with air outside. An HVAC system references Distribution systems that
 serve one of three purposes: - deliver conditioning to a space/zone. - provide heat.
 - provide cold (a fluid to reject heat to). An HVAC system serves a zone, however,
 zones reference the HVAC systems that serve them. Note that parameters associated with
 the transport and movement of air and water are captured in a Distribution System.</
xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is simply a descriptive name, typically a common name used
 for the system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Place for user to include additional notes/description of the
 system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="CoolingSystem" type="CoolingSystemType" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is to capture details relating to the operation and energy
 consumption of the cooling system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="HeatingSystem" type="HeatingSystemType" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is to capture details relating to the operation and energy
 consumption of the heating system.</xs:documentation>
      </xs:annotation>
    </xs:element>
```

```
    <xs:element maxOccurs="unbounded" minOccurs="0" name="HVACEquipmentDefinition"
 type="EquipmentDefinitionType"/>
    <xs:element minOccurs="0" name="DeliverySystem" type="DeliverySystemType">
      <xs:annotation>
        <xs:documentation>This describes the details of the way in which the HVAC system
 delivers conditioning to the space it conditions. This allows the user to define
 ducting or piping etc. This includes an optional reference to a distribution system.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="unbounded" minOccurs="0" name="VentilationProperties"
 type="VentilationPropertiesType"/>
  </xs:sequence>
  <xs:attribute form="unqualified" name="id" type="xs:ID"/>
</xs:complexType>
```

Complex Type `CoolingSystemType`

Namespace	http://www.iepmodel.net
Annotations	This describes the details of the cooling system, which may be one of many or the only component of the HVAC system. System properties are contained here.
Diagram	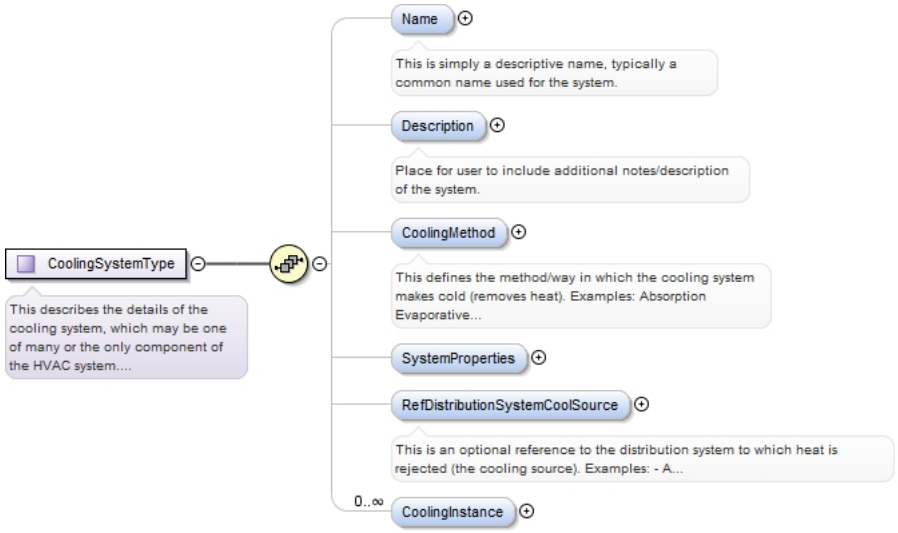
Used by	Element HVACSystemType/CoolingSystem
Model	Name{0,1} , Description{0,1} , CoolingMethod{0,1} , SystemProperties{0,1} , RefDistributionSystemCoolSource{0,1} , CoolingInstance*
Children	CoolingInstance, CoolingMethod, Description, Name, RefDistributionSystemCoolSource, SystemProperties
Source	

```
<xs:complexType name="CoolingSystemType">
  <xs:annotation>
    <xs:documentation>This describes the details of the cooling system, which may be one
 of many or the only component of the HVAC system. System properties are contained here.</
xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is simply a descriptive name, typically a common name used
 for the system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Place for user to include additional notes/description of the
 system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="CoolingMethod" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This defines the method/way in which the cooling system makes
 cold (removes heat). Examples: Absorption Evaporative Refrigeration – Air Rejection
 Refrigeration – Water Rejection Hydronic Coils Refrigerant (Direct Expansion, DX) Coils</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="SystemProperties" type="CommonSystemPropertiesType" minOccurs="0"/>
```

```
    <xs:element maxOccurs="1" minOccurs="0" name="RefDistributionSystemCoolSource"
 type="xs:IDREF">
      <xs:annotation>
        <xs:documentation>This is an optional reference to the distribution system to
 which heat is rejected (the cooling source). Examples: - A geothermal heat pump may
 reference a water loop that cycles to a pond or to piping in the ground. - An air
 handler with chilled water coils would reference the chilled water loop that serves the
 coils. - A water-cooled chiller or condenser would reference a condenser water loop.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="unbounded" minOccurs="0" name="CoolingInstance"
 nillable="false" type="EquipmentInstanceType"/>
  </xs:sequence>
</xs:complexType>
```

Complex Type `HeatingSystemType`

Namespace	http://www.iepmodel.net
Annotations	This describes the details of the heating system, which may be one of many or the only component of the HVAC system. System properties are contained here.
Diagram	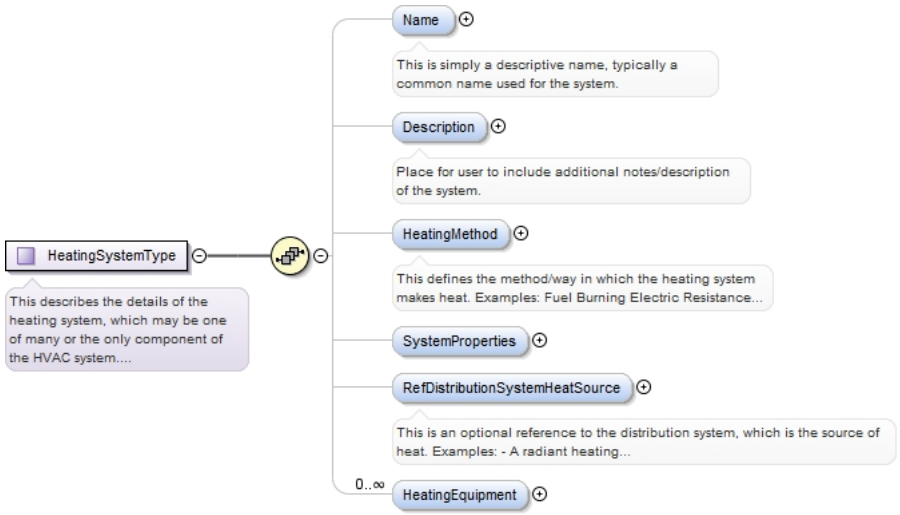
Used by	Element HVACSystemType/HeatingSystem
Model	Name{0,1} , Description{0,1} , HeatingMethod{0,1} , SystemProperties{0,1} , RefDistributionSystemHeatSource{0,1} , HeatingEquipment*
Children	Description, HeatingEquipment, HeatingMethod, Name, RefDistributionSystemHeatSource, SystemProperties
Source	

```
<xs:complexType name="HeatingSystemType">
  <xs:annotation>
    <xs:documentation>This describes the details of the heating system, which may be one
 of many or the only component of the HVAC system. System properties are contained here.</
xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is simply a descriptive name, typically a common name used
 for the system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Place for user to include additional notes/description of the
 system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="HeatingMethod" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This defines the method/way in which the heating system makes
 heat. Examples: Fuel Burning Electric Resistance Refrigeration – Air-Source Refrigeration
 – Water-Source Hydronic Coils</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="SystemProperties" type="CommonSystemPropertiesType" minOccurs="0"/>
    <xs:element maxOccurs="1" minOccurs="0" name="RefDistributionSystemHeatSource"
 type="xs:IDREF">
```

```
      <xs:annotation>
        <xs:documentation>This is an optional reference to the distribution system, which
 is the source of heat. Examples: - A radiant heating system may consist of "radiators"
 and this references the hot water loop that serves it. - An air handler with hot water
 coils may reference the hot water loop that serves the coils. - A heat pump would
 reference the water loop from which it absorbs heat when it is in heating mode.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="HeatingEquipment" maxOccurs="unbounded" minOccurs="0"
 nillable="false" type="EquipmentInstanceType"/>
  </xs:sequence>
</xs:complexType>
```

Complex Type `DeliverySystemType`

Namespace	http://www.iepmodel.net
Annotations	This describes the details of the way in which the HVAC system delivers conditioning to the space it conditions. This allows the user to define ducting or piping etc. This includes an optional reference to a distribution system.
Diagram	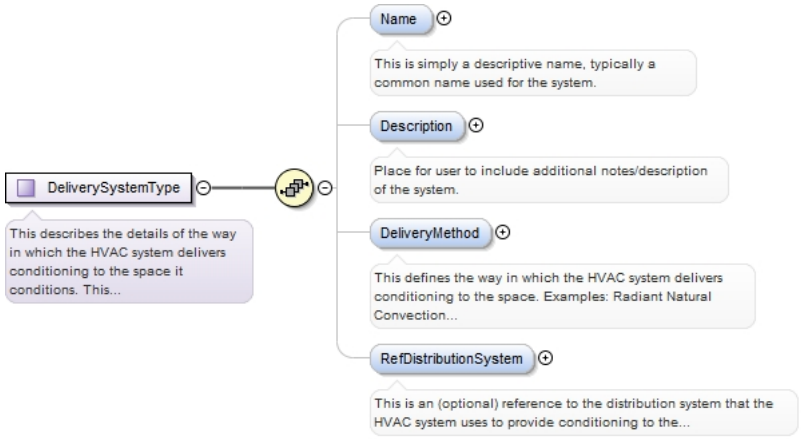
Used by	Element HVACSystemType/DeliverySystem
Model	Name{0,1} , Description{0,1} , DeliveryMethod{0,1} , RefDistributionSystem{0,1}
Children	DeliveryMethod, Description, Name, RefDistributionSystem
Source	

```
<xs:complexType name="DeliverySystemType">
  <xs:annotation>
    <xs:documentation>This describes the details of the way in which the HVAC system
 delivers conditioning to the space it conditions. This allows the user to define
 ducting or piping etc. This includes an optional reference to a distribution system.</
xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is simply a descriptive name, typically a common name used
 for the system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Place for user to include additional notes/description of the
 system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="DeliveryMethod" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This defines the way in which the HVAC system delivers
 conditioning to the space. Examples: Radiant Natural Convection Forced Convection</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="1" minOccurs="0" name="RefDistributionSystem" type="xs:IDREF">
      <xs:annotation>
        <xs:documentation>This is an (optional) reference to the distribution system that
 the HVAC system uses to provide conditioning to the space.</xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
```

```
</xs:complexType>
```

Complex Type `VentilationPropertiesType`

Namespace	http://www.iepmodel.net
Annotations	This describes the properties of ventilation. Ventilation in the IEP model is defined as the exchange (inlet or exhaust) of air with the environment outside of the building. Since Delivery System defines the way in which air is transported, this object simply defines how, when and what portion of that air is inlet from or exhausted to outside. It is not necessary to define a Delivery System in order to define ventilation. This is particularly true when the ventilation type is natural. Ventilation should not be confused with "venting". This is not where one describes the ducting that provides conditioned air to the space/zone. This is done in the DeliverySystem.
Diagram	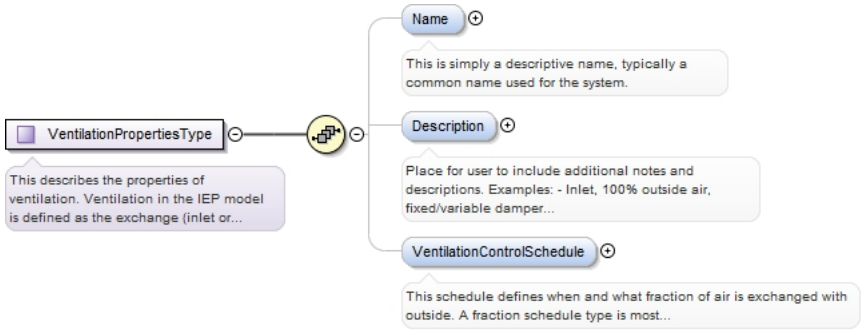
Used by	Element HVACSystemType/VentilationProperties
Model	Name{0,1} , Description{0,1} , VentilationControlSchedule{0,1}
Children	Description, Name, VentilationControlSchedule
Source	

```
<xs:complexType name="VentilationPropertiesType">
  <xs:annotation>
    <xs:documentation>This describes the properties of ventilation. Ventilation in the IEP
 model is defined as the exchange (inlet or exhaust) of air with the environment outside
 of the building. Since Delivery System defines the way in which air is transported,
 this object simply defines how, when and what portion of that air is inlet from or
 exhausted to outside. It is not necessary to define a Delivery System in order to define
 ventilation. This is particularly true when the ventilation type is natural. Ventilation
 should not be confused with "venting". This is not where one describes the ducting
 that provides conditioned air to the space/zone. This is done in the DeliverySystem.</
xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is simply a descriptive name, typically a common name used
 for the system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Place for user to include additional notes and descriptions.
 Examples: - Inlet, 100% outside air, fixed/variable damper - Exhaust, fixed/variable
 damper - Outside air economizer system - Natural: Windows, manual/auto control - Exhaust,
 relief vent - Whole house fan It may be appropriate to define the nominal (maximum,
 100%) outside air flow rate, particularly when the Ventilation Control Schedule is a
 fraction schedule type. This would be useful when the ventilation type is natural or
 if no Delivery System is defined. It may be appropriate to define the flow rate units
 (cubic-feet per minute) if the Ventilation Control Schedule type is a value schedule.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="VentilationControlSchedule" type="xs:IDREF">
      <xs:annotation>
        <xs:documentation>This schedule defines when and what fraction of air is exchanged
 with outside. A fraction schedule type is most appropriate. The nominal (100%) flow rate
 would reflect the Delivery System flow rate at the given conditions. Alternatively,
 if the ventilation type is natural, the user may define the maximum flow rate in the
 Description. Another option would be to define a value schedule and indicate in the
 description what the units of the schedule values represent (i.e. cubic-feet per
 minute).</xs:documentation>
```

```
      </xs:annotation>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

Complex Type `LightingSystemType`

Namespace	http://www.iepmodel.net
Annotations	This is the high-level object that is istanced when one wants to define a lighting system.
Diagram	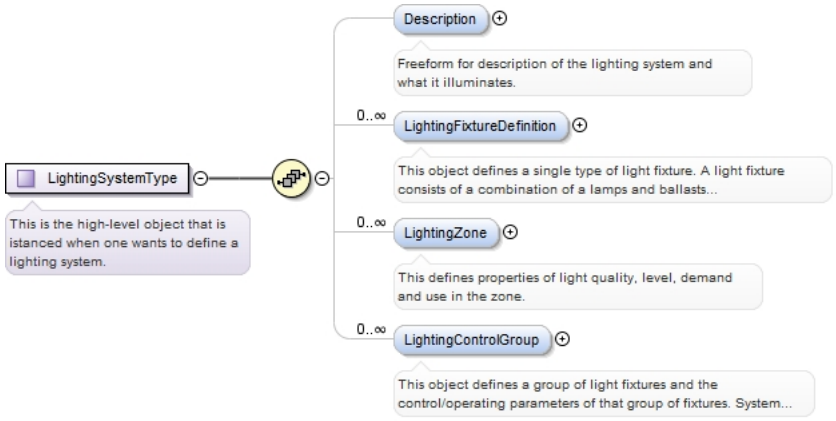
Used by	Elements LightingSystem, ProjectType/ExistingLighting, SystemChoiceType/Lighting
Model	Description{0,1} , LightingFixtureDefinition* , LightingZone* , LightingControlGroup*
Children	Description, LightingControlGroup, LightingFixtureDefinition, LightingZone
Source	

```
<xs:complexType name="LightingSystemType">
  <xs:annotation>
    <xs:documentation>This is the high-level object that is istanced when one wants to
 define a lighting system.</xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Freeform for description of the lighting system and what it
 illuminates.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="unbounded" minOccurs="0" name="LightingFixtureDefinition"
 type="LightingFixtureDefintionType">
      <xs:annotation>
        <xs:documentation>This object defines a single type of light fixture. A light
 fixture consists of a combination of a lamps and ballasts (optional) as well as the
 container and mounting accessories.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="unbounded" minOccurs="0" name="LightingZone"
 type="LightingZoneType">
      <xs:annotation>
        <xs:documentation>This defines properties of light quality, level, demand and use
 in the zone.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="unbounded" minOccurs="0" name="LightingControlGroup"
 type="LightingControlGroupType">
      <xs:annotation>
        <xs:documentation>This object defines a group of light fixtures and the control/
operating parameters of that group of fixtures. System properties are contained here.</
xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

Complex Type `LightingFixtureDefintionType`

Namespace	http://www.iepmodel.net
Annotations	This object defines a single type of light fixture. A light fixture consists of a combination of a lamps and ballasts (optional) as well as the container and mounting accessories.

Diagram

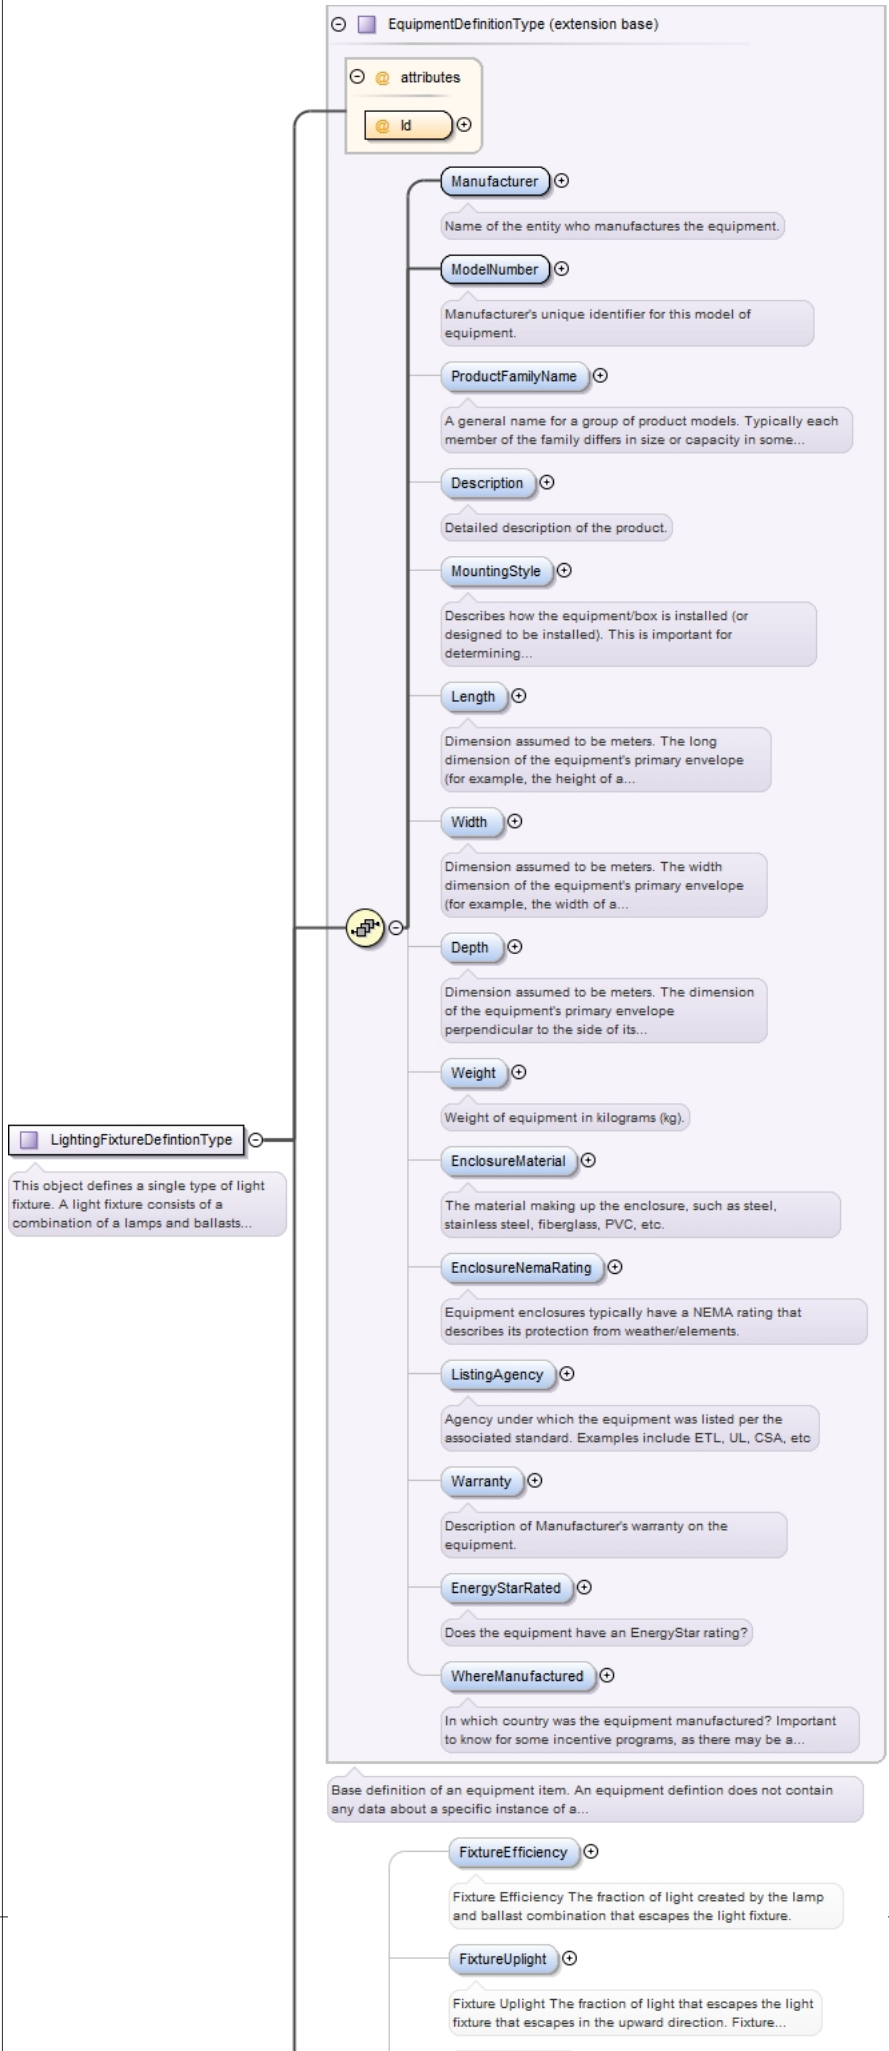
EquipmentDefinitionType (extension base)
attributes
Id
Manufacturer
Name of the entity who manufactures the equipment.
ModelNumber
Manufacturer's unique identifier for this model of equipment.
ProductFamilyName
A general name for a group of product models. Typically each member of the family differs in size or capacity in some...
Description
Detailed description of the product.
MountingStyle
Describes how the equipment/box is installed (or designed to be installed). This is important for determining...
Length
Dimension assumed to be meters. The long dimension of the equipment's primary envelope (for example, the height of a...
Width
Dimension assumed to be meters. The width dimension of the equipment's primary envelope (for example, the width of a...
Depth
Dimension assumed to be meters. The dimension of the equipment's primary envelope perpendicular to the side of its...
Weight
Weight of equipment in kilograms (kg).
EnclosureMaterial
The material making up the enclosure, such as steel, stainless steel, fiberglass, PVC, etc.
EnclosureNemaRating
Equipment enclosures typically have a NEMA rating that describes its protection from weather/elements.
ListingAgency
Agency under which the equipment was listed per the associated standard. Examples include ETL, UL, CSA, etc
Warranty
Description of Manufacturer's warranty on the equipment.
EnergyStarRated
Does the equipment have an EnergyStar rating?
WhereManufactured
In which country was the equipment manufactured? Important to know for some incentive programs, as there may be a...
Base definition of an equipment item. An equipment defintion does not contain any data about a specific instance of a...
LightingFixtureDefintionType
This object defines a single type of light fixture. A light fixture consists of a combination of a lamps and ballasts...
FixtureEfficiency
Fixture Efficiency The fraction of light created by the lamp and ballast combination that escapes the light fixture.
FixtureUplight
Fixture Uplight The fraction of light that escapes the light fixture that escapes in the upward direction. Fixture...

Type	extension of EquipmentDefinitionType
Type hierarchy	• EquipmentDefinitionType • LightingFixtureDefintionType
Used by	Element LightingSystemType/LightingFixtureDefinition
Model	Manufacturer , ModelNumber , ProductFamilyName{0,1} , Description{0,1} , MountingStyle{0,1} , Length{0,1} , Width{0,1} , Depth{0,1} , Weight{0,1} , EnclosureMaterial{0,1} , EnclosureNemaRating{0,1} , ListingAgency{0,1} , Warranty{0,1} , EnergyStarRated{0,1} , WhereManufactured{0,1} , FixtureEfficiency{0,1} , FixtureUplight{0,1} , FixtureDownlight{0,1} , FixtureIESFile* , LightingTechnology{0,1} , LampProperties{0,1} , BallastProperties{0,1}
Children	BallastProperties, Depth, Description, EnclosureMaterial, EnclosureNemaRating, EnergyStarRated, FixtureDownlight, FixtureEfficiency, FixtureIESFile, FixtureUplight, LampProperties, Length, LightingTechnology, ListingAgency, Manufacturer, ModelNumber, MountingStyle, ProductFamilyName, Warranty, Weight, WhereManufactured, Width

Attributes

QName	Type	Fixed	Default	Use
Id	xs:ID			required

Source

```
<xs:complexType name="LightingFixtureDefintionType">
  <xs:annotation>
    <xs:documentation>This object defines a single type of light fixture. A light fixture
 consists of a combination of a lamps and ballasts (optional) as well as the container and
 mounting accessories.</xs:documentation>
  </xs:annotation>
  <xs:complexContent>
    <xs:extension base="EquipmentDefinitionType">
      <xs:sequence minOccurs="1" maxOccurs="1">
        <xs:element minOccurs="0" name="FixtureEfficiency">
          <xs:annotation>
            <xs:documentation>Fixture Efficiency The fraction of light created by the lamp
 and ballast combination that escapes the light fixture.</xs:documentation>
          </xs:annotation>
          <xs:simpleType>
            <xs:restriction base="xs:float">
              <xs:minInclusive value="0"/>
              <xs:maxInclusive value="1"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element minOccurs="0" name="FixtureUplight">
          <xs:annotation>
            <xs:documentation>Fixture Uplight The fraction of light that escapes the light
 fixture that escapes in the upward direction. Fixture uplight and fixture downlight
 should sum to 1.</xs:documentation>
          </xs:annotation>
          <xs:simpleType>
            <xs:restriction base="xs:float">
              <xs:minInclusive value="0"/>
              <xs:maxInclusive value="1"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element minOccurs="0" name="FixtureDownlight">
          <xs:annotation>
            <xs:documentation>Fixture Uplight The fraction of light that escapes the light
 fixture that escapes in the downward direction. Fixture uplight and fixture downlight
 should sum to 1.</xs:documentation>
          </xs:annotation>
          <xs:simpleType>
            <xs:restriction base="xs:float">
              <xs:minInclusive value="0"/>
              <xs:maxInclusive value="1"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element maxOccurs="unbounded" minOccurs="0" name="FixtureIESFile"
 type="xs:string">
          <xs:annotation>
            <xs:documentation>This element has not been fully implemented at this
 time. The IES file is created by ____ and contains... In the future, this element may
 contain the actual IES file converted to a suitable format such as text or binary.</
xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element name="LightingTechnology" type="LightingTechnologyEnumType"
 minOccurs="0" maxOccurs="1">
          <xs:annotation>
            <xs:documentation>The type of technology that is used to create light. This is
 also a general indication of the lamp type.</xs:documentation>
```

```
          </xs:annotation>
        </xs:element>
        <xs:element name="LampProperties" type="LampPropertiesType" minOccurs="0"
 maxOccurs="1">
          <xs:annotation>
            <xs:documentation>These are common attributes of a lamp.</xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element name="BallastProperties" type="BallastPropertiesType" minOccurs="0"
 maxOccurs="1">
          <xs:annotation>
            <xs:documentation>These are attributes of the ballast. There doesn't need to
 be a ballast.</xs:documentation>
          </xs:annotation>
        </xs:element>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

Complex Type `LampPropertiesType`

Namespace	http://www.iepmodel.net
Annotations	This is a collection of common lamp attributes. Note that the lamp type is known from the LightingTypeEnum which is used in the LightingSystem element Type.

Diagram

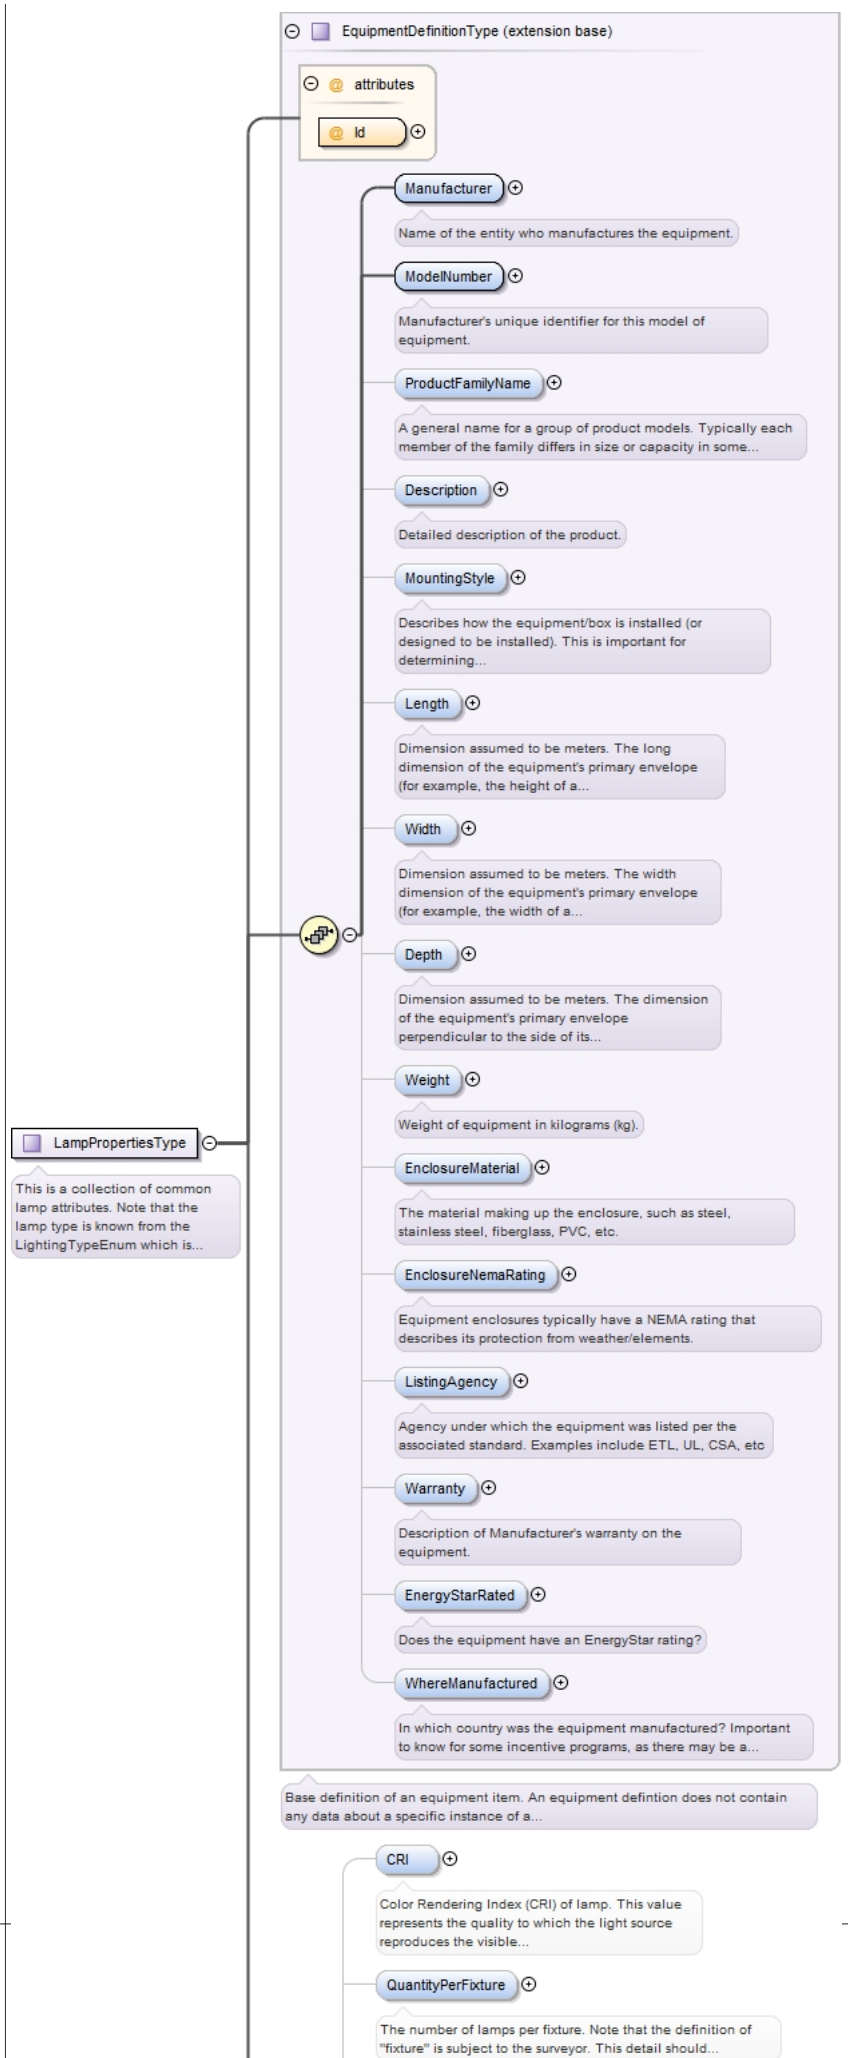
EquipmentDefinitionType (extension base)
attributes
Id
Manufacturer
Name of the entity who manufactures the equipment.
ModelNumber
Manufacturer's unique identifier for this model of equipment.
ProductFamilyName
A general name for a group of product models. Typically each member of the family differs in size or capacity in some...
Description
Detailed description of the product.
MountingStyle
Describes how the equipment/box is installed (or designed to be installed). This is important for determining...
Length
Dimension assumed to be meters. The long dimension of the equipment's primary envelope (for example, the height of a...
Width
Dimension assumed to be meters. The width dimension of the equipment's primary envelope (for example, the width of a...
Depth
Dimension assumed to be meters. The dimension of the equipment's primary envelope perpendicular to the side of its...
Weight
Weight of equipment in kilograms (kg).
EnclosureMaterial
The material making up the enclosure, such as steel, stainless steel, fiberglass, PVC, etc.
EnclosureNemaRating
Equipment enclosures typically have a NEMA rating that describes its protection from weather/elements.
ListingAgency
Agency under which the equipment was listed per the associated standard. Examples include ETL, UL, CSA, etc
Warranty
Description of Manufacturer's warranty on the equipment.
EnergyStarRated
Does the equipment have an EnergyStar rating?
WhereManufactured
In which country was the equipment manufactured? Important to know for some incentive programs, as there may be a...
Base definition of an equipment item. An equipment defintion does not contain any data about a specific instance of a...
LampPropertiesType
This is a collection of common lamp attributes. Note that the lamp type is known from the LightingTypeEnum which is...
CRI
Color Rendering Index (CRI) of lamp. This value represents the quality to which the light source reproduces the visible...
QuantityPerFixture
The number of lamps per fixture. Note that the definition of "fixture" is subject to the surveyor. This detail should...

Type	extension of EquipmentDefinitionType
Type hierarchy	• EquipmentDefinitionType • LampPropertiesType
Used by	Element LightingFixtureDefintionType/LampProperties
Model	Manufacturer , ModelNumber , ProductFamilyName{0,1} , Description{0,1} , MountingStyle{0,1} , Length{0,1} , Width{0,1} , Depth{0,1} , Weight{0,1} , EnclosureMaterial{0,1} , EnclosureNemaRating{0,1} , ListingAgency{0,1} , Warranty{0,1} , EnergyStarRated{0,1} , WhereManufactured{0,1} , CRI{0,1} , QuantityPerFixture{0,1} , WattsNominal{0,1} , ColorTemperature{0,1} , InitialLumens{0,1} , MeanLumens{0,1} , SPRatio{0,1}
Children	CRI, ColorTemperature, Depth, Description, EnclosureMaterial, EnclosureNemaRating, EnergyStarRated, InitialLumens, Length, ListingAgency, Manufacturer, MeanLumens, ModelNumber, MountingStyle, ProductFamilyName, QuantityPerFixture, SPRatio, Warranty, WattsNominal, Weight, WhereManufactured, Width

Attributes

QName	Type	Fixed	Default	Use
Id	xs:ID			required

Source

```
<xs:complexType name="LampPropertiesType">
  <xs:annotation>
    <xs:documentation>This is a collection of common lamp attributes. Note that the lamp
 type is known from the LightingTypeEnum which is used in the LightingSystem element
 Type.</xs:documentation>
  </xs:annotation>
  <xs:complexContent>
    <xs:extension base="EquipmentDefinitionType">
      <xs:sequence minOccurs="1" maxOccurs="1">
        <xs:element name="CRI" type="xs:float" minOccurs="0" maxOccurs="1">
          <xs:annotation>
            <xs:documentation>Color Rendering Index (CRI) of lamp. This value represents
 the quality to which the light source reproduces the visible light spectrum.</
xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element name="QuantityPerFixture" minOccurs="0" maxOccurs="1">
          <xs:annotation>
            <xs:documentation>The number of lamps per fixture. Note that the definition
 of "fixture" is subject to the surveyor. This detail should be described included in the
 Description element of Lighting Fixture Type.</xs:documentation>
          </xs:annotation>
          <xs:simpleType>
            <xs:restriction base="xs:int">
              <xs:minInclusive value="0"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="WattsNominal" minOccurs="0" maxOccurs="1">
          <xs:annotation>
            <xs:documentation>Nominal wattage of the lamp (value listed on lamp label
 or nameplate). Note that this doesn't represent the actual input power of a ballasted
 fixture.</xs:documentation>
          </xs:annotation>
          <xs:simpleType>
            <xs:restriction base="xs:float">
              <xs:minExclusive value="0"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="ColorTemperature" minOccurs="0" maxOccurs="1">
          <xs:annotation>
            <xs:documentation>The lamp color temperature as measured in Kelvin.</
xs:documentation>
          </xs:annotation>
          <xs:simpleType>
            <xs:restriction base="xs:float">
              <xs:minInclusive value="0"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="InitialLumens" minOccurs="0" maxOccurs="1">
          <xs:annotation>
            <xs:documentation>Light output (in Lumens) when lamp is first powered.</
xs:documentation>
          </xs:annotation>
          <xs:simpleType>
            <xs:restriction base="xs:int">
              <xs:minInclusive value="0"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
```

```
        <xs:element name="MeanLumens" minOccurs="0" maxOccurs="1">
          <xs:annotation>
            <xs:documentation>Average light output over the lifetime of the lamp.</
xs:documentation>
          </xs:annotation>
          <xs:simpleType>
            <xs:restriction base="xs:int">
              <xs:minInclusive value="0"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="SPRatio" minOccurs="0" maxOccurs="1">
          <xs:annotation>
            <xs:documentation>SP Ratio.</xs:documentation>
          </xs:annotation>
          <xs:simpleType>
            <xs:restriction base="xs:float">
              <xs:minInclusive value="0"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

Complex Type `BallastPropertiesType`

Namespace	http://www.iepmodel.net
Annotations	A set of typical attributes associated with ballasts.

Diagram

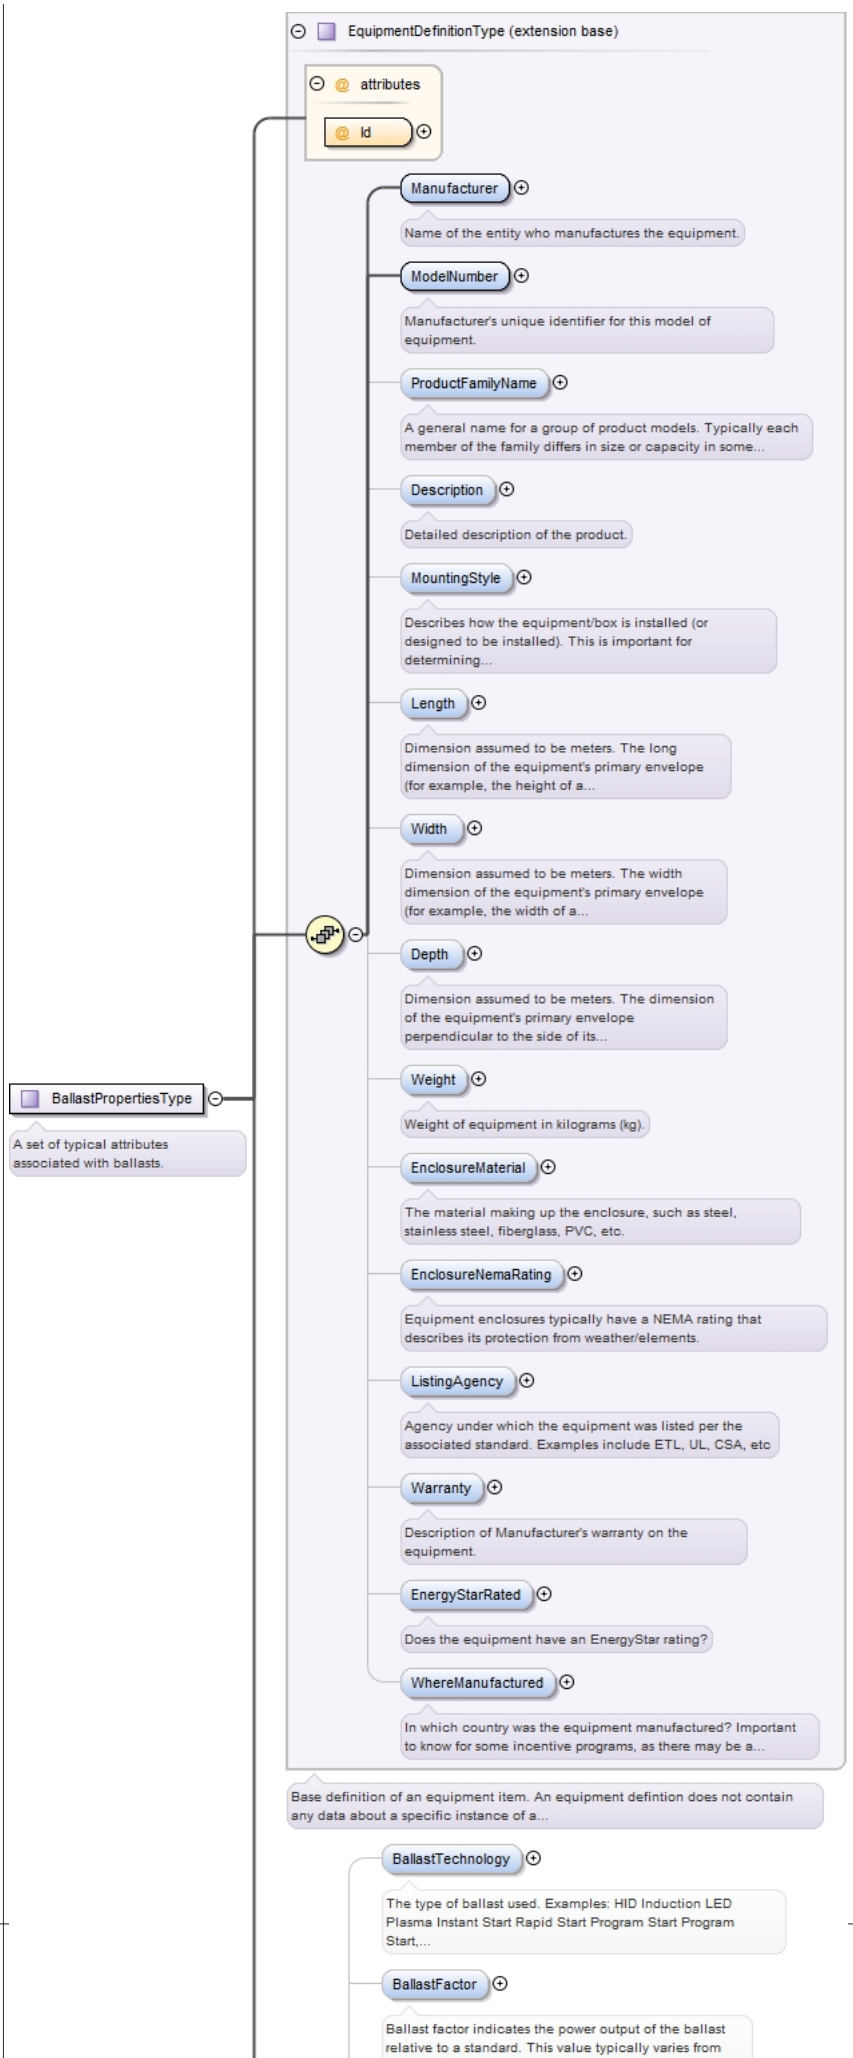
EquipmentDefinitionType (extension base)
attributes
Id
Manufacturer
Name of the entity who manufactures the equipment.
ModelNumber
Manufacturer's unique identifier for this model of equipment.
ProductFamilyName
A general name for a group of product models. Typically each member of the family differs in size or capacity in some...
Description
Detailed description of the product.
MountingStyle
Describes how the equipment/box is installed (or designed to be installed). This is important for determining...
Length
Dimension assumed to be meters. The long dimension of the equipment's primary envelope (for example, the height of a...
Width
Dimension assumed to be meters. The width dimension of the equipment's primary envelope (for example, the width of a...
Depth
Dimension assumed to be meters. The dimension of the equipment's primary envelope perpendicular to the side of its...
Weight
Weight of equipment in kilograms (kg).
EnclosureMaterial
The material making up the enclosure, such as steel, stainless steel, fiberglass, PVC, etc.
EnclosureNemaRating
Equipment enclosures typically have a NEMA rating that describes its protection from weather/elements.
ListingAgency
Agency under which the equipment was listed per the associated standard. Examples include ETL, UL, CSA, etc
Warranty
Description of Manufacturer's warranty on the equipment.
EnergyStarRated
Does the equipment have an EnergyStar rating?
WhereManufactured
In which country was the equipment manufactured? Important to know for some incentive programs, as there may be a...
Base definition of an equipment item. An equipment defintion does not contain any data about a specific instance of a...
BallastPropertiesType
A set of typical attributes associated with ballasts.
BallastTechnology
The type of ballast used. Examples: HID Induction LED Plasma Instant Start Rapid Start Program Start Program Start,...
BallastFactor
Ballast factor indicates the power output of the ballast relative to a standard. This value typically varies from

Type	extension of EquipmentDefinitionType
Type hierarchy	• EquipmentDefinitionType • BallastPropertiesType
Used by	Element LightingFixtureDefintionType/BallastProperties
Model	Manufacturer , ModelNumber , ProductFamilyName{0,1} , Description{0,1} , MountingStyle{0,1} , Length{0,1} , Width{0,1} , Depth{0,1} , Weight{0,1} , EnclosureMaterial{0,1} , EnclosureNemaRating{0,1} , ListingAgency{0,1} , Warranty{0,1} , EnergyStarRated{0,1} , WhereManufactured{0,1} , BallastTechnology{0,1} , BallastFactor{0,1} , QuantityPerFixture{0,1} , PowerFactor{0,1} , THD{0,1}
Children	BallastFactor, BallastTechnology, Depth, Description, EnclosureMaterial, EnclosureNemaRating, EnergyStarRated, Length, ListingAgency, Manufacturer, ModelNumber, MountingStyle, PowerFactor, ProductFamilyName, QuantityPerFixture, THD, Warranty, Weight, WhereManufactured, Width

Attributes

QName	Type	Fixed	Default	Use
Id	xs:ID			required

Source

```
<xs:complexType name="BallastPropertiesType">
  <xs:annotation>
    <xs:documentation>A set of typical attributes associated with ballasts.</
xs:documentation>
  </xs:annotation>
  <xs:complexContent>
    <xs:extension base="EquipmentDefinitionType">
      <xs:sequence minOccurs="1">
        <xs:element name="BallastTechnology" type="xs:string" minOccurs="0" maxOccurs="1">
          <xs:annotation>
            <xs:documentation>The type of ballast used. Examples: HID Induction LED Plasma
 Instant Start Rapid Start Program Start Program Start, Dimming Program Start, Bi-Level
 Program Start, Multi-Level</xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element name="BallastFactor" minOccurs="0" maxOccurs="1">
          <xs:annotation>
            <xs:documentation>Ballast factor indicates the power output of the
 ballast relative to a standard. This value typically varies from 0.5 to 1.5 and is
 typically falls 0.75 to 1.2. A value of zero may indicate that no ballast is used.</
xs:documentation>
          </xs:annotation>
          <xs:simpleType>
            <xs:restriction base="xs:float">
              <xs:minInclusive value="0"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="QuantityPerFixture" minOccurs="0" maxOccurs="1">
          <xs:annotation>
            <xs:documentation>The number of ballasts per fixture. Note that the definition
 of "fixture" is subject to the surveyor. This detail should be described included in the
 Description element of Lighting System.</xs:documentation>
          </xs:annotation>
          <xs:simpleType>
            <xs:restriction base="xs:int">
              <xs:minInclusive value="0"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="PowerFactor" minOccurs="0" maxOccurs="1">
          <xs:annotation>
            <xs:documentation>This is the power factor of the ballast.</xs:documentation>
          </xs:annotation>
          <xs:simpleType>
            <xs:restriction base="xs:float">
              <xs:minInclusive value="0"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element minOccurs="0" name="THD">
          <xs:annotation>
            <xs:documentation>Total Harmonic Distortion</xs:documentation>
          </xs:annotation>
          <xs:simpleType>
            <xs:restriction base="xs:float">
              <xs:minInclusive value="0"/>
              <xs:maxInclusive value="1"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
      </xs:sequence>
```

```
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

Complex Type `LightingZoneType`

Namespace	http://www.iepmodel.net
Annotations	This object defines the properties of the space/zone that is illuminated. This is where some details of a lighting survey are contained, such as light leve, lighting planes and space use type.
Diagram	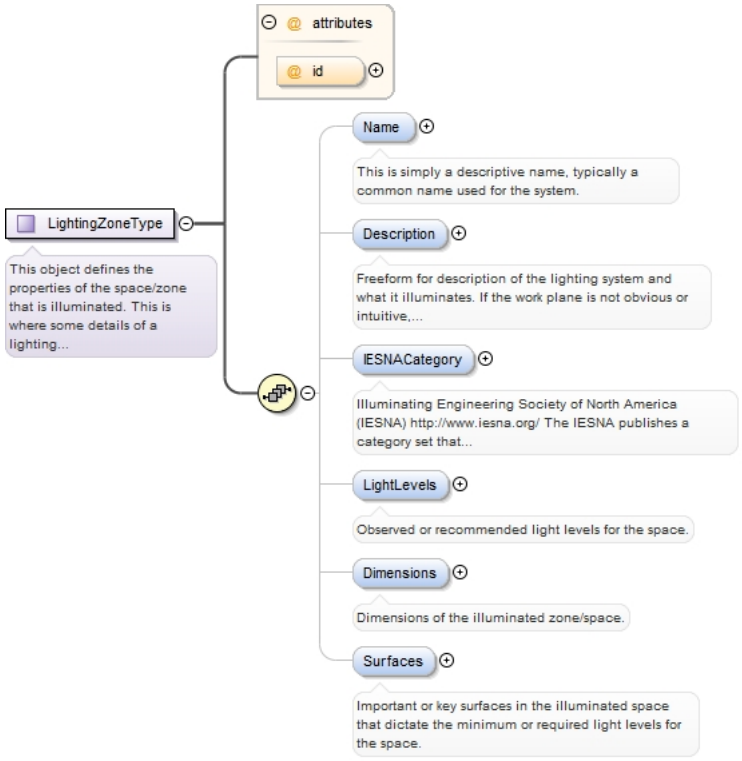

Used by	Element LightingSystemType/LightingZone
Model	Name{0,1} , Description{0,1} , IESNACategory{0,1} , LightLevels{0,1} , Dimensions{0,1} , Surfaces{0,1}
Children	Description, Dimensions, IESNACategory, LightLevels, Name, Surfaces

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			optional

Source

```
<xs:complexType name="LightingZoneType">
  <xs:annotation>
    <xs:documentation>This object defines the properties of the space/zone that is
 illuminated. This is where some details of a lighting survey are contained, such as light
 leve, lighting planes and space use type.</xs:documentation>
  </xs:annotation>
  <xs:sequence minOccurs="1">
    <xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is simply a descriptive name, typically a common name used
 for the system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Freeform for description of the lighting system and what it
 illuminates. If the work plane is not obvious or intuitive, it should be defined here.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="IESNACategory" type="xs:string">
      <xs:annotation>
        <xs:documentation>Illuminating Engineering Society of North America (IESNA)
 http://www.iesna.org/ The IESNA publishes a category set that describes the use case for
 lighting in a space. This listing can be found here:</xs:documentation>
      </xs:annotation>
    </xs:element>
```

```
    <xs:element minOccurs="0" name="LightLevels" type="xs:string">
      <xs:annotation>
        <xs:documentation>Observed or recommended light levels for the space.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="Dimensions" type="xs:string">
      <xs:annotation>
        <xs:documentation>Dimensions of the illuminated zone/space.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="Surfaces" type="xs:string">
      <xs:annotation>
        <xs:documentation>Important or key surfaces in the illuminated space that dictate
 the minimum or required light levels for the space.</xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
  <xs:attribute name="id" type="xs:ID"/>
</xs:complexType>
```

Complex Type `LightingControlGroupType`

Namespace	http://www.iepmodel.net
Annotations	`This object defines a group of light fixtures and the control/operating parameters of that group of fixtures. System properties are contained here.`
Diagram	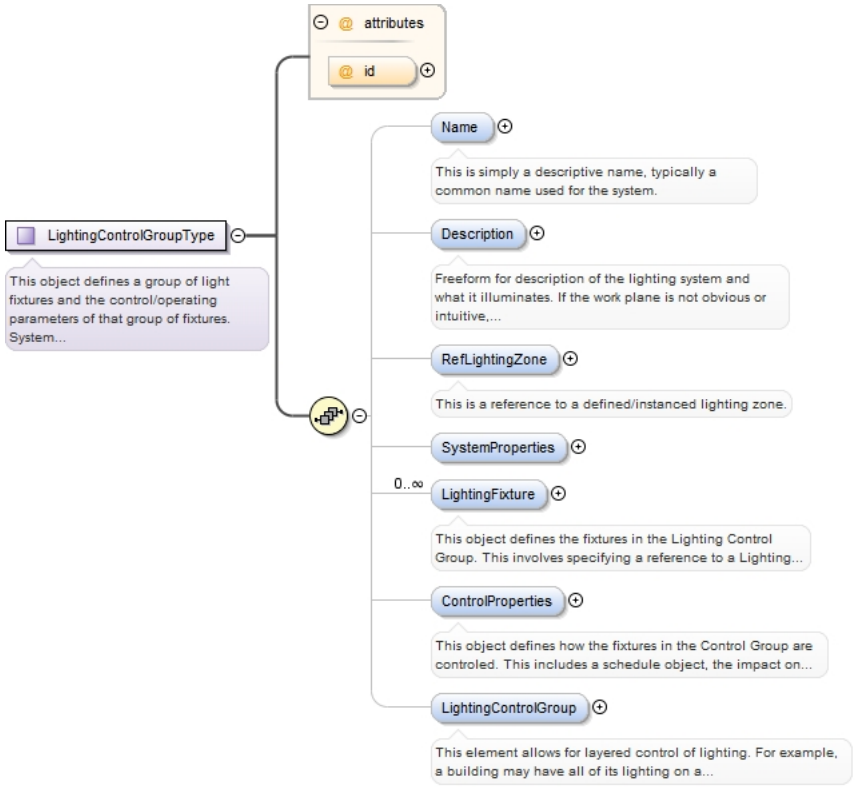
Used by	Elements: LightingControlGroupType/LightingControlGroup, LightingSystemType/LightingControlGroup
Model	Name{0,1} , Description{0,1} , RefLightingZone{0,1} , SystemProperties{0,1} , LightingFixture* , ControlProperties{0,1} , LightingControlGroup{0,1}
Children	ControlProperties, Description, LightingControlGroup, LightingFixture, Name, RefLightingZone, SystemProperties

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			optional

Source

```
<xs:complexType name="LightingControlGroupType">
  <xs:annotation>
    <xs:documentation>This object defines a group of light fixtures and the control/
operating parameters of that group of fixtures. System properties are contained here.</
xs:documentation>
  </xs:annotation>
  <xs:sequence>
```

```
    <xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is simply a descriptive name, typically a common name used
 for the system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Freeform for description of the lighting system and what it
 illuminates. If the work plane is not obvious or intuitive, it should be defined here.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="1" minOccurs="0" name="RefLightingZone" type="xs:IDREF">
      <xs:annotation>
        <xs:documentation>This is a reference to a defined/instanced lighting zone.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="SystemProperties" type="CommonSystemPropertiesType"/>
    <xs:element maxOccurs="unbounded" minOccurs="0" name="LightingFixture"
 type="LightingFixtureGroupType">
      <xs:annotation>
        <xs:documentation>This object defines the fixtures in the Lighting Control Group.
 This involves specifying a reference to a Lighting Fixture Type defined in the Lighting
 System and a quantity of the Fixture Type.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="ControlProperties" type="LightingControlMethodType" minOccurs="0">
      <xs:annotation>
        <xs:documentation>This object defines how the fixtures in the Control Group are
 controled. This includes a schedule object, the impact on the operating hours if an
 automatic control type is defined, the way in which the fixtures are controled (auto,
 manual, etc.), and the switching method (the way that the light output is modulated -
 dimming, on/off, bi-level...).</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="LightingControlGroup" type="LightingControlGroupType">
      <xs:annotation>
        <xs:documentation>This element allows for layered control of lighting. For
 example, a building may have all of its lighting on a timeclock that turns off power to
 all of the lighting system at night. In addition, the light fixtures in an open office
 area may be manually switched. The light fixtures in another exterior office are may
 be on an occupancy and/or daylight sensor. In this example, some light fixtures have
 multiple layers of control.</xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
  <xs:attribute name="id" type="xs:ID"/>
</xs:complexType>
```

Complex Type `LightingFixtureGroupType`

Namespace	http://www.iepmodel.net
Annotations	This object defines a type of light fixture and the quantity of them.

Diagram	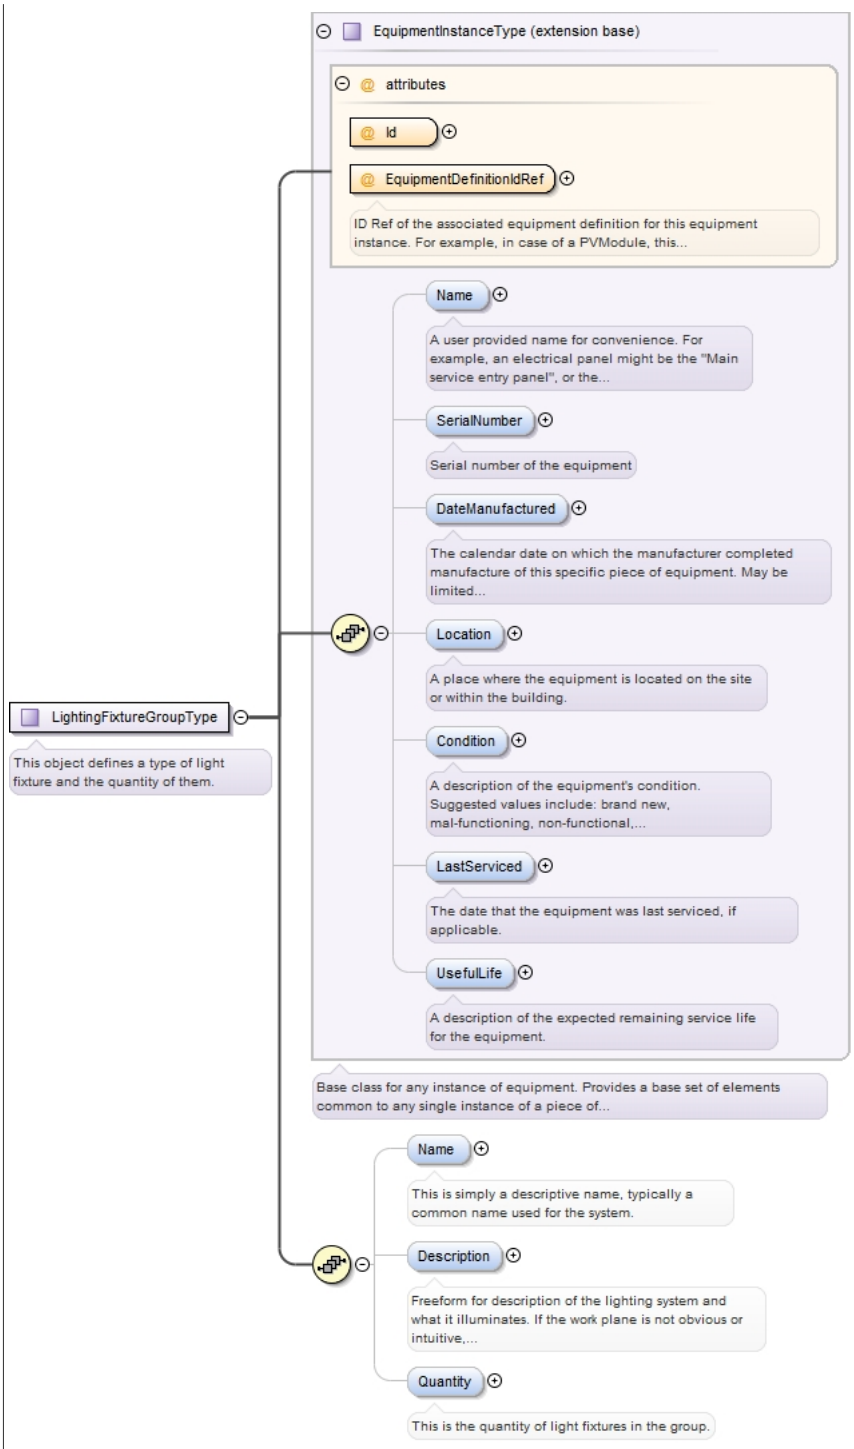
Type	extension of EquipmentInstanceType
Type hierarchy	• EquipmentInstanceType • LightingFixtureGroupType
Used by	Element LightingControlGroupType/LightingFixture
Model	Name{0,1} , SerialNumber{0,1} , DateManufactured{0,1} , Location{0,1} , Condition{0,1} , LastServiced{0,1} , UsefulLife{0,1} , Name{0,1} , Description{0,1} , Quantity{0,1}
Children	Condition, DateManufactured, Description, LastServiced, Location, Name, Quantity, SerialNumber, UsefulLife
Attributes	**QName** **Type** **Fixed** **Default** **Use** **EquipmentDefinitionIdRef** IDREF required ID Ref of the associated equipment definition for this equipment instance. For example, in case of a PVModule, this would be the ID

	QName	Type	Fixed	Default	Use
		of the PvModuleDefinition element that describes this particular PV module instance.			
	Id	xs:ID			required

Source

```
<xs:complexType name="LightingFixtureGroupType">
  <xs:annotation>
    <xs:documentation>This object defines a type of light fixture and the quantity of
 them.</xs:documentation>
  </xs:annotation>
  <xs:complexContent>
    <xs:extension base="EquipmentInstanceType">
      <xs:sequence>
        <xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">
          <xs:annotation>
            <xs:documentation>This is simply a descriptive name, typically a common name
 used for the system.</xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1">
          <xs:annotation>
            <xs:documentation>Freeform for description of the lighting system and what it
 illuminates. If the work plane is not obvious or intuitive, it should be defined here.</
xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element minOccurs="0" name="Quantity">
          <xs:annotation>
            <xs:documentation>This is the quantity of light fixtures in the group.</
xs:documentation>
          </xs:annotation>
          <xs:simpleType>
            <xs:restriction base="xs:int">
              <xs:minInclusive value="0"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

Complex Type `LightingControlMethodType`

Namespace	http://www.iepmodel.net
Annotations	This object defines the way in which a group of light fixtures is controled.

Diagram	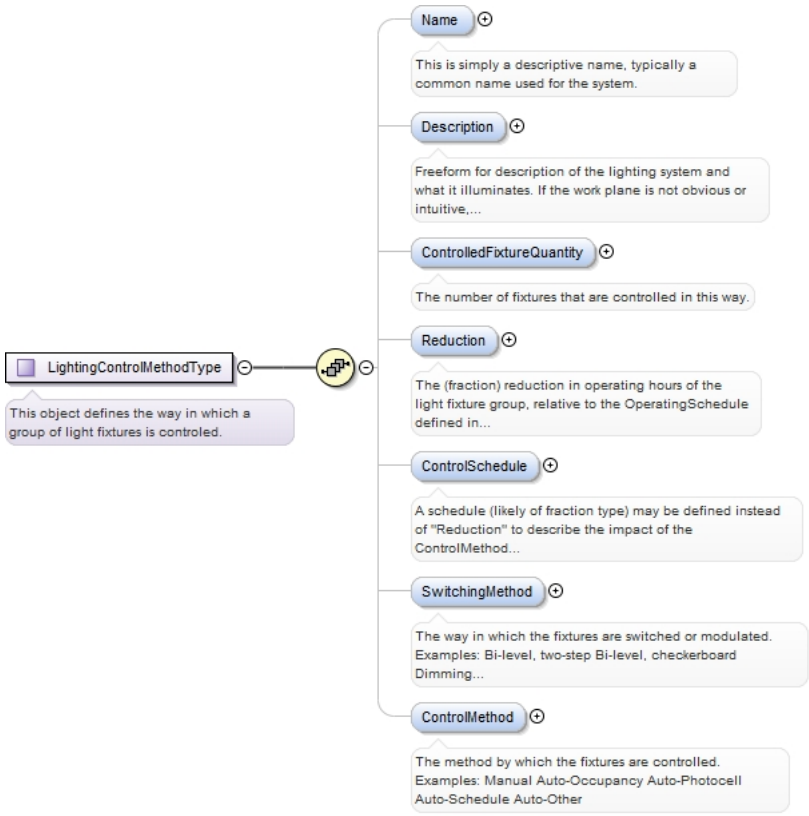
Used by	Element LightingControlGroupType/ControlProperties
Model	Name{0,1} , Description{0,1} , ControlledFixtureQuantity{0,1} , Reduction{0,1} , ControlSchedule{0,1} , SwitchingMethod{0,1} , ControlMethod{0,1}
Children	ControlMethod, ControlSchedule, ControlledFixtureQuantity, Description, Name, Reduction, SwitchingMethod

Source	`<xs:complexType name="LightingControlMethodType">`
	`<xs:annotation>`
	`<xs:documentation>This object defines the way in which a group of light fixtures is controled.</xs:documentation>`
	`</xs:annotation>`
	`<xs:sequence>`
	`<xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">`
	`<xs:annotation>`
	`<xs:documentation>This is simply a descriptive name, typically a common name used for the system.</xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`
	`<xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1">`
	`<xs:annotation>`
	`<xs:documentation>Freeform for description of the lighting system and what it illuminates. If the work plane is not obvious or intuitive, it should be defined here.</xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`
	`<xs:element minOccurs="0" name="ControlledFixtureQuantity">`
	`<xs:annotation>`
	`<xs:documentation>The number of fixtures that are controlled in this way.</xs:documentation>`
	`</xs:annotation>`
	`<xs:simpleType>`
	`<xs:restriction base="xs:int">`
	`<xs:minInclusive value="0"/>`
	`</xs:restriction>`
	`</xs:simpleType>`
	`</xs:element>`
	`<xs:element minOccurs="0" name="Reduction">`
	`<xs:annotation>`
	`<xs:documentation>The (fraction) reduction in operating hours of the light fixture group, relative to the OperatingSchedule defined in SystemProperties, that results from the ControlMethod and SwitchingMethod.</xs:documentation>`
	`</xs:annotation>`
	`<xs:simpleType>`
	`<xs:restriction base="xs:float">`

```
          <xs:minInclusive value="0"/>
          <xs:maxInclusive value="1"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element minOccurs="0" name="ControlSchedule" type="xs:IDREF">
      <xs:annotation>
        <xs:documentation>A schedule (likely of fraction type) may be defined instead
 of "Reduction" to describe the impact of the ControlMethod and SwitchingMethod on the
 operation/operating-hours of the Fixtures.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="SwitchingMethod" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>The way in which the fixtures are switched or modulated.
 Examples: Bi-level, two-step Bi-level, checkerboard Dimming Three Position Switch On/Off
 Other</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="ControlMethod" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>The method by which the fixtures are controlled. Examples:
 Manual Auto-Occupancy Auto-Photocell Auto-Schedule Auto-Other</xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

Complex Type PvSystemBasicType

Namespace	http://www.iepmodel.net
Diagram	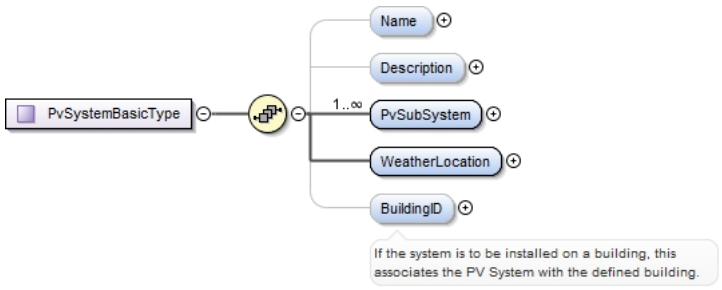
Used by	Elements ProjectType/ExistingPvSystem/Basic, PvSystemBasic, SystemChoiceType/PV/Basic
Model	Name{0,1} , Description{0,1} , PvSubSystem+ , WeatherLocation , BuildingID{0,1}
Children	BuildingID, Description, Name, PvSubSystem, WeatherLocation
Source	

```
<xs:complexType name="PvSystemBasicType">
  <xs:sequence>
    <xs:element minOccurs="0" name="Name" type="xs:string" maxOccurs="1"/>
    <xs:element minOccurs="0" name="Description" type="xs:string" maxOccurs="1"/>
    <xs:element maxOccurs="unbounded" name="PvSubSystem" type="PvSubSystemType"
 minOccurs="1"/>
    <xs:element name="WeatherLocation" type="ClimateDataType" maxOccurs="1" minOccurs="1"/
>
    <xs:element minOccurs="0" name="BuildingID" type="xs:IDREF" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>If the system is to be installed on a building, this associates
 the PV System with the defined building.</xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

Complex Type PvSubSystemType

Namespace	http://www.iepmodel.net
Annotations	Use in PvSystemBasic. A portion of a PV system that shares a common solar orientation for the purpose of modeling its potential output.

Diagram	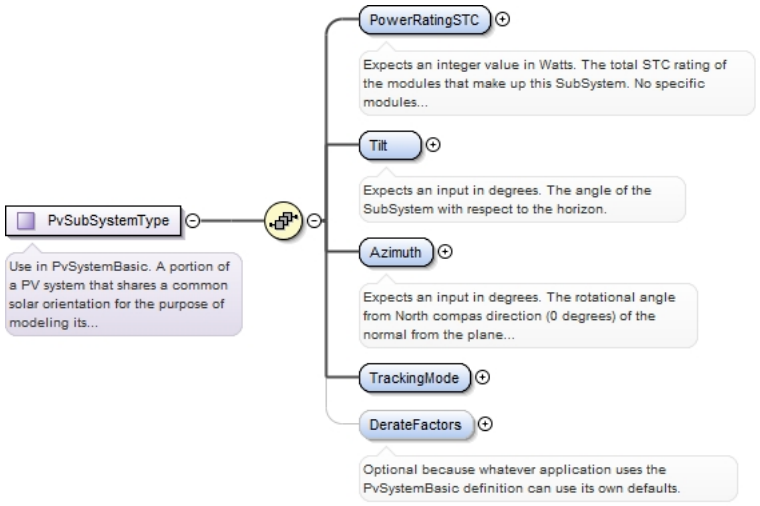
Used by	Element PvSystemBasicType/PvSubSystem
Model	PowerRatingSTC , Tilt , Azimuth , TrackingMode , DerateFactors{0,1}
Children	Azimuth, DerateFactors, PowerRatingSTC, Tilt, TrackingMode

Source	`<xs:complexType name="PvSubSystemType">`
	`  <xs:annotation>`
	`  <xs:documentation>Use in PvSystemBasic. A portion of a PV system that shares a common solar orientation for the purpose of modeling its potential output.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:sequence>`
	`  <xs:element name="PowerRatingSTC" type="xs:integer" maxOccurs="1" minOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>Expects an integer value in Watts. The total STC rating of the modules that make up this SubSystem. No specific modules or quantities need be defined.</xs:documentation>`
	`  </xs:annotation>`
	`  </xs:element>`
	`  <xs:element name="Tilt" type="xs:double" maxOccurs="1" minOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>Expects an input in degrees. The angle of the SubSystem with respect to the horizon.</xs:documentation>`
	`  </xs:annotation>`
	`  </xs:element>`
	`  <xs:element name="Azimuth" type="xs:double" maxOccurs="1" minOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>Expects an input in degrees. The rotational angle from North compas direction (0 degrees) of the normal from the plane defining the SubSystem.</xs:documentation>`
	`  </xs:annotation>`
	`  </xs:element>`
	`  <xs:element name="TrackingMode" type="TrackingModeEnumType" maxOccurs="1" minOccurs="1"/>`
	`  <xs:element name="DerateFactors" type="DerateFactorsType" minOccurs="0" maxOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>Optional because whatever application uses the PvSystemBasic definition can use its own defaults.</xs:documentation>`
	`  </xs:annotation>`
	`  </xs:element>`
	`  </xs:sequence>`
	`</xs:complexType>`

Complex Type `DerateFactorsType`

Namespace	http://www.iepmodel.net
Annotations	Use in PvSystemBasic. A set of environmental or component efficiency effects causing some reduction of ideal system performance. Default values correspond to NREL's PVWatts default values.

Diagram	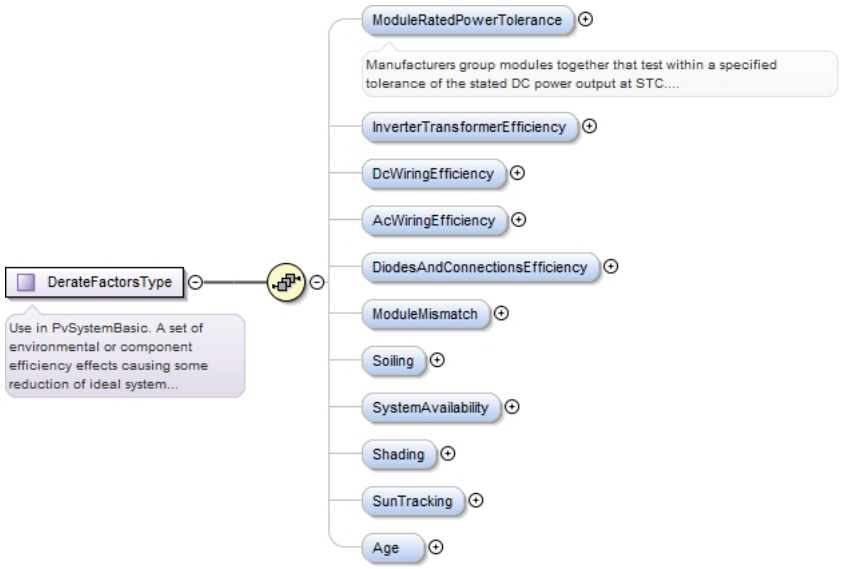
Used by	Element PvSubSystemType/DerateFactors
Model	ModuleRatedPowerTolerance{0,1} , InverterTransformerEfficiency{0,1} , DcWiringEfficiency{0,1} , AcWiringEfficiency{0,1} , DiodesAndConnectionsEfficiency{0,1} , ModuleMismatch{0,1} , Soiling{0,1} , SystemAvailability{0,1} , Shading{0,1} , SunTracking{0,1} , Age{0,1}
Children	AcWiringEfficiency, Age, DcWiringEfficiency, DiodesAndConnectionsEfficiency, InverterTransformerEfficiency, ModuleMismatch, ModuleRatedPowerTolerance, Shading, Soiling, SunTracking, SystemAvailability
Source	

```
<xs:complexType name="DerateFactorsType">
  <xs:annotation>
    <xs:documentation>Use in PvSystemBasic. A set of environmental or component efficiency
 effects causing some reduction of ideal system performance. Default values correspond to
 NREL's PVWatts default values.</xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element default="0.95" minOccurs="0" name="ModuleRatedPowerTolerance"
 type="xs:double">
      <xs:annotation>
        <xs:documentation>Manufacturers group modules together that test within a
 specified tolerance of the stated DC power output at STC. Depending on how they define
 the group, the actual expected power of the modules may be lower than the STC ratings.
 For example, if the module is rated at 200Wstc, but it has a lower power tolerance of
 -5%, then the assumption should be made that the modules will only output 190Wstc, and
 have a derate of 0.95. If the module's lower tolerance is 0%, then the derate would be
 1.0.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element default="0.92" name="InverterTransformerEfficiency" type="xs:double"
 maxOccurs="1" minOccurs="0"/>
    <xs:element default="0.98" name="DcWiringEfficiency" type="xs:double" maxOccurs="1"
 minOccurs="0"/>
    <xs:element default="0.99" name="AcWiringEfficiency" type="xs:double" maxOccurs="1"
 minOccurs="0"/>
    <xs:element default="0.995" name="DiodesAndConnectionsEfficiency" type="xs:double"
 maxOccurs="1" minOccurs="0"/>
    <xs:element name="ModuleMismatch" default="0.98" type="xs:double" maxOccurs="1"
 minOccurs="0"/>
    <xs:element default="0.95" name="Soiling" type="xs:double" maxOccurs="1"
 minOccurs="0"/>
    <xs:element default="0.98" name="SystemAvailability" type="xs:double" maxOccurs="1"
 minOccurs="0"/>
    <xs:element name="Shading" default="1.0" type="xs:double" maxOccurs="1" minOccurs="0"/
>
    <xs:element default="1.0" name="SunTracking" type="xs:double" form="qualified"
 maxOccurs="1" minOccurs="0"/>
    <xs:element default="1.0" name="Age" type="xs:double" maxOccurs="1" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
```

Complex Type `ClimateDataType`

Namespace	http://www.iepmodel.net
Annotations	NEEDS REVIEW.

	Use in PvSystemBasic. Idea here is to communicate what weather data to use in an analysis (e.g. TMY data). The weather files are associated with specific locations. Unsure as to whether this should be included, however, since this schema could be used to incorporate the entire input required to run an analysis (e.g. PVWatts or other), we are including it.
Diagram	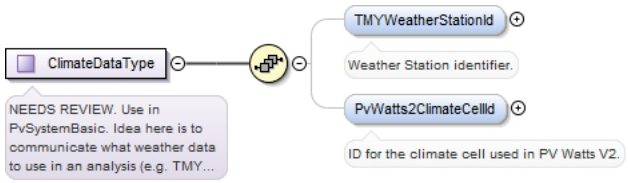
Used by	Element PvSystemBasicType/WeatherLocation
Model	TMYWeatherStationId{0,1} , PvWatts2ClimateCellId{0,1}
Children	PvWatts2ClimateCellId, TMYWeatherStationId
Source	<xs:complexType name="ClimateDataType"> <xs:annotation> <xs:documentation>NEEDS REVIEW. Use in PvSystemBasic. Idea here is to communicate what weather data to use in an analysis (e.g. TMY data). The weather files are associated with specific locations. Unsure as to whether this should be included, however, since this schema could be used to incorporate the entire input required to run an analysis (e.g. PVWatts or other), we are including it.</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="TMYWeatherStationId" type="xs:string" minOccurs="0"> <xs:annotation> <xs:documentation>Weather Station identifier.</xs:documentation> </xs:annotation> </xs:element> <xs:element minOccurs="0" name="PvWatts2ClimateCellId" type="xs:string"> <xs:annotation> <xs:documentation>ID for the climate cell used in PV Watts V2.</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType>

Complex Type PvDesignType

Namespace	http://www.iepmodel.net
Annotations	Description of a PV System Design.

Diagram	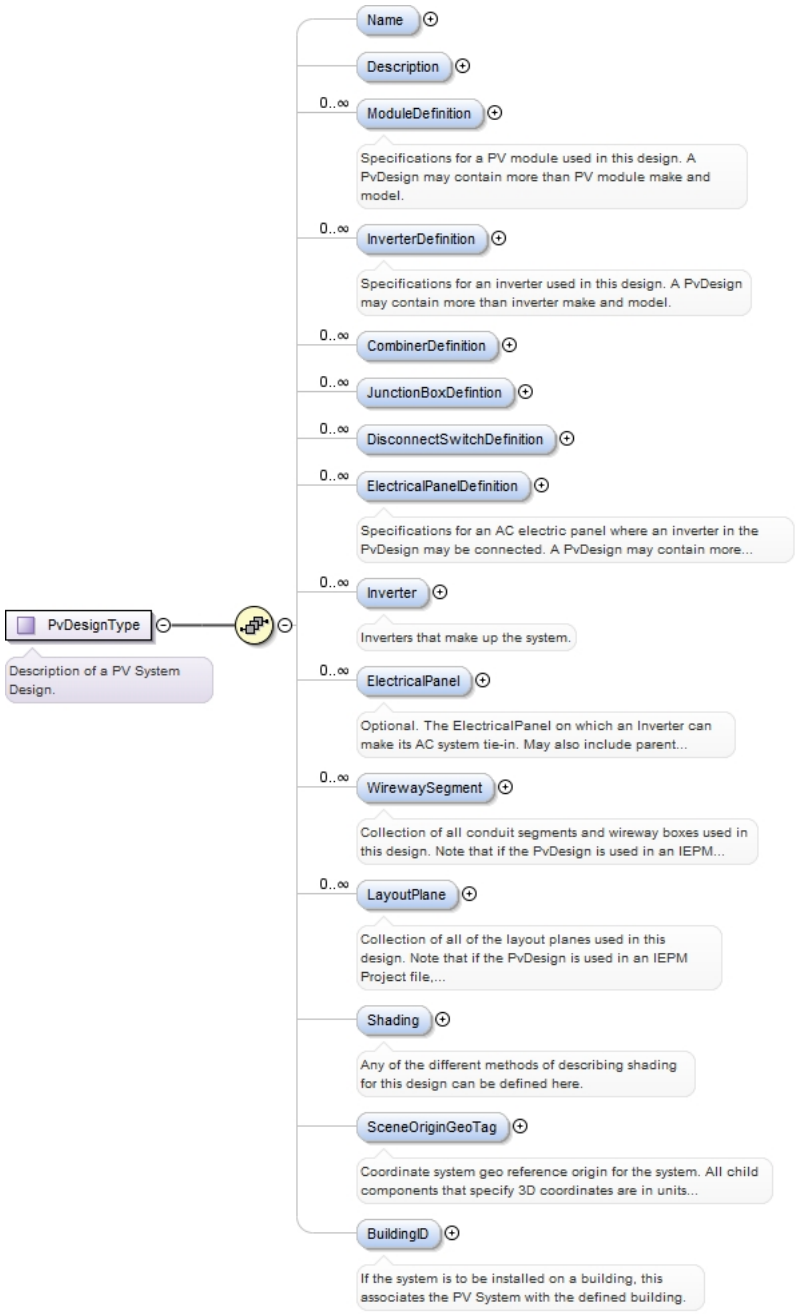
Used by	Elements ProjectType/ExistingPvSystem/Complex, PvDesign, SystemChoiceType/PV/Complex
Model	Name{0,1} , Description{0,1} , ModuleDefinition* , InverterDefinition* , CombinerDefinition* , JunctionBoxDefintion* , DisconnectSwitchDefinition* , ElectricalPanelDefinition* , Inverter* , ElectricalPanel* , WirewaySegment* , LayoutPlane* , Shading{0,1} , SceneOriginGeoTag{0,1} , BuildingID{0,1}
Children	BuildingID, CombinerDefinition, Description, DisconnectSwitchDefinition, ElectricalPanel, ElectricalPanelDefinition, Inverter, InverterDefinition, JunctionBoxDefintion, LayoutPlane, ModuleDefinition, Name, SceneOriginGeoTag, Shading, WirewaySegment
Source	<xs:complexType name="PvDesignType"> <xs:annotation> <xs:documentation>Description of a PV System Design.</xs:documentation> </xs:annotation> <xs:sequence> <xs:element minOccurs="0" name="Name" type="xs:string" maxOccurs="1"/> <xs:element minOccurs="0" name="Description" type="xs:string" maxOccurs="1"/> <xs:element name="ModuleDefinition" type="PvModuleDefinitionType" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>Specifications for a PV module used in this design. A PvDesign may contain more than PV module make and model.</xs:documentation> </xs:annotation>

```
    </xs:element>
    <xs:element name="InverterDefinition" type="InverterDefinitionType" minOccurs="0"
maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>Specifications for an inverter used in this design. A PvDesign
may contain more than inverter make and model.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="unbounded" minOccurs="0" name="CombinerDefinition"
type="CombinerDefinitionType"/>
    <xs:element maxOccurs="unbounded" minOccurs="0" name="JunctionBoxDefintion"
type="JunctionBoxDefinitionType"/>
    <xs:element maxOccurs="unbounded" minOccurs="0" name="DisconnectSwitchDefinition"
type="DisconnectSwitchDefinitionType"/>
    <xs:element maxOccurs="unbounded" minOccurs="0" name="ElectricalPanelDefinition"
type="ElectricalPanelDefinitionType">
      <xs:annotation>
        <xs:documentation>Specifications for an AC electric panel where an inverter in the
PvDesign may be connected. A PvDesign may contain more than one AC electric panel make
and model (each inverter can connect to different equipment).</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Inverter" type="InverterType" minOccurs="0" maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>Inverters that make up the system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="unbounded" minOccurs="0" name="ElectricalPanel"
type="ElectricalPanelType">
      <xs:annotation>
        <xs:documentation>Optional. The ElectricalPanel on which an Inverter can make
its AC system tie-in. May also include parent ElectricalPanels. Use of this element is
somewhat dependent on what XSDs are used. This element is always used to describe a new
electrical panel which will be added to a site to accommodate the addition of a PV system
(perhaps serving as an AC Combiner). If PvDesign xml document is used independently from
a broader Project XML document, then this element can also be used to define existing
ElectricalPanel(s) where the PV system may be interconnected. This element is not
required when the PvDesign is used within a broader Project XML instance that contains an
ExistingElectricalDitributionHierarchy and the PvDesign's Inverter(s) are to be connected
to the ElectricalPanel(s) defined there. NOTE: The EquipmentWhereConnectedIdRef within
the Inverter's AcCircuitConnection should reference either this element, or a similar
ElectricalPanel instance within an ExistingElectricalDistributionHierarchy element of a
Project.xml. NOTE: A PvDesign cannot be used within an ElectricalDistributionHierarchy
element. It can only be associated with an ElectricalDistributionHierarchy via
EquipmentWhereConnectedIdRef attribute of the Inverter's AcTie-InCircuitConnection
element.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="WirewaySegment" type="WirewaySegmentType" minOccurs="0"
maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>Collection of all conduit segments and wireway boxes used
in this design. Note that if the PvDesign is used in an IEPM Project file, this
collection of Wireway Segments does not reference any ExistingWirewaySegments or
ProposedWirewaySegments defined in the Site element. Those elements are used for site
survey data collection, not system definition.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="LayoutPlane" type="LayoutPlaneType" minOccurs="0"
maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>Collection of all of the layout planes used in this design. Note
that if the PvDesign is used in an IEPM Project file, this collection of LayoutPlanes
does not reference any LayoutPlane defined in the Site-Building-Envelope-Roof element.
LayoutPlane element(s) defined for a Roof element can be used in a PvDesign as the plane
on which modules are installed. The PvDesign would include those LayoutPlane elements
here, rather than referencing them as a part of the Building's Roof inside the Project's
Site element. The LayoutPlane elements in the Roof are primarily used for site survey
data collection, not system definition.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Shading" type="ShadingMeasurementsType" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Any of the different methods of describing shading for this
design can be defined here.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="SceneOriginGeoTag" type="GeoLocationType" minOccurs="0"
maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Coordinate system geo reference origin for the system. All child
components that specify 3D coordinates are in units meters relative to this location. The
3D coordinate of this origin is (0,0,0).</xs:documentation>
```

```
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="BuildingID" type="xs:IDREF" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>If the system is to be installed on a building, this associates
 the PV System with the defined building.</xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

Complex Type `PvModuleDefinitionType`

Namespace	http://www.iepmodel.net
Annotations	`Definition of a PV module.`

Diagram

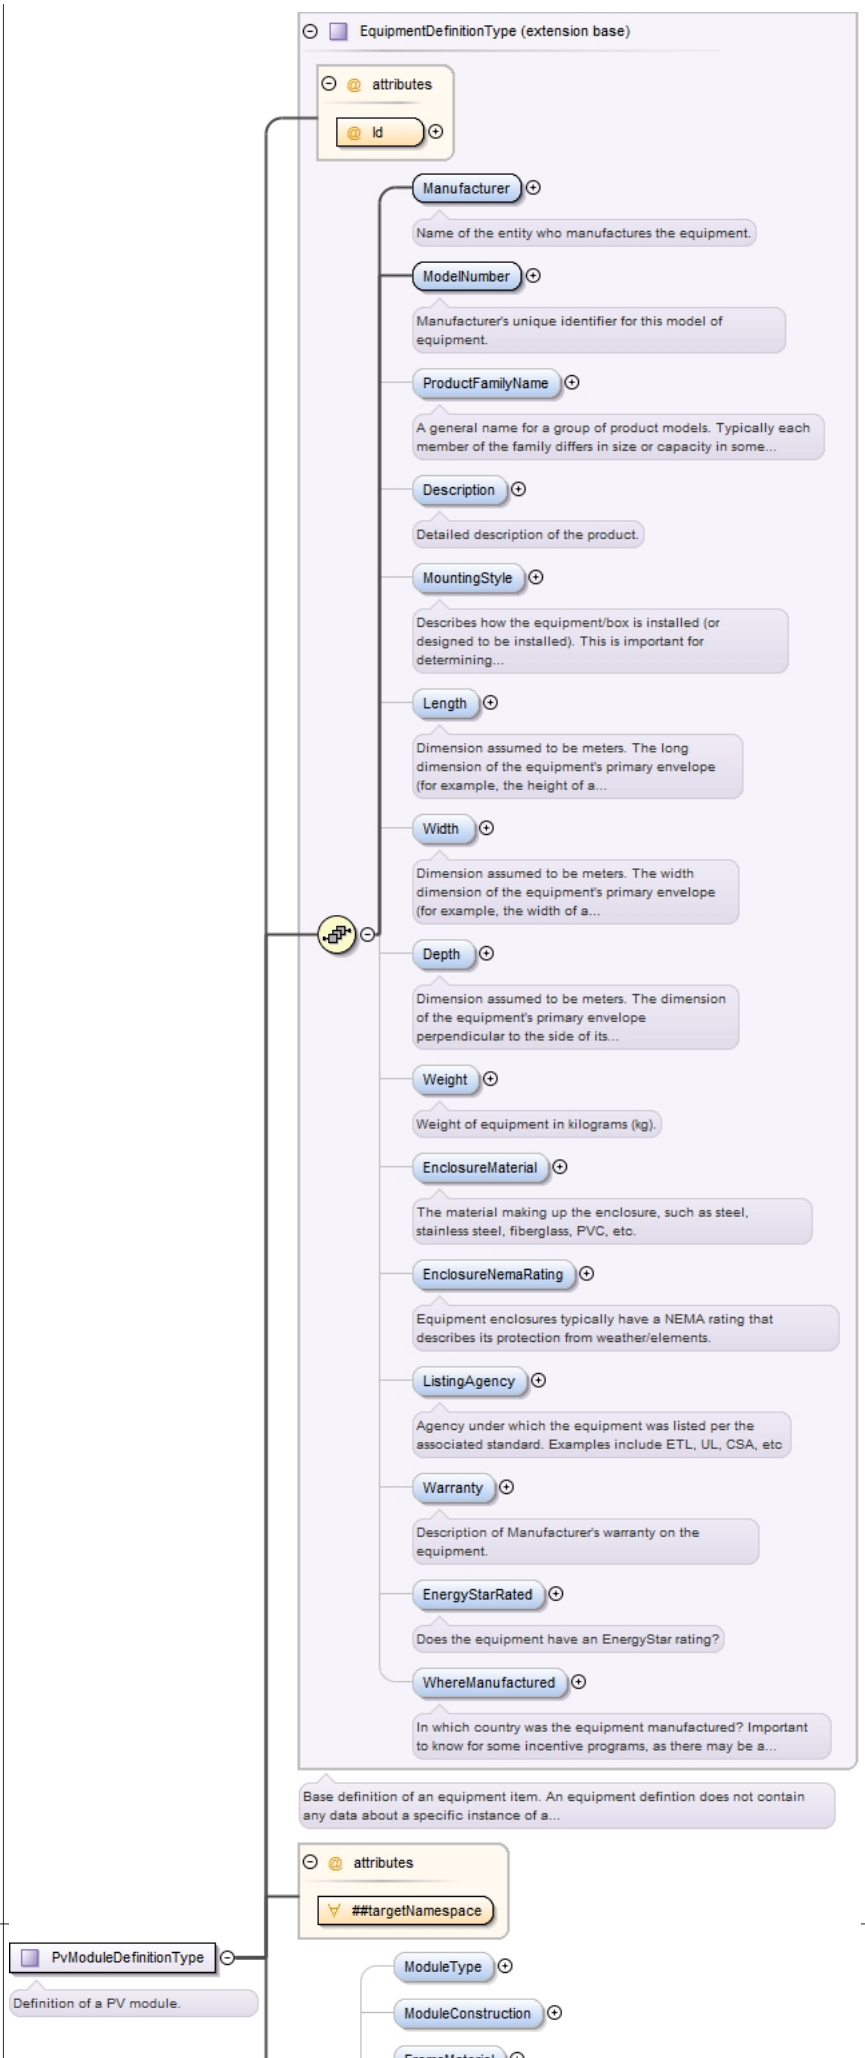
EquipmentDefinitionType (extension base)
attributes
Id
Manufacturer
Name of the entity who manufactures the equipment.
ModelNumber
Manufacturer's unique identifier for this model of equipment.
ProductFamilyName
A general name for a group of product models. Typically each member of the family differs in size or capacity in some...
Description
Detailed description of the product.
MountingStyle
Describes how the equipment/box is installed (or designed to be installed). This is important for determining...
Length
Dimension assumed to be meters. The long dimension of the equipment's primary envelope (for example, the height of a...
Width
Dimension assumed to be meters. The width dimension of the equipment's primary envelope (for example, the width of a...
Depth
Dimension assumed to be meters. The dimension of the equipment's primary envelope perpendicular to the side of its...
Weight
Weight of equipment in kilograms (kg).
EnclosureMaterial
The material making up the enclosure, such as steel, stainless steel, fiberglass, PVC, etc.
EnclosureNemaRating
Equipment enclosures typically have a NEMA rating that describes its protection from weather/elements.
ListingAgency
Agency under which the equipment was listed per the associated standard. Examples include ETL, UL, CSA, etc
Warranty
Description of Manufacturer's warranty on the equipment.
EnergyStarRated
Does the equipment have an EnergyStar rating?
WhereManufactured
In which country was the equipment manufactured? Important to know for some incentive programs, as there may be a...
Base definition of an equipment item. An equipment defintion does not contain any data about a specific instance of a...
attributes
##targetNamespace
PvModuleDefinitionType
Definition of a PV module.
ModuleType
ModuleConstruction

Type	extension of EquipmentDefinitionType
Type hierarchy	• EquipmentDefinitionType • PvModuleDefinitionType
Used by	Element PvDesignType/ModuleDefinition
Model	Manufacturer , ModelNumber , ProductFamilyName{0,1} , Description{0,1} , MountingStyle{0,1} , Length{0,1} , Width{0,1} , Depth{0,1} , Weight{0,1} , EnclosureMaterial{0,1} , EnclosureNemaRating{0,1} , ListingAgency{0,1} , Warranty{0,1} , EnergyStarRated{0,1} , WhereManufactured{0,1} , ModuleType{0,1} , ModuleConstruction{0,1} , FrameMaterial{0,1} , BIPV{0,1} , DepthWithConnectionBox{0,1} , ConnectorType{0,1} , CableDiameter{0,1} , FuseRating{0,1} , ParallelSubstrings{0,1} , BypassDiodeCount{0,1} , Pstc{0,1} , PstcToleranceHighPercent{0,1} , PstcToleranceLowPercent{0,1} , Pptc{0,1} , Vmpp{0,1} , Impp{0,1} , Voc{0,1} , Isc{0,1} , Noct{0,1} , MaxSystemVoltage{0,1} , MaxSystemCurrent{0,1} , PowerSqFt{0,1} , Efficiency{0,1} , PowerWarrantyYears{0,1} , CellTechnology{0,1} , CellDimensions{0,1} , CellCount{0,1} , CecVmppLowLight{0,1} , CecImppLowLight{0,1} , CecVmppNoct{0,1} , CecImppNoct{0,1} , CecGeometricMultipl{0,1} , MeasurementDate{0,1} , FiveParamAref{0,1} , FiveParamILref{0,1} , FiveParamIoref{0,1} , FiveParamRs{0,1} , FiveParamRshref{0,1} , FiveParamAdjust{0,1} , SandiaIxo{0,1} , SandiaIxxo{0,1} , SandiaDiodeFactor{0,1} , SandiaThermalVoltage{0,1} , SandiaMbVoc{0,1} , SandiaMbVmpp{0,1} , GammaPmppPercent{0,1} , BetaVocPercent{0,1} , BetaMppPercent{0,1} , AlphaIscPercent{0,1} , AlphaImppPercent{0,1} , SandiaTempFactorA{0,1} , SandiaTempFactorB{0,1} , SandiaCoefA0{0,1} , SandiaCoefA1{0,1} , SandiaCoefA2{0,1} , SandiaCoefA3{0,1} , SandiaCoefA4{0,1} , SandiaCoefB0{0,1} , SandiaCoefB1{0,1} , SandiaCoefB2{0,1} , SandiaCoefB3{0,1} , SandiaCoefB4{0,1} , SandiaCoefB5{0,1} , SandiaCoefC0{0,1} , SandiaCoefC1{0,1} , SandiaCoefC2{0,1} , SandiaCoefC3{0,1} , SandiaCoefC4{0,1} , SandiaCoefC5{0,1} , SandiaCoefC6{0,1} , SandiaCoefC7{0,1} , SandiaDiffuseAcceptanceFactor{0,1} , Notes{0,1}
Children	AlphaImppPercent, AlphaIscPercent, BIPV, BetaMppPercent, BetaVocPercent, BypassDiodeCount, CableDiameter, CecGeometricMultipl, CecImppLowLight, CecImppNoct, CecVmppLowLight, CecVmppNoct, CellCount, CellDimensions, CellTechnology, ConnectorType, Depth, DepthWithConnectionBox, Description, Efficiency, EnclosureMaterial, EnclosureNemaRating, EnergyStarRated, FiveParamAdjust, FiveParamAref, FiveParamILref, FiveParamIoref, FiveParamRs, FiveParamRshref, FrameMaterial, FuseRating, GammaPmppPercent, Impp, Isc, Length, ListingAgency, Manufacturer, MaxSystemCurrent, MaxSystemVoltage, MeasurementDate, ModelNumber, ModuleConstruction, ModuleType, MountingStyle, Noct, Notes, ParallelSubstrings, PowerSqFt, PowerWarrantyYears, Pptc, ProductFamilyName, Pstc, PstcToleranceHighPercent, PstcToleranceLowPercent, SandiaCoefA0, SandiaCoefA1, SandiaCoefA2, SandiaCoefA3, SandiaCoefA4, SandiaCoefB0, SandiaCoefB1, SandiaCoefB2, SandiaCoefB3, SandiaCoefB4, SandiaCoefB5, SandiaCoefC0, SandiaCoefC1, SandiaCoefC2, SandiaCoefC3, SandiaCoefC4, SandiaCoefC5, SandiaCoefC6, SandiaCoefC7, SandiaDiffuseAcceptanceFactor, SandiaDiodeFactor, SandiaIxo, SandiaIxxo, SandiaMbVmpp, SandiaMbVoc, SandiaTempFactorA, SandiaTempFactorB, SandiaThermalVoltage, Vmpp, Voc, Warranty, Weight, WhereManufactured, Width

Attributes

QName	Type	Fixed	Default	Use
ANY attribute from TARGET namespace 'http://www.iepmodel.net'				
Id	xs:ID			required

Source

```
<xs:complexType name="PvModuleDefinitionType">
  <xs:annotation>
    <xs:documentation>Definition of a PV module.</xs:documentation>
  </xs:annotation>
  <xs:complexContent>
    <xs:extension base="EquipmentDefinitionType">
      <xs:sequence>
        <xs:element name="ModuleType" minOccurs="0" maxOccurs="1">
          <xs:simpleType>
            <xs:restriction base="xs:string">
              <xs:maxLength value="255"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="ModuleConstruction" minOccurs="0" maxOccurs="1">
          <xs:simpleType>
            <xs:restriction base="xs:string">
              <xs:maxLength value="255"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="FrameMaterial" minOccurs="0" maxOccurs="1">
          <xs:simpleType>
            <xs:restriction base="xs:string">
              <xs:maxLength value="255"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="BIPV" minOccurs="0" maxOccurs="1">
```

```
          <xs:simpleType>
            <xs:restriction base="xs:string">
              <xs:maxLength value="255"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="DepthWithConnectionBox" minOccurs="0" maxOccurs="1">
          <xs:simpleType>
            <xs:restriction base="xs:double">
              <xs:minInclusive value="0.0"/>
              <xs:maxInclusive value="500.0"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="ConnectorType" minOccurs="0" maxOccurs="1">
          <xs:simpleType>
            <xs:restriction base="xs:string">
              <xs:maxLength value="255"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="CableDiameter" minOccurs="0" maxOccurs="1">
          <xs:simpleType>
            <xs:restriction base="xs:double">
              <xs:minInclusive value="1.0"/>
              <xs:maxInclusive value="10.0"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="FuseRating" minOccurs="0" maxOccurs="1">
          <xs:simpleType>
            <xs:restriction base="xs:double">
              <xs:minInclusive value="1.0"/>
              <xs:maxInclusive value="100.0"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="ParallelSubstrings" minOccurs="0" maxOccurs="1">
          <xs:simpleType>
            <xs:restriction base="xs:integer">
              <xs:minInclusive value="1"/>
              <xs:maxInclusive value="100"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="BypassDiodeCount" minOccurs="0" maxOccurs="1">
          <xs:simpleType>
            <xs:restriction base="xs:integer">
              <xs:minInclusive value="0"/>
              <xs:maxInclusive value="100"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="Pstc" minOccurs="0" maxOccurs="1">
          <xs:annotation>
            <xs:documentation>Rated power output at Standard Test Conditions (stc).</
xs:documentation>
          </xs:annotation>
          <xs:simpleType>
            <xs:restriction base="xs:double">
              <xs:minInclusive value="1.0"/>
              <xs:maxInclusive value="800.0"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="PstcToleranceHighPercent" minOccurs="0" maxOccurs="1">
          <xs:annotation>
            <xs:documentation>Upper range of variation from rated power at STC. A module
 with this specification may output up to x % more than rated Pstc.</xs:documentation>
          </xs:annotation>
          <xs:simpleType>
            <xs:restriction base="xs:double">
              <xs:minInclusive value="0.0"/>
              <xs:maxInclusive value="20.0"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="PstcToleranceLowPercent" minOccurs="0" maxOccurs="1">
          <xs:annotation>
            <xs:documentation>Lower range of variation from rated power at STC. A module
 with this specification may output up to x % less than rated Pstc.</xs:documentation>
          </xs:annotation>
          <xs:simpleType>
```

```
            <xs:restriction base="xs:double">
              <xs:minInclusive value="-20.0"/>
              <xs:maxInclusive value="0.0"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="Pptc" minOccurs="0" maxOccurs="1">
          <xs:annotation>
            <xs:documentation>Rated power at PVUSA test conditions (PTC).</
xs:documentation>
          </xs:annotation>
          <xs:simpleType>
            <xs:restriction base="xs:double">
              <xs:minInclusive value="1.0"/>
              <xs:maxInclusive value="800.0"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="Vmpp" minOccurs="0" maxOccurs="1">
          <xs:annotation>
            <xs:documentation>Voltage at MPP (V)</xs:documentation>
          </xs:annotation>
          <xs:simpleType>
            <xs:restriction base="xs:double">
              <xs:minInclusive value="1.0"/>
              <xs:maxInclusive value="800.0"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="Impp" minOccurs="0" maxOccurs="1">
          <xs:simpleType>
            <xs:restriction base="xs:double">
              <xs:minInclusive value=".1"/>
              <xs:maxInclusive value="50.0"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="Voc" minOccurs="0" maxOccurs="1">
          <xs:annotation>
            <xs:documentation>Open Circuit Voltage (V)</xs:documentation>
          </xs:annotation>
          <xs:simpleType>
            <xs:restriction base="xs:double">
              <xs:minInclusive value="1.0"/>
              <xs:maxInclusive value="500.0"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="Isc" minOccurs="0" maxOccurs="1">
          <xs:simpleType>
            <xs:restriction base="xs:double">
              <xs:minInclusive value=".1"/>
              <xs:maxInclusive value="50"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="Noct" minOccurs="0" maxOccurs="1">
          <xs:simpleType>
            <xs:restriction base="xs:double">
              <xs:minInclusive value="30.0"/>
              <xs:maxInclusive value="60.0"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="MaxSystemVoltage" minOccurs="0" maxOccurs="1">
          <xs:simpleType>
            <xs:restriction base="xs:double">
              <xs:minInclusive value="1.0"/>
              <xs:maxInclusive value="1000.0"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="MaxSystemCurrent" minOccurs="0" maxOccurs="1">
          <xs:simpleType>
            <xs:restriction base="xs:double">
              <xs:minInclusive value=".1"/>
              <xs:maxInclusive value="50.0"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="PowerSqFt" minOccurs="0" maxOccurs="1">
          <xs:simpleType>
            <xs:restriction base="xs:double"/>
```

```
      </xs:simpleType>
    </xs:element>
    <xs:element name="Efficiency" minOccurs="0" maxOccurs="1">
      <xs:simpleType>
        <xs:restriction base="xs:double">
          <xs:minInclusive value="1.0"/>
          <xs:maxInclusive value="30.0"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="PowerWarrantyYears" minOccurs="0" maxOccurs="1">
      <xs:simpleType>
        <xs:restriction base="xs:string">
          <xs:maxLength value="255"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="CellTechnology" minOccurs="0" maxOccurs="1">
      <xs:simpleType>
        <xs:restriction base="xs:string">
          <xs:maxLength value="255"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="CellDimensions" minOccurs="0" maxOccurs="1">
      <xs:simpleType>
        <xs:restriction base="xs:string">
          <xs:maxLength value="255"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="CellCount" minOccurs="0" maxOccurs="1">
      <xs:simpleType>
        <xs:restriction base="xs:integer">
          <xs:minInclusive value="1"/>
          <xs:maxInclusive value="1000"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="CecVmppLowLight" minOccurs="0" maxOccurs="1">
      <xs:simpleType>
        <xs:restriction base="xs:double">
          <xs:minInclusive value=".1"/>
          <xs:maxInclusive value="500.0"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="CecImppLowLight" minOccurs="0" maxOccurs="1">
      <xs:simpleType>
        <xs:restriction base="xs:double">
          <xs:minInclusive value=".1"/>
          <xs:maxInclusive value="50.0"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="CecVmppNoct" minOccurs="0" maxOccurs="1">
      <xs:simpleType>
        <xs:restriction base="xs:double">
          <xs:minInclusive value="1.0"/>
          <xs:maxInclusive value="500.0"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="CecImppNoct" minOccurs="0" maxOccurs="1">
      <xs:simpleType>
        <xs:restriction base="xs:double">
          <xs:minInclusive value=".1"/>
          <xs:maxInclusive value="50.0"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="CecGeometricMultipl" minOccurs="0" maxOccurs="1">
      <xs:simpleType>
        <xs:restriction base="xs:double">
          <xs:minInclusive value=".10"/>
          <xs:maxInclusive value="1.0"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="MeasurementDate" minOccurs="0" maxOccurs="1">
      <xs:simpleType>
        <xs:restriction base="xs:string">
          <xs:maxLength value="255"/>
```

```
      </xs:restriction>
    </xs:simpleType>
  </xs:element>
  <xs:element name="FiveParamAref" minOccurs="0" maxOccurs="1">
    <xs:simpleType>
      <xs:restriction base="xs:double">
        <xs:minInclusive value=".1"/>
        <xs:maxInclusive value="10.0"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:element>
  <xs:element name="FiveParamILref" minOccurs="0" maxOccurs="1">
    <xs:simpleType>
      <xs:restriction base="xs:double">
        <xs:minInclusive value=".1"/>
        <xs:maxInclusive value="20.0"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:element>
  <xs:element name="FiveParamIoref" minOccurs="0" maxOccurs="1">
    <xs:simpleType>
      <xs:restriction base="xs:double">
        <xs:minInclusive value="1.0e-13"/>
        <xs:maxInclusive value="1.0e-6"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:element>
  <xs:element name="FiveParamRs" minOccurs="0" maxOccurs="1">
    <xs:simpleType>
      <xs:restriction base="xs:double">
        <xs:minInclusive value="1.0e-3"/>
        <xs:maxInclusive value="100.0"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:element>
  <xs:element name="FiveParamRshref" minOccurs="0" maxOccurs="1">
    <xs:simpleType>
      <xs:restriction base="xs:double">
        <xs:minInclusive value="10.0"/>
        <xs:maxInclusive value="1000000.00"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:element>
  <xs:element name="FiveParamAdjust" minOccurs="0" maxOccurs="1">
    <xs:simpleType>
      <xs:restriction base="xs:double">
        <xs:minInclusive value="-100.0"/>
        <xs:maxInclusive value="100.0"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:element>
  <xs:element name="SandiaIxo" minOccurs="0" maxOccurs="1">
    <xs:simpleType>
      <xs:restriction base="xs:double">
        <xs:minInclusive value=".1"/>
        <xs:maxInclusive value="50.0"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:element>
  <xs:element name="SandiaIxxo" minOccurs="0" maxOccurs="1">
    <xs:simpleType>
      <xs:restriction base="xs:double">
        <xs:minInclusive value=".1"/>
        <xs:maxInclusive value="50.0"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:element>
  <xs:element name="SandiaDiodeFactor" minOccurs="0" maxOccurs="1">
    <xs:simpleType>
      <xs:restriction base="xs:double">
        <xs:minInclusive value=".1"/>
        <xs:maxInclusive value="10.0"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:element>
  <xs:element name="SandiaThermalVoltage" minOccurs="0" maxOccurs="1">
    <xs:simpleType>
      <xs:restriction base="xs:double">
        <xs:minInclusive value=".1"/>
        <xs:maxInclusive value="10.0"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:element>
```

```
<xs:element name="SandiaMbVoc" minOccurs="0" maxOccurs="1">
  <xs:simpleType>
    <xs:restriction base="xs:double"/>
  </xs:simpleType>
</xs:element>
<xs:element name="SandiaMbVmpp" minOccurs="0" maxOccurs="1">
  <xs:simpleType>
    <xs:restriction base="xs:double"/>
  </xs:simpleType>
</xs:element>
<xs:element name="GammaPmppPercent" minOccurs="0" maxOccurs="1">
  <xs:simpleType>
    <xs:restriction base="xs:double">
      <xs:minInclusive value="-10.0"/>
      <xs:maxInclusive value="10.0"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
<xs:element name="BetaVocPercent" minOccurs="0" maxOccurs="1">
  <xs:simpleType>
    <xs:restriction base="xs:double">
      <xs:minInclusive value="-2.0"/>
      <xs:maxInclusive value="2.0"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
<xs:element name="BetaMppPercent" minOccurs="0" maxOccurs="1">
  <xs:simpleType>
    <xs:restriction base="xs:double">
      <xs:minInclusive value="-2.0"/>
      <xs:maxInclusive value="2.0"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
<xs:element name="AlphaIscPercent" minOccurs="0" maxOccurs="1">
  <xs:simpleType>
    <xs:restriction base="xs:double">
      <xs:minInclusive value="-2.0"/>
      <xs:maxInclusive value="2.0"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
<xs:element name="AlphaImppPercent" minOccurs="0" maxOccurs="1">
  <xs:simpleType>
    <xs:restriction base="xs:double">
      <xs:minInclusive value="-2.0"/>
      <xs:maxInclusive value="2.0"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
<xs:element name="SandiaTempFactorA" minOccurs="0" maxOccurs="1">
  <xs:simpleType>
    <xs:restriction base="xs:double">
      <xs:minInclusive value="-5.0"/>
      <xs:maxInclusive value="-1.0"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
<xs:element name="SandiaTempFactorB" minOccurs="0" maxOccurs="1">
  <xs:simpleType>
    <xs:restriction base="xs:double">
      <xs:minInclusive value="-1.0"/>
      <xs:maxInclusive value="-0.01"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
<xs:element name="SandiaCoefA0" minOccurs="0" maxOccurs="1">
  <xs:simpleType>
    <xs:restriction base="xs:double">
      <xs:minInclusive value="-100.0"/>
      <xs:maxInclusive value="100.0"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
<xs:element name="SandiaCoefA1" minOccurs="0" maxOccurs="1">
  <xs:simpleType>
    <xs:restriction base="xs:double">
      <xs:minInclusive value="-100.0"/>
      <xs:maxInclusive value="100.0"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
<xs:element name="SandiaCoefA2" minOccurs="0" maxOccurs="1">
```

```
        <xs:simpleType>
          <xs:restriction base="xs:double">
            <xs:minInclusive value="-100.0"/>
            <xs:maxInclusive value="100.0"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="SandiaCoefA3" minOccurs="0" maxOccurs="1">
        <xs:simpleType>
          <xs:restriction base="xs:double">
            <xs:minInclusive value="-100.0"/>
            <xs:maxInclusive value="100.0"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="SandiaCoefA4" minOccurs="0" maxOccurs="1">
        <xs:simpleType>
          <xs:restriction base="xs:double">
            <xs:minInclusive value="-100.0"/>
            <xs:maxInclusive value="100.0"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="SandiaCoefB0" minOccurs="0" maxOccurs="1">
        <xs:simpleType>
          <xs:restriction base="xs:double">
            <xs:minInclusive value="-100.0"/>
            <xs:maxInclusive value="100.0"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="SandiaCoefB1" minOccurs="0" maxOccurs="1">
        <xs:simpleType>
          <xs:restriction base="xs:double">
            <xs:minInclusive value="-100.0"/>
            <xs:maxInclusive value="100.0"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="SandiaCoefB2" minOccurs="0" maxOccurs="1">
        <xs:simpleType>
          <xs:restriction base="xs:double">
            <xs:minInclusive value="-100.0"/>
            <xs:maxInclusive value="100.0"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="SandiaCoefB3" minOccurs="0" maxOccurs="1">
        <xs:simpleType>
          <xs:restriction base="xs:double">
            <xs:minInclusive value="-100.0"/>
            <xs:maxInclusive value="100.0"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="SandiaCoefB4" minOccurs="0" maxOccurs="1">
        <xs:simpleType>
          <xs:restriction base="xs:double">
            <xs:minInclusive value="-100.0"/>
            <xs:maxInclusive value="100.0"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="SandiaCoefB5" minOccurs="0" maxOccurs="1">
        <xs:simpleType>
          <xs:restriction base="xs:double">
            <xs:minInclusive value="-100.0"/>
            <xs:maxInclusive value="100.0"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="SandiaCoefC0" minOccurs="0" maxOccurs="1">
        <xs:simpleType>
          <xs:restriction base="xs:double">
            <xs:minInclusive value="-100.0"/>
            <xs:maxInclusive value="100.0"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="SandiaCoefC1" minOccurs="0" maxOccurs="1">
        <xs:simpleType>
          <xs:restriction base="xs:double">
            <xs:minInclusive value="-100.0"/>
```

```
              <xs:maxInclusive value="100.0"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="SandiaCoefC2" minOccurs="0" maxOccurs="1">
          <xs:simpleType>
            <xs:restriction base="xs:double">
              <xs:minInclusive value="-100.0"/>
              <xs:maxInclusive value="100.0"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="SandiaCoefC3" minOccurs="0" maxOccurs="1">
          <xs:simpleType>
            <xs:restriction base="xs:double">
              <xs:minInclusive value="-100.0"/>
              <xs:maxInclusive value="100.0"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="SandiaCoefC4" minOccurs="0" maxOccurs="1">
          <xs:simpleType>
            <xs:restriction base="xs:double">
              <xs:minInclusive value="-100.0"/>
              <xs:maxInclusive value="100.0"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="SandiaCoefC5" minOccurs="0" maxOccurs="1">
          <xs:simpleType>
            <xs:restriction base="xs:double">
              <xs:minInclusive value="-100.0"/>
              <xs:maxInclusive value="100.0"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="SandiaCoefC6" minOccurs="0" maxOccurs="1">
          <xs:simpleType>
            <xs:restriction base="xs:double">
              <xs:minInclusive value="-100.0"/>
              <xs:maxInclusive value="100.0"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="SandiaCoefC7" minOccurs="0" maxOccurs="1">
          <xs:simpleType>
            <xs:restriction base="xs:double">
              <xs:minInclusive value="-100.0"/>
              <xs:maxInclusive value="100.0"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="SandiaDiffuseAcceptanceFactor" minOccurs="0" maxOccurs="1">
          <xs:simpleType>
            <xs:restriction base="xs:double">
              <xs:minInclusive value=".1"/>
              <xs:maxInclusive value="1.0"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="Notes" minOccurs="0" maxOccurs="1">
          <xs:simpleType>
            <xs:restriction base="xs:string">
              <xs:maxLength value="255"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
      </xs:sequence>
      <xs:anyAttribute namespace="##targetNamespace" processContents="lax"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

Complex Type `InverterDefinitionType`

Namespace	http://www.iepmodel.net
Annotations	`Definition of a DC to AC inverter.`

Diagram

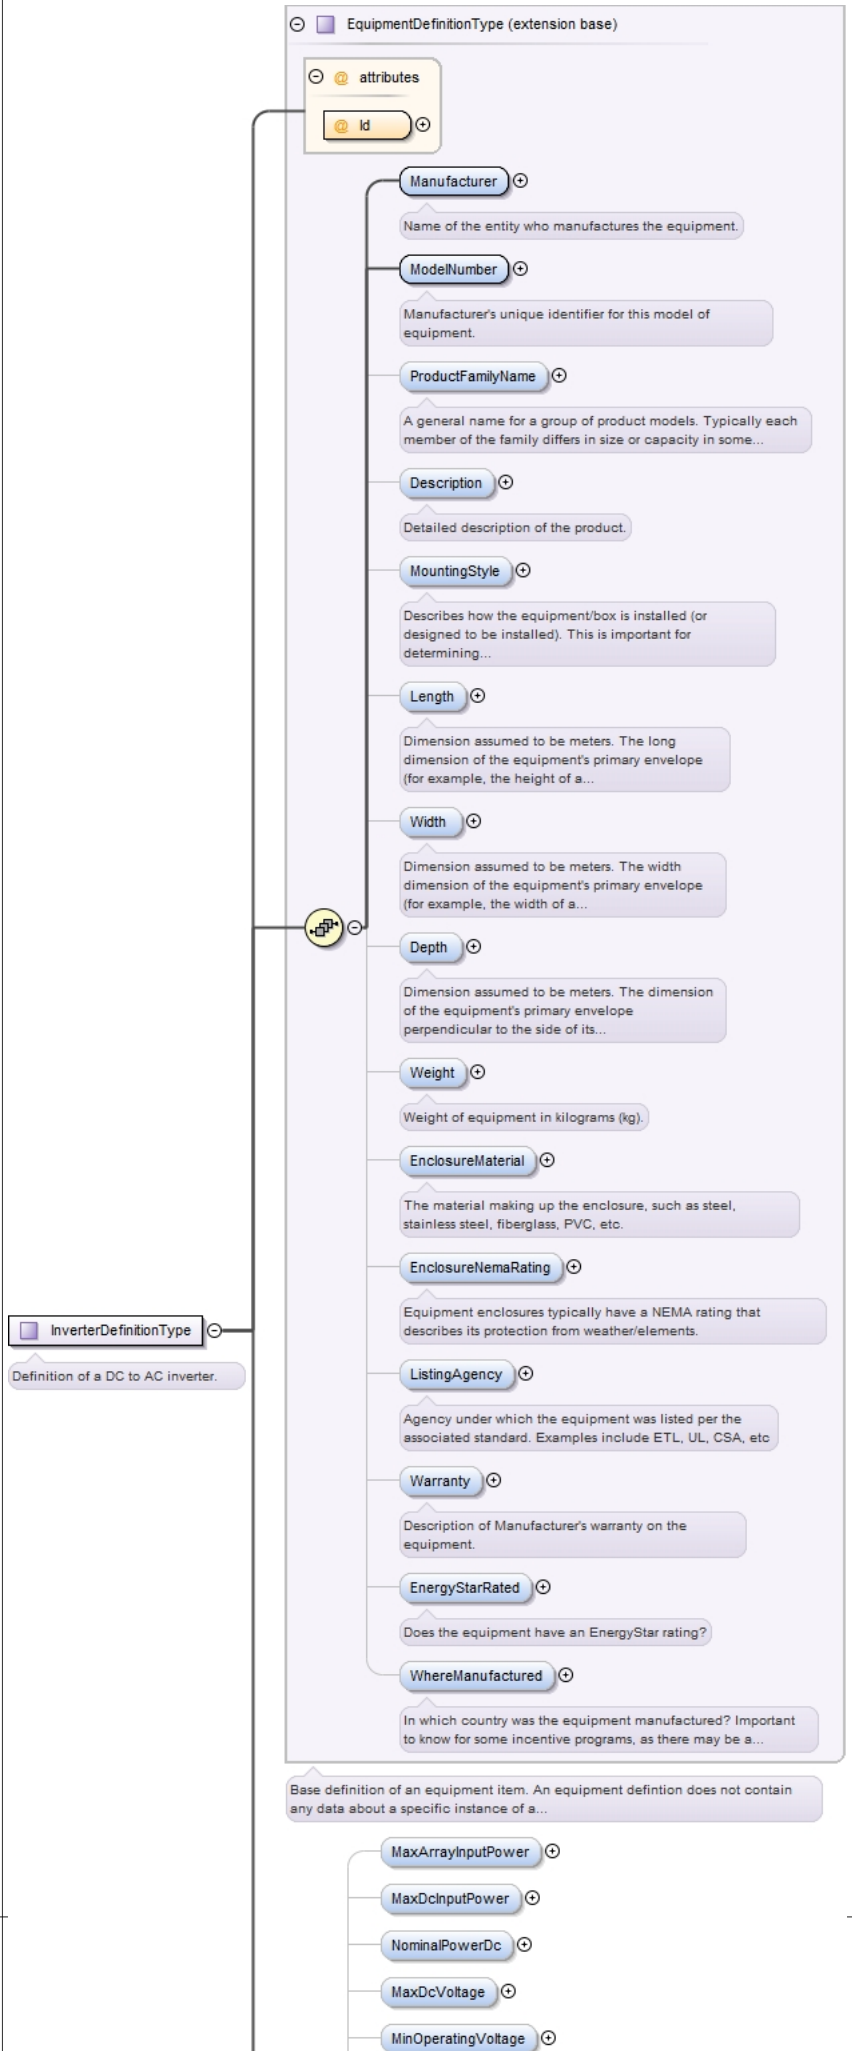
EquipmentDefinitionType (extension base)
attributes
Id
Manufacturer
Name of the entity who manufactures the equipment.
ModelNumber
Manufacturer's unique identifier for this model of equipment.
ProductFamilyName
A general name for a group of product models. Typically each member of the family differs in size or capacity in some...
Description
Detailed description of the product.
MountingStyle
Describes how the equipment/box is installed (or designed to be installed). This is important for determining...
Length
Dimension assumed to be meters. The long dimension of the equipment's primary envelope (for example, the height of a...
Width
Dimension assumed to be meters. The width dimension of the equipment's primary envelope (for example, the width of a...
Depth
Dimension assumed to be meters. The dimension of the equipment's primary envelope perpendicular to the side of its...
Weight
Weight of equipment in kilograms (kg).
EnclosureMaterial
The material making up the enclosure, such as steel, stainless steel, fiberglass, PVC, etc.
EnclosureNemaRating
Equipment enclosures typically have a NEMA rating that describes its protection from weather/elements.
ListingAgency
Agency under which the equipment was listed per the associated standard. Examples include ETL, UL, CSA, etc
Warranty
Description of Manufacturer's warranty on the equipment.
EnergyStarRated
Does the equipment have an EnergyStar rating?
WhereManufactured
In which country was the equipment manufactured? Important to know for some incentive programs, as there may be a...
Base definition of an equipment item. An equipment defintion does not contain any data about a specific instance of a...
InverterDefinitionType
Definition of a DC to AC inverter.
MaxArrayInputPower
MaxDcInputPower
NominalPowerDc
MaxDcVoltage
MinOperatingVoltage

Type	extension of EquipmentDefinitionType
Type hierarchy	• EquipmentDefinitionType • InverterDefinitionType
Used by	Element PvDesignType/InverterDefinition
Model	Manufacturer , ModelNumber , ProductFamilyName{0,1} , Description{0,1} , MountingStyle{0,1} , Length{0,1} , Width{0,1} , Depth{0,1} , Weight{0,1} , EnclosureMaterial{0,1} , EnclosureNemaRating{0,1} , ListingAgency{0,1} , Warranty{0,1} , EnergyStarRated{0,1} , WhereManufactured{0,1} , MaxArrayInputPower{0,1} , MaxDcInputPower{0,1} , NominalPowerDc{0,1} , MaxDcVoltage{0,1} , MinOperatingVoltage{0,1} , MaxOperatingVoltage{0,1} , MaxCurrentDc{0,1} , MaxPowerAc{0,1} , NominalPowerAc{0,1} , GridVoltageRange{0,1} , GridFrequency{0,1} , MaxEffeciency{0,1} , CecWeightedEffeciency{0,1} , EuroEtaEffeciency{0,1} , NumberMppTrackers{0,1} , UsProtectionClass{0,1} , EuProtectionClass{0,1} , DcConnection{0,1} , NumberInputsDc{0,1} , MaxCableDiameterDc{0,1} , AcConnection{0,1} , MaxCableDiameterAc{0,1} , GridFeed{0,1} , Fan{0,1} , Transformer{0,1} , Msd{0,1} , ResidualCurrentProtection{0,1} , IntegratedDcCircuitBreaker{0,1} , OvervoltageProtection{0,1} , Display{0,1} , Notes{0,1}
Children	AcConnection, CecWeightedEffeciency, DcConnection, Depth, Description, Display, EnclosureMaterial, EnclosureNemaRating, EnergyStarRated, EuProtectionClass, EuroEtaEffeciency, Fan, GridFeed, GridFrequency, GridVoltageRange, IntegratedDcCircuitBreaker, Length, ListingAgency, Manufacturer, MaxArrayInputPower, MaxCableDiameterAc, MaxCableDiameterDc, MaxCurrentDc, MaxDcInputPower, MaxDcVoltage, MaxEffeciency, MaxOperatingVoltage, MaxPowerAc, MinOperatingVoltage, ModelNumber, MountingStyle, Msd, NominalPowerAc, NominalPowerDc, Notes, NumberInputsDc, NumberMppTrackers, OvervoltageProtection, ProductFamilyName, ResidualCurrentProtection, Transformer, UsProtectionClass, Warranty, Weight, WhereManufactured, Width

Attributes

QName	Type	Fixed	Default	Use
Id	xs:ID			required

Source

```
<xs:complexType name="InverterDefinitionType">
  <xs:annotation>
    <xs:documentation>Definition of a DC to AC inverter.</xs:documentation>
  </xs:annotation>
  <xs:complexContent>
    <xs:extension base="EquipmentDefinitionType">
      <xs:sequence>
        <xs:element name="MaxArrayInputPower" type="xs:double" minOccurs="0"
 maxOccurs="1"/>
        <xs:element name="MaxDcInputPower" type="xs:double" minOccurs="0" maxOccurs="1"/>
        <xs:element name="NominalPowerDc" type="xs:double" minOccurs="0" maxOccurs="1"/>
        <xs:element name="MaxDcVoltage" type="xs:double" minOccurs="0" maxOccurs="1"/>
        <xs:element name="MinOperatingVoltage" type="xs:double" minOccurs="0"
 maxOccurs="1"/>
        <xs:element name="MaxOperatingVoltage" type="xs:double" minOccurs="0"
 maxOccurs="1"/>
        <xs:element name="MaxCurrentDc" type="xs:double" minOccurs="0" maxOccurs="1"/>
        <xs:element name="MaxPowerAc" type="xs:double" minOccurs="0" maxOccurs="1"/>
        <xs:element name="NominalPowerAc" type="xs:double" minOccurs="0" maxOccurs="1"/>
        <xs:element name="GridVoltageRange" minOccurs="0" maxOccurs="1">
          <xs:simpleType>
            <xs:restriction base="xs:string">
              <xs:maxLength value="255"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="GridFrequency" type="xs:double" minOccurs="0" maxOccurs="1"/>
        <xs:element name="MaxEffeciency" type="xs:double" minOccurs="0" maxOccurs="1"/>
        <xs:element name="CecWeightedEffeciency" type="xs:double" minOccurs="0"
 maxOccurs="1"/>
        <xs:element name="EuroEtaEffeciency" type="xs:double" minOccurs="0" maxOccurs="1"/
>
        <xs:element name="NumberMppTrackers" type="xs:integer" minOccurs="0"
 maxOccurs="1"/>
        <xs:element name="UsProtectionClass" minOccurs="0" maxOccurs="1">
          <xs:simpleType>
            <xs:restriction base="xs:string">
              <xs:maxLength value="255"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="EuProtectionClass" minOccurs="0" maxOccurs="1">
          <xs:simpleType>
            <xs:restriction base="xs:string">
              <xs:maxLength value="255"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
```

```
      <xs:element name="DcConnection" minOccurs="0" maxOccurs="1">
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="255"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="NumberInputsDc" type="xs:integer" minOccurs="0" maxOccurs="1"/>
      <xs:element name="MaxCableDiameterDc" type="xs:double" minOccurs="0"
maxOccurs="1"/>
      <xs:element name="AcConnection" minOccurs="0" maxOccurs="1">
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="255"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="MaxCableDiameterAc" type="xs:double" minOccurs="0"
maxOccurs="1"/>
      <xs:element name="GridFeed" minOccurs="0" maxOccurs="1">
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="255"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="Fan" minOccurs="0" maxOccurs="1">
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="255"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="Transformer" minOccurs="0" maxOccurs="1">
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="255"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="Msd" minOccurs="0" maxOccurs="1">
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="255"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="ResidualCurrentProtection" minOccurs="0" maxOccurs="1">
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="255"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="IntegratedDcCircuitBreaker" minOccurs="0" maxOccurs="1">
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="255"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="OvervoltageProtection" minOccurs="0" maxOccurs="1">
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="255"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="Display" minOccurs="0" maxOccurs="1">
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="255"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="Notes" minOccurs="0" maxOccurs="1">
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="255"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
    </xs:sequence>
```

```
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

Complex Type `CombinerDefinitionType`

Namespace	http://www.iepmodel.net
Annotations	`Specification data defining a combiner.`

Diagram


EquipmentDefinitionType (extension base)
attributes
Id
Manufacturer
Name of the entity who manufactures the equipment.
ModelNumber
Manufacturer's unique identifier for this model of equipment.
ProductFamilyName
A general name for a group of product models. Typically each member of the family differs in size or capacity in some...
Description
Detailed description of the product.
MountingStyle
Describes how the equipment/box is installed (or designed to be installed). This is important for determining...
Length
Dimension assumed to be meters. The long dimension of the equipment's primary envelope (for example, the height of a...
Width
Dimension assumed to be meters. The width dimension of the equipment's primary envelope (for example, the width of a...
Depth
Dimension assumed to be meters. The dimension of the equipment's primary envelope perpendicular to the side of its...
Weight
Weight of equipment in kilograms (kg).
EnclosureMaterial
The material making up the enclosure, such as steel, stainless steel, fiberglass, PVC, etc.
EnclosureNemaRating
Equipment enclosures typically have a NEMA rating that describes its protection from weather/elements.
ListingAgency
Agency under which the equipment was listed per the associated standard. Examples include ETL, UL, CSA, etc
Warranty
Description of Manufacturer's warranty on the equipment.
EnergyStarRated
Does the equipment have an EnergyStar rating?
WhereManufactured
In which country was the equipment manufactured? Important to know for some incentive programs, as there may be a...
CombinerDefinitionType
Specification data defining a combiner.
Base definition of an equipment item. An equipment defintion does not contain any data about a specific instance of a...
AcVoltageRating
Maximum rated AC voltage.
DcVoltageRating
Maximum rated DC voltage.
MaxContinuousCurrent

Type	extension of EquipmentDefinitionType
Type hierarchy	• EquipmentDefinitionType • CombinerDefinitionType
Used by	Element PvDesignType/CombinerDefinition
Model	Manufacturer , ModelNumber , ProductFamilyName{0,1} , Description{0,1} , MountingStyle{0,1} , Length{0,1} , Width{0,1} , Depth{0,1} , Weight{0,1} , EnclosureMaterial{0,1} , EnclosureNemaRating{0,1} , ListingAgency{0,1} , Warranty{0,1} , EnergyStarRated{0,1} , WhereManufactured{0,1} , AcVoltageRating{0,1} , DcVoltageRating{0,1} , MaxContinuousCurrent{0,1} , QtyInputCircuits{0,1} , MaxOCPDRating{0,1} , MinInputConductorSize{0,1} , MaxInputConductorSize{0,1} , QtyOutputConductors{0,1} , MinOutputConductorSize{0,1} , MaxOutputConductorSize{0,1} , IntegratedDisconnectIncluded{0,1} , IntegratedDisconnectRating{0,1} , MonitoringAvailable{0,1} , RevenueGradeMonitoring{0,1}
Children	AcVoltageRating, DcVoltageRating, Depth, Description, EnclosureMaterial, EnclosureNemaRating, EnergyStarRated, IntegratedDisconnectIncluded, IntegratedDisconnectRating, Length, ListingAgency, Manufacturer, MaxContinuousCurrent, MaxInputConductorSize, MaxOCPDRating, MaxOutputConductorSize, MinInputConductorSize, MinOutputConductorSize, ModelNumber, MonitoringAvailable, MountingStyle, ProductFamilyName, QtyInputCircuits, QtyOutputConductors, RevenueGradeMonitoring, Warranty, Weight, WhereManufactured, Width

Attributes

QName	Type	Fixed	Default	Use
Id	xs:ID			required

Source

```
<xs:complexType name="CombinerDefinitionType">
  <xs:annotation>
    <xs:documentation>Specification data defining a combiner.</xs:documentation>
  </xs:annotation>
  <xs:complexContent>
    <xs:extension base="EquipmentDefinitionType">
      <xs:sequence>
        <xs:element minOccurs="0" name="AcVoltageRating" type="xs:integer">
          <xs:annotation>
            <xs:documentation>Maximum rated AC voltage.</xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element minOccurs="0" name="DcVoltageRating" type="xs:integer">
          <xs:annotation>
            <xs:documentation>Maximum rated DC voltage.</xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element minOccurs="0" name="MaxContinuousCurrent" type="xs:integer">
          <xs:annotation>
            <xs:documentation>Rating in amps.</xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element name="QtyInputCircuits" minOccurs="0" type="xs:integer">
          <xs:annotation>
            <xs:documentation>Max number of circuits on the input side.</xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element minOccurs="0" name="MaxOCPDRating" type="xs:integer">
          <xs:annotation>
            <xs:documentation>Maximum rated current (in Amps) of the over-current
 protection device (OCPD) per input circuit.</xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element minOccurs="0" name="MinInputConductorSize"
 type="ConductorSizeEnumType"/>
        <xs:element minOccurs="0" name="MaxInputConductorSize"
 type="ConductorSizeEnumType"/>
        <xs:element name="QtyOutputConductors" minOccurs="0" type="xs:integer">
          <xs:annotation>
            <xs:documentation>Max number of output conductors.</xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element minOccurs="0" name="MinOutputConductorSize"
 type="ConductorSizeEnumType"/>
        <xs:element minOccurs="0" name="MaxOutputConductorSize"
 type="ConductorSizeEnumType"/>
        <xs:element minOccurs="0" name="IntegratedDisconnectIncluded" type="xs:boolean"/>
        <xs:element minOccurs="0" name="IntegratedDisconnectRating" type="xs:integer"/>
        <xs:element minOccurs="0" name="MonitoringAvailable" type="xs:boolean"/>
        <xs:element minOccurs="0" name="RevenueGradeMonitoring" type="xs:boolean"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

Complex Type `JunctionBoxDefinitionType`

Namespace	http://www.iepmodel.net

Diagram

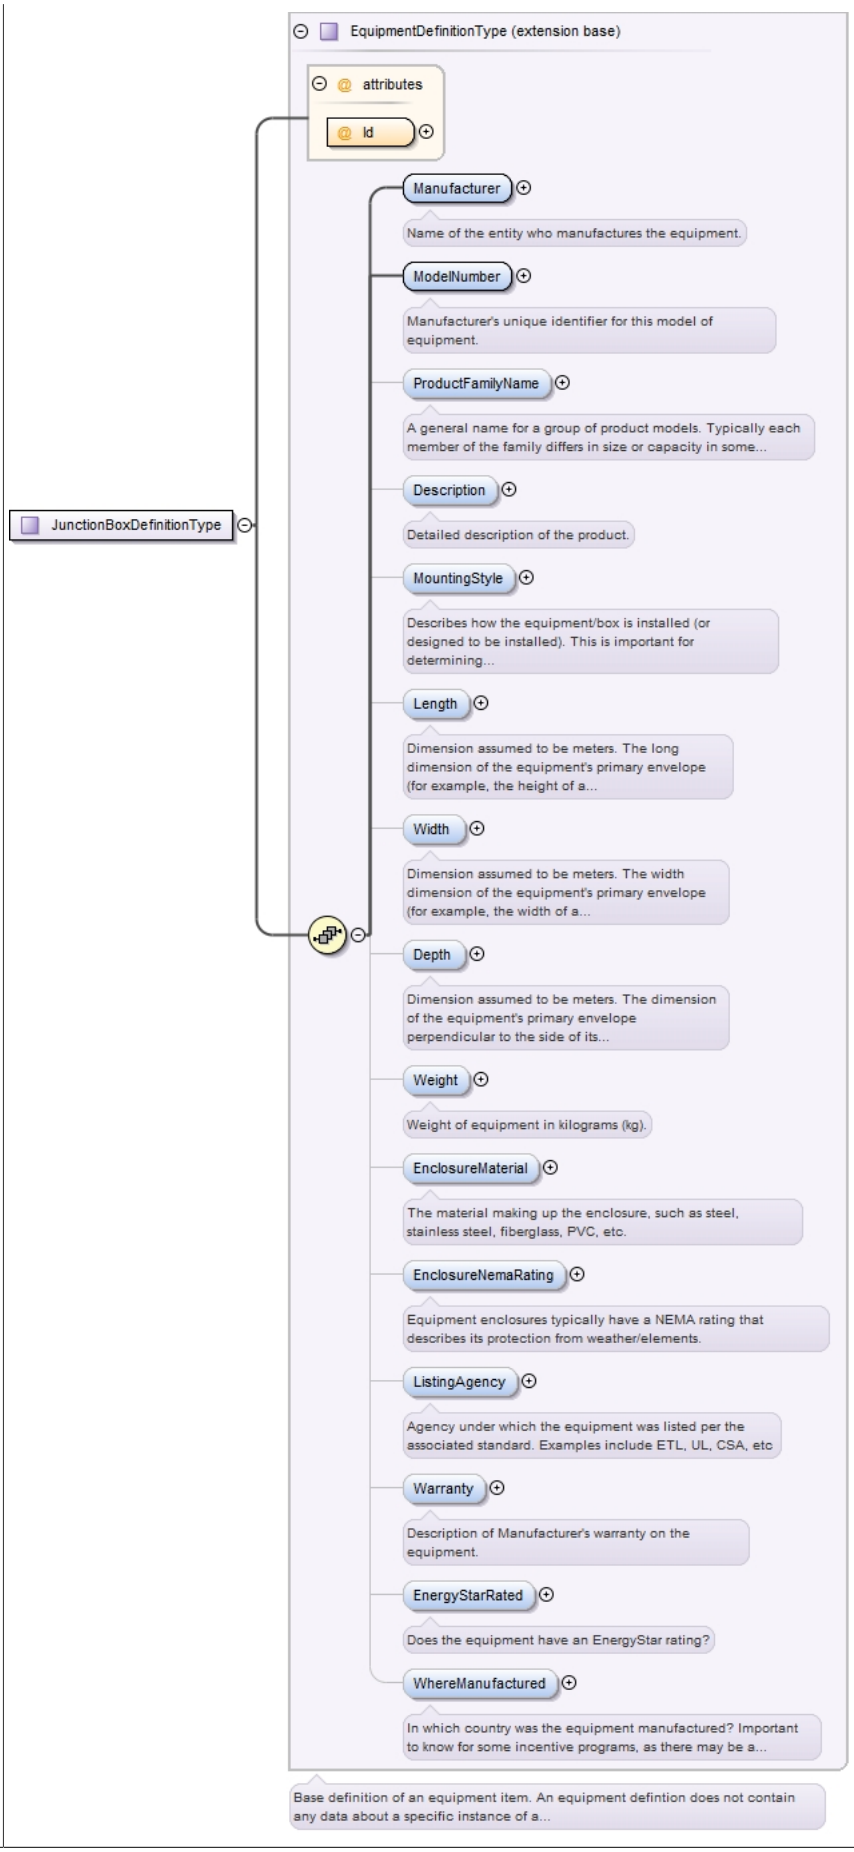
JunctionBoxDefinitionType
EquipmentDefinitionType (extension base)
attributes
Id
Manufacturer
Name of the entity who manufactures the equipment.
ModelNumber
Manufacturer's unique identifier for this model of equipment.
ProductFamilyName
A general name for a group of product models. Typically each member of the family differs in size or capacity in some...
Description
Detailed description of the product.
MountingStyle
Describes how the equipment/box is installed (or designed to be installed). This is important for determining...
Length
Dimension assumed to be meters. The long dimension of the equipment's primary envelope (for example, the height of a...
Width
Dimension assumed to be meters. The width dimension of the equipment's primary envelope (for example, the width of a...
Depth
Dimension assumed to be meters. The dimension of the equipment's primary envelope perpendicular to the side of its...
Weight
Weight of equipment in kilograms (kg).
EnclosureMaterial
The material making up the enclosure, such as steel, stainless steel, fiberglass, PVC, etc.
EnclosureNemaRating
Equipment enclosures typically have a NEMA rating that describes its protection from weather/elements.
ListingAgency
Agency under which the equipment was listed per the associated standard. Examples include ETL, UL, CSA, etc
Warranty
Description of Manufacturer's warranty on the equipment.
EnergyStarRated
Does the equipment have an EnergyStar rating?
WhereManufactured
In which country was the equipment manufactured? Important to know for some incentive programs, as there may be a...
Base definition of an equipment item. An equipment defintion does not contain any data about a specific instance of a...

Type	extension of EquipmentDefinitionType
Type hierarchy	• EquipmentDefinitionType • JunctionBoxDefinitionType
Used by	Element PvDesignType/JunctionBoxDefintion
Model	Manufacturer , ModelNumber , ProductFamilyName{0,1} , Description{0,1} , MountingStyle{0,1} , Length{0,1} , Width{0,1} , Depth{0,1} , Weight{0,1} , EnclosureMaterial{0,1} , EnclosureNemaRating{0,1} , ListingAgency{0,1} , Warranty{0,1} , EnergyStarRated{0,1} , WhereManufactured{0,1}
Children	Depth, Description, EnclosureMaterial, EnclosureNemaRating, EnergyStarRated, Length, ListingAgency, Manufacturer, ModelNumber, MountingStyle, ProductFamilyName, Warranty, Weight, WhereManufactured, Width

Attributes

QName	Type	Fixed	Default	Use
Id	xs:ID			required

Source

```
<xs:complexType name="JunctionBoxDefinitionType">
  <xs:complexContent>
    <xs:extension base="EquipmentDefinitionType"/>
  </xs:complexContent>
</xs:complexType>
```

Complex Type `DisconnectSwitchDefinitionType`

Namespace	http://www.iepmodel.net

Diagram

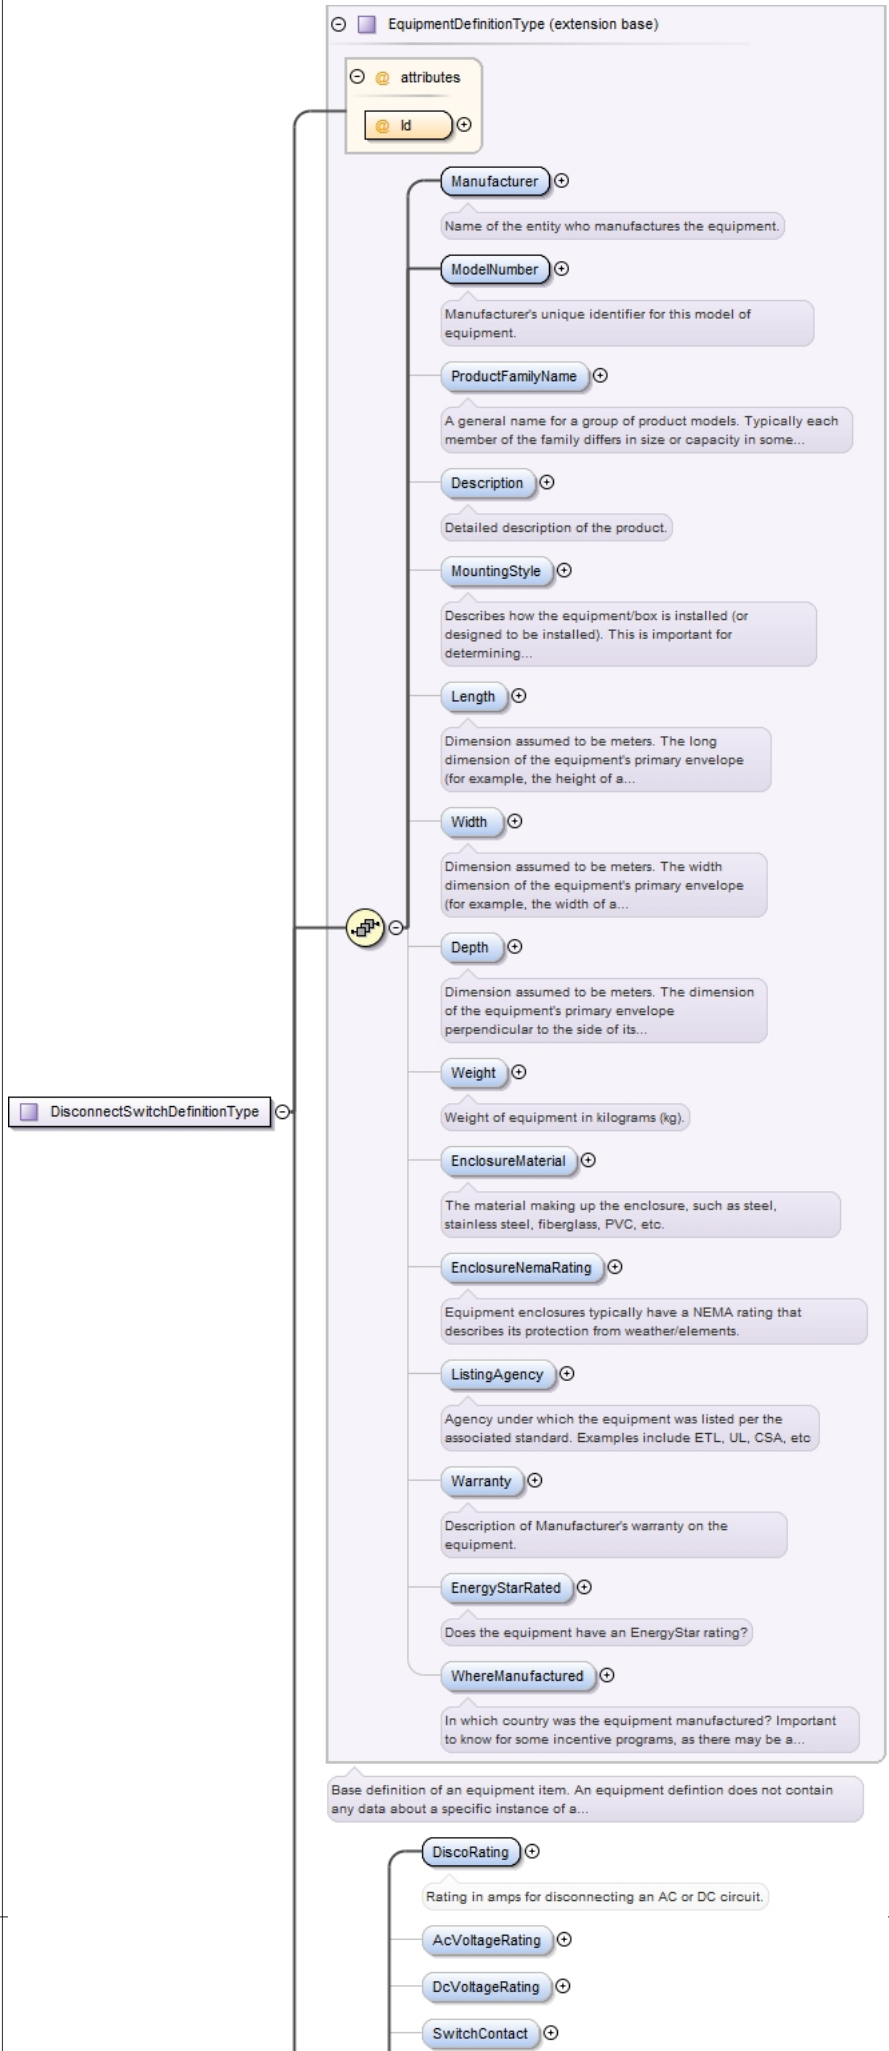
DisconnectSwitchDefinitionType
EquipmentDefinitionType (extension base)
attributes
Id
Manufacturer
Name of the entity who manufactures the equipment.
ModelNumber
Manufacturer's unique identifier for this model of equipment.
ProductFamilyName
A general name for a group of product models. Typically each member of the family differs in size or capacity in some...
Description
Detailed description of the product.
MountingStyle
Describes how the equipment/box is installed (or designed to be installed). This is important for determining...
Length
Dimension assumed to be meters. The long dimension of the equipment's primary envelope (for example, the height of a...
Width
Dimension assumed to be meters. The width dimension of the equipment's primary envelope (for example, the width of a...
Depth
Dimension assumed to be meters. The dimension of the equipment's primary envelope perpendicular to the side of its...
Weight
Weight of equipment in kilograms (kg).
EnclosureMaterial
The material making up the enclosure, such as steel, stainless steel, fiberglass, PVC, etc.
EnclosureNemaRating
Equipment enclosures typically have a NEMA rating that describes its protection from weather/elements.
ListingAgency
Agency under which the equipment was listed per the associated standard. Examples include ETL, UL, CSA, etc
Warranty
Description of Manufacturer's warranty on the equipment.
EnergyStarRated
Does the equipment have an EnergyStar rating?
WhereManufactured
In which country was the equipment manufactured? Important to know for some incentive programs, as there may be a...
Base definition of an equipment item. An equipment defintion does not contain any data about a specific instance of a...
DiscoRating
Rating in amps for disconnecting an AC or DC circuit.
AcVoltageRating
DcVoltageRating
SwitchContact

Type	extension of EquipmentDefinitionType
Type hierarchy	• EquipmentDefinitionType • DisconnectSwitchDefinitionType
Used by	Element PvDesignType/DisconnectSwitchDefinition
Model	Manufacturer , ModelNumber , ProductFamilyName{0,1} , Description{0,1} , MountingStyle{0,1} , Length{0,1} , Width{0,1} , Depth{0,1} , Weight{0,1} , EnclosureMaterial{0,1} , EnclosureNemaRating{0,1} , ListingAgency{0,1} , Warranty{0,1} , EnergyStarRated{0,1} , WhereManufactured{0,1} , DiscoRating , AcVoltageRating{0,1} , DcVoltageRating{0,1} , SwitchContact{0,1} , Duty{0,1} , VisibleLock{0,1} , Fusible{0,1} , Fuse{0,1}
Children	AcVoltageRating, DcVoltageRating, Depth, Description, DiscoRating, Duty, EnclosureMaterial, EnclosureNemaRating, EnergyStarRated, Fuse, Fusible, Length, ListingAgency, Manufacturer, ModelNumber, MountingStyle, ProductFamilyName, SwitchContact, VisibleLock, Warranty, Weight, WhereManufactured, Width

Attributes

QName	Type	Fixed	Default	Use
Id	xs:ID			required

Source

```
<xs:complexType name="DisconnectSwitchDefinitionType">
  <xs:complexContent>
    <xs:extension base="EquipmentDefinitionType">
      <xs:sequence>
        <xs:element minOccurs="1" name="DiscoRating" type="xs:integer">
          <xs:annotation>
            <xs:documentation>Rating in amps for disconnecting an AC or DC circuit.</
xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element minOccurs="0" name="AcVoltageRating" type="xs:integer"/>
        <xs:element minOccurs="0" name="DcVoltageRating" type="xs:integer"/>
        <xs:element name="SwitchContact" minOccurs="0" type="SwitchContactActionEnumType">
          <xs:annotation>
            <xs:documentation>The terms pole and throw are also used to describe switch
 contact variations. The number of "poles" is the number of separate circuits which are
 controlled by a switch. For example, a "2-pole" switch has two separate identical sets
 of contacts controlled by the same knob. The number of "throws" is the number of separate
 positions that the switch can adopt. A single-throw switch has one pair of contacts that
 can either be closed or open. A double-throw switch has a contact that can be connected
 to either of two other contacts, a triple-throw has a contact which can be connected to
 one of three other contacts, etc</xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element minOccurs="0" name="Duty" type="SwitchDutyEnumType"/>
        <xs:element minOccurs="0" name="VisibleLock" type="xs:boolean">
          <xs:annotation>
            <xs:documentation>Does the switch have a visible locking mechnism?</
xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element minOccurs="0" name="Fusible" type="xs:boolean">
          <xs:annotation>
            <xs:documentation>Do the switch circuits include fuses?</xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element minOccurs="0" name="Fuse" type="FuseType">
          <xs:annotation>
            <xs:documentation>If the switch includes fuses, this describes the fuses.</
xs:documentation>
          </xs:annotation>
        </xs:element>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

Complex Type FuseType

Namespace	http://www.iepmodel.net
Annotations	Extends the abstract OverCurrentProtectionDeviceType (OCPD) element. A fuse is a disposable, one time use OCPD lacking any disconnect means.

Diagram	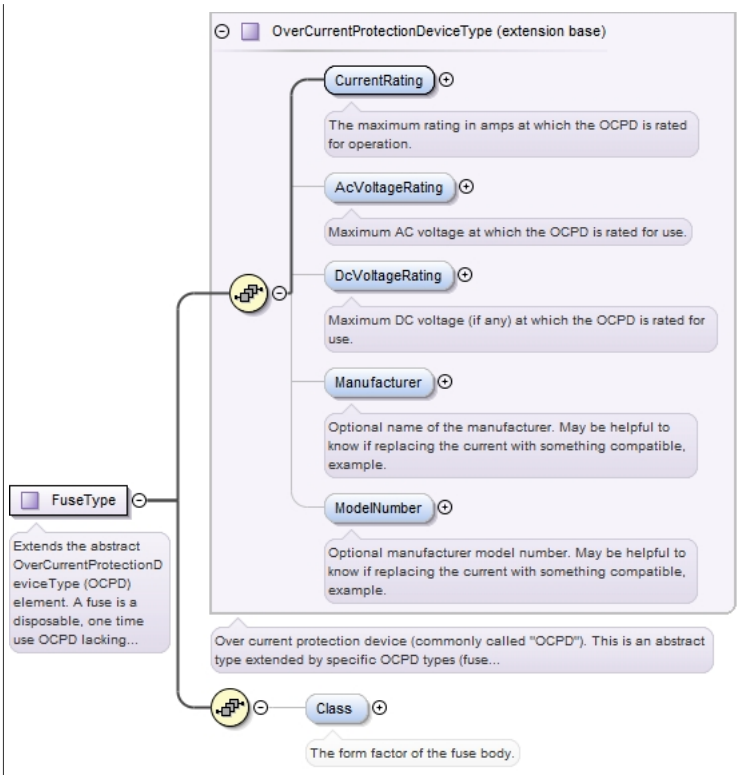
Type	extension of OverCurrentProtectionDeviceType
Type hierarchy	• OverCurrentProtectionDeviceType • FuseType
Used by	Element DisconnectSwitchDefinitionType/Fuse
Model	CurrentRating , AcVoltageRating{0,1} , DcVoltageRating{0,1} , Manufacturer{0,1} , ModelNumber{0,1} , Class{0,1}
Children	AcVoltageRating, Class, CurrentRating, DcVoltageRating, Manufacturer, ModelNumber
Source	<xs:complexType name="FuseType"> <xs:annotation> <xs:documentation>Extends the abstract OverCurrentProtectionDeviceType (OCPD) element. A fuse is a disposable, one time use OCPD lacking any disconnect means.</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="OverCurrentProtectionDeviceType"> <xs:sequence> <xs:element minOccurs="0" name="Class" type="xs:string"> <xs:annotation> <xs:documentation>The form factor of the fuse body.</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType>

Complex Type `InverterType`

Namespace	http://www.iepmodel.net
Annotations	Defines an inverter that converts DC electricity to AC. Includes all the possible DC inputs. Works well for modeling string based inverters. Micro-inverters are modeled by defining a single PPT with a single IndividualCircuitInput for the module feeding it. To define an AC Branch Circuit, use the AcTie-InCircuitConnection element to refer to the next inverter in the series circuit.

Diagram	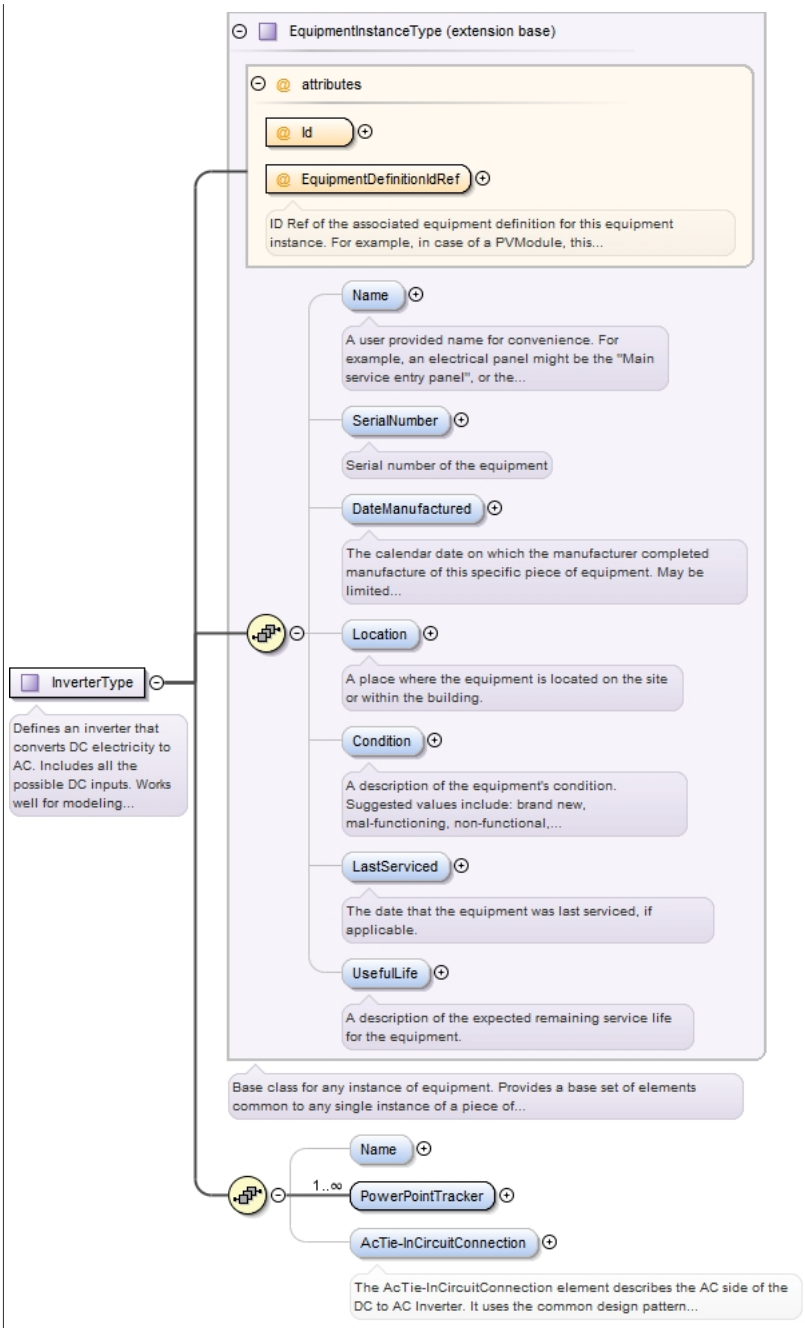
Type	extension of EquipmentInstanceType
Type hierarchy	• EquipmentInstanceType • InverterType
Used by	Element PvDesignType/Inverter
Model	Name{0,1} , SerialNumber{0,1} , DateManufactured{0,1} , Location{0,1} , Condition{0,1} , LastServiced{0,1} , UsefulLife{0,1} , Name{0,1} , PowerPointTracker+ , AcTie-InCircuitConnection{0,1}
Children	AcTie-InCircuitConnection, Condition, DateManufactured, LastServiced, Location, Name, PowerPointTracker, SerialNumber, UsefulLife
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **EquipmentDefinitionIdRef** / IDREF / / / required ID Ref of the associated equipment definition for this equipment instance. For example, in case of a PVModule, this would be the ID of the PvModuleDefinition element that describes this particular PV module instance. **Id** / xs:ID / / / required

Source	<xs:complexType name="InverterType"> <xs:annotation> <xs:documentation>Defines an inverter that converts DC electricity to AC. Includes all the possible DC inputs. Works well for modeling string based inverters. Micro-inverters are modeled by defining a single PPT with a single IndividualCircuitInput for the module feeding it. To define an AC Branch Circuit, use the AcTie-InCircuitConnection element to refer to the next inverter in the series circuit.</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="EquipmentInstanceType"> <xs:sequence> <xs:element name="Name" type="xs:string" minOccurs="0"/> <xs:element maxOccurs="unbounded" name="PowerPointTracker" type="PowerPointTrackerType"/> <xs:element name="AcTie-InCircuitConnection" type="CircuitConnectionType" minOccurs="0"> <xs:annotation> <xs:documentation>The AcTie-InCircuitConnection element describes the AC side of the DC to AC Inverter. It uses the common design pattern of each electrical equipment instance having a single CircuitConnection element that describes its electrical connection to upstream electrical equipment (for example, Combiners, ElectricalPanels, etc). However, Inverters do not have a parent element to which the CircuitConnection refers. Instead, it relies on its optional EquipmentWhereConnectedIdRef attribute to describe the EquipmentInstance to which it is connected. For string inverters, the EquipmentWhereConnectedIdRef attribute should reference the ElectricalPanel element that represents the electrical panel where the Inverter will be (or already is) connected. In micro-inverter case, the EquipmentWhereConnectedIdRef attribute should reference the ID of the next micro-inverter in the circuit. The last inverter in the circuit will reference the electrical panel where interconnected. If the PvDesign is used independently (a PvDesign document) then the EquipmentWhereConnectedIdRef attribute should reference an ElectricalPanel element within the PvDesign element. The referenced ElectricalPanel can represent an existing electrical panel on the site, or a new panel (perhaps serving as an AC Combiner). If the PvDesign is used within a Project.xml document, and the PvDesign calls for the connection of the Inverter to an existing ElectricalPanel, the EquipmentWhereConnectedIdRef attribute should reference an ElectricalPanel element within the ExistingElectricalDistributionHierarchy element of the Site. If the PvDesign calls for the inverter to connect to a new ElectricPanel, then the EquipmentWhereConnectedIdRef attribute should reference an ElectricalPanel instance within the PvDesign itself. NOTE: If an external AC Disconnect Switch is required, it is a part of this CircuitConnection's WirewaySegments. One segment can be a disconnect type.</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType>

Complex Type `PowerPointTrackerType`

Namespace	http://www.iepmodel.net
Annotations	PPT in an inverter. An inverter may have more than one PPT.
Diagram	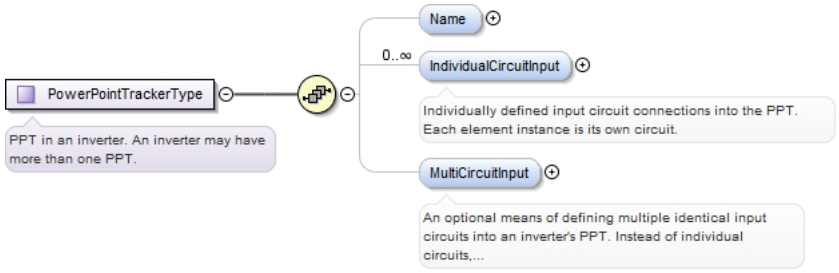
Used by	Element InverterType/PowerPointTracker
Model	Name{0,1} , IndividualCircuitInput* , MultiCircuitInput{0,1}
Children	IndividualCircuitInput, MultiCircuitInput, Name
Source	<xs:complexType name="PowerPointTrackerType"> <xs:annotation> <xs:documentation>PPT in an inverter. An inverter may have more than one PPT.</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="Name" minOccurs="0" type="xs:string"/> <xs:element maxOccurs="unbounded" name="IndividualCircuitInput" type="InverterDcSingleInputType" minOccurs="0">

```
      <xs:annotation>
        <xs:documentation>Individually defined input circuit connections into the PPT.
 Each element instance is its own circuit.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="MultiCircuitInput" type="InverterDcMultiInputType">
      <xs:annotation>
        <xs:documentation>An optional means of defining multiple identical input circuits
 into an inverter's PPT. Instead of individual circuits, it contains a single definition
 of a PvArray's set of identical strings. The MultiCircuitInput can include more than one
 set of PvArray inputs, provided the inverter can support them. In most cases an inverter
 will only support the inputs from a single PvArray element. Since a PvArray is defined as
 a set of modules that share the same LayoutPlane, there may be occasions where one string
 might define a PvArray, and a second string defines another PvArray, making two separate
 PvArray elements that each feed only a single string into the PPT. NOTE: not relevant
 in use of micro-inverter architectures where the inverter always has a single circuit
 input.</xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

Complex Type `InverterDcSingleInputType`

Namespace	http://www.iepmodel.net
Annotations	An individual circuit connection into a PPT. A single PPT may have more than one connection.
Diagram	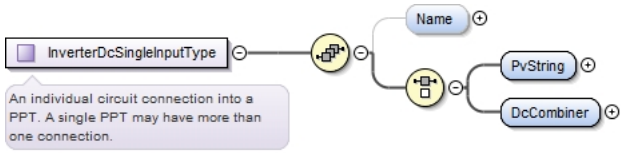
Used by	Element PowerPointTrackerType/IndividualCircuitInput
Model	Name{0,1} , (PvString | DcCombiner)
Children	DcCombiner, Name, PvString
Source	<xs:complexType name="InverterDcSingleInputType"> <xs:annotation> <xs:documentation>An individual circuit connection into a PPT. A single PPT may have more than one connection.</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="Name" type="xs:string" minOccurs="0"/> <xs:choice> <xs:element maxOccurs="1" minOccurs="1" name="PvString" type="PvStringType"/> <xs:element maxOccurs="1" minOccurs="1" name="DcCombiner" type="CombinerType"/> </xs:choice> </xs:sequence> </xs:complexType>

Complex Type `PvStringType`

Namespace	http://www.iepmodel.net
Annotations	A string of PV modules connected in series.
Diagram	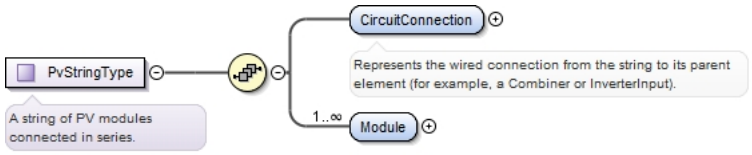
Used by	Elements CombinerType/PvStringInput, InverterDcSingleInputType/PvString
Model	CircuitConnection , Module+
Children	CircuitConnection, Module
Source	<xs:complexType name="PvStringType"> <xs:annotation> <xs:documentation>A string of PV modules connected in series.</xs:documentation> </xs:annotation> <xs:sequence>

```
    <xs:element name="CircuitConnection" type="CircuitConnectionType">
      <xs:annotation>
        <xs:documentation>Represents the wired connection from the string to its parent
 element (for example, a Combiner or InverterInput).</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="unbounded" minOccurs="1" name="Module" type="PvModuleType"/>
  </xs:sequence>
</xs:complexType>
```

Complex Type `PvModuleType`

Namespace	http://www.iepmodel.net
Annotations	`Represents an instance of a module contained in the design.`

Diagram

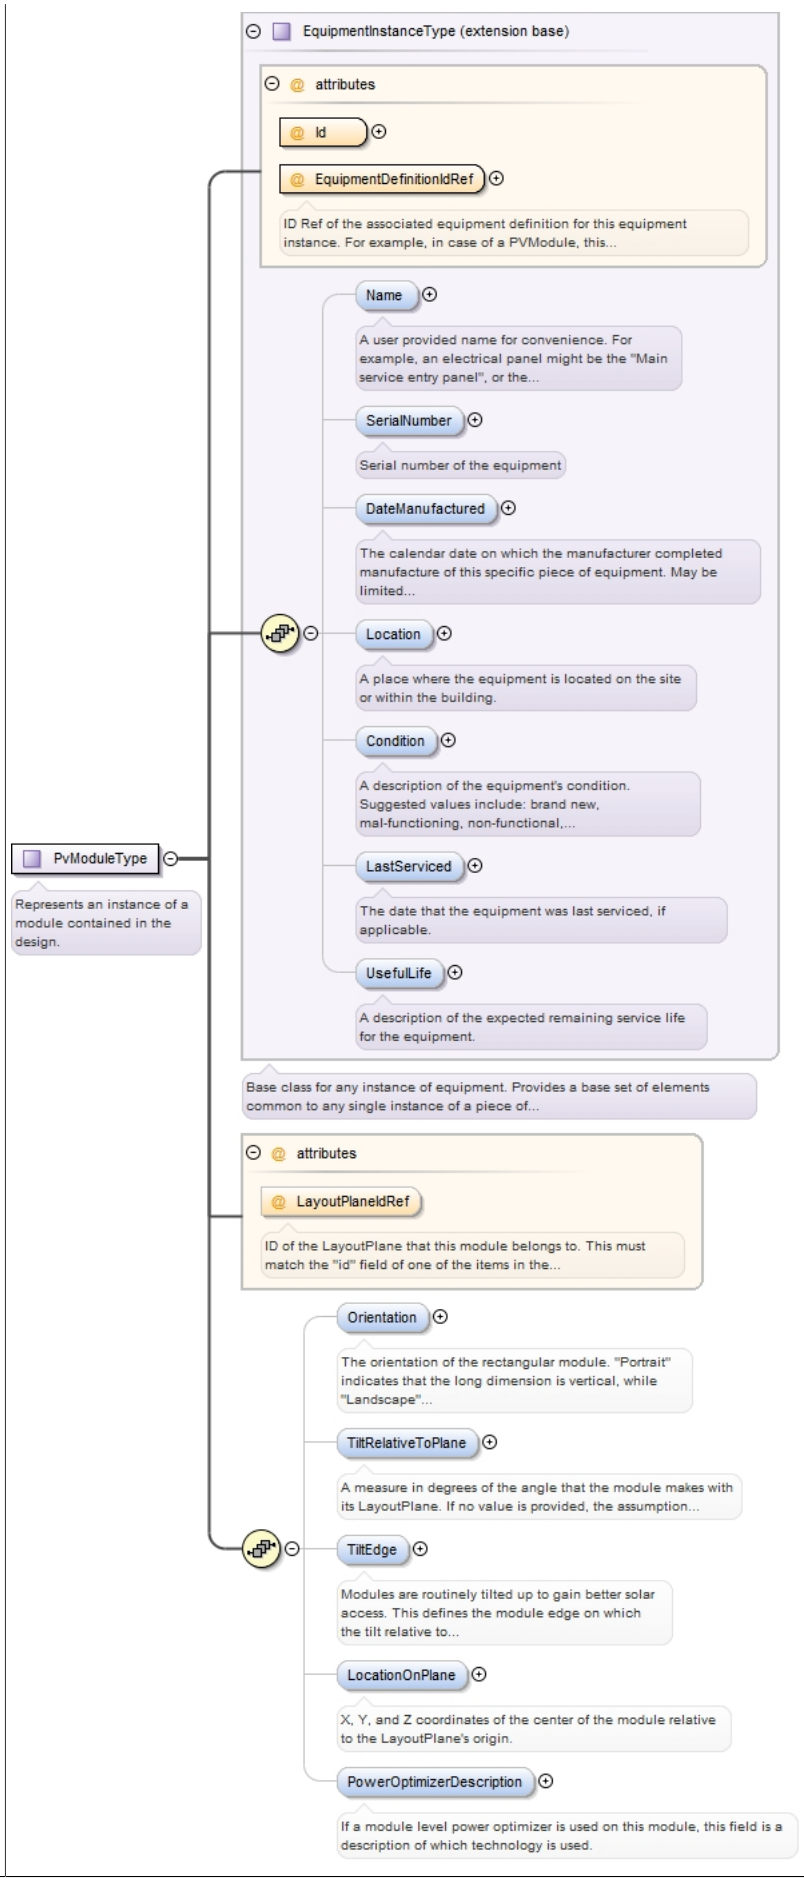
EquipmentInstanceType (extension base)
attributes
Id
EquipmentDefinitionIdRef
ID Ref of the associated equipment definition for this equipment instance. For example, in case of a PVModule, this...
Name
A user provided name for convenience. For example, an electrical panel might be the "Main service entry panel", or the...
SerialNumber
Serial number of the equipment
DateManufactured
The calendar date on which the manufacturer completed manufacture of this specific piece of equipment. May be limited...
Location
A place where the equipment is located on the site or within the building.
Condition
A description of the equipment's condition. Suggested values include: brand new, mal-functioning, non-functional,...
LastServiced
The date that the equipment was last serviced, if applicable.
UsefulLife
A description of the expected remaining service life for the equipment.
Base class for any instance of equipment. Provides a base set of elements common to any single instance of a piece of...
PvModuleType
Represents an instance of a module contained in the design.
attributes
LayoutPlaneIdRef
ID of the LayoutPlane that this module belongs to. This must match the "id" field of one of the items in the...
Orientation
The orientation of the rectangular module. "Portrait" indicates that the long dimension is vertical, while "Landscape"...
TiltRelativeToPlane
A measure in degrees of the angle that the module makes with its LayoutPlane. If no value is provided, the assumption...
TiltEdge
Modules are routinely tilted up to gain better solar access. This defines the module edge on which the tilt relative to...
LocationOnPlane
X, Y, and Z coordinates of the center of the module relative to the LayoutPlane's origin.
PowerOptimizerDescription
If a module level power optimizer is used on this module, this field is a description of which technology is used.

Type	extension of EquipmentInstanceType
Type hierarchy	• EquipmentInstanceType • PvModuleType
Used by	Element PvStringType/Module
Model	Name{0,1} , SerialNumber{0,1} , DateManufactured{0,1} , Location{0,1} , Condition{0,1} , LastServiced{0,1} , UsefulLife{0,1} , Orientation{0,1} , TiltRelativeToPlane{0,1} , TiltEdge{0,1} , LocationOnPlane{0,1} , PowerOptimizerDescription{0,1}
Children	Condition, DateManufactured, LastServiced, Location, LocationOnPlane, Name, Orientation, PowerOptimizerDescription, SerialNumber, TiltEdge, TiltRelativeToPlane, UsefulLife

Attributes

QName	Type	Fixed	Default	Use
EquipmentDefinitionIdRef	IDREF			required
	ID Ref of the associated equipment definition for this equipment instance. For example, in case of a PVModule, this would be the ID of the PvModuleDefinition element that describes this particular PV module instance.			
Id	xs:ID			required
LayoutPlaneIdRef				optional
	ID of the LayoutPlane that this module belongs to. This must match the "id" field of one of the items in the LayoutPlanes field of the PvDesignType instance this module belongs to.			

Source

```
<xs:complexType name="PvModuleType">
  <xs:annotation>
    <xs:documentation>Represents an instance of a module contained in the design.</
xs:documentation>
  </xs:annotation>
  <xs:complexContent>
    <xs:extension base="EquipmentInstanceType">
      <xs:sequence>
        <xs:element minOccurs="0" name="Orientation" default="Portrait">
          <xs:annotation>
            <xs:documentation>The orientation of the rectangular module. "Portrait"
 indicates that the long dimension is vertical, while "Landscape" indicates that the long
 dimension is horizontal.</xs:documentation>
          </xs:annotation>
          <xs:simpleType>
            <xs:restriction base="xs:string">
              <xs:enumeration value="Portrait"/>
              <xs:enumeration value="Landscape"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="TiltRelativeToPlane" minOccurs="0" type="xs:integer"
 default="0">
          <xs:annotation>
            <xs:documentation>A measure in degrees of the angle that the module makes
 with its LayoutPlane. If no value is provided, the assumption is that the module will be
 placed parallel to its LayoutPlane.</xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element name="TiltEdge" maxOccurs="1" minOccurs="0" type="TiltEdgeEnumType">
          <xs:annotation>
            <xs:documentation>Modules are routinely tilted up to gain better solar access.
 This defines the module edge on which the tilt relative to the LayoutPlane's azimuth
 occurs. For example, a "top" edge tilt is routinely used on a north roof to tilt the
 module to face south (aka "reverse tilt"). "Bottom edge" is the edge toward the azimuth
 direction of the LayoutPlane.</xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element minOccurs="0" name="LocationOnPlane" type="Location3dType">
          <xs:annotation>
            <xs:documentation>X, Y, and Z coordinates of the center of the module relative
 to the LayoutPlane's origin.</xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element minOccurs="0" name="PowerOptimizerDescription" type="xs:string">
          <xs:annotation>
            <xs:documentation>If a module level power optimizer is used on this module,
 this field is a description of which technology is used.</xs:documentation>
          </xs:annotation>
        </xs:element>
      </xs:sequence>
      <xs:attribute name="LayoutPlaneIdRef">
        <xs:annotation>
```

```
          <xs:documentation>ID of the LayoutPlane that this module belongs to. This must
 match the "id" field of one of the items in the LayoutPlanes field of the PvDesignType
 instance this module belongs to.</xs:documentation>
        </xs:annotation>
      </xs:attribute>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

Complex Type `CombinerType`

Namespace	http://www.iepmodel.net
Annotations	`Note that the EquipmentDefinitionRefID for the Combiner references the ID of the associated CombinerDefinition.`

Diagram	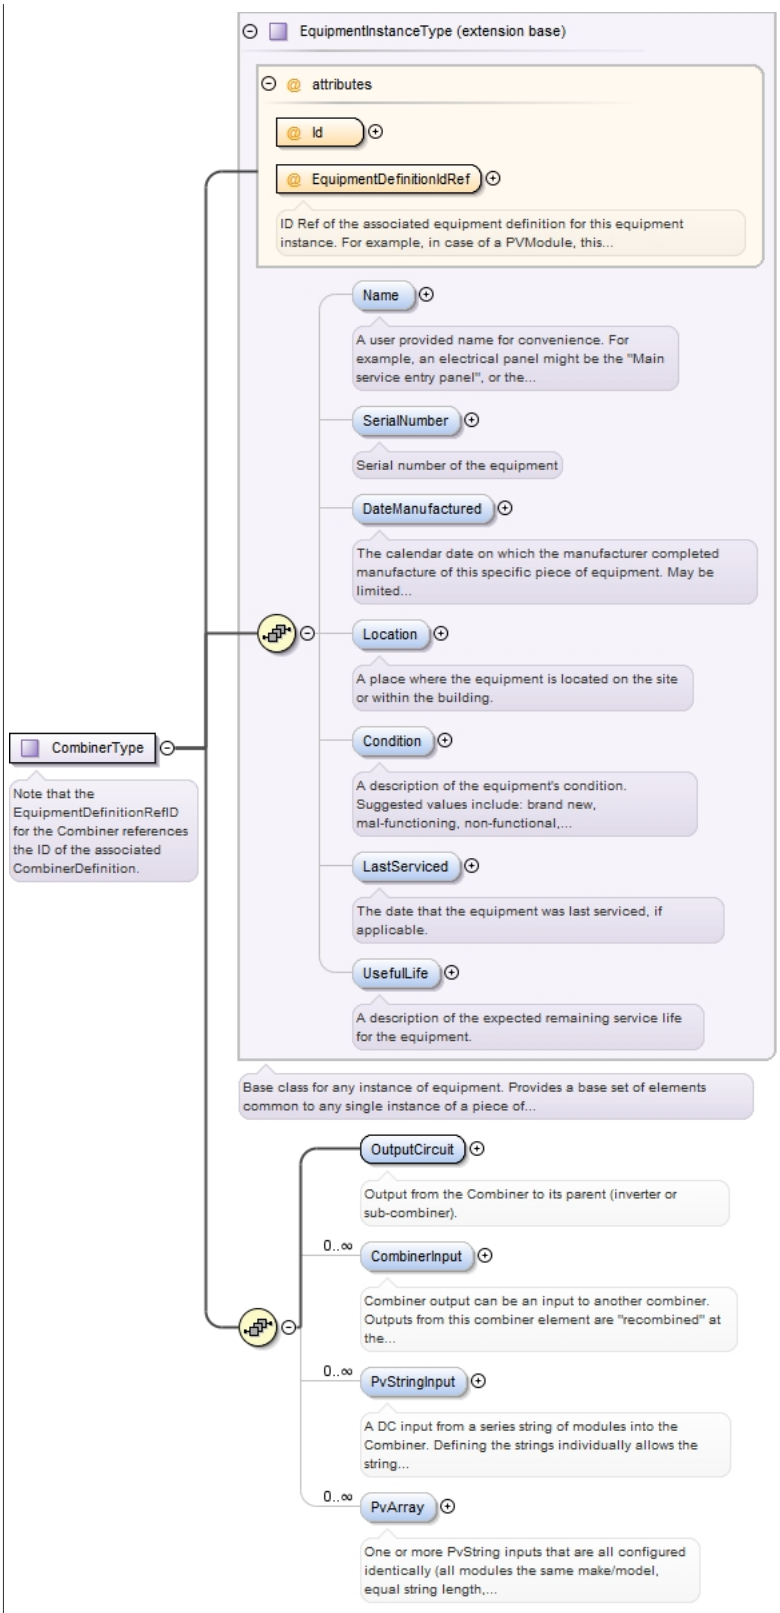
Type	extension of EquipmentInstanceType
Type hierarchy	• EquipmentInstanceType • CombinerType
Used by	Elements CombinerType/CombinerInput, InverterDcSingleInputType/DcCombiner
Model	Name{0,1} , SerialNumber{0,1} , DateManufactured{0,1} , Location{0,1} , Condition{0,1} , LastServiced{0,1} , UsefulLife{0,1} , OutputCircuit , CombinerInput* , PvStringInput* , PvArray*

Children	CombinerInput, Condition, DateManufactured, LastServiced, Location, Name, OutputCircuit, PvArray, PvStringInput, SerialNumber, UsefulLife
Attributes	

QName	Type	Fixed	Default	Use
EquipmentDefinitionIdRef	IDREF			required
	ID Ref of the associated equipment definition for this equipment instance. For example, in case of a PVModule, this would be the ID of the PvModuleDefinition element that describes this particular PV module instance.			
Id	xs:ID			required

Source

```
<xs:complexType name="CombinerType">
  <xs:annotation>
    <xs:documentation>Note that the EquipmentDefinitionRefID for the Combiner references
 the ID of the associated CombinerDefinition.</xs:documentation>
  </xs:annotation>
  <xs:complexContent>
    <xs:extension base="EquipmentInstanceType">
      <xs:sequence>
        <xs:element name="OutputCircuit" type="CircuitConnectionType">
          <xs:annotation>
            <xs:documentation>Output from the Combiner to its parent (inverter or sub-
combiner).</xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element maxOccurs="unbounded" minOccurs="0" name="CombinerInput"
 type="CombinerType">
          <xs:annotation>
            <xs:documentation>Combiner output can be an input to another combiner. Outputs
 from this combiner element are "recombined" at the combiner in which this element is
 found.</xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element maxOccurs="unbounded" minOccurs="0" name="PvStringInput"
 type="PvStringType">
          <xs:annotation>
            <xs:documentation>A DC input from a series string of modules into the
 Combiner. Defining the strings individually allows the string definitions to vary.</
xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element name="PvArray" type="PvArrayType" maxOccurs="unbounded" minOccurs="0">
          <xs:annotation>
            <xs:documentation>One or more PvString inputs that are all configured
 identically (all modules the same make/model, equal string length, and share the same
 LayoutPlane). The PvArray element provides an alternate, and simpler means of defining
 a set of identical strings than using the PvString element which lists every module
 individually, making it quite verbose. The PvArray defines a single string and how many
 of them there are. NOTE: Must consider total number of strings to be separate inputs into
 the combiner.</xs:documentation>
          </xs:annotation>
        </xs:element>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

Complex Type PvArrayType

Namespace	http://www.iepmodel.net
Annotations	A PV Array is defined as a group of modules that share the same make and model, are installed on the same LayoutPlane, and feed the same inverter. Defining PvArrays instead of individual strings allows a system to be defined using far fewer records because there are no individual PvModule instances.

Diagram

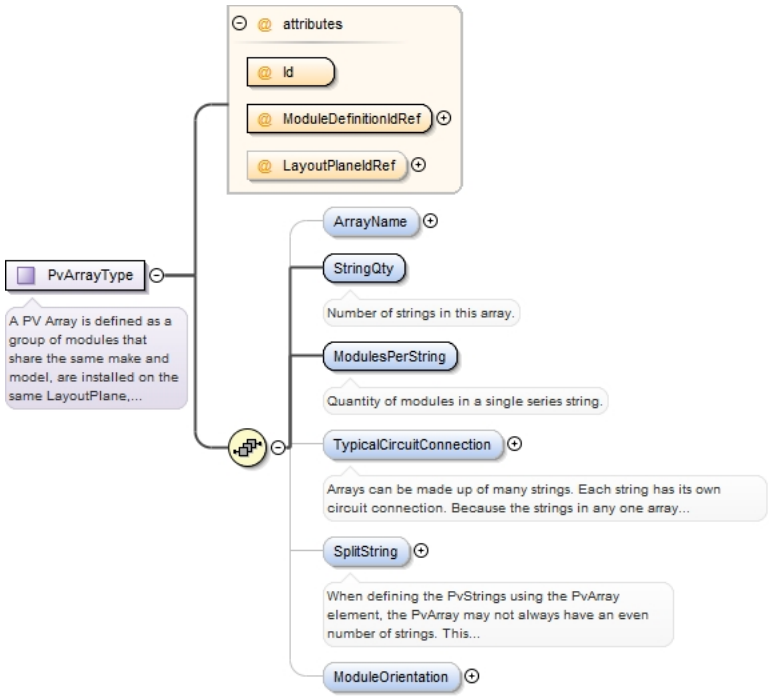

Used by

Elements CombinerType/PvArray, InverterDcMultiInputType/PvArray

Model

ArrayName{0,1} , StringQty , ModulesPerString , TypicalCircuitConnection{0,1} , SplitString{0,1} , ModuleOrientation{0,1}

Children

ArrayName, ModuleOrientation, ModulesPerString, SplitString, StringQty, TypicalCircuitConnection

Attributes

QName	Type	Fixed	Default	Use
Id				required
LayoutPlaneIdRef	xs:IDREF			optional
ModuleDefinitionIdRef	xs:IDREF			required

Source

```
<xs:complexType name="PvArrayType">
  <xs:annotation>
    <xs:documentation>A PV Array is defined as a group of modules that share the same make
 and model, are installed on the same LayoutPlane, and feed the same inverter. Defining
 PvArrays instead of individual strings allows a system to be defined using far fewer
 records because there are no individual PvModule instances.</xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element minOccurs="0" name="ArrayName" type="xs:string"/>
    <xs:element name="StringQty">
      <xs:annotation>
        <xs:documentation>Number of strings in this array.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="ModulesPerString">
      <xs:annotation>
        <xs:documentation>Quantity of modules in a single series string.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="TypicalCircuitConnection" minOccurs="0"
 type="CircuitConnectionType">
      <xs:annotation>
        <xs:documentation>Arrays can be made up of many strings. Each string has its own
 circuit connection. Because the strings in any one array are almost always connected to
 their parent element in a common way, this TypicalCircuitConnection element defines the
 commonly used connection approach from any one of the strings to the parent element (a
 combiner, or inverter).</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="SplitString" type="PartialStringType">
      <xs:annotation>
        <xs:documentation>When defining the PvStrings using the PvArray element, the
 PvArray may not always have an even number of strings. This type allows a partial string
 to be included in an array, noting how many modules of the total string length are in
 this array, and setting a reference to another array where the remainder of the string is
 included.</xs:documentation>
```

```
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="ModuleOrientation" type="PvModuleOrientationEnumType"/
>
  </xs:sequence>
  <xs:attribute name="Id" use="required"/>
  <xs:attribute name="ModuleDefinitionIdRef" type="xs:IDREF" use="required"/>
  <xs:attribute name="LayoutPlaneIdRef" type="xs:IDREF"/>
</xs:complexType>
```

Complex Type `PartialStringType`

Namespace	http://www.iepmodel.net
Annotations	When defining the PvStrings using the PvArray element, the PvArray may not have an even number of strings. This type allows a partial string to be included in an array, noting how many modules of the total string length are in this array, and setting a reference to another array where the remainder of the string is included.
Diagram	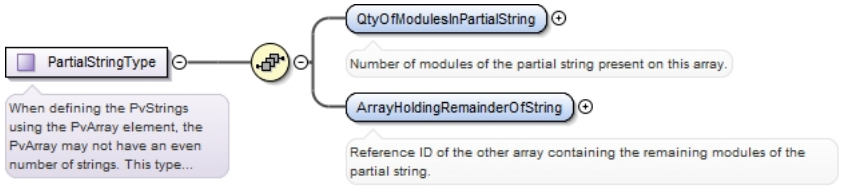
Used by	Element PvArrayType/SplitString
Model	QtyOfModulesInPartialString , ArrayHoldingRemainderOfString
Children	ArrayHoldingRemainderOfString, QtyOfModulesInPartialString
Source	

```
<xs:complexType name="PartialStringType">
  <xs:annotation>
    <xs:documentation>When defining the PvStrings using the PvArray element, the PvArray
 may not have an even number of strings. This type allows a partial string to be included
 in an array, noting how many modules of the total string length are in this array, and
 setting a reference to another array where the remainder of the string is included.</
xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="QtyOfModulesInPartialString" type="xs:integer">
      <xs:annotation>
        <xs:documentation>Number of modules of the partial string present on this array.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="ArrayHoldingRemainderOfString" type="xs:IDREF">
      <xs:annotation>
        <xs:documentation>Reference ID of the other array containing the remaining modules
 of the partial string.</xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

Complex Type `InverterDcMultiInputType`

Namespace	http://www.iepmodel.net
Annotations	A group of identical individual circuit connections into a PPT. A single PPT may have more than one connection.
Diagram	
Used by	Element PowerPointTrackerType/MultiCircuitInput
Model	PvArray+
Children	PvArray
Source	

```
<xs:complexType name="InverterDcMultiInputType">
  <xs:annotation>
    <xs:documentation>A group of identical individual circuit connections into a PPT. A
 single PPT may have more than one connection.</xs:documentation>
  </xs:annotation>
```

```
  <xs:sequence>
    <xs:element name="PvArray" type="PvArrayType" maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>A set of one or more string inputs. NOTE: If fed as an input to
 an inverters PowerPointTracker, then must consider total number of strings to be separate
 inputs into the PPT. Make sure PPT has combiner capable of handling these separate string
 circuits.</xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

Complex Type `GeoLocationType`

Namespace	http://www.iepmodel.net
Annotations	`Geographic location.`
Diagram	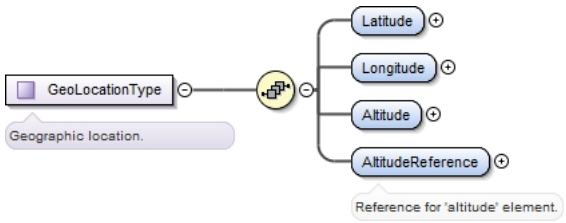
Used by	Element PvDesignType/SceneOriginGeoTag
Model	Latitude , Longitude , Altitude , AltitudeReference
Children	Altitude, AltitudeReference, Latitude, Longitude
`Source`	

```
<xs:complexType name="GeoLocationType">
  <xs:annotation>
    <xs:documentation>Geographic location.</xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="Latitude" type="xs:double"/>
    <xs:element name="Longitude" type="xs:double"/>
    <xs:element name="Altitude" type="xs:double"/>
    <xs:element name="AltitudeReference" default="Ground">
      <xs:annotation>
        <xs:documentation>Reference for 'altitude' element.</xs:documentation>
      </xs:annotation>
      <xs:simpleType>
        <xs:restriction base="xs:string">
          <xs:enumeration value="Ground">
            <xs:annotation>
              <xs:documentation>The altitude is measured from the ground.</
xs:documentation>
            </xs:annotation>
          </xs:enumeration>
          <xs:enumeration value="Ellipsoid">
            <xs:annotation>
              <xs:documentation>The altitude is measured from the ellipsoid.</
xs:documentation>
            </xs:annotation>
          </xs:enumeration>
          <xs:enumeration value="SeaLevel">
            <xs:annotation>
              <xs:documentation>The altitude is measured from sea level.</
xs:documentation>
            </xs:annotation>
          </xs:enumeration>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

Complex Type `WaterHeatingSystemType`

Namespace	http://www.iepmodel.net

Annotations	`This system describes a generic system used for heating water. The end use may be HVAC, domestic or another.`
	
	`Attributes from Title24 WaterHeating`

Diagram

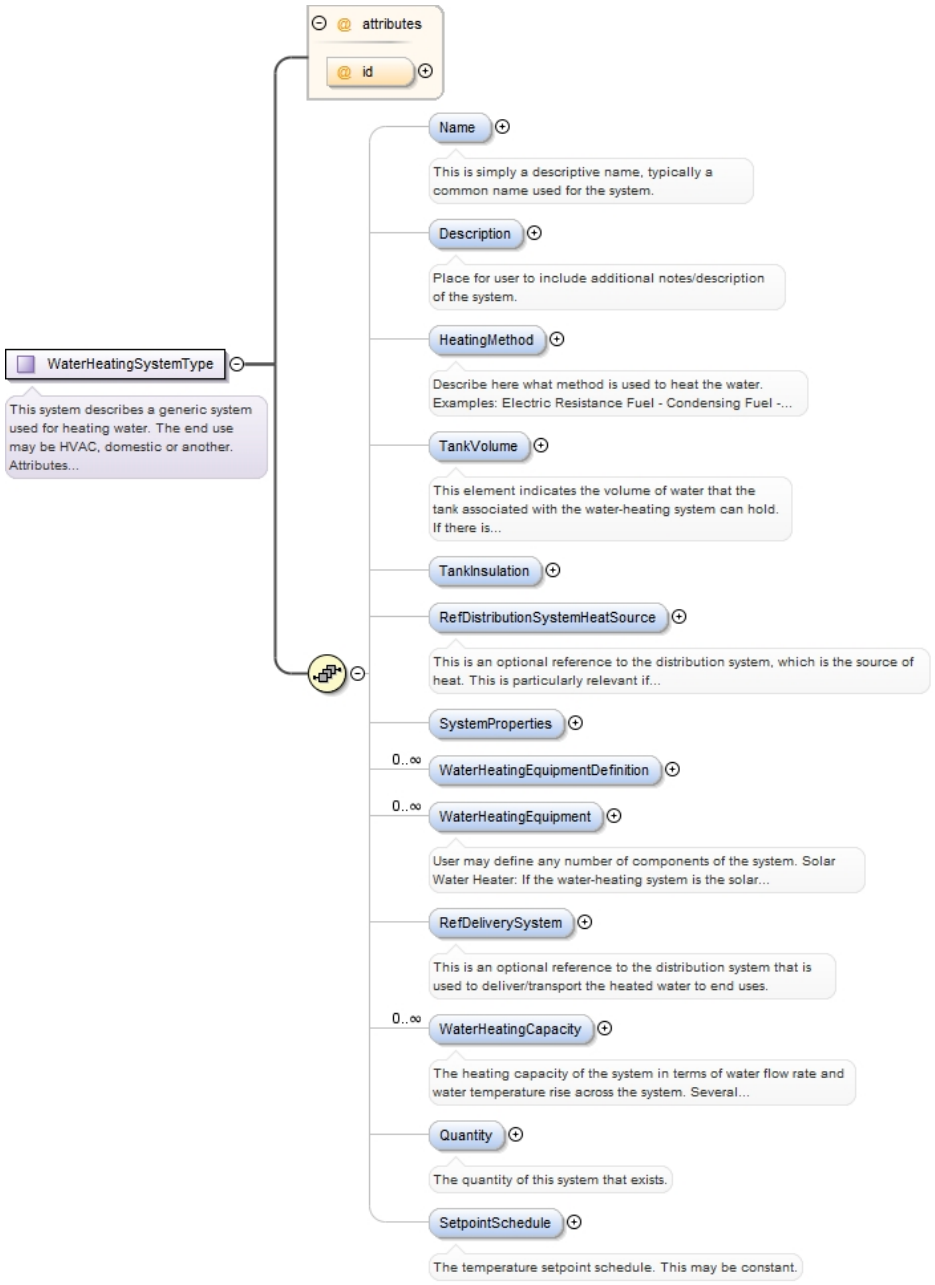

Used by

Elements: ProjectType/ExistingWaterHeatingSystem, SystemChoiceType/WaterHeating, WaterHeatingSystem

Model

Name{0,1} , Description{0,1} , HeatingMethod{0,1} , TankVolume{0,1} , TankInsulation{0,1} , RefDistributionSystemHeatSource{0,1} , SystemProperties{0,1} , WaterHeatingEquipmentDefinition* , WaterHeatingEquipment* , RefDeliverySystem{0,1} , WaterHeatingCapacity* , Quantity{0,1} , SetpointSchedule{0,1}

Children

Description, HeatingMethod, Name, Quantity, RefDeliverySystem, RefDistributionSystemHeatSource, SetpointSchedule, SystemProperties, TankInsulation, TankVolume, WaterHeatingCapacity, WaterHeatingEquipment, WaterHeatingEquipmentDefinition

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			optional

Source

```
<xs:complexType name="WaterHeatingSystemType">
  <xs:annotation>
    <xs:documentation>This system describes a generic system used for heating water.
 The end use may be HVAC, domestic or another. Attributes from Title24 WaterHeating</
xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">
```

```
      <xs:annotation>
        <xs:documentation>This is simply a descriptive name, typically a common name used
 for the system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Place for user to include additional notes/description of the
 system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="HeatingMethod" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Describe here what method is used to heat the water. Examples:
 Electric Resistance Fuel - Condensing Fuel - Non-Condensing Heat Pump – Air Source Heat
 Pump – Water Source Hybrid Heat Exchanger Solar Note, that some of the examples above
 require additional objects to be defined. For example: - If the heating type is Heat
 Exchanger, a reference to a distribution system that is the heat source is needed. -
 If solar, then additional details regarding the solar heating system are needed. This
 may simply be a reference to the distribution system that transfers heat from the solar
 panels to the water heating system. It may be an instance of Equipment Properties.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="TankVolume" type="VolumeType" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This element indicates the volume of water that the tank
 associated with the water-heating system can hold. If there is no tank, then this
 should have the value zero. Water heating systems wtih zero volume (no) tanks are
 commonly referred to as: - tankless - direct - instantaneous - boiler (typical in a large
 facility; used for space heating) Note that a hot water tank is not necessarily and does
 not have to be integrated with the water heating equipment. The water heater and the
 storage tank may be separate entities.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element minOccurs="0" name="TankInsulation" type="InsulationType"/>
    <xs:element maxOccurs="1" minOccurs="0" name="RefDistributionSystemHeatSource"
 type="xs:IDREF">
      <xs:annotation>
        <xs:documentation>This is an optional reference to the distribution system, which
 is the source of heat. This is particularly relevant if the heating method is a heat
 exchanger. For example, a facility may use hot water at multiple temperatures. One boiler
 may heat water to 180 degF to use for space heating. A heat exchanger may be used to
 extract heat from the 180degF water loop and heat another water loop to only 120 degF to
 be used as domestic hot water. Another use case is when multiple water heaters are used
 in series. The first heaters may heat water to 130 degF for one purpose, such as domestic
 hot water. Another heater may boost the water to a higher temperature for another use
 such as laundry or dish washing. Multiple hot water loops are often advantageous when the
 end uses are very far apart. The less distance that the hotter water has to travel, the
 less heat that will lost through the piping into the environment. It is then advantageous
 to boost the water temperature nearby the end use.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="SystemProperties" type="CommonSystemPropertiesType" minOccurs="0"
 maxOccurs="1"/>
    <xs:element maxOccurs="unbounded" minOccurs="0" name="WaterHeatingEquipmentDefinition"
 type="EquipmentDefinitionType"/>
    <xs:element maxOccurs="unbounded" minOccurs="0" name="WaterHeatingEquipment"
 nillable="false" type="EquipmentInstanceType">
      <xs:annotation>
        <xs:documentation>User may define any number of components of the system. Solar
 Water Heater: If the water-heating system is the solar type, it may be useful to describe
 the properties of the solar system with an instance of this object.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="1" minOccurs="0" name="RefDeliverySystem" type="xs:IDREF">
      <xs:annotation>
        <xs:documentation>This is an optional reference to the distribution system that is
 used to deliver/transport the heated water to end uses.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="WaterHeatingCapacity" type="WaterHeatingCapacityType" minOccurs="0"
 maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>The heating capacity of the system in terms of water flow rate
 and water temperature rise across the system. Several are allowed because it is not
 uncommon for manufacturers to specify the temperature rise at various flow rates.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Quantity" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>The quantity of this system that exists.</xs:documentation>
```

```
      </xs:annotation>
      <xs:simpleType>
        <xs:restriction base="xs:int">
          <xs:minInclusive value="0"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="SetpointSchedule" type="xs:IDREF" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>The temperature setpoint schedule. This may be constant.</
xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
  <xs:attribute name="id" type="xs:ID" use="optional"/>
</xs:complexType>
```

Complex Type `VolumeType`

Namespace	http://www.iepmodel.net
Annotations	`This is a base class used to represent a three-dimensional spatial quantity (i.e. a volume).`
Diagram	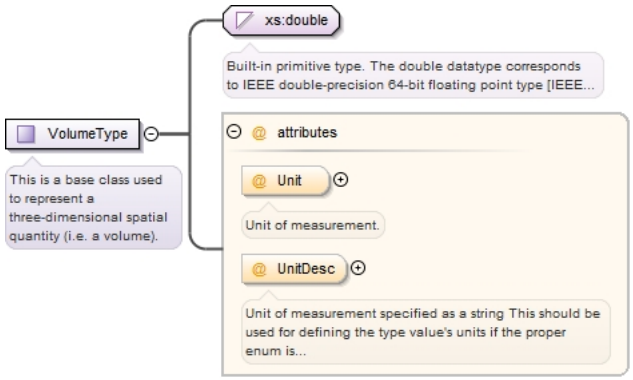
Type	extension of xs:double
Used by	Elements: ValueType/Water, WaterHeatingSystemType/TankVolume

Attributes

QName	Type	Fixed	Default	Use
Unit	VolumeUnitEnumType			optional
	`Unit of measurement.`			
UnitDesc	xs:string			optional
	`Unit of measurement specified as a string This should be used for defining the type value's units if the proper enum is not listed in Unit. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.`			

Source

```
<xs:complexType name="VolumeType">
  <xs:annotation>
    <xs:documentation>This is a base class used to represent a three-dimensional spatial
 quantity (i.e. a volume).</xs:documentation>
  </xs:annotation>
  <xs:simpleContent>
    <xs:extension base="xs:double">
      <xs:attribute name="Unit" type="VolumeUnitEnumType" use="optional">
        <xs:annotation>
          <xs:documentation>Unit of measurement.</xs:documentation>
        </xs:annotation>
      </xs:attribute>
      <xs:attribute name="UnitDesc" type="xs:string">
        <xs:annotation>
          <xs:documentation>Unit of measurement specified as a string This should be used
 for defining the type value's units if the proper enum is not listed in Unit. These are
 all optional attributes in order to allow for a simplified value descriptions since these
 are used throughout the IEP schemas. Additionally the UnitDesc may contain a default
 type.</xs:documentation>
        </xs:annotation>
      </xs:attribute>
    </xs:extension>
  </xs:simpleContent>
</xs:complexType>
```

Complex Type `WaterHeatingCapacityType`

Namespace	http://www.iepmodel.net
Annotations	This object reflects the water heating capacity of the system in terms of the water flow rate and rise in temperature of water across the system. This "capacity" is commonly used with domestic tankless (instantaneous) water heaters. Systems in the U.S. are often rated in a maximum gpm (flow rate) with a 35 degree Fahrenheit temperature rise. Detailed manufacturer specifications often also list the temperature rise at various flow rates.
Diagram	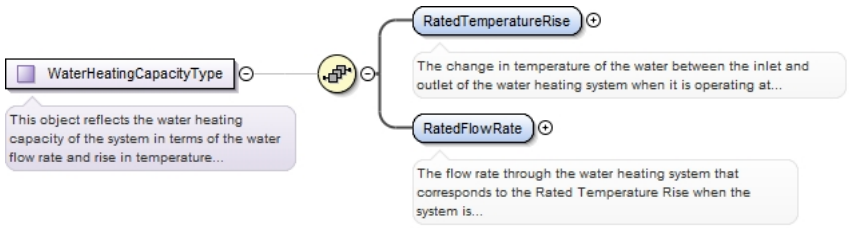
Used by	Element WaterHeatingSystemType/WaterHeatingCapacity
Model	RatedTemperatureRise , RatedFlowRate
Children	RatedFlowRate, RatedTemperatureRise
Source	`<xs:complexType name="WaterHeatingCapacityType">` `  <xs:annotation>` ` <xs:documentation>This object reflects the water heating capacity of the system in terms of the water flow rate and rise in temperature of water across the system. This "capacity" is commonly used with domestic tankless (instantaneous) water heaters. Systems in the U.S. are often rated in a maximum gpm (flow rate) with a 35 degree Fahrenheit temperature rise. Detailed manufacturer specifications often also list the temperature rise at various flow rates.</xs:documentation>` ` </xs:annotation>` ` <xs:sequence minOccurs="0" maxOccurs="1">` ` <xs:element name="RatedTemperatureRise" type="TemperatureType" minOccurs="1" maxOccurs="1">` ` <xs:annotation>` ` <xs:documentation>The change in temperature of the water between the inlet and outlet of the water heating system when it is operating at full load (maximum heat output or firing rate). This Rated Temperature Rise corresponds to the Rated Flow Rate.</xs:documentation>` ` </xs:annotation>` ` </xs:element>` ` <xs:element name="RatedFlowRate" type="FlowType" minOccurs="1" maxOccurs="1">` ` <xs:annotation>` ` <xs:documentation>The flow rate through the water heating system that corresponds to the Rated Temperature Rise when the system is operating at full load (maximum heat output or firing rate).</xs:documentation>` ` </xs:annotation>` ` </xs:element>` ` </xs:sequence>` `</xs:complexType>`

Complex Type `TemperatureType`

Namespace	http://www.iepmodel.net
Annotations	This is a base class used to represent a temperature quantity.
Diagram	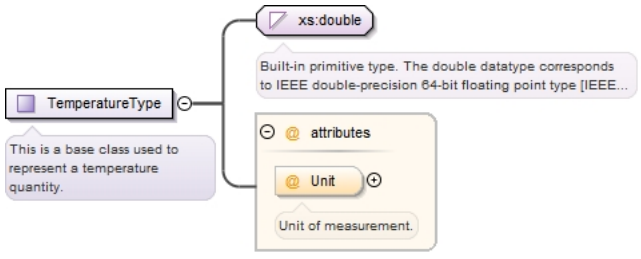
Type	extension of xs:double
Used by	Element WaterHeatingCapacityType/RatedTemperatureRise
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **Unit** / TemperatureUnitEnumType / / / optional

	QName	Type	Fixed	Default	Use
		Unit of measurement.			

Source

```
<xs:complexType name="TemperatureType">
  <xs:annotation>
    <xs:documentation>This is a base class used to represent a temperature quantity.</
xs:documentation>
  </xs:annotation>
  <xs:simpleContent>
    <xs:extension base="xs:double">
      <xs:attribute name="Unit" type="TemperatureUnitEnumType" use="optional">
        <xs:annotation>
          <xs:documentation>Unit of measurement.</xs:documentation>
        </xs:annotation>
      </xs:attribute>
    </xs:extension>
  </xs:simpleContent>
</xs:complexType>
```

Complex Type `ModificationType`

Namespace	http://www.iepmodel.net
Diagram	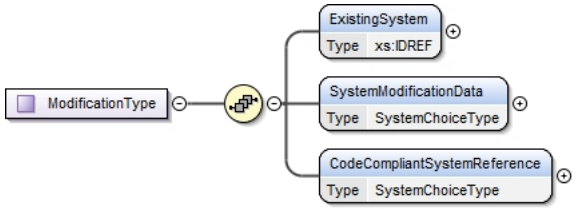
Used by	Element MeasureActionType/Modification
Model	ExistingSystem , SystemModificationData , CodeCompliantSystemReference
Children	CodeCompliantSystemReference, ExistingSystem, SystemModificationData
Source	

```
<xs:complexType name="ModificationType">
  <xs:sequence>
    <xs:element name="ExistingSystem" type="xs:IDREF"/>
    <xs:element name="SystemModificationData" type="SystemChoiceType"/>
    <xs:element name="CodeCompliantSystemReference" type="SystemChoiceType"/>
  </xs:sequence>
</xs:complexType>
```

Complex Type `ReplacementType`

Namespace	http://www.iepmodel.net
Diagram	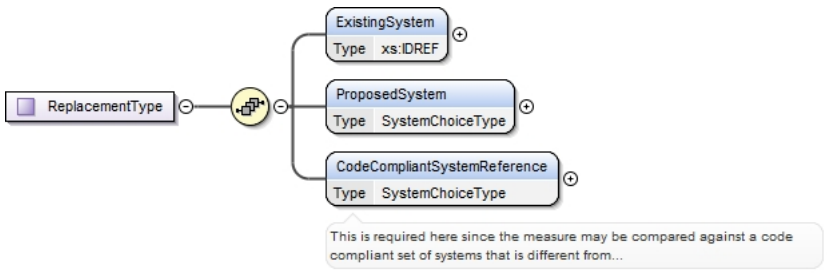
Used by	Element MeasureActionType/Replacement
Model	ExistingSystem , ProposedSystem , CodeCompliantSystemReference
Children	CodeCompliantSystemReference, ExistingSystem, ProposedSystem
Source	

```
<xs:complexType name="ReplacementType">
  <xs:sequence>
    <xs:element name="ExistingSystem" type="xs:IDREF"/>
    <xs:element name="ProposedSystem" nillable="false" type="SystemChoiceType"/>
    <xs:element name="CodeCompliantSystemReference" type="SystemChoiceType">
      <xs:annotation>
        <xs:documentation>This is required here since the measure may be compared
 against a code compliant set of systems that is different from the existing baseline
 equipment. Specifically used for incentive calculations where incentives are only paid
 for incremental savings above code. For example: Building Energy code</xs:documentation>
```

```
      </xs:annotation>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

Complex Type `ProgramMeasureCodeType`

Namespace	http://www.iepmodel.net
Annotations	This is used to match to existing measure codes usually defined for the purposes of incentives such as the PG&E measure codes
Diagram	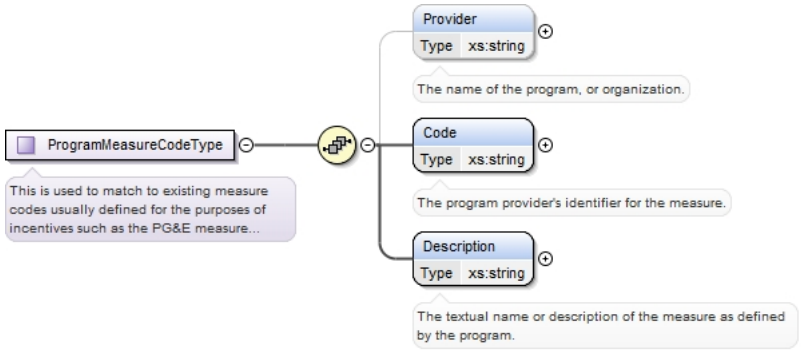
Used by	Element MeasureType/ProgramMeasureCode
Model	Provider{0,1} , Code , Description
Children	Code, Description, Provider
Source	

```
<xs:complexType name="ProgramMeasureCodeType">
  <xs:annotation>
    <xs:documentation>This is used to match to existing measure codes usually defined for
 the purposes of incentives such as the PG&E measure codes</xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="Provider" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>The name of the program, or organization.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Code" type="xs:string" minOccurs="1" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>The program provider's identifier for the measure.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Description" type="xs:string" minOccurs="1" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>The textual name or description of the measure as defined by the
 program.</xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

Complex Type `CostType`

Namespace	http://www.iepmodel.net
Diagram	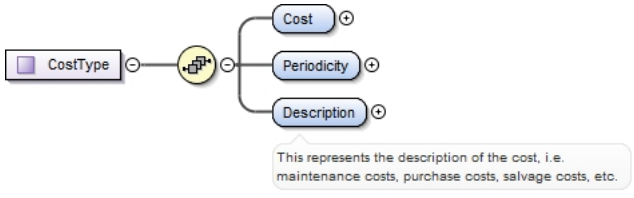
Used by	Element MeasureType/Cost
Model	Cost , Periodicity , Description
Children	Cost, Description, Periodicity
Source	

```
<xs:complexType name="CostType">
```

```
  <xs:sequence>
    <xs:element name="Cost" type="xs:float" minOccurs="1" maxOccurs="1"/>
    <xs:element name="Periodicity" type="PeriodicityType" minOccurs="1" maxOccurs="1"/>
    <xs:element name="Description" type="xs:string" minOccurs="1" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This represents the description of the cost, i.e. maintenance
 costs, purchase costs, salvage costs, etc.</xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

Complex Type `PeriodicityType`

Namespace	http://www.iepmodel.net
Diagram	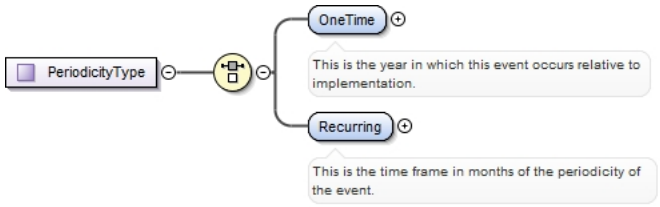
Used by	Elements BenefitType/Periodicity, CostType/Periodicity
Model	OneTime | Recurring
Children	OneTime, Recurring
`Source`	

```
<xs:complexType name="PeriodicityType">
  <xs:choice>
    <xs:element name="OneTime" type="xs:integer">
      <xs:annotation>
        <xs:documentation>This is the year in which this event occurs relative to
 implementation.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Recurring">
      <xs:annotation>
        <xs:documentation>This is the time frame in months of the periodicity of the
 event.</xs:documentation>
      </xs:annotation>
      <xs:complexType>
        <xs:sequence>
          <xs:element name="Duration" type="xs:integer">
            <xs:annotation>
              <xs:documentation>This is the duration in months</xs:documentation>
            </xs:annotation>
          </xs:element>
          <xs:element maxOccurs="1" name="Frequency" type="FrequencyEnumType">
            <xs:annotation>
              <xs:documentation>This is the frequency of the recurring event.</
xs:documentation>
            </xs:annotation>
          </xs:element>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
  </xs:choice>
</xs:complexType>
```

Complex Type `BenefitType`

Namespace	http://www.iepmodel.net
Annotations	This type is used to collect a specific type of benefit i.e. Estimated, Measured or Incentive and it's associated Method, source and Author

Diagram	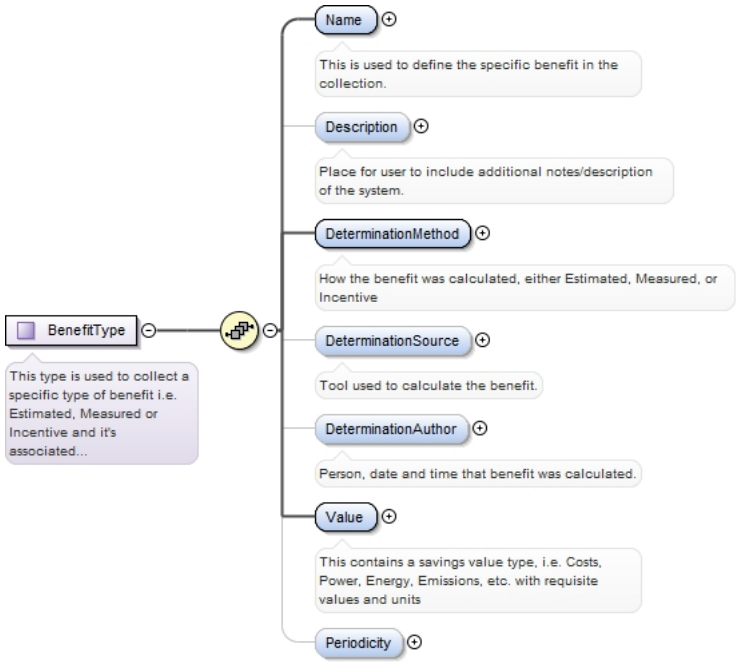
Used by	Elements MeasureType/Benefit, ScopeOfWorkType/TotalBenefits
Model	Name , Description{0,1} , DeterminationMethod , DeterminationSource{0,1} , DeterminationAuthor{0,1} , Value , Periodicity{0,1}
Children	Description, DeterminationAuthor, DeterminationMethod, DeterminationSource, Name, Periodicity, Value
Source	

```
<xs:complexType name="BenefitType">
  <xs:annotation>
    <xs:documentation>This type is used to collect a specific type of benefit i.e.
 Estimated, Measured or Incentive and it's associated Method, source and Author</
xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="Name" type="xs:string">
      <xs:annotation>
        <xs:documentation>This is used to define the specific benefit in the collection.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Description" type="xs:string" minOccurs="0">
      <xs:annotation>
        <xs:documentation>Place for user to include additional notes/description of the
 system.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="DeterminationMethod" type="DeterminationMethodType" minOccurs="1"
 maxOccurs="1">
      <xs:annotation>
        <xs:documentation>How the benefit was calculated, either Estimated, Measured, or
 Incentive</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="DeterminationSource" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Tool used to calculate the benefit.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="DeterminationAuthor" type="DataOriginatorType" minOccurs="0"
 maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Person, date and time that benefit was calculated.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Value" type="ValueType">
      <xs:annotation>
        <xs:documentation>This contains a savings value type, i.e. Costs, Power, Energy,
 Emissions, etc. with requisite values and units</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Periodicity" type="PeriodicityType" minOccurs="0" maxOccurs="1"/>
```

```
  </xs:sequence>
</xs:complexType>
```

Complex Type `DeterminationMethodType`

Namespace	http://www.iepmodel.net
Diagram	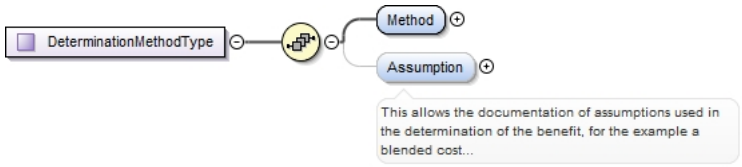
Used by	Element BenefitType/DeterminationMethod
Model	Method , Assumption{0,1}
Children	Assumption, Method
Source	

```
<xs:complexType name="DeterminationMethodType">
  <xs:sequence>
    <xs:element name="Method" type="DeterminationMethodEnumType"/>
    <xs:element name="Assumption" type="xs:string" minOccurs="0">
      <xs:annotation>
        <xs:documentation>This allows the documentation of assumptions used in the
 determination of the benefit, for the example a blended cost of energy instead of a
 detailed rate schedule analysis for determining energy cost savings</xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

Complex Type `ValueType`

Namespace	http://www.iepmodel.net
Diagram	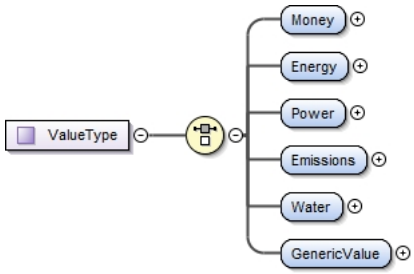
Used by	Element BenefitType/Value
Model	Money | Energy | Power | Emissions | Water | GenericValue
Children	Emissions, Energy, GenericValue, Money, Power, Water
Source	

```
<xs:complexType name="ValueType">
  <xs:choice>
    <xs:element name="Money" type="MonetaryType"/>
    <xs:element name="Energy" type="EnergyType"/>
    <xs:element name="Power" type="PowerType"/>
    <xs:element name="Emissions" type="EmissionsType"/>
    <xs:element name="Water" type="VolumeType"/>
    <xs:element name="GenericValue" type="GenericValueType"/>
  </xs:choice>
</xs:complexType>
```

Complex Type `MonetaryType`

Namespace	http://www.iepmodel.net
Diagram	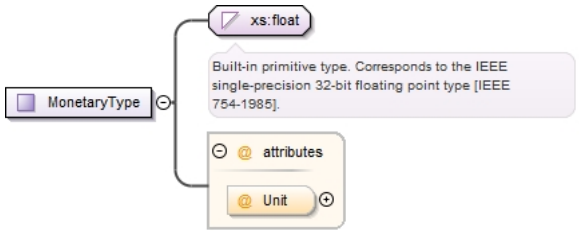

Type	extension of xs:float				
Used by	Elements	EnergyServiceType/BlendedRate, EnergyServiceType/TypicalMonthlyCost, ValueType/Money			
Attributes	**QName**	**Type**	**Fixed**	**Default**	**Use**
	Unit	MonetaryUnitEnumType			optional

Source

```
<xs:complexType name="MonetaryType">
  <xs:simpleContent>
    <xs:extension base="xs:float">
      <xs:attribute name="Unit" type="MonetaryUnitEnumType"/>
    </xs:extension>
  </xs:simpleContent>
</xs:complexType>
```

Complex Type `EmissionsType`

Namespace	http://www.iepmodel.net
Diagram	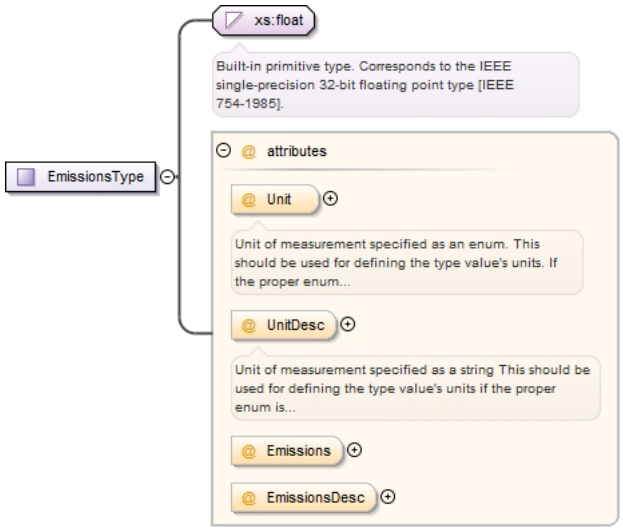

Type	extension of xs:float				
Used by	Element	ValueType/Emissions			
Attributes	**QName**	**Type**	**Fixed**	**Default**	**Use**
	Emissions	EmissionsEnumType			optional
	EmissionsDesc	xs:string			optional
	Unit	EmissionsUnitEnumType			optional
		Unit of measurement specified as an enum. This should be used for defining the type value's units. If the proper enum is not listed, please use the UnitDesc field to specify the units. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.			
	UnitDesc	xs:string			optional
		Unit of measurement specified as a string This should be used for defining the type value's units if the proper enum is not listed in Unit. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.			

Source

```
<xs:complexType name="EmissionsType">
  <xs:simpleContent>
    <xs:extension base="xs:float">
      <xs:attribute name="Unit" type="EmissionsUnitEnumType">
        <xs:annotation>
          <xs:documentation>Unit of measurement specified as an enum. This should be used
 for defining the type value's units. If the proper enum is not listed, please use the
 UnitDesc field to specify the units. These are all optional attributes in order to allow
 for a simplified value descriptions since these are used throughout the IEP schemas.
 Additionally the UnitDesc may contain a default type.</xs:documentation>
        </xs:annotation>
      </xs:attribute>
```

```
      <xs:attribute name="UnitDesc" type="xs:string">
        <xs:annotation>
          <xs:documentation>Unit of measurement specified as a string This should be used
 for defining the type value's units if the proper enum is not listed in Unit. These are
 all optional attributes in order to allow for a simplified value descriptions since these
 are used throughout the IEP schemas. Additionally the UnitDesc may contain a default
 type.</xs:documentation>
        </xs:annotation>
      </xs:attribute>
      <xs:attribute name="Emissions" type="EmissionsEnumType"/>
      <xs:attribute name="EmissionsDesc" type="xs:string"/>
    </xs:extension>
  </xs:simpleContent>
</xs:complexType>
```

Complex Type `GenericValueType`

Namespace	http://www.iepmodel.net
Diagram	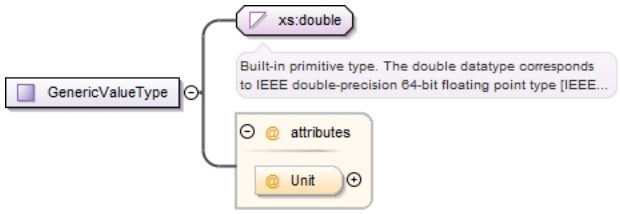
Type	extension of xs:double
Used by	Element ValueType/GenericValue

Attributes

QName	Type	Fixed	Default	Use
Unit	xs:string			optional

Source

```
<xs:complexType name="GenericValueType">
  <xs:simpleContent>
    <xs:extension base="xs:double">
      <xs:attribute name="Unit" type="xs:string"/>
    </xs:extension>
  </xs:simpleContent>
</xs:complexType>
```

Complex Type `ScopeOfWorkType`

Namespace	http://www.iepmodel.net
Annotations	This defines a specific scope of work from a single service provider. Benefits for the work are calculated at this level instead of at the Measure level since multiple Measures may impact a single Benefit. For example putting in a new high efficiency furnace and sealing the ducts will have different impact than the benefit for each measure taken independently.

Diagram

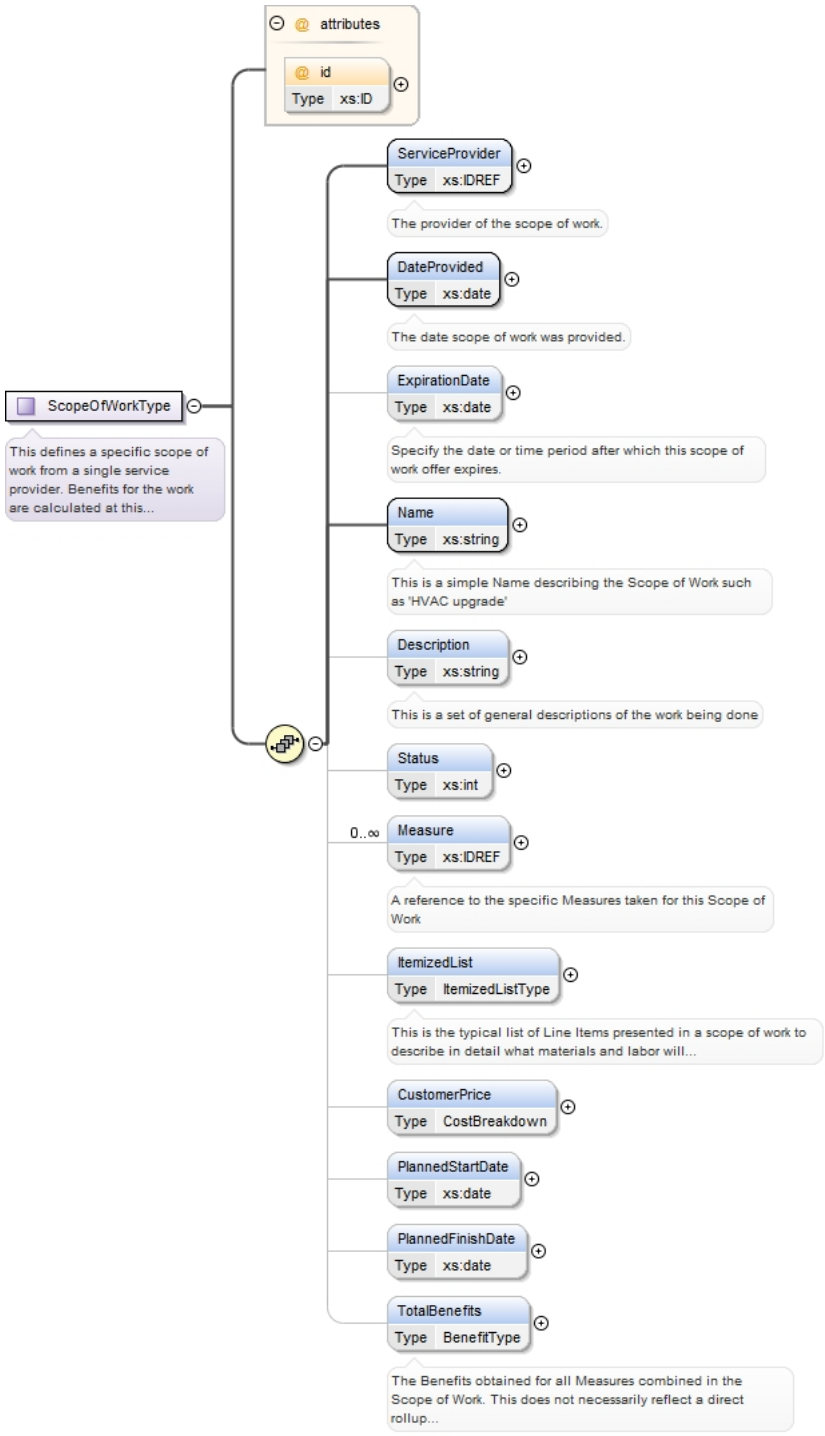

Used by

Element ProjectType/ScopeOfWork

Model

ServiceProvider , DateProvided , ExpirationDate{0,1} , Name , Description{0,1} , Status{0,1} , Measure* , ItemizedList{0,1} , CustomerPrice{0,1} , PlannedStartDate{0,1} , PlannedFinishDate{0,1} , TotalBenefits{0,1}

Children

CustomerPrice, DateProvided, Description, ExpirationDate, ItemizedList, Measure, Name, PlannedFinishDate, PlannedStartDate, ServiceProvider, Status, TotalBenefits

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			optional

Source

```
<xs:complexType name="ScopeOfWorkType">
  <xs:annotation>
    <xs:documentation>This defines a specific scope of work from a single service
 provider. Benefits for the work are calculated at this level instead of at the Measure
 level since multiple Measures may impact a single Benefit. For example putting in a new
```

```
 high efficiency furnace and sealing the ducts will have different impact than the benefit
 for each measure taken independently.</xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="ServiceProvider" type="xs:IDREF" minOccurs="1" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>The provider of the scope of work.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="DateProvided" type="xs:date" minOccurs="1" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>The date scope of work was provided.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="ExpirationDate" type="xs:date" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Specify the date or time period after which this scope of work
 offer expires.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Name" type="xs:string" minOccurs="1" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is a simple Name describing the Scope of Work such as 'HVAC
 upgrade'</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>This is a set of general descriptions of the work being done</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="Status" type="xs:int" minOccurs="0" maxOccurs="1"/>
    <xs:element name="Measure" type="xs:IDREF" minOccurs="0" maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>A reference to the specific Measures taken for this Scope of
 Work</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="1" minOccurs="0" name="ItemizedList" type="ItemizedListType">
      <xs:annotation>
        <xs:documentation>This is the typical list of Line Items presented in a scope of
 work to describe in detail what materials and labor will be delivered for the contract
 price.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element maxOccurs="1" minOccurs="0" name="CustomerPrice" type="CostBreakdown"/>
    <xs:element name="PlannedStartDate" type="xs:date" minOccurs="0" maxOccurs="1"/>
    <xs:element name="PlannedFinishDate" type="xs:date" minOccurs="0" maxOccurs="1"/>
    <xs:element name="TotalBenefits" type="BenefitType" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>The Benefits obtained for all Measures combined in the Scope of
 Work. This does not necessarily reflect a direct rollup of all of the individual measure
 benefits as some combination of measures may impact measure benefits. Individual measure
 benefits may be expressed independent of other measures. For example: The total benefit
 of a Lighting efficiency measure combined with a high efficiency HVAC measure would not
 equal the sum of the measures benefit if implemented independently.</xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
  <xs:attribute name="id" type="xs:ID"/>
</xs:complexType>
```

Complex Type `ItemizedListType`

Namespace	http://www.iepmodel.net
Diagram	
Used by	Element ScopeOfWorkType/ItemizedList
Model	LineItem+
Children	LineItem
Source	

```
<xs:complexType name="ItemizedListType">
  <xs:sequence>
    <xs:element maxOccurs="unbounded" minOccurs="1" name="LineItem" type="LineItemType"/>
  </xs:sequence>
</xs:complexType>
```

Complex Type `LineItemType`

Namespace	http://www.iepmodel.net
Annotations	`We include costs at this level in order capture the costs that are applicable to multiple measures such as administrative costs`
Diagram	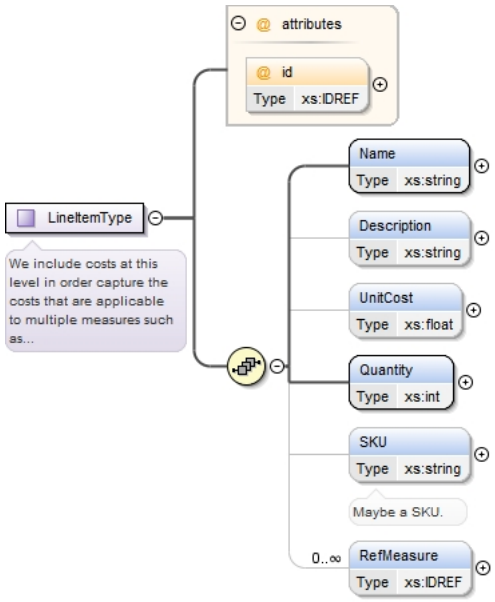
Used by	Element ItemizedListType/LineItem
Model	Name , Description{0,1} , UnitCost{0,1} , Quantity , SKU{0,1} , RefMeasure*
Children	Description, Name, Quantity, RefMeasure, SKU, UnitCost

Attributes

QName	Type	Fixed	Default	Use
id	xs:IDREF			optional

Source

```
<xs:complexType name="LineItemType">
  <xs:annotation>
    <xs:documentation>We include costs at this level in order capture the costs that are
 applicable to multiple measures such as administrative costs</xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element maxOccurs="1" minOccurs="1" name="Name" type="xs:string"/>
    <xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1"/>
    <xs:element name="UnitCost" type="xs:float" minOccurs="0" maxOccurs="1"/>
    <xs:element name="Quantity" type="xs:int" maxOccurs="1" minOccurs="1"/>
    <xs:element name="SKU" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Maybe a SKU.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="RefMeasure" type="xs:IDREF" minOccurs="0" maxOccurs="unbounded"/>
  </xs:sequence>
  <xs:attribute name="id" use="optional" type="xs:IDREF"/>
</xs:complexType>
```

Complex Type `CostBreakdown`

Namespace	http://www.iepmodel.net

Diagram	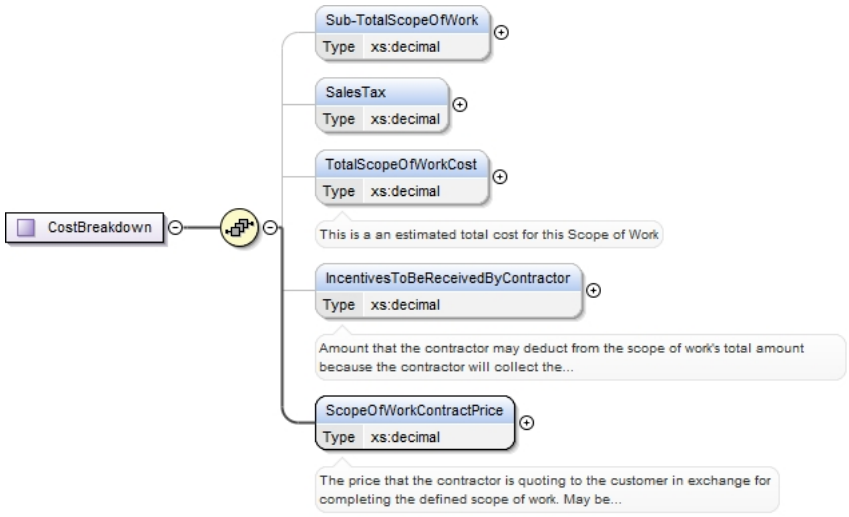
Used by	Element ScopeOfWorkType/CustomerPrice
Model	Sub-TotalScopeOfWork{0,1} , SalesTax{0,1} , TotalScopeOfWorkCost{0,1} , IncentivesToBeReceivedByContractor{0,1} , ScopeOfWorkContractPrice
Children	IncentivesToBeReceivedByContractor, SalesTax, ScopeOfWorkContractPrice, Sub-TotalScopeOfWork, TotalScopeOfWorkCost

Source	`<xs:complexType name="CostBreakdown">`
	`  <xs:sequence>`
	`  <xs:element maxOccurs="1" minOccurs="0" name="Sub-TotalScopeOfWork" type="xs:decimal"/>`
	`  <xs:element maxOccurs="1" minOccurs="0" name="SalesTax" type="xs:decimal"/>`
	`  <xs:element name="TotalScopeOfWorkCost" type="xs:decimal" minOccurs="0" maxOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>This is a an estimated total cost for this Scope of Work</xs:documentation>`
	`  </xs:annotation>`
	`  </xs:element>`
	`  <xs:element maxOccurs="1" minOccurs="0" name="IncentivesToBeReceivedByContractor" type="xs:decimal">`
	`  <xs:annotation>`
	`  <xs:documentation>Amount that the contractor may deduct from the scope of work's total amount because the contractor will collect the incentive money rather than asking the customer to pay the contractor and acquire it themselves.</xs:documentation>`
	`  </xs:annotation>`
	`  </xs:element>`
	`  <xs:element maxOccurs="1" minOccurs="1" name="ScopeOfWorkContractPrice" type="xs:decimal">`
	`  <xs:annotation>`
	`  <xs:documentation>The price that the contractor is quoting to the customer in exchange for completing the defined scope of work. May be the the TotalScopeOfWorkCost less any IncentivesToBeReceivedByContractor.</xs:documentation>`
	`  </xs:annotation>`
	`  </xs:element>`
	`  </xs:sequence>`
	`</xs:complexType>`

Complex Type DayScheduleType

Namespace	http://www.iepmodel.net
Diagram	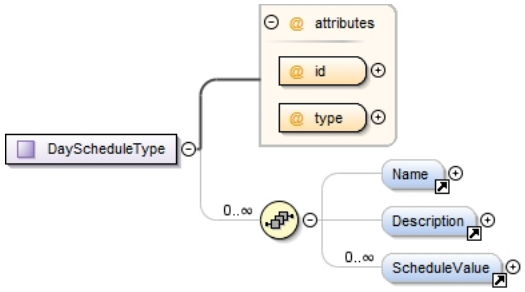
Used by	Element DaySchedule

Model	Name{0,1} , Description{0,1} , ScheduleValue*
Children	Description, Name, ScheduleValue
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **id** / xs:ID / / / required **type** / scheduleEnumType / / / required

Source	`<xs:complexType name="DayScheduleType">`
	`  <xs:sequence minOccurs="0" maxOccurs="unbounded">`
	`  <xs:element ref="Name" minOccurs="0" maxOccurs="1"/>`
	`  <xs:element ref="Description" minOccurs="0" maxOccurs="1"/>`
	`  <xs:element ref="ScheduleValue" minOccurs="0" maxOccurs="unbounded"/>`
	`  </xs:sequence>`
	`  <xs:attribute name="id" use="required" type="xs:ID"/>`
	`  <xs:attribute name="type" use="required" type="scheduleEnumType"/>`
	`</xs:complexType>`

Complex Type ScheduleValueType

Namespace	http://www.iepmodel.net
Annotations	This is an extension of the original ScheduleValue in the
Diagram	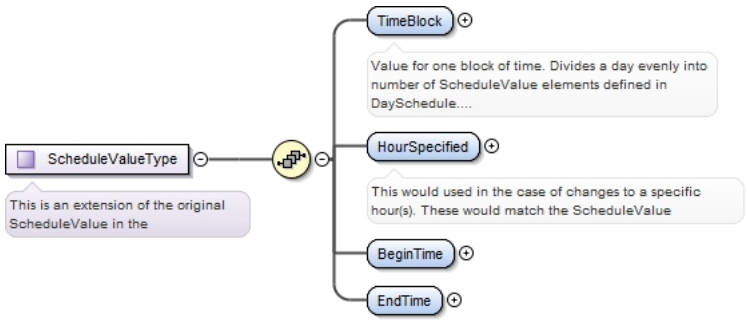
Used by	Element ScheduleValue
Model	TimeBlock , HourSpecified , BeginTime , EndTime
Children	BeginTime, EndTime, HourSpecified, TimeBlock

Source	`<xs:complexType name="ScheduleValueType">`
	`  <xs:annotation>`
	`  <xs:documentation>This is an extension of the original ScheduleValue in the</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:sequence>`
	`  <xs:element name="TimeBlock" type="xs:decimal" minOccurs="1" maxOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>Value for one block of time. Divides a day evenly into number of ScheduleValue elements defined in DaySchedule. Example: If 12 ScheduleValue elements are defined, each will represent two hours</xs:documentation>`
	`  </xs:annotation>`
	`  </xs:element>`
	`  <xs:element name="HourSpecified" type="hourIDType" minOccurs="1" maxOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>This would used in the case of changes to a specific hour(s). These would match the ScheduleValue</xs:documentation>`
	`  </xs:annotation>`
	`  </xs:element>`
	`  <xs:element name="BeginTime" type="xs:time" minOccurs="1" maxOccurs="1"/>`
	`  <xs:element name="EndTime" type="xs:time" minOccurs="1" maxOccurs="1"/>`
	`  </xs:sequence>`
	`</xs:complexType>`

Complex Type WeekScheduleType

Namespace	http://www.iepmodel.net
Annotations	Set of day schedules all assigned to a unique particular period of the week using the day type attribute. Do not schedule conflicting day types to the same week schedule.

Diagram	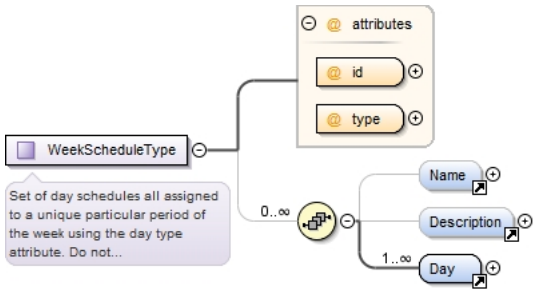
Used by	Element WeekSchedule
Model	Name{0,1} , Description{0,1} , Day+
Children	Day, Description, Name

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			required
type	scheduleEnumType			required

Source

```
<xs:complexType name="WeekScheduleType">
  <xs:annotation>
    <xs:documentation>Set of day schedules all assigned to a unique particular period of
 the week using the day type attribute. Do not schedule conflicting day types to the same
 week schedule.</xs:documentation>
  </xs:annotation>
  <xs:sequence minOccurs="0" maxOccurs="unbounded">
    <xs:element ref="Name" minOccurs="0" maxOccurs="1"/>
    <xs:element ref="Description" minOccurs="0" maxOccurs="1"/>
    <xs:element ref="Day" minOccurs="1" maxOccurs="unbounded"/>
  </xs:sequence>
  <xs:attribute name="id" use="required" type="xs:ID"/>
  <xs:attribute name="type" use="required" type="scheduleEnumType"/>
</xs:complexType>
```

Complex Type `UtilityAccountType`

Namespace	http://www.iepmodel.net
Diagram	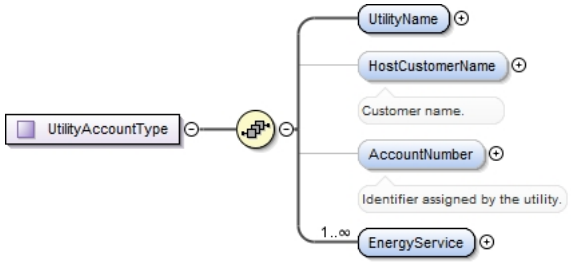
Used by	Elements ProjectType/UtilityService, UtilityAccount
Model	UtilityName , HostCustomerName{0,1} , AccountNumber{0,1} , EnergyService+
Children	AccountNumber, EnergyService, HostCustomerName, UtilityName

Source

```
<xs:complexType name="UtilityAccountType">
  <xs:sequence minOccurs="1" maxOccurs="1">
    <xs:element name="UtilityName" type="xs:string"/>
    <xs:element name="HostCustomerName" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Customer name.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="AccountNumber" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Identifier assigned by the utility.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="EnergyService" type="EnergyServiceType" minOccurs="1"
 maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
```

Complex Type EnergyServiceType

Namespace	http://www.iepmodel.net
Annotations	A single connection to the utility for energy. The utility bills the customer based on metering of an energy service.
Diagram	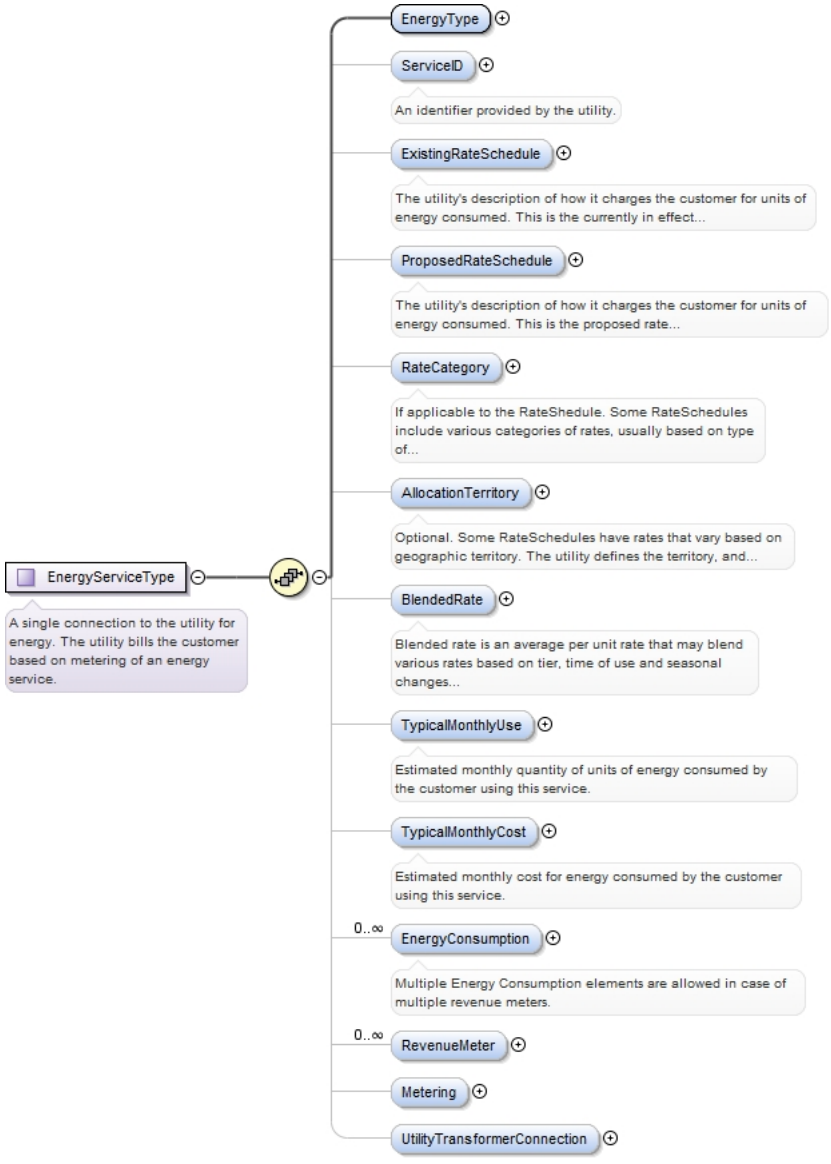
Used by	Element UtilityAccountType/EnergyService
Model	EnergyType , ServiceID{0,1} , ExistingRateSchedule{0,1} , ProposedRateSchedule{0,1} , RateCategory{0,1} , AllocationTerritory{0,1} , BlendedRate{0,1} , TypicalMonthlyUse{0,1} , TypicalMonthlyCost{0,1} , EnergyConsumption* , RevenueMeter* , Metering{0,1} , UtilityTransformerConnection{0,1}
Children	AllocationTerritory, BlendedRate, EnergyConsumption, EnergyType, ExistingRateSchedule, Metering, ProposedRateSchedule, RateCategory, RevenueMeter, ServiceID, TypicalMonthlyCost, TypicalMonthlyUse, UtilityTransformerConnection
Source	<xs:complexType name="EnergyServiceType"> <xs:annotation> <xs:documentation>A single connection to the utility for energy. The utility bills the customer based on metering of an energy service.</xs:documentation> </xs:annotation> <xs:sequence minOccurs="1" maxOccurs="1"> <xs:element name="EnergyType" type="EnergyUnitEnumType"/> <xs:element name="ServiceID" type="xs:string" minOccurs="0"> <xs:annotation> <xs:documentation>An identifier provided by the utility.</xs:documentation> </xs:annotation> </xs:element> <xs:element name="ExistingRateSchedule" type="xs:string" maxOccurs="1" minOccurs="0">

```
      <xs:annotation>
        <xs:documentation>The utility's description of how it charges the customer
 for units of energy consumed. This is the currently in effect rate schedule.</
xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="ProposedRateSchedule" maxOccurs="1" minOccurs="0" type="xs:string">
      <xs:annotation>
        <xs:documentation>The utility's description of how it charges the customer for
 units of energy consumed. This is the proposed rate schedule in cases where the project
 includes a change of rate schedule.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="RateCategory" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>If applicable to the RateShedule. Some RateSchedules include
 various categories of rates, usually based on type of customer (for example, "All
 Electric," "Low Income," etc).</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="AllocationTerritory" type="xs:string" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Optional. Some RateSchedules have rates that vary based on
 geographic territory. The utility defines the territory, and this is their identifier.
 May be a name or a code.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="BlendedRate" type="MonetaryType" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Blended rate is an average per unit rate that may blend various
 rates based on tier, time of use and seasonal changes into a single rate. This will be in
 cents/kwh or dollars/therm</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="TypicalMonthlyUse" type="EnergyConsumptionType" minOccurs="0"
 maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Estimated monthly quantity of units of energy consumed by the
 customer using this service.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="TypicalMonthlyCost" type="MonetaryType" minOccurs="0" maxOccurs="1">
      <xs:annotation>
        <xs:documentation>Estimated monthly cost for energy consumed by the customer using
 this service.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="EnergyConsumption" type="EnergyConsumptionType" minOccurs="0"
 maxOccurs="unbounded">
      <xs:annotation>
        <xs:documentation>Multiple Energy Consumption elements are allowed in case of
 multiple revenue meters.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="RevenueMeter" type="RevenueMeterType" minOccurs="0"
 maxOccurs="unbounded"/>
    <xs:element name="Metering" type="MeteringTypesEnumType" minOccurs="0" maxOccurs="1"/>
    <xs:element name="UtilityTransformerConnection"
 type="UtilityTransformerConnectionTypesEnumType" minOccurs="0" maxOccurs="1"/>
  </xs:sequence>
</xs:complexType>
```

Complex Type RevenueMeterType

Namespace	http://www.iepmodel.net
Annotations	The device that records the quantity of energy units consumed by the customer. ISSUES / TO DO: 1) Are MeterDirectionType and MeasurementMechanism required for doing a retrofit project? For what?

Diagram

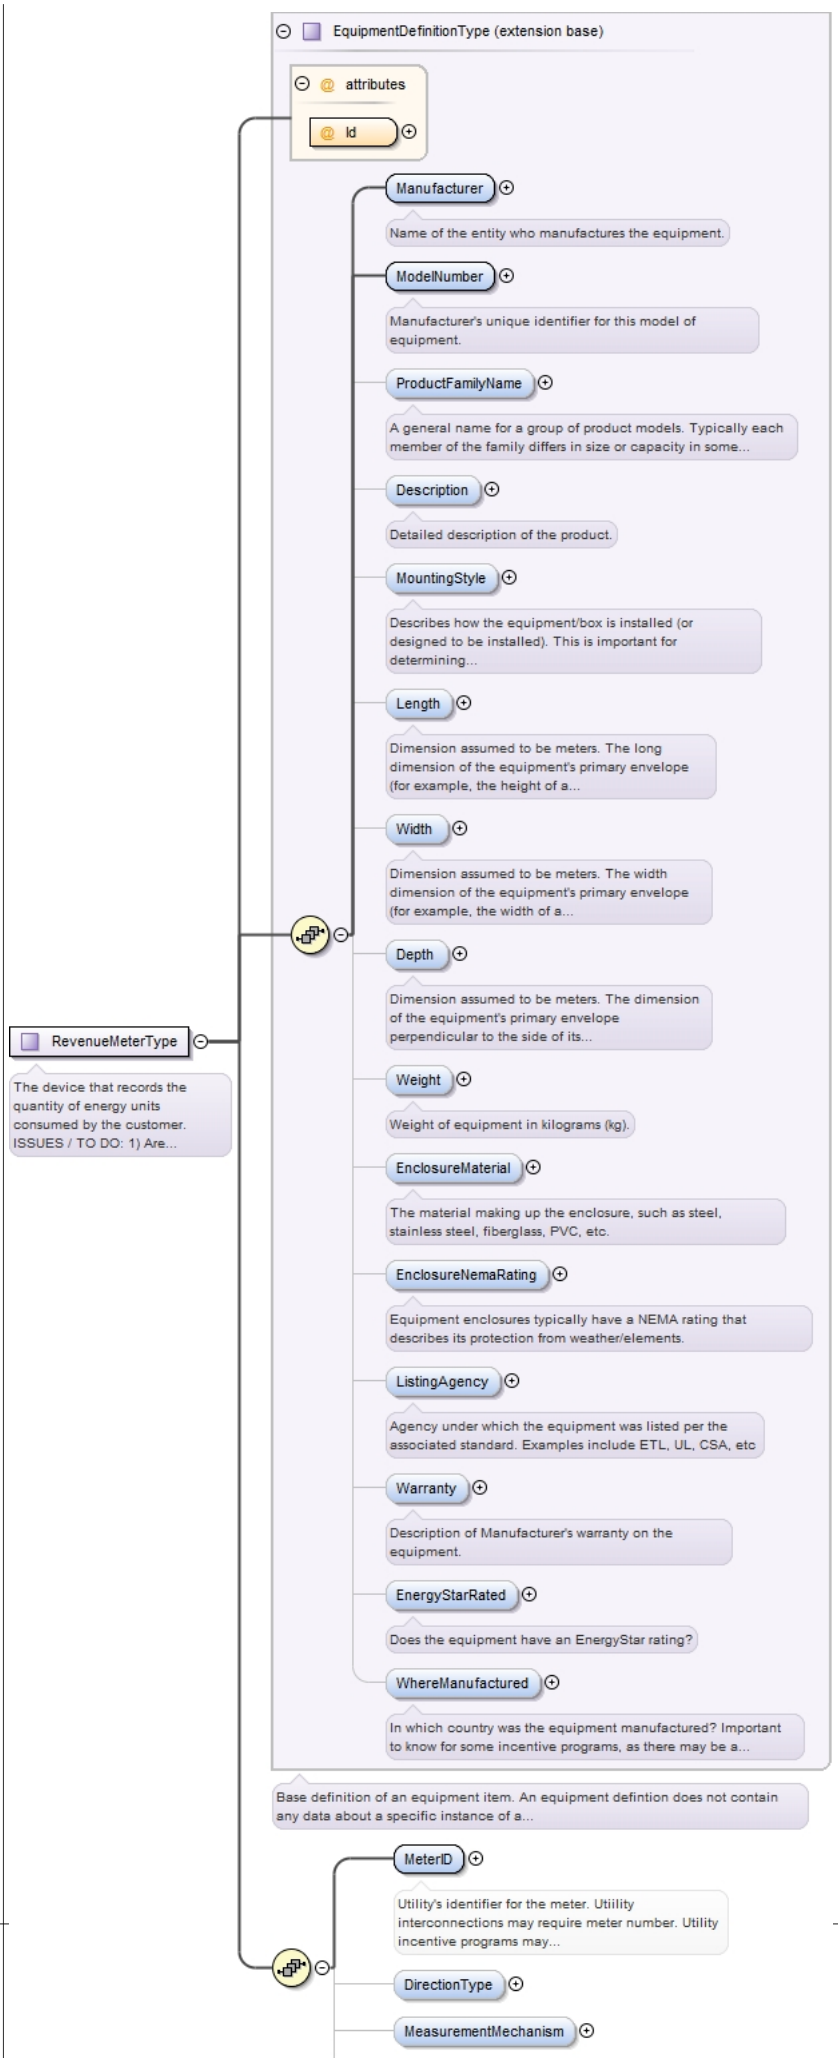
EquipmentDefinitionType (extension base)
attributes
Id
Manufacturer
Name of the entity who manufactures the equipment.
ModelNumber
Manufacturer's unique identifier for this model of equipment.
ProductFamilyName
A general name for a group of product models. Typically each member of the family differs in size or capacity in some...
Description
Detailed description of the product.
MountingStyle
Describes how the equipment/box is installed (or designed to be installed). This is important for determining...
Length
Dimension assumed to be meters. The long dimension of the equipment's primary envelope (for example, the height of a...
Width
Dimension assumed to be meters. The width dimension of the equipment's primary envelope (for example, the width of a...
Depth
Dimension assumed to be meters. The dimension of the equipment's primary envelope perpendicular to the side of its...
Weight
Weight of equipment in kilograms (kg).
EnclosureMaterial
The material making up the enclosure, such as steel, stainless steel, fiberglass, PVC, etc.
EnclosureNemaRating
Equipment enclosures typically have a NEMA rating that describes its protection from weather/elements.
ListingAgency
Agency under which the equipment was listed per the associated standard. Examples include ETL, UL, CSA, etc
Warranty
Description of Manufacturer's warranty on the equipment.
EnergyStarRated
Does the equipment have an EnergyStar rating?
WhereManufactured
In which country was the equipment manufactured? Important to know for some incentive programs, as there may be a...
Base definition of an equipment item. An equipment defintion does not contain any data about a specific instance of a...
RevenueMeterType
The device that records the quantity of energy units consumed by the customer. ISSUES / TO DO: 1) Are...
MeterID
Utility's identifier for the meter. Utility interconnections may require meter number. Utility incentive programs may...
DirectionType
MeasurementMechanism

Type	extension of EquipmentDefinitionType
Type hierarchy	• EquipmentDefinitionType • RevenueMeterType
Used by	Element EnergyServiceType/RevenueMeter
Model	Manufacturer , ModelNumber , ProductFamilyName{0,1} , Description{0,1} , MountingStyle{0,1} , Length{0,1} , Width{0,1} , Depth{0,1} , Weight{0,1} , EnclosureMaterial{0,1} , EnclosureNemaRating{0,1} , ListingAgency{0,1} , Warranty{0,1} , EnergyStarRated{0,1} , WhereManufactured{0,1} , MeterID , DirectionType{0,1} , MeasurementMechanism{0,1} , Space*
Children	Depth, Description, DirectionType, EnclosureMaterial, EnclosureNemaRating, EnergyStarRated, Length, ListingAgency, Manufacturer, MeasurementMechanism, MeterID, ModelNumber, MountingStyle, ProductFamilyName, Space, Warranty, Weight, WhereManufactured, Width

Attributes

QName	Type	Fixed	Default	Use
Id	xs:ID			required

Source

```
<xs:complexType name="RevenueMeterType">
  <xs:annotation>
    <xs:documentation>The device that records the quantity of energy units consumed by the
 customer. ISSUES / TO DO: 1) Are MeterDirectionType and MeasurementMechanism required for
 doing a retrofit project? For what?</xs:documentation>
  </xs:annotation>
  <xs:complexContent>
    <xs:extension base="EquipmentDefinitionType">
      <xs:sequence minOccurs="1" maxOccurs="1">
        <xs:element name="MeterID" type="xs:string" minOccurs="1" maxOccurs="1">
          <xs:annotation>
            <xs:documentation>Utility's identifier for the meter. Utiility
 interconnections may require meter number. Utility incentive programs may require meter
 id as well.</xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element name="DirectionType" type="MeterDirectionEnumType" minOccurs="0"
 maxOccurs="1"/>
        <xs:element name="MeasurementMechanism" type="MeterMeasurementMechanismEnumType"
 minOccurs="0" maxOccurs="1"/>
        <xs:element name="Space" type="xs:IDREF" minOccurs="0" maxOccurs="unbounded">
          <xs:annotation>
            <xs:documentation>A building consists of one or many spaces. This
 object provides a high level specification of the building space profile intended
 for use with Projects and simulations such as SaveEnergy123 and Portfolio
 Manager. https://saveenergy123.com/ http://www.energystar.gov/index.cfm?
c=evaluate_performance.bus_portfoliomanager</xs:documentation>
          </xs:annotation>
        </xs:element>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

Complex Type `OccupantConstraintType`

Namespace	http://www.iepmodel.net
Annotations	This is an optional description of the feedback given to a specific contractor for the project
Diagram	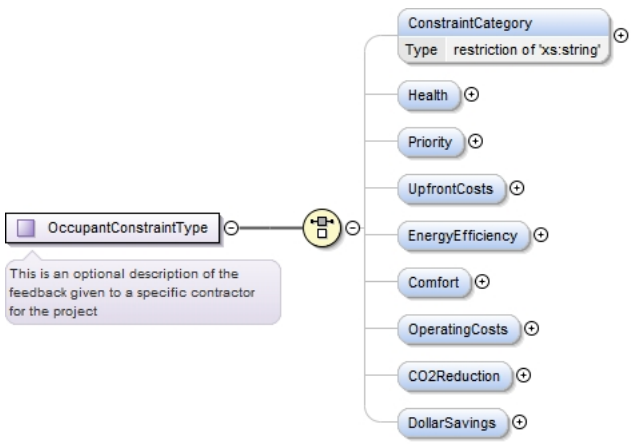

Used by	Element ProjectType/OccupantConstraints
Model	ConstraintCategory{0,1} | Health{0,1} | Priority{0,1} | UpfrontCosts{0,1} | EnergyEfficiency{0,1} | Comfort{0,1} | OperatingCosts{0,1} | CO2Reduction{0,1} | DollarSavings{0,1}
Children	CO2Reduction, Comfort, ConstraintCategory, DollarSavings, EnergyEfficiency, Health, OperatingCosts, Priority, UpfrontCosts
Source	

```
<xs:complexType name="OccupantConstraintType">
  <xs:annotation>
    <xs:documentation>This is an optional description of the feedback given to a specific
 contractor for the project</xs:documentation>
  </xs:annotation>
  <xs:choice>
    <xs:element name="ConstraintCategory" minOccurs="0">
      <xs:simpleType>
        <xs:restriction base="xs:string">
          <xs:enumeration value="Health"/>
          <xs:enumeration value="Comfort"/>
          <xs:enumeration value="EnergyEfficiency"/>
          <xs:enumeration value="UpfrontCosts"/>
          <xs:enumeration value="OperatingCosts"/>
          <xs:enumeration value="CO2Reduction"/>
          <xs:enumeration value="DollarSavings"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="Health" minOccurs="0">
      <xs:complexType>
        <xs:annotation>
          <xs:documentation>This is used to describe health constraints such as specific
 allergies</xs:documentation>
        </xs:annotation>
        <xs:sequence>
          <xs:element name="Name" type="xs:string" minOccurs="1" maxOccurs="1"/>
          <xs:element name="Description" type="xs:string" minOccurs="1" maxOccurs="1"/>
          <xs:element name="Severity" type="xs:string" minOccurs="1" maxOccurs="1"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:element name="Priority" minOccurs="0">
      <xs:complexType>
        <xs:annotation>
          <xs:documentation>Scale of 1 to 10.</xs:documentation>
        </xs:annotation>
        <xs:sequence minOccurs="0" maxOccurs="unbounded">
          <xs:element name="PriorityLevel" type="xs:int" minOccurs="1" maxOccurs="1"/>
          <xs:element name="PriorityType" type="xs:string" minOccurs="1" maxOccurs="1"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:element name="UpfrontCosts" minOccurs="0">
      <xs:complexType>
        <xs:sequence>
          <xs:element name="MaximumUpfrontCosts" type="xs:float" minOccurs="1"
 maxOccurs="1"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:element name="EnergyEfficiency" minOccurs="0">
      <xs:complexType>
        <xs:sequence>
          <xs:element name="RequestedLevelOfEfficiency" type="xs:string" minOccurs="1"
 maxOccurs="1"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:element name="Comfort" minOccurs="0">
      <xs:complexType>
        <xs:annotation>
          <xs:documentation>This is used to describe specific comfort constraints in the
 building such as drafts, ventilation, hot and cold spots, etc.</xs:documentation>
        </xs:annotation>
        <xs:sequence>
          <xs:element name="Name" type="xs:string" minOccurs="1" maxOccurs="1"/>
          <xs:element name="Description" type="xs:string" minOccurs="1" maxOccurs="1"/>
          <xs:element name="Severity" type="xs:string" minOccurs="1" maxOccurs="1"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:element name="OperatingCosts" minOccurs="0">
      <xs:complexType>
        <xs:sequence>
```

```
          <xs:element name="MaximumOperatingCosts" type="xs:float" minOccurs="1"
maxOccurs="1"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:element name="CO2Reduction" minOccurs="0">
      <xs:complexType>
        <xs:sequence>
          <xs:element name="RequestedCO2ReductionDesc" type="xs:string" minOccurs="1"
maxOccurs="1">
            <xs:annotation>
              <xs:documentation>This is a descriptive element and may be represented in
several ways</xs:documentation>
            </xs:annotation>
          </xs:element>
          <xs:element name="RequestedCO2ReductionInTonsPerYear" type="xs:float"
minOccurs="1" maxOccurs="1"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:element name="DollarSavings" minOccurs="0">
      <xs:complexType>
        <xs:sequence>
          <xs:element name="ExpectedTotalDollarSavingsInOperatingCosts" type="xs:float"
minOccurs="1" maxOccurs="1"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
  </xs:choice>
</xs:complexType>
```

Complex Type `ConsumerFeedbackType`

Namespace	http://www.iepmodel.net
Diagram	
Used by	Element ProjectType/ConsumerFeedback
Model	ProductRating{0,1} , ServiceProviderRating{0,1}
Children	ProductRating, ServiceProviderRating
Source	

```
<xs:complexType name="ConsumerFeedbackType">
  <xs:sequence>
    <xs:element name="ProductRating" minOccurs="0">
      <xs:complexType>
        <xs:sequence>
          <xs:element name="Comments" type="xs:string" minOccurs="0" maxOccurs="1">
            <xs:annotation>
              <xs:documentation>Fair Good Great</xs:documentation>
            </xs:annotation>
          </xs:element>
          <xs:element name="EaseOfUse" type="xs:string" minOccurs="0" maxOccurs="1"/>
          <xs:element name="QualityOfProduct" type="xs:string" minOccurs="0"
maxOccurs="1"/>
          <xs:element name="SatisfactionLevel" type="xs:string" minOccurs="0"
maxOccurs="1">
            <xs:annotation>
              <xs:documentation>Fair Good Excellent or 5 star rating?</xs:documentation>
            </xs:annotation>
          </xs:element>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:element name="ServiceProviderRating" minOccurs="0">
      <xs:complexType>
        <xs:sequence>
          <xs:element name="BudgetSatisfaction" type="xs:string" minOccurs="0"
maxOccurs="1"/>
          <xs:element name="Compliments" type="xs:string" minOccurs="0" maxOccurs="1"/>
          <xs:element name="OverallSatisfaction" type="xs:string" minOccurs="0"
maxOccurs="1"/>
          <xs:element name="QualityOfWork" type="xs:int" minOccurs="0" maxOccurs="1"/>
          <xs:element name="TimelinessSatisfaction" type="xs:string" minOccurs="0"
maxOccurs="1"/>
          <xs:element name="Suggestions" type="xs:string" minOccurs="0" maxOccurs="1"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
```

```
  </xs:sequence>
</xs:complexType>
```

Complex Type `PointDoubleType`

Namespace	http://www.iepmodel.net
Annotations	Represents a 2D point, with X and Y as doubles
Diagram	
Model	X , Y
Children	X, Y
Source	<xs:complexType name="PointDoubleType"> <xs:annotation> <xs:documentation>Represents a 2D point, with X and Y as doubles</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="X" type="xs:double"/> <xs:element name="Y" type="xs:double"/> </xs:sequence> </xs:complexType>

Complex Type `PointType`

Namespace	http://www.iepmodel.net
Annotations	Represents a 2D point, with X and Y.
Diagram	
Model	X , Y
Children	X, Y
Source	<xs:complexType name="PointType"> <xs:annotation> <xs:documentation>Represents a 2D point, with X and Y.</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="X" type="xs:int"/> <xs:element name="Y" type="xs:int"/> </xs:sequence> </xs:complexType>

Complex Type `SizeDoubleType`

Namespace	http://www.iepmodel.net
Annotations	Represents a 2D size, with a width and a height as doubles
Diagram	
Model	Width , Height
Children	Height, Width
Source	<xs:complexType name="SizeDoubleType"> <xs:annotation> <xs:documentation>Represents a 2D size, with a width and a height as doubles</ xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="Width" type="xs:double"/> <xs:element name="Height" type="xs:double"/> </xs:sequence> </xs:complexType>

Complex Type SizeType

Namespace	http://www.iepmodel.net
Annotations	Represents a 2D size, with a width and a height
Diagram	
Model	Width , Height
Children	Height, Width
Source	<xs:complexType name="SizeType"> <xs:annotation> <xs:documentation>Represents a 2D size, with a width and a height</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="Width" type="xs:int"/> <xs:element name="Height" type="xs:int"/> </xs:sequence> </xs:complexType>

Complex Type Location2dType

Namespace	http://www.iepmodel.net
Annotations	Location in 2D space
Diagram	
Used by	Element PolygonPlaneType/PlaneShape2d
Model	X , Y
Children	X, Y
Source	<xs:complexType name="Location2dType"> <xs:annotation> <xs:documentation>Location in 2D space</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="X" type="xs:double"/> <xs:element name="Y" type="xs:double"/> </xs:sequence> </xs:complexType>

Complex Type AngleType

Namespace	http://www.iepmodel.net
Annotations	This is a base class used to represent an angular quantity.
Diagram	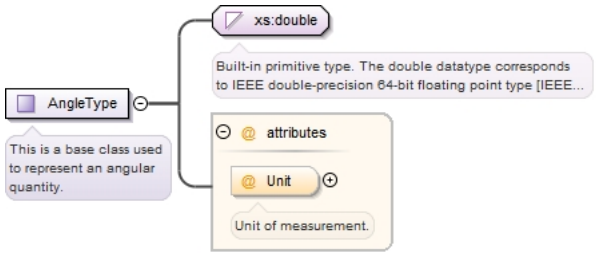
Type	extension of xs:double
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **Unit** / AngularUnitEnumType / / degrees / optional Unit of measurement.
Source	<xs:complexType name="AngleType"> <xs:annotation> <xs:documentation>This is a base class used to represent an angular quantity.</ xs:documentation>

```
  </xs:annotation>
  <xs:simpleContent>
    <xs:extension base="xs:double">
      <xs:attribute name="Unit" type="AngularUnitEnumType" use="optional"
 default="degrees">
        <xs:annotation>
          <xs:documentation>Unit of measurement.</xs:documentation>
        </xs:annotation>
      </xs:attribute>
    </xs:extension>
  </xs:simpleContent>
</xs:complexType>
```

Complex Type `TimeType`

Namespace	http://www.iepmodel.net
Annotations	This is a base class used to represent a time quantity. A use case is in the lighting system lamp life.
Diagram	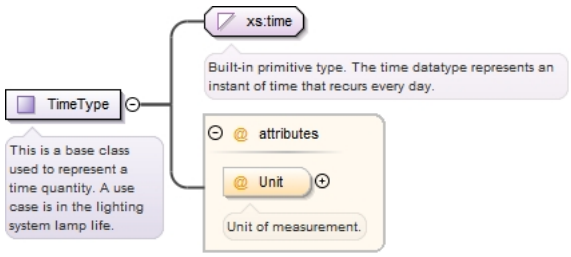

Type	extension of xs:time

Attributes

QName	Type	Fixed	Default	Use
Unit	TimeUnitEnumType			optional
	Unit of measurement.			

Source

```
<xs:complexType name="TimeType">
  <xs:annotation>
    <xs:documentation>This is a base class used to represent a time quantity. A use case
 is in the lighting system lamp life.</xs:documentation>
  </xs:annotation>
  <xs:simpleContent>
    <xs:extension base="xs:time">
      <xs:attribute name="Unit" type="TimeUnitEnumType" use="optional">
        <xs:annotation>
          <xs:documentation>Unit of measurement.</xs:documentation>
        </xs:annotation>
      </xs:attribute>
    </xs:extension>
  </xs:simpleContent>
</xs:complexType>
```

Complex Type `WeightType`

Namespace	http://www.iepmodel.net
Annotations	This is a base class for defining a weight quantity. Equipment objects instance this type.
Diagram	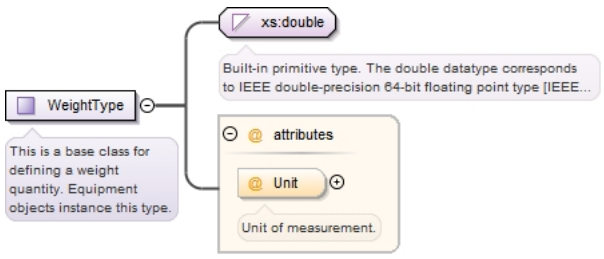

Type	extension of xs:double

Attributes

QName	Type	Fixed	Default	Use
Unit	WeightUnitEnumType			optional
	Unit of measurement.			

Source

```
<xs:complexType name="WeightType">
```

```
  <xs:annotation>
    <xs:documentation>This is a base class for defining a weight quantity. Equipment
 objects instance this type.</xs:documentation>
  </xs:annotation>
  <xs:simpleContent>
    <xs:extension base="xs:double">
      <xs:attribute name="Unit" type="WeightUnitEnumType" use="optional">
        <xs:annotation>
          <xs:documentation>Unit of measurement.</xs:documentation>
        </xs:annotation>
      </xs:attribute>
    </xs:extension>
  </xs:simpleContent>
</xs:complexType>
```

Complex Type `VelocityType`

Namespace	http://www.iepmodel.net
Annotations	This is a base class used for defining a velocity quantity. This is a common design criteria for air flow in ducts (distribution systems).
Diagram	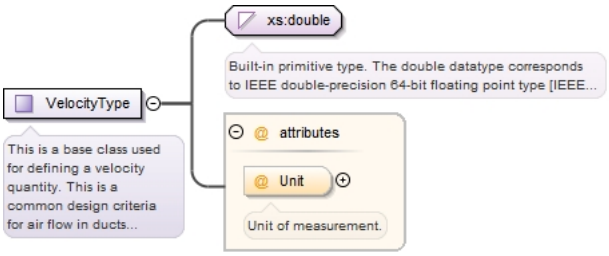
Type	extension of xs:double
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **Unit** / VelocityUnitEnumType / / / optional Unit of measurement.
Source	


```
<xs:complexType name="VelocityType">
  <xs:annotation>
    <xs:documentation>This is a base class used for defining a velocity quantity. This is
 a common design criteria for air flow in ducts (distribution systems).</xs:documentation>
  </xs:annotation>
  <xs:simpleContent>
    <xs:extension base="xs:double">
      <xs:attribute name="Unit" type="VelocityUnitEnumType" use="optional">
        <xs:annotation>
          <xs:documentation>Unit of measurement.</xs:documentation>
        </xs:annotation>
      </xs:attribute>
    </xs:extension>
  </xs:simpleContent>
</xs:complexType>
```

Complex Type `DensityType`

Namespace	http://www.iepmodel.net
Annotations	This is a base class used to represent a density quantity.
Diagram	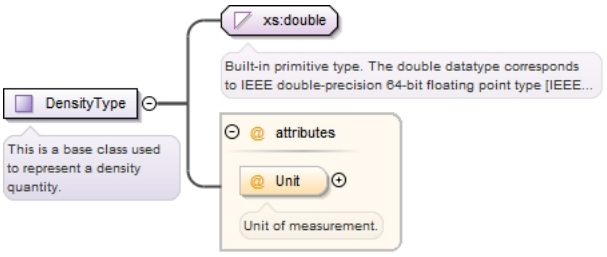
Type	extension of xs:double
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **Unit** / DensityUnitEnumType / / / optional Unit of measurement.

Source	<xs:complexType name="DensityType"> <xs:annotation> <xs:documentation>This is a base class used to represent a density quantity.</xs:documentation> </xs:annotation> <xs:simpleContent> <xs:extension base="xs:double"> <xs:attribute name="Unit" type="DensityUnitEnumType" use="optional"> <xs:annotation> <xs:documentation>Unit of measurement.</xs:documentation> </xs:annotation> </xs:attribute> </xs:extension> </xs:simpleContent> </xs:complexType>

Complex Type FuelConnectorType

Namespace	http://www.iepmodel.net
Annotations	This is the type of connector used for linking in the fuel.
Diagram	
Type	extension of xs:string
Used by	Element InputPowerType/FuelConnector
Source	<xs:complexType name="FuelConnectorType"> <xs:annotation> <xs:documentation>This is the type of connector used for linking in the fuel.</xs:documentation> </xs:annotation> <xs:simpleContent> <xs:extension base="xs:string"> </xs:extension> </xs:simpleContent> </xs:complexType>

Complex Type InputPowerType

Namespace	http://www.iepmodel.net
Diagram	
Model	Power , FuelConnector{0,1}
Children	FuelConnector, Power
Source	<xs:complexType name="InputPowerType"> <xs:sequence> <xs:element name="Power" type="PowerType" minOccurs="1" maxOccurs="1"/> <xs:element name="FuelConnector" type="FuelConnectorType" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType>

Complex Type DayType

Namespace	http://www.iepmodel.net
Diagram	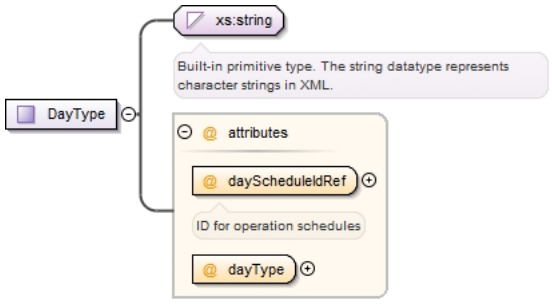

Type	extension of xs:string
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **dayScheduleIdRef** / xs:IDREF / / / required ID for operation schedules **dayType** / dayEnumType / / / required

Source	`<xs:complexType name="DayType">`
	`  <xs:simpleContent>`
	`  <xs:extension base="xs:string">`
	`  <xs:attribute name="dayScheduleIdRef" use="required" type="xs:IDREF">`
	`  <xs:annotation>`
	`  <xs:documentation>ID for operation schedules</xs:documentation>`
	`  </xs:annotation>`
	`  </xs:attribute>`
	`  <xs:attribute name="dayType" use="required" type="dayEnumType"/>`
	`  </xs:extension>`
	`  </xs:simpleContent>`
	`</xs:complexType>`

Complex Type `PolygonPlaneType`

Namespace	http://www.iepmodel.net

Diagram	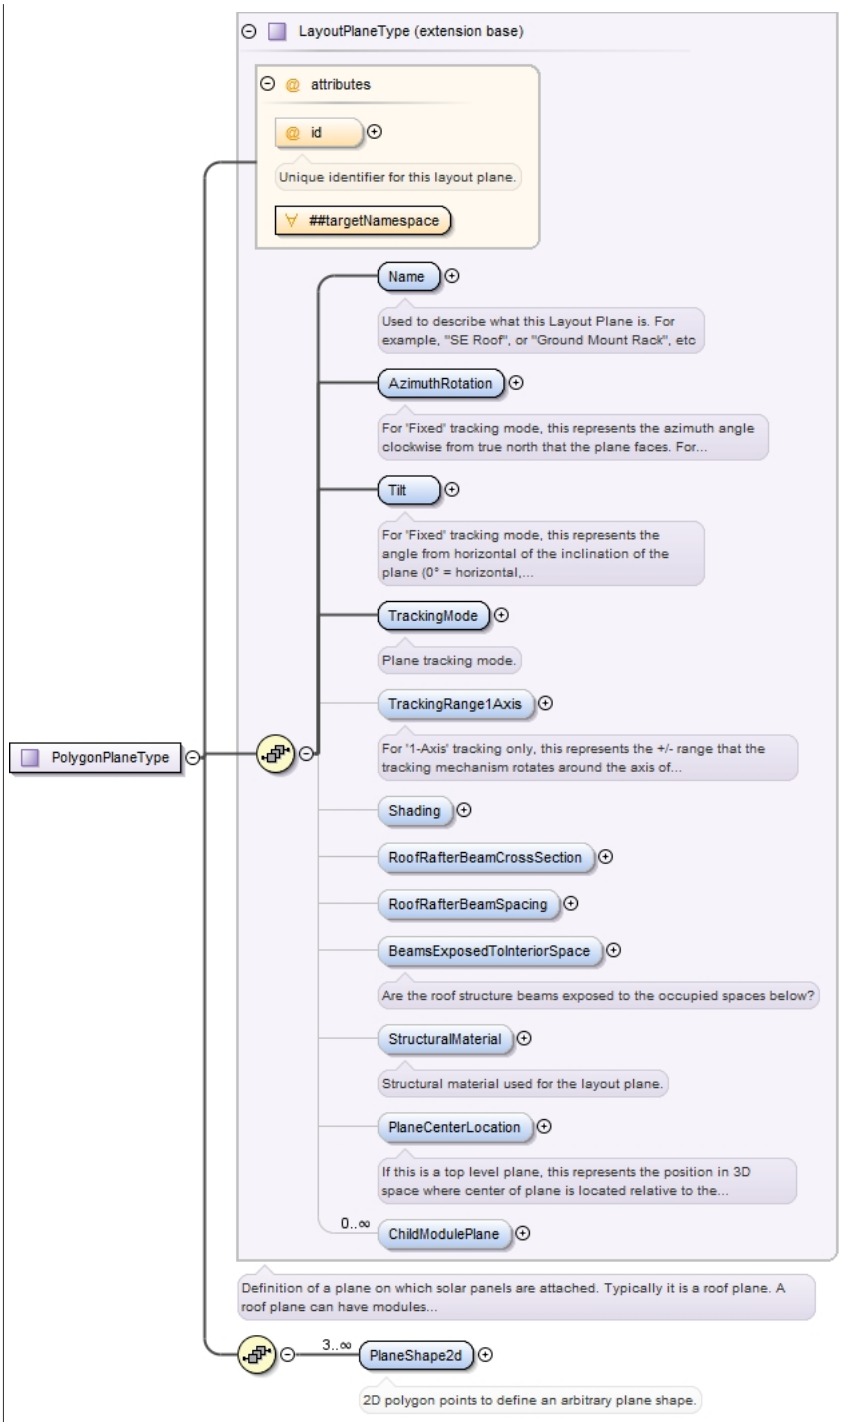
Type	extension of LayoutPlaneType
Type hierarchy	• LayoutPlaneType • PolygonPlaneType
Model	Name , AzimuthRotation , Tilt , TrackingMode , TrackingRange1Axis{0,1} , Shading{0,1} , RoofRafterBeamCrossSection{0,1} , RoofRafterBeamSpacing{0,1} , BeamsExposedToInteriorSpace{0,1} , StructuralMaterial{0,1} , PlaneCenterLocation{0,1} , ChildModulePlane* , PlaneShape2d{3,unbounded}
Children	AzimuthRotation, BeamsExposedToInteriorSpace, ChildModulePlane, Name, PlaneCenterLocation, PlaneShape2d, RoofRafterBeamCrossSection, RoofRafterBeamSpacing, Shading, StructuralMaterial, Tilt, TrackingMode, TrackingRange1Axis

Attributes

QName	Type	Fixed	Default	Use
ANY attribute from TARGET				

	QName	Type	Fixed	Default	Use
	namespace 'http://www.iepmodel.net'				
	id	xs:ID			optional
		Unique identifier for this layout plane.			

Source

```
<xs:complexType name="PolygonPlaneType">
  <xs:complexContent>
    <xs:extension base="LayoutPlaneType">
      <xs:sequence>
        <xs:element name="PlaneShape2d" type="Location2dType" nillable="true"
 minOccurs="3" maxOccurs="unbounded">
          <xs:annotation>
            <xs:documentation>2D polygon points to define an arbitrary plane shape.</
xs:documentation>
          </xs:annotation>
        </xs:element>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

Complex Type `RectangularPlaneType`

Namespace	http://www.iepmodel.net

Diagram	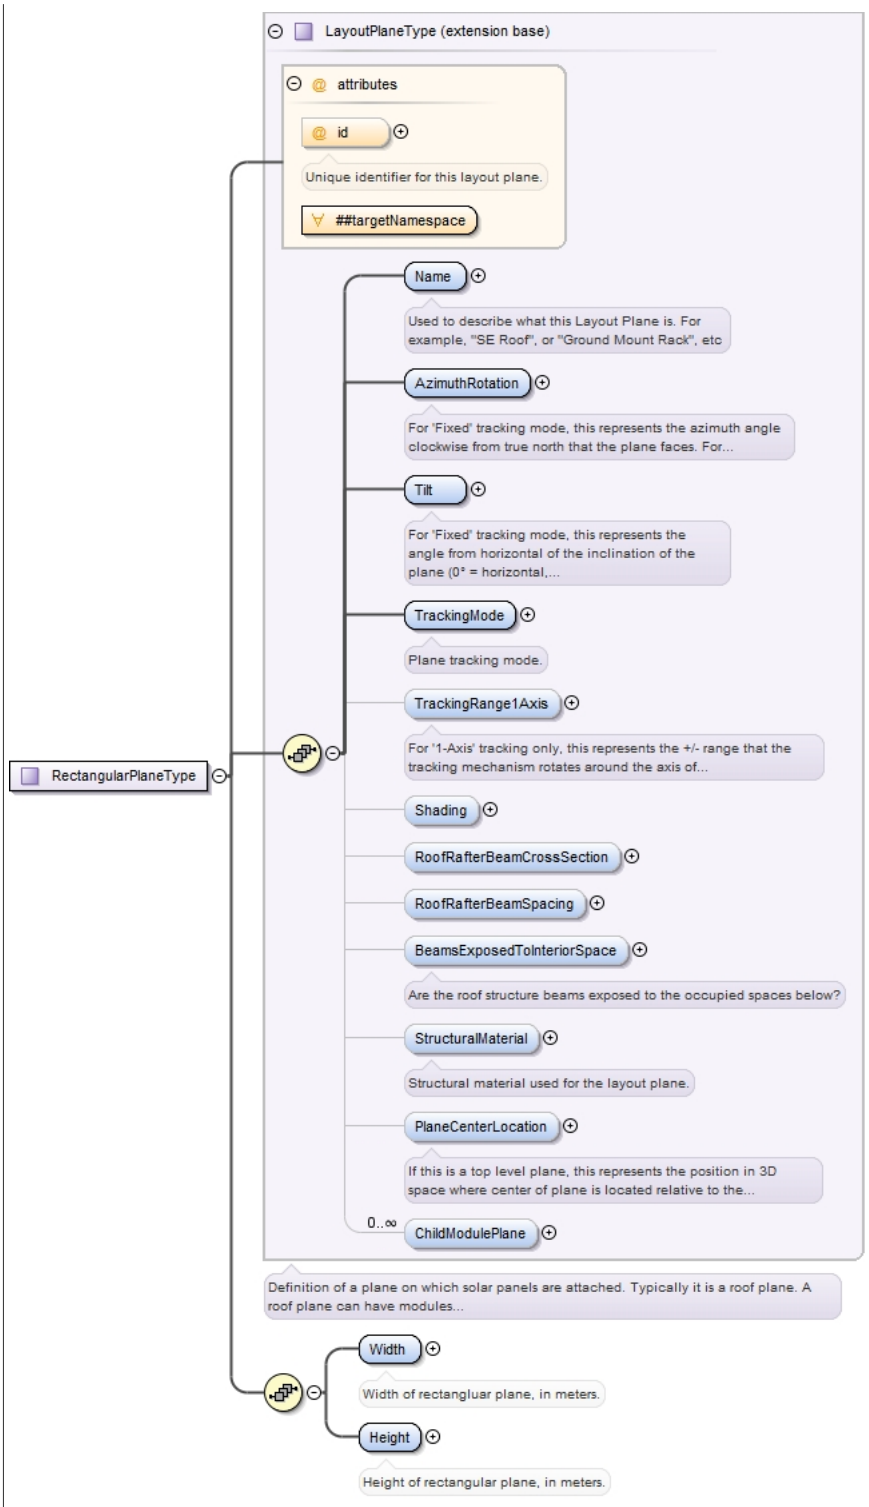
Type	extension of LayoutPlaneType
Type hierarchy	• LayoutPlaneType • RectangularPlaneType
Model	Name , AzimuthRotation , Tilt , TrackingMode , TrackingRange1Axis{0,1} , Shading{0,1} , RoofRafterBeamCrossSection{0,1} , RoofRafterBeamSpacing{0,1} , BeamsExposedToInteriorSpace{0,1} , StructuralMaterial{0,1} , PlaneCenterLocation{0,1} , ChildModulePlane* , Width , Height
Children	AzimuthRotation, BeamsExposedToInteriorSpace, ChildModulePlane, Height, Name, PlaneCenterLocation, RoofRafterBeamCrossSection, RoofRafterBeamSpacing, Shading, StructuralMaterial, Tilt, TrackingMode, TrackingRange1Axis, Width

Attributes	QName	Type	Fixed	Default	Use
	ANY attribute from TARGET namespace 'http://www.iepmodel.net'				
	id	xs:ID			optional
		Unique identifier for this layout plane.			

Source

```
<xs:complexType name="RectangularPlaneType">
  <xs:complexContent>
    <xs:extension base="LayoutPlaneType">
      <xs:sequence>
        <xs:element name="Width" type="xs:double">
          <xs:annotation>
            <xs:documentation>Width of rectangluar plane, in meters.</xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element name="Height" type="xs:double">
          <xs:annotation>
            <xs:documentation>Height of rectangular plane, in meters.</xs:documentation>
          </xs:annotation>
        </xs:element>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

Complex Type `WirewayBoxType`

Namespace	http://www.iepmodel.net
Annotations	A WirewayBox is any electrical box through which circuit connections travel. A WirewayBox is modeled just like a piece of conduit. It doesn't provide any services (e.g. disconnect, combination). It is only a place for 1:1 wire splices and transition from one ConduitSegment to another.
Diagram	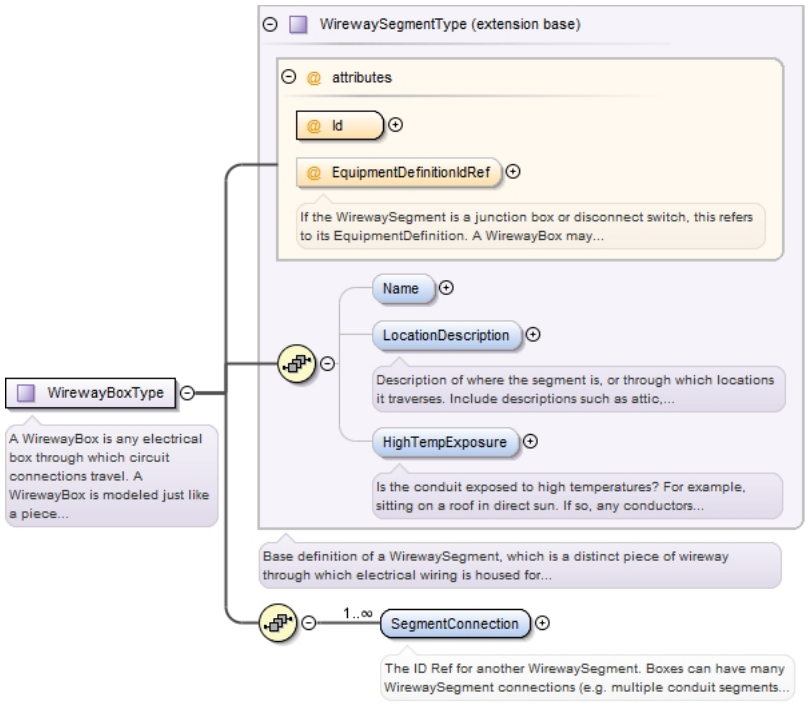
Type	extension of WirewaySegmentType
Type hierarchy	• WirewaySegmentType • WirewayBoxType
Model	Name{0,1} , LocationDescription{0,1} , HighTempExposure{0,1} , SegmentConnection+
Children	HighTempExposure, LocationDescription, Name, SegmentConnection

Attributes	QName	Type	Fixed	Default	Use
	EquipmentDefinitionIdRef	IDREF			optional

	QName	Type	Fixed	Default	Use
		If the WirewaySegment is a junction box or disconnect switch, this refers to its EquipmentDefinition. A WirewayBox may be a pass through where multiple ConduitSegments are combined into a single ConduitSegment for example. A disconnect switch box may also be modeled as a WirewayBox, provided that the circuit(s) involved are simply disoconnected and not combined in any way. DO NOT use WirewayBox to represent a combiner, or distribution panel.			
	Id	xs:ID			required

Source

```
<xs:complexType name="WirewayBoxType">
  <xs:annotation>
    <xs:documentation>A WirewayBox is any electrical box through which circuit connections
 travel. A WirewayBox is modeled just like a piece of conduit. It doesn't provide any
 services (e.g. disconnect, combination). It is only a place for 1:1 wire splices and
 transition from one ConduitSegment to another.</xs:documentation>
  </xs:annotation>
  <xs:complexContent>
    <xs:extension base="WirewaySegmentType">
      <xs:sequence>
        <xs:element maxOccurs="unbounded" name="SegmentConnection" type="xs:IDREF"
 minOccurs="1">
          <xs:annotation>
            <xs:documentation>The ID Ref for another WirewaySegment. Boxes can have many
 WirewaySegment connections (e.g. multiple conduit segments can terminate at a box).
 Conduit is a pipe with 2 ends, so it has a maximum of two WirewaySegments to which it
 connects.</xs:documentation>
          </xs:annotation>
        </xs:element>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

Complex Type ConduitSegmentType

Namespace	http://www.iepmodel.net
Annotations	A ConduitSegment is any continuous section of electrical conduit of a consistent type.
Diagram	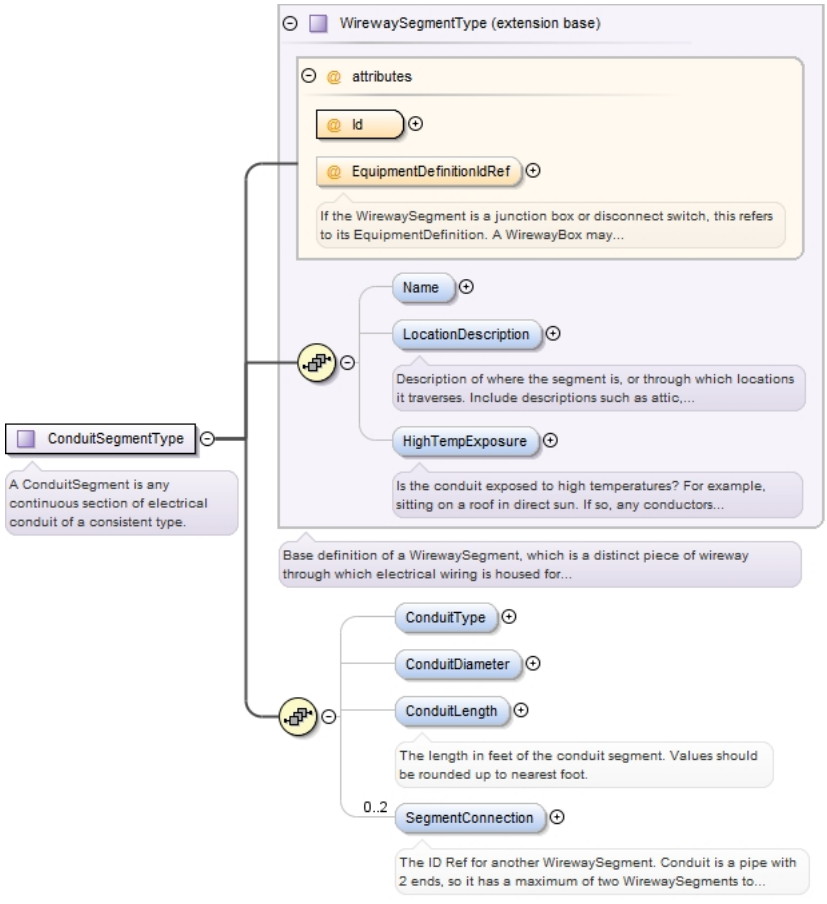

Type	extension of WirewaySegmentType
Type hierarchy	• WirewaySegmentType • ConduitSegmentType
Model	Name{0,1} , LocationDescription{0,1} , HighTempExposure{0,1} , ConduitType{0,1} , ConduitDiameter{0,1} , ConduitLength{0,1} , SegmentConnection{0,2}
Children	ConduitDiameter, ConduitLength, ConduitType, HighTempExposure, LocationDescription, Name, SegmentConnection
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **EquipmentDefinitionIdREF** / IDREF / / / optional If the WirewaySegment is a junction box or disconnect switch, this refers to its EquipmentDefinition. A WirewayBox may be a pass through where multiple ConduitSegments are combined into a single ConduitSegment for example. A disconnect switch box may also be modeled as a WirewayBox, provided that the circuit(s) involved are simply disoconnected and not combined in any way. DO NOT use WirewayBox to represent a combiner, or distribution panel. **Id** / xs:ID / / / required
Source	<xs:complexType name="ConduitSegmentType"> <xs:annotation> <xs:documentation>A ConduitSegment is any continuous section of electrical conduit of a consistent type.</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="WirewaySegmentType"> <xs:sequence> <xs:element name="ConduitType" type="TypeOfConduitEnumType" minOccurs="0" maxOccurs="1"/> <xs:element name="ConduitDiameter" type="ConduitDiameterEnumType" minOccurs="0" maxOccurs="1"/> <xs:element name="ConduitLength" type="xs:double" minOccurs="0"> <xs:annotation> <xs:documentation>The length in feet of the conduit segment. Values should be rounded up to nearest foot.</xs:documentation> </xs:annotation> </xs:element> <xs:element maxOccurs="2" name="SegmentConnection" type="xs:IDREF" minOccurs="0"> <xs:annotation> <xs:documentation>The ID Ref for another WirewaySegment. Conduit is a pipe with 2 ends, so it has a maximum of two WirewaySegments to which it connects. Boxes can have many WirewaySegment connections.</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType>

Complex Type `CertifyingAuthority`

Namespace	http://www.iepmodel.net
Diagram	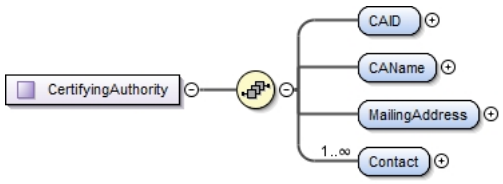
Model	CAID , CAName , MailingAddress , Contact+
Children	CAID, CAName, Contact, MailingAddress
Source	<xs:complexType name="CertifyingAuthority"> <xs:sequence> <xs:element name="CAID" type="xs:int" minOccurs="1" maxOccurs="1"/> <xs:element name="CAName" type="xs:string" minOccurs="1" maxOccurs="1"/> <xs:element name="MailingAddress" type="AddressType" minOccurs="1" maxOccurs="1"/> <xs:element name="Contact" type="ContactType" minOccurs="1" maxOccurs="unbounded"/> </xs:sequence> </xs:complexType>

Simple Type(s)

Simple Type `ProjectClassificationEnumType`

Namespace	http://www.iepmodel.net
Annotations	This defines whether the project is New Construction or a Retrofit
Diagram	
Type	restriction of xs:string
Facets	enumeration Retrofit enumeration New Construction
Used by	Element ProjectType/ProjectClassification
Source	<xs:simpleType name="ProjectClassificationEnumType"> <xs:annotation> <xs:documentation>This defines whether the project is New Construction or a Retrofit</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:enumeration value="Retrofit"/> <xs:enumeration value="New Construction"/> </xs:restriction> </xs:simpleType>

Simple Type `RealEstateClassificationEnumType`

Namespace	http://www.iepmodel.net
Annotations	This refers to the property type or what is sometimes referred to as real estate type. Commercial is synonymous with non-residential. This is also used for PowerClerk/CSI program
Diagram	
Type	restriction of xs:string
Facets	enumeration Commercial enumeration Residential
Used by	Element ProjectType/RealEstateClassification
Source	<xs:simpleType name="RealEstateClassificationEnumType"> <xs:annotation> <xs:documentation>This refers to the property type or what is sometimes referred to as real estate type. Commercial is synonymous with non-residential. This is also used for PowerClerk/CSI program</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:enumeration value="Commercial"/> <xs:enumeration value="Residential"/> </xs:restriction> </xs:simpleType>

Simple Type `PhoneNumberEnumType`

Namespace	http://www.iepmodel.net
Diagram	
Type	restriction of xs:string
Facets	enumeration Business enumeration Business Fax enumeration Home

	enumeration	Home Fax
	enumeration	Mobile
	enumeration	Pager
	enumeration	Skype
Used by	Element	PhoneNumberType/PhoneNumberUse
Source		

```
<xs:simpleType name="PhoneNumberEnumType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Business"/>
    <xs:enumeration value="Business Fax"/>
    <xs:enumeration value="Home"/>
    <xs:enumeration value="Home Fax"/>
    <xs:enumeration value="Mobile"/>
    <xs:enumeration value="Pager"/>
    <xs:enumeration value="Skype"/>
  </xs:restriction>
</xs:simpleType>
```

Simple Type EmailAddressEnumType

Namespace	http://www.iepmodel.net	
Diagram		
Type	restriction of xs:string	
Facets	enumeration	Work
	enumeration	Home
	enumeration	Alternate
Used by	Element	EmailAddressType/EmailAddressUse
Source		

```
<xs:simpleType name="EmailAddressEnumType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Work"/>
    <xs:enumeration value="Home"/>
    <xs:enumeration value="Alternate"/>
  </xs:restriction>
</xs:simpleType>
```

Simple Type PreferredContactMethodEnumType

Namespace	http://www.iepmodel.net	
Diagram		
Type	restriction of xs:string	
Facets	enumeration	Home Phone
	enumeration	Work Phone
	enumeration	Cell Phone
	enumeration	Email
Used by	Element	ContactType/PreferredContactMethod
Source		

```
<xs:simpleType name="PreferredContactMethodEnumType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Home Phone"/>
    <xs:enumeration value="Work Phone"/>
    <xs:enumeration value="Cell Phone"/>
    <xs:enumeration value="Email"/>
  </xs:restriction>
</xs:simpleType>
```

Simple Type ZipCodeType

Namespace	http://www.iepmodel.net

Diagram	
Type	restriction of xs:string
Facets	pattern \d{5}|\d{5}-\d{4}
Used by	Element AddressType/ZipCode
Source	<xs:simpleType name="ZipCodeType"> <xs:restriction base="xs:string"> <xs:pattern value="\d{5}|\d{5}-\d{4}"/> </xs:restriction> </xs:simpleType>

Simple Type `ParticipantRoleEnumType`

Namespace	http://www.iepmodel.net
Annotations	Host Customer - "utility account holder" Customer - "The customer of the scope of work offered." Occupant - "The organization or persons occupying a building specified in the project." Seller - "The party providing the defined system / scope of work" Installer - "The party installing the system." Referrer - "A party who referred the customer to the seller." Auditor - "A party who provides the site audit."
Diagram	
Type	restriction of xs:string
Facets	enumeration Host Customer enumeration Customer enumeration Occupant enumeration PV System Owner enumeration Incentive Payee enumeration Seller enumeration Installer enumeration Referrer enumeration Auditor
Used by	Element ParticipantType/Role
Source	<xs:simpleType name="ParticipantRoleEnumType"> <xs:annotation> <xs:documentation>Host Customer - "utility account holder"</xs:documentation> <xs:documentation>Customer - "The customer of the scope of work offered."</xs:documentation> <xs:documentation>Occupant - "The organization or persons occupying a building specified in the project."</xs:documentation> <xs:documentation>Seller - "The party providing the defined system / scope of work"</xs:documentation> <xs:documentation>Installer - "The party installing the system."</xs:documentation> <xs:documentation>Referrer - "A party who referred the customer to the seller."</xs:documentation> <xs:documentation>Auditor - "A party who provides the site audit."</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:enumeration value="Host Customer"/> <xs:enumeration value="Customer"/> <xs:enumeration value="Occupant"/> <xs:enumeration value="PV System Owner"/> <xs:enumeration value="Incentive Payee"/> <xs:enumeration value="Seller"/>

```
    <xs:enumeration value="Installer"/>
    <xs:enumeration value="Referrer"/>
    <xs:enumeration value="Auditor"/>
  </xs:restriction>
</xs:simpleType>
```

Simple Type `ExistenceEnumType`

Namespace	http://www.iepmodel.net
Diagram	
Type	restriction of xs:string
Facets	enumeration `Existing` enumeration `New` enumeration `Unknown`
Used by	Element SpaceType/NewExisting

Source	`<xs:simpleType name="ExistenceEnumType">`
	`  <xs:restriction base="xs:string">`
	`  <xs:enumeration value="Existing"/>`
	`  <xs:enumeration value="New"/>`
	`  <xs:enumeration value="Unknown"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

Simple Type `ResidentialEnumType`

Namespace	http://www.iepmodel.net
Diagram	
Type	restriction of xs:string
Facets	enumeration `Single-Family` enumeration `Multi-Family`
Used by	Element BuildingClassType/Residential

Source	`<xs:simpleType name="ResidentialEnumType">`
	`  <xs:restriction base="xs:string">`
	`  <xs:enumeration value="Single-Family"/>`
	`  <xs:enumeration value="Multi-Family"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

Simple Type `CEUSBuildingEnumType`

Namespace	http://www.iepmodel.net
Annotations	The California Commercial End-Use Survey (CEUS) is a comprehensive study of commercial sector energy use, primarily designed to support the state's energy demand forecasting activities. http://www.energy.ca.gov/ceus/ This enumeration lists the CEUS building types.
Diagram	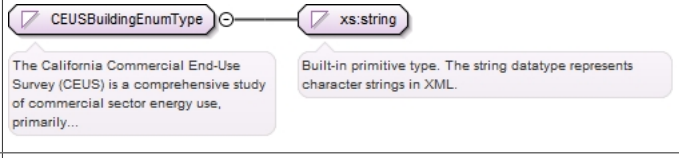
Type	restriction of xs:string
Facets	enumeration `College` enumeration `Food Store` enumeration `Health` enumeration `Large Office (>=30k ft2)`

	enumeration	Lodging
	enumeration	Miscellaneous
	enumeration	Refrigerated Warehouse
	enumeration	Restaurant
	enumeration	Retail
	enumeration	School
	enumeration	Small Office (<30k ft2)
	enumeration	Unrefrigerated Warehouse
Used by	Element	CommercialBuildingClassType/CEUSClassification

Source

```
<xs:simpleType name="CEUSBuildingEnumType">
  <xs:annotation>
    <xs:documentation>The California Commercial End-Use Survey (CEUS) is a comprehensive
 study of commercial sector energy use, primarily designed to support the state's energy
 demand forecasting activities. http://www.energy.ca.gov/ceus/ This enumeration lists the
 CEUS building types.</xs:documentation>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:enumeration value="College"/>
    <xs:enumeration value="Food Store"/>
    <xs:enumeration value="Health"/>
    <xs:enumeration value="Large Office (>=30k ft2)"/>
    <xs:enumeration value="Lodging"/>
    <xs:enumeration value="Miscellaneous"/>
    <xs:enumeration value="Refrigerated Warehouse"/>
    <xs:enumeration value="Restaurant"/>
    <xs:enumeration value="Retail"/>
    <xs:enumeration value="School"/>
    <xs:enumeration value="Small Office (<30k ft2)"/>
    <xs:enumeration value="Unrefrigerated Warehouse"/>
  </xs:restriction>
</xs:simpleType>
```

Simple Type DEERBuildingEnumType

Namespace	http://www.iepmodel.net
Annotations	The Database for Energy Efficient Resources (DEER) is a California Energy Commission and California Public Utilities Commission (CPUC) sponsored database designed to provide well-documented estimates of energy and peak demand savings values, measure costs, and effective useful life (EUL) all with one data source. http://www.energy.ca.gov/deer/ This list can be found in the "key" sheet of the excel file from the DEER website at the following link: http://www.deeresources.com/deer0911planning/downloads/DEER2008%20Database%20Description%20%28version%202.05%29.xls
Diagram	
Type	restriction of xs:string
Facets	enumeration: Education - Community College enumeration: Education - Primary School enumeration: Education - Secondary School enumeration: Education - University enumeration: Grocery enumeration: Health/Medical - Hospital enumeration: Health/Medical - Nursing Home

	enumeration	Lodging - Guest Rooms
	enumeration	Lodging - Hotel
	enumeration	Lodging - Motel
	enumeration	Manufacturing - Light Industrial
	enumeration	Office - Large
	enumeration	Office - Small
	enumeration	Residential - Indoor
	enumeration	Residential - Outdoor
	enumeration	Restaurant - Fast-Food
	enumeration	Restaurant - Sit-Down
	enumeration	Retail - 3-Story Large
	enumeration	Retail - Single-Story Large
	enumeration	Retail - Small
	enumeration	Storage - Conditioned
	enumeration	Storage - Unconditioned
	enumeration	Warehouse - Refrigerated
Used by	Element	CommercialBuildingClassType/DEERClassification

Source

```
<xs:simpleType name="DEERBuildingEnumType">
  <xs:annotation>
    <xs:documentation>The Database for Energy Efficient Resources (DEER) is a California
 Energy Commission and California Public Utilities Commission (CPUC) sponsored database
 designed to provide well-documented estimates of energy and peak demand savings values,
 measure costs, and effective useful life (EUL) all with one data source. http://
www.energy.ca.gov/deer/ This list can be found in the "key" sheet of the excel file from
 the DEER website at the following link: http://www.deeresources.com/deer0911planning/
downloads/DEER2008%20Database%20Description%20%28version%202.05%29.xls</xs:documentation>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:enumeration value="Education - Community College"/>
    <xs:enumeration value="Education - Primary School"/>
    <xs:enumeration value="Education - Secondary School"/>
    <xs:enumeration value="Education - University"/>
    <xs:enumeration value="Grocery"/>
    <xs:enumeration value="Health/Medical - Hospital"/>
    <xs:enumeration value="Health/Medical - Nursing Home"/>
    <xs:enumeration value="Lodging - Guest Rooms"/>
    <xs:enumeration value="Lodging - Hotel"/>
    <xs:enumeration value="Lodging - Motel"/>
    <xs:enumeration value="Manufacturing - Light Industrial"/>
    <xs:enumeration value="Office - Large"/>
    <xs:enumeration value="Office - Small"/>
    <xs:enumeration value="Residential - Indoor"/>
    <xs:enumeration value="Residential - Outdoor"/>
    <xs:enumeration value="Restaurant - Fast-Food"/>
    <xs:enumeration value="Restaurant - Sit-Down"/>
    <xs:enumeration value="Retail - 3-Story Large"/>
    <xs:enumeration value="Retail - Single-Story Large"/>
    <xs:enumeration value="Retail - Small"/>
    <xs:enumeration value="Storage - Conditioned"/>
    <xs:enumeration value="Storage - Unconditioned"/>
    <xs:enumeration value="Warehouse - Refrigerated"/>
  </xs:restriction>
</xs:simpleType>
```

Simple Type EnergyStarBuildingEnumType

Namespace	http://www.iepmodel.net
Annotations	Details of how the Energy Star Portfolio Manager tool rates buildings can be found at the following url: http://www.energystar.gov/index.cfm?c=evaluate_performance.pt_neprs_learn When benchmarking a mixed-use building, Portfolio Recommends defining the building as the space type that accounts for 50% or more of the floor area to get an accurate benchmark. Details can be found at the following url:

	http://www.energystar.gov/index.cfm?c=eligibility.bus_portfoliomanager_eligibility_mixed
Diagram	
Type	restriction of xs:string
Facets	enumeration: Office enumeration: Bank/Financial Institution enumeration: Courthouse enumeration: Dormitory / Residence Hall enumeration: K-12 School enumeration: Hospital (Acute Care and Children's) enumeration: House of Worship enumeration: Hotel enumeration: Retail Store enumeration: Supermarket enumeration: Senior Care Facility enumeration: Residence Halls/ Dormitorie enumeration: Warehouse enumeration: Medical Office enumeration: Wastewater Facility enumeration: Data Center enumeration: Swimming Pool enumeration: Parking enumeration: Other
Used by	Element: CommercialBuildingClassType/EnergyStarClassification

Source

```
<xs:simpleType name="EnergyStarBuildingEnumType">
  <xs:annotation>
    <xs:documentation>Details of how the Energy Star Portfolio Manager tool
 rates buildings can be found at the following url: http://www.energystar.gov/
index.cfm?c=evaluate_performance.pt_neprs_learn When benchmarking a mixed-use
 building, Portfolio Recommends defining the building as the space type that
 accounts for 50% or more of the floor area to get an accurate benchmark.
 Details can be found at the following url: http://www.energystar.gov/index.cfm?
c=eligibility.bus_portfoliomanager_eligibility_mixed</xs:documentation>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:enumeration value="Office"/>
    <xs:enumeration value="Bank/Financial Institution"/>
    <xs:enumeration value="Courthouse"/>
    <xs:enumeration value="Dormitory / Residence Hall"/>
    <xs:enumeration value="K-12 School"/>
    <xs:enumeration value="Hospital (Acute Care and Children's)"/>
    <xs:enumeration value="House of Worship"/>
    <xs:enumeration value="Hotel"/>
    <xs:enumeration value="Retail Store"/>
    <xs:enumeration value="Supermarket"/>
    <xs:enumeration value="Senior Care Facility"/>
    <xs:enumeration value="Residence Halls/Dormitorie"/>
    <xs:enumeration value="Warehouse"/>
    <xs:enumeration value="Medical Office"/>
    <xs:enumeration value="Wastewater Facility"/>
    <xs:enumeration value="Data Center"/>
    <xs:enumeration value="Swimming Pool"/>
    <xs:enumeration value="Parking"/>
    <xs:enumeration value="Other"/>
  </xs:restriction>
</xs:simpleType>
```

Simple Type `AreaUnitEnumType`

Namespace	http://www.iepmodel.net
Annotations	This is an enumeration of area units of measurement. Taken directly from gbXML.
Diagram	
Type	restriction of xs:string
Facets	enumeration SquareCentimeters enumeration SquareFeet enumeration SquareInches enumeration SquareKilometers enumeration SquareMeters enumeration SquareMiles enumeration SquareMillimeters enumeration SquareYards
Used by	Attribute AreaType/@Unit
Source	<xs:simpleType name="AreaUnitEnumType"> <xs:annotation> <xs:documentation>This is an enumeration of area units of measurement. Taken directly from gbXML.</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:enumeration value="SquareCentimeters"/> <xs:enumeration value="SquareFeet"/> <xs:enumeration value="SquareInches"/> <xs:enumeration value="SquareKilometers"/> <xs:enumeration value="SquareMeters"/> <xs:enumeration value="SquareMiles"/> <xs:enumeration value="SquareMillimeters"/> <xs:enumeration value="SquareYards"/> </xs:restriction> </xs:simpleType>

Simple Type `ConsumptionDataSourceEnumType`

Namespace	http://www.iepmodel.net
Annotations	This enumeration indicates where the energy consumption data originated.
Diagram	
Type	restriction of xs:string
Facets	enumeration Utility Bill enumeration Simulated enumeration Rated enumeration Measured
Used by	Element EnergyConsumptionType/DataSource
Source	<xs:simpleType name="ConsumptionDataSourceEnumType"> <xs:annotation> <xs:documentation>This enumeration indicates where the energy consumption data originated.</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:enumeration value="Utility Bill"/> <xs:enumeration value="Simulated"/> <xs:enumeration value="Rated"/> <xs:enumeration value="Measured"/> </xs:restriction> </xs:simpleType>

Simple Type EnergyUnitEnumType

Namespace	http://www.iepmodel.net
Annotations	This is an enumeration of common energy units of measurement used in the building industry.
Diagram	
Type	restriction of xs:string
Facets	enumeration BTU enumeration Joules enumeration KilowattHours enumeration Therms
Used by	Attribute EnergyType/@Unit Element EnergyServiceType/EnergyType

Source	`<xs:simpleType name="EnergyUnitEnumType">`
	`  <xs:annotation>`
	`  <xs:documentation>This is an enumeration of common energy units of measurement used in the building industry.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="xs:string">`
	`  <xs:enumeration value="BTU"/>`
	`  <xs:enumeration value="Joules"/>`
	`  <xs:enumeration value="KilowattHours"/>`
	`  <xs:enumeration value="Therms"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

Simple Type EnergyClassEnumType

Namespace	http://www.iepmodel.net
Annotations	This is an enumeration of fuels and energy transport media. "Fuel Oil (No. 2)" is the diesel fuel that trucks and some cars run on, leading to the name "road diesel". It is the same thing as heating oil.
Diagram	
Type	restriction of xs:string
Facets	enumeration Coal (anthracite) enumeration Coal (bituminous) enumeration Coke enumeration Diesel enumeration District Chilled Water enumeration District Hot Water enumeration District Steam enumeration Electricity enumeration Fuel Oil (No. 1) — Number 1 is similar to kerosene and is the fraction that boils off right after gasoline. enumeration Fuel Oil (No. 2) enumeration Fuel Oil (No. 4) — Number 4 fuel oil is usually a blend of distillate and residual fuel oils, such as No. 2 and 6; however, sometimes it is just a heavy distillate. No. 4 may be classified as diesel, distillate or residual fuel oil. enumeration Fuel Oil (No. 5 and No. 6) — Number 5 fuel oil and Number 6 fuel oil are called residual fuel oils (RFO) or heavy fuel oils. More Number 6 oil is

		produced compared to Number 5 oil, the terms heavy fuel oil and residual fuel oil are sometimes used as names for Number 6. Number 5 and 6 are what remains of the crude oil after gasoline and the distillate fuel oils are extracted through distillation. Number 5 fuel oil is a mixture of 75-80 % Number 6 oil and 25-20% of Number 2 oil. Number 6 oil may also contain a small amount of No. 2 to get it to meet specifications.
enumeration	Geothermal	
enumeration	Kerosene	
enumeration	Liquid Propane	
enumeration	Natural Gas	
enumeration	Other	
enumeration	Propane	
enumeration	Steam	
enumeration	Wood	
Used by	Attributes	EnergyType/@Fuel, PowerType/@Fuel

Source

```
<xs:simpleType name="EnergyClassEnumType">
  <xs:annotation>
    <xs:documentation>This is an enumeration of fuels and energy transport media. "Fuel
 Oil (No. 2)" is the diesel fuel that trucks and some cars run on, leading to the name
 "road diesel". It is the same thing as heating oil.</xs:documentation>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:enumeration value="Coal (anthracite)"/>
    <xs:enumeration value="Coal (bituminous)"/>
    <xs:enumeration value="Coke"/>
    <xs:enumeration value="Diesel"/>
    <xs:enumeration value="District Chilled Water"/>
    <xs:enumeration value="District Hot Water"/>
    <xs:enumeration value="District Steam"/>
    <xs:enumeration value="Electricity"/>
    <xs:enumeration value="Fuel Oil (No. 1)">
      <xs:annotation>
        <xs:documentation>Number 1 is similar to kerosene and is the fraction that boils
 off right after gasoline.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="Fuel Oil (No. 2)"/>
    <xs:enumeration value="Fuel Oil (No. 4)">
      <xs:annotation>
        <xs:documentation>Number 4 fuel oil is usually a blend of distillate and residual
 fuel oils, such as No. 2 and 6; however, sometimes it is just a heavy distillate. No. 4
 may be classified as diesel, distillate or residual fuel oil.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="Fuel Oil (No. 5 and No. 6)">
      <xs:annotation>
        <xs:documentation>Number 5 fuel oil and Number 6 fuel oil are called residual fuel
 oils (RFO) or heavy fuel oils. More Number 6 oil is produced compared to Number 5 oil,
 the terms heavy fuel oil and residual fuel oil are sometimes used as names for Number 6.
 Number 5 and 6 are what remains of the crude oil after gasoline and the distillate fuel
 oils are extracted through distillation. Number 5 fuel oil is a mixture of 75-80 % Number
 6 oil and 25-20% of Number 2 oil. Number 6 oil may also contain a small amount of No. 2
 to get it to meet specifications.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="Geothermal"/>
    <xs:enumeration value="Kerosene"/>
    <xs:enumeration value="Liquid Propane"/>
    <xs:enumeration value="Natural Gas"/>
    <xs:enumeration value="Other"/>
    <xs:enumeration value="Propane"/>
    <xs:enumeration value="Steam"/>
    <xs:enumeration value="Wood"/>
  </xs:restriction>
</xs:simpleType>
```

Simple Type TOUPeriodsEnumType

Namespace	http://www.iepmodel.net

Annotations	Devan's prior analysis of TOU periods across OR, WA, CA verified that there are six, so we can use these as ENUMs. However, its optional.
Diagram	
Type	restriction of xs:string
Facets	enumeration Base enumeration Off enumeration Off-Peak enumeration Off-Peak (P4) enumeration Pre-Peak enumeration Post-Peak enumeration Light Load enumeration Low Load enumeration Low Load A enumeration Low Load B enumeration Low Peak enumeration Part-Peak enumeration Partial Peak enumeration Intermediate Peak enumeration Semi-Peak enumeration Mid-Peak enumeration Mid-Peak (P2) enumeration On enumeration Peak enumeration On-Peak enumeration On-Peak (P1) enumeration On-Peak (P3) enumeration Shoulder-Peak enumeration Super-Peak enumeration Heavy Load enumeration High Peak enumeration New Period enumeration Summer Off-Peak enumeration Summer Part-Peak enumeration Summer Peak enumeration Winter Off-Peak enumeration Winter Part-Peak enumeration Winter Peak
Used by	Element ConsumedEnergyType/TimeOfUsePeriod
Source	<xs:simpleType name="TOUPeriodsEnumType"> <xs:annotation> <xs:documentation>Devan's prior analysis of TOU periods across OR, WA, CA verified that there are six, so we can use these as ENUMs. However, its optional.</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:enumeration value="Base"/> <xs:enumeration value="Off"/> <xs:enumeration value="Off-Peak"/> <xs:enumeration value="Off-Peak (P4)"/> <xs:enumeration value="Pre-Peak"/> <xs:enumeration value="Post-Peak"/>

```
    <xs:enumeration value="Light Load"/>
    <xs:enumeration value="Low Load"/>
    <xs:enumeration value="Low Load A"/>
    <xs:enumeration value="Low Load B"/>
    <xs:enumeration value="Low Peak"/>
    <xs:enumeration value="Part-Peak"/>
    <xs:enumeration value="Partial Peak"/>
    <xs:enumeration value="Intermediate Peak"/>
    <xs:enumeration value="Semi-Peak"/>
    <xs:enumeration value="Mid-Peak"/>
    <xs:enumeration value="Mid-Peak (P2)"/>
    <xs:enumeration value="On"/>
    <xs:enumeration value="Peak"/>
    <xs:enumeration value="On-Peak"/>
    <xs:enumeration value="On-Peak (P1)"/>
    <xs:enumeration value="On-Peak (P3)"/>
    <xs:enumeration value="Shoulder-Peak"/>
    <xs:enumeration value="Super-Peak"/>
    <xs:enumeration value="Heavy Load"/>
    <xs:enumeration value="High Peak"/>
    <xs:enumeration value="New Period"/>
    <xs:enumeration value="Summer Off-Peak"/>
    <xs:enumeration value="Summer Part-Peak"/>
    <xs:enumeration value="Summer Peak"/>
    <xs:enumeration value="Winter Off-Peak"/>
    <xs:enumeration value="Winter Part-Peak"/>
    <xs:enumeration value="Winter Peak"/>
  </xs:restriction>
</xs:simpleType>
```

Simple Type `DimensionUnitEnumType`

Namespace	http://www.iepmodel.net
Annotations	This is an enumeration of one-dimensional spatial units of measurement.
Diagram	
Type	restriction of xs:string
Facets	enumeration Centimeters enumeration Feet enumeration Inches enumeration Kilometers enumeration Meters enumeration Miles enumeration Millimeters enumeration Yards
Used by	Attribute DimensionType/@Unit
Source	<xs:simpleType name="DimensionUnitEnumType"> <xs:annotation> <xs:documentation>This is an enumeration of one-dimensional spatial units of measurement.</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:enumeration value="Centimeters"/> <xs:enumeration value="Feet"/> <xs:enumeration value="Inches"/> <xs:enumeration value="Kilometers"/> <xs:enumeration value="Meters"/> <xs:enumeration value="Miles"/> <xs:enumeration value="Millimeters"/> <xs:enumeration value="Yards"/> </xs:restriction> </xs:simpleType>

Simple Type `FoundationBaseEnumType`

Namespace	http://www.iepmodel.net

Diagram	
Type	restriction of xs:string
Facets	enumeration `Crawlspace` enumeration `Finished Basement` enumeration `Unfinished Basement` enumeration `SlabOnGrade` enumeration `Raised Floor`
Used by	Element FoundationType/Base

Source	`<xs:simpleType name="FoundationBaseEnumType">`
	`  <xs:restriction base="xs:string">`
	`  <xs:enumeration value="Crawlspace"/>`
	`  <xs:enumeration value="Finished Basement"/>`
	`  <xs:enumeration value="Unfinished Basement"/>`
	`  <xs:enumeration value="SlabOnGrade"/>`
	`  <xs:enumeration value="Raised Floor"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

Simple Type `RoofLookEnumType`

Namespace	http://www.iepmodel.net
Diagram	
Type	restriction of xs:string
Facets	enumeration `Butterfly` enumeration `Combination` enumeration `Flat` enumeration `Gable` enumeration `Gambrel` enumeration `Hip` enumeration `Mansard` enumeration `Shed`
Used by	Element RoofType/Look

Source	`<xs:simpleType name="RoofLookEnumType">`
	`  <xs:restriction base="xs:string">`
	`  <xs:enumeration value="Butterfly"/>`
	`  <xs:enumeration value="Combination"/>`
	`  <xs:enumeration value="Flat"/>`
	`  <xs:enumeration value="Gable"/>`
	`  <xs:enumeration value="Gambrel"/>`
	`  <xs:enumeration value="Hip"/>`
	`  <xs:enumeration value="Mansard"/>`
	`  <xs:enumeration value="Shed"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

Simple Type `RoofConstructionEnumType`

Namespace	http://www.iepmodel.net
Diagram	
Type	restriction of xs:string
Facets	enumeration `beams and purlins`

	enumeration	rafters with attic
	enumeration	truss with attic
	enumeration	vaulted 2x
	enumeration	vaulted beams
Used by	Element	RoofType/ConstructionStyle
Source		

```
<xs:simpleType name="RoofConstructionEnumType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="beams and purlins"/>
    <xs:enumeration value="rafters with attic"/>
    <xs:enumeration value="truss with attic"/>
    <xs:enumeration value="vaulted 2x"/>
    <xs:enumeration value="vaulted beams"/>
  </xs:restriction>
</xs:simpleType>
```

Simple Type RoofSurfaceEnumType

Namespace	http://www.iepmodel.net	
Diagram		
Type	restriction of xs:string	
Facets	enumeration	CalPac metal
	enumeration	composition roll
	enumeration	composition shingle
	enumeration	foam
	enumeration	heavy concrete tile
	enumeration	high-definition comp shingle
	enumeration	light weight concrete tile
	enumeration	single-ply membrane
	enumeration	slate
	enumeration	spanish barrel tile
	enumeration	standing seam metal
	enumeration	tar & gravel
	enumeration	wood shake
Used by	Element	RoofType/SurfaceType
Source		


```
<xs:simpleType name="RoofSurfaceEnumType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="CalPac metal"/>
    <xs:enumeration value="composition roll"/>
    <xs:enumeration value="composition shingle"/>
    <xs:enumeration value="foam"/>
    <xs:enumeration value="heavy concrete tile"/>
    <xs:enumeration value="high-definition comp shingle"/>
    <xs:enumeration value="light weight concrete tile"/>
    <xs:enumeration value="single-ply membrane"/>
    <xs:enumeration value="slate"/>
    <xs:enumeration value="spanish barrel tile"/>
    <xs:enumeration value="standing seam metal"/>
    <xs:enumeration value="tar & gravel"/>
    <xs:enumeration value="wood shake"/>
  </xs:restriction>
</xs:simpleType>
```

Simple Type TrackingModeEnumType

Namespace	http://www.iepmodel.net
Annotations	Enumeration of eligible tracking modes for a PV mounting structure.

Diagram	
Type	restriction of xs:string
Facets	enumeration `Fixed` enumeration `Single-Axis` enumeration `Dual-Axis`
Used by	Elements LayoutPlaneType/TrackingMode, PvSubSystemType/TrackingMode
Source	

```
<xs:simpleType name="TrackingModeEnumType">
  <xs:annotation>
    <xs:documentation>Enumeration of eligible tracking modes for a PV mounting
 structure.</xs:documentation>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:enumeration value="Fixed"/>
    <xs:enumeration value="Single-Axis"/>
    <xs:enumeration value="Dual-Axis"/>
  </xs:restriction>
</xs:simpleType>
```

Simple Type `RafterBeamCrossSectionEnumType`

Namespace	http://www.iepmodel.net
Annotations	Dimensions given in inches. Provided as an Enum because we wish to eventually support automated building permit acceptance via use of an IEP file that fully describes the system. SolarABCs expedited permit process steps through a check of rafter beam cross section size, so we want to be sure our Enums match theirs.
Diagram	
Type	restriction of xs:string
Facets	enumeration `2x10` enumeration `2x12` enumeration `2x4` enumeration `2x6` enumeration `2x8` enumeration `Other`
Used by	Element LayoutPlaneType/RoofRafterBeamCrossSection
Source	

```
<xs:simpleType name="RafterBeamCrossSectionEnumType">
  <xs:annotation>
    <xs:documentation>Dimensions given in inches. Provided as an Enum because we wish to
 eventually support automated building permit acceptance via use of an IEP file that fully
 describes the system. SolarABCs expedited permit process steps through a check of rafter
 beam cross section size, so we want to be sure our Enums match theirs.</xs:documentation>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:enumeration value="2x10"/>
    <xs:enumeration value="2x12"/>
    <xs:enumeration value="2x4"/>
    <xs:enumeration value="2x6"/>
    <xs:enumeration value="2x8"/>
    <xs:enumeration value="Other"/>
  </xs:restriction>
</xs:simpleType>
```

Simple Type `RafterBeamSpacingEnumType`

Namespace	http://www.iepmodel.net
Annotations	Dimensions given in inches. Provided as an Enum because we wish to eventually support automated building permit acceptance via use of an IEP file that fully describes the system. SolarABCs expedited permit process steps through a check of rafter beam spacing, so we want to be sure our Enums match theirs.

Diagram	
Type	restriction of xs:string
Facets	enumeration 12 enumeration 16 enumeration 24 enumeration Other
Used by	Element LayoutPlaneType/RoofRafterBeamSpacing

Source	`<xs:simpleType name="RafterBeamSpacingEnumType">`
	`<xs:annotation>`
	`<xs:documentation>`Dimensions given in inches. Provided as an Enum because we wish to eventually support automated building permit acceptance via use of an IEP file that fully describes the system. SolarABCs expedited permit process steps through a check of rafter beam spacing, so we want to be sure our Enums match theirs.`</xs:documentation>`
	`</xs:annotation>`
	`<xs:restriction base="xs:string">`
	`<xs:enumeration value="12"/>`
	`<xs:enumeration value="16"/>`
	`<xs:enumeration value="24"/>`
	`<xs:enumeration value="Other"/>`
	`</xs:restriction>`
	`</xs:simpleType>`

Simple Type `StructuralMaterialEnumType`

Namespace	http://www.iepmodel.net
Annotations	Material making up the roof's structural supports. Provided as an Enum because we wish to eventually support automated building permit acceptance via use of an IEP file that fully describes the system. SolarABCs expedited permit process steps through a check of rafter beam material, so we want to be sure our Enums match theirs.
Diagram	
Type	restriction of xs:string
Facets	enumeration Wood, Fir#2 Or Better enumeration Wood enumeration Steel enumeration Aluminum
Used by	Element LayoutPlaneType/StructuralMaterial

Source	`<xs:simpleType name="StructuralMaterialEnumType">`
	`<xs:annotation>`
	`<xs:documentation>`Material making up the roof's structural supports. Provided as an Enum because we wish to eventually support automated building permit acceptance via use of an IEP file that fully describes the system. SolarABCs expedited permit process steps through a check of rafter beam material, so we want to be sure our Enums match theirs.`</xs:documentation>`
	`</xs:annotation>`
	`<xs:restriction base="xs:string">`
	`<xs:enumeration value="Wood, Fir#2 Or Better"/>`
	`<xs:enumeration value="Wood"/>`
	`<xs:enumeration value="Steel"/>`
	`<xs:enumeration value="Aluminum"/>`
	`</xs:restriction>`
	`</xs:simpleType>`

Simple Type `FlowUnitEnumType`

Namespace	http://www.iepmodel.net
Annotations	This is an enumeration of (fluid) flow units of measurement.

Diagram	
Type	restriction of xs:string
Facets	enumeration CFM enumeration CubicMPerHr enumeration CubicMPerMin enumeration GPH enumeration GPM enumeration LPerSec
Used by	Attribute FlowType/@Unit

Source	`<xs:simpleType name="FlowUnitEnumType">`
	`  <xs:annotation>`
	`  <xs:documentation>This is an enumeration of (fluid) flow units of measurement.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="xs:string">`
	`  <xs:enumeration value="CFM"/>`
	`  <xs:enumeration value="CubicMPerHr"/>`
	`  <xs:enumeration value="CubicMPerMin"/>`
	`  <xs:enumeration value="GPH"/>`
	`  <xs:enumeration value="GPM"/>`
	`  <xs:enumeration value="LPerSec"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

Simple Type `PressureUnitEnumType`

Namespace	http://www.iepmodel.net
Annotations	This is an enumeration of pressure units of measurement.
Diagram	
Type	restriction of xs:string
Facets	enumeration Atmospheres enumeration CentimetersOfH2O enumeration CentimetersOfMercury enumeration InchesOfH2O enumeration InchesOfMercury enumeration kPa kiloPascals enumeration MillimetersOfMercury enumeration Pascals enumeration PSI Pounds per Square Inch
Used by	Attribute PressureType/@Unit

Source	`<xs:simpleType name="PressureUnitEnumType">`
	`  <xs:annotation>`
	`  <xs:documentation>This is an enumeration of pressure units of measurement.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="xs:string">`
	`  <xs:enumeration value="Atmospheres"/>`
	`  <xs:enumeration value="CentimetersOfH2O"/>`
	`  <xs:enumeration value="CentimetersOfMercury"/>`
	`  <xs:enumeration value="InchesOfH2O"/>`
	`  <xs:enumeration value="InchesOfMercury"/>`
	`  <xs:enumeration value="kPa">`
	`  <xs:annotation>`
	`  <xs:documentation>kiloPascals</xs:documentation>`
	`  </xs:annotation>`
	`  </xs:enumeration>`
	`  <xs:enumeration value="MillimetersOfMercury"/>`

```
    <xs:enumeration value="Pascals"/>
    <xs:enumeration value="PSI">
      <xs:annotation>
        <xs:documentation>Pounds per Square Inch</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

Simple Type `PowerUnitEnumType`

Namespace	http://www.iepmodel.net
Annotations	This is an enumeration of common power units of measurement used in the solar and building industry.
Diagram	
Type	restriction of xs:string
Facets	enumeration BtuPerHour enumeration BtuPerSecond enumeration Candela enumeration Footcandle enumeration FootPoundForcePerSecond enumeration Horsepower enumeration KilocaloriesPerSecond enumeration KilogramForceMeterPerSecond enumeration Kilowatt enumeration Lumen enumeration Watt
Used by	Attribute PowerType/@Unit
Source	

```
<xs:simpleType name="PowerUnitEnumType">
  <xs:annotation>
    <xs:documentation>This is an enumeration of common power units of measurement used in
 the solar and building industry.</xs:documentation>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:enumeration value="BtuPerHour"/>
    <xs:enumeration value="BtuPerSecond"/>
    <xs:enumeration value="Candela"/>
    <xs:enumeration value="Footcandle"/>
    <xs:enumeration value="FootPoundForcePerSecond"/>
    <xs:enumeration value="Horsepower"/>
    <xs:enumeration value="KilocaloriesPerSecond"/>
    <xs:enumeration value="KilogramForceMeterPerSecond"/>
    <xs:enumeration value="Kilowatt"/>
    <xs:enumeration value="Lumen"/>
    <xs:enumeration value="Watt"/>
  </xs:restriction>
</xs:simpleType>
```

Simple Type `DescriptionType`

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:string
Used by	Element Description
Source	

```
<xs:simpleType name="DescriptionType">
  <xs:restriction base="xs:string"/>
</xs:simpleType>
```

Simple Type BeginDateType

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:date
Used by	Element BeginDate
Source	<xs:simpleType name="BeginDateType"> <xs:restriction base="xs:date"/> </xs:simpleType>

Simple Type EndDateType

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:date
Used by	Element EndDate
Source	<xs:simpleType name="EndDateType"> <xs:restriction base="xs:date"/> </xs:simpleType>

Simple Type scheduleEnumType

Namespace	http://www.iepmodel.net
Annotations	This is used to define the type of schedule used. For lighting: Fraction of the day or On/Off may be used, but not Temp For heating or cooling any of the three may be used to define the schedule
Diagram	
Type	restriction of xs:NMTOKEN
Facets	enumeration Temp — This defines the a set temperature for a heating or cooling system enumeration Fraction — Defines the fraction of use. Typically used for lighting and occupancy enumeration OnOff — Used for schedules for fans and heating and cooling availability
Used by	Attributes DayScheduleType/@type, ScheduleType/@type, WeekScheduleType/@type
Source	<xs:simpleType name="scheduleEnumType"> <xs:annotation> <xs:documentation>This is used to define the type of schedule used. For lighting: Fraction of the day or On/Off may be used, but not Temp For heating or cooling any of the three may be used to define the schedule</xs:documentation> </xs:annotation> <xs:restriction base="xs:NMTOKEN"> <xs:enumeration value="Temp"> <xs:annotation> <xs:documentation>This defines the a set temperature for a heating or cooling system</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="Fraction"> <xs:annotation> <xs:documentation>Defines the fraction of use. Typically used for lighting and occupancy</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="OnOff">

```
      <xs:annotation>
        <xs:documentation>Used for schedules for fans and heating and cooling
 availability</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

Simple Type `PresenceOfUndergroundEntitiesEnumType`

Namespace	http://www.iepmodel.net
Diagram	
Type	restriction of xs:string
Facets	enumeration None enumeration Yes (location marked) enumeration Yes (location TBD)
Used by	Elements GroundAreaType/PresenceOfBuriedLines, GroundAreaType/PresenceOfSepticTanksAndLeachFields
Source	<xs:simpleType name="PresenceOfUndergroundEntitiesEnumType"> <xs:restriction base="xs:string"> <xs:enumeration value="None"/> <xs:enumeration value="Yes (location marked)"/> <xs:enumeration value="Yes (location TBD)"/> </xs:restriction> </xs:simpleType>

Simple Type `ApplianceEnumType`

Namespace	http://www.iepmodel.net
Annotations	Enum exists to know specifically what equipment is being referenced as opposed to being a open description only.
Diagram	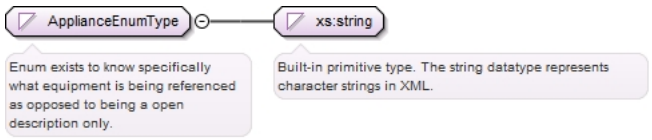
Type	restriction of xs:string
Facets	enumeration Dishwasher enumeration Dryer enumeration Microwave enumeration Stove enumeration Range enumeration Refrigerator enumeration Stove enumeration Washer enumeration Computer enumeration FishTank enumeration Other enumeration TV enumeration DVR Digital Video Recorder enumeration WellPump
Used by	Element ApplianceType/Type
Source	<xs:simpleType name="ApplianceEnumType"> <xs:annotation> <xs:documentation>Enum exists to know specifically what equipment is being referenced as opposed to being a open description only.</xs:documentation> </xs:annotation>

```
  <xs:restriction base="xs:string">
    <xs:enumeration value="Dishwasher"/>
    <xs:enumeration value="Dryer"/>
    <xs:enumeration value="Microwave"/>
    <xs:enumeration value="Stove"/>
    <xs:enumeration value="Range"/>
    <xs:enumeration value="Refrigerator"/>
    <xs:enumeration value="Stove"/>
    <xs:enumeration value="Washer"/>
    <xs:enumeration value="Computer"/>
    <xs:enumeration value="FishTank"/>
    <xs:enumeration value="Other"/>
    <xs:enumeration value="TV"/>
    <xs:enumeration value="DVR">
      <xs:annotation>
        <xs:documentation>Digital Video Recorder</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="WellPump"/>
  </xs:restriction>
</xs:simpleType>
```

Simple Type `NemaRatingEnumType`

Namespace	http://www.iepmodel.net
Annotations	NEMA provides ratings on equipment enclosures that describe its protection from weather/ elements. Included in Common.xsd because EquipmentDefinitionType element uses it, else would be in CommonElectrical.xsd.
Diagram	
Type	restriction of xs:string
Facets	enumeration 3 enumeration 3R enumeration 4 enumeration 4X
Used by	Element EquipmentDefinitionType/EnclosureNemaRating
Source	

```
<xs:simpleType name="NemaRatingEnumType">
  <xs:annotation>
    <xs:documentation>NEMA provides ratings on equipment enclosures that describe its
 protection from weather/elements. Included in Common.xsd because EquipmentDefinitionType
 element uses it, else would be in CommonElectrical.xsd.</xs:documentation>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:enumeration value="3"/>
    <xs:enumeration value="3R"/>
    <xs:enumeration value="4"/>
    <xs:enumeration value="4X"/>
  </xs:restriction>
</xs:simpleType>
```

Simple Type `EfficiencyUnitEnumType`

Namespace	http://www.iepmodel.net
Annotations	This is an enumeration of common efficiency units of measurement used in the building solar and energy efficiency industry.
Diagram	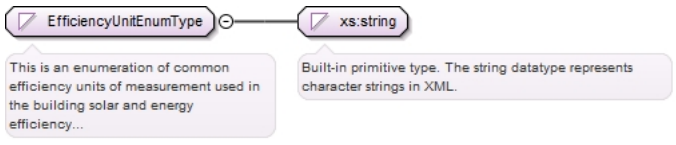
Type	restriction of xs:string
Facets	enumeration AFUE — The annual fuel utilization efficiency (AFUE; pronounced 'A'-'Few') is a thermal efficiency measure of combustion equipment like furnaces, boilers, and water

		heaters. The AFUE differs from the true 'thermal efficiency' in that it is not a steady-state, peak measure of conversion efficiency, but instead attempts to represent the actual, season-long, average efficiency of that piece of equipment, including the operating transients.
enumeration	BoilerEff	???
enumeration	COP	The coefficient of performance or COP (sometimes CP), of a heat pump is the ratio of the change in heat at the "output" (the heat reservoir of interest) to the supplied work.
enumeration	EER	The Energy Efficiency Ratio (EER) of a particular cooling device is the ratio of output cooling (in Btu/hr) to input electrical power (in Watts) at a given operating point (indoor and outdoor temperature and humidity conditions). The EER is related to the coefficient of performance (COP) commonly used in thermodynamics, with the primary difference being that the COP of a cooling device is unit-less: the cooling load and the electrical power needed to run the device are both measured using the same units, e.g. watts.
enumeration	effectiveness	???
enumeration	EnergyFactor	"Energy Factor is the ratio of useful energy output from the water heater to the total amount of energy delivered to the water heater. The higher the EF is, the more efficient the water heater." - http://www.energystar.gov/index.cfm?c=water_heat.pr_crit_water_heaters "Energy Factor is a metric that was previously used to compare relative efficiencies of clothes washers. The higher the Energy Factor is, the more efficient the clothes washer is. For clothes washers, Energy Factor is calculated using the following formula:[2]" Energy Factor = 392 x Volume (ft^3) / Annual Energy Usage (kWh) - http://www.energystar.gov/index.cfm?fuseaction=clotheswash.display_column_definitions
enumeration	FanEff	is this Specific Fan power?
enumeration	HSPF	HSPF (Heating Seasonal Performance Factor) is a term used in the heating and cooling industry. HSPF is specifically used to measure the efficiency of air source heat pumps. The efficiency of air conditioners are often rated by the Heating Seasonal Performance Factor (HSPF) as defined by the Air Conditioning, Heating, and Refrigeration Institute in its standard 210/240 Performance Rating of Unitary Air-Conditioning and Air-Source Heat Pump Equipment last updated in 2008.
enumeration	kWPerkW	???
enumeration	kWPerTon	kiloWatts per Ton - power to weight ratio of an engine
enumeration	LumensPerWatt	The ratio of luminous flux in lumens to power measured in watts.
enumeration	MechanicalEff	???
enumeration	MotorEff	???
enumeration	SEER	The Seasonal Energy Efficiency Ratio (SEER) has the same units of Btu/W·hr, but instead of being evaluated at a single operating condition, it represents the expected

			overall performance for a typical year's weather in a given location.
	enumeration	ThermalEff	In thermodynamics, the thermal efficiency is a dimensionless performance measure of a device that uses thermal energy, such as a boiler, a furnace, or a refrigerator.

Used by

Attribute	EfficiencyType/@Unit	

Source

```
<xs:simpleType name="EfficiencyUnitEnumType">
  <xs:annotation>
    <xs:documentation>This is an enumeration of common efficiency units of measurement
 used in the building solar and energy efficiency industry.</xs:documentation>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:enumeration value="AFUE">
      <xs:annotation>
        <xs:documentation>The annual fuel utilization efficiency (AFUE; pronounced
 'A'-'Few') is a thermal efficiency measure of combustion equipment like furnaces,
 boilers, and water heaters. The AFUE differs from the true 'thermal efficiency' in that
 it is not a steady-state, peak measure of conversion efficiency, but instead attempts
 to represent the actual, season-long, average efficiency of that piece of equipment,
 including the operating transients.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="BoilerEff">
      <xs:annotation>
        <xs:documentation>???</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="COP">
      <xs:annotation>
        <xs:documentation>The coefficient of performance or COP (sometimes CP), of a heat
 pump is the ratio of the change in heat at the "output" (the heat reservoir of interest)
 to the supplied work.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="EER">
      <xs:annotation>
        <xs:documentation>The Energy Efficiency Ratio (EER) of a particular cooling device
 is the ratio of output cooling (in Btu/hr) to input electrical power (in Watts) at a
 given operating point (indoor and outdoor temperature and humidity conditions). The EER
 is related to the coefficient of performance (COP) commonly used in thermodynamics, with
 the primary difference being that the COP of a cooling device is unit-less: the cooling
 load and the electrical power needed to run the device are both measured using the same
 units, e.g. watts.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="effectiveness">
      <xs:annotation>
        <xs:documentation>???</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="EnergyFactor">
      <xs:annotation>
        <xs:documentation>"Energy Factor is the ratio of useful energy output from
 the water heater to the total amount of energy delivered to the water heater. The
 higher the EF is, the more efficient the water heater." - http://www.energystar.gov/
index.cfm?c=water_heat.pr_crit_water_heaters "Energy Factor is a metric that was
 previously used to compare relative efficiencies of clothes washers. The higher the
 Energy Factor is, the more efficient the clothes washer is. For clothes washers,
 Energy Factor is calculated using the following formula:[2]" Energy Factor = 392
 x Volume (ft³) / Annual Energy Usage (kWh) - http://www.energystar.gov/index.cfm?
fuseaction=clotheswash.display_column_definitions</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="FanEff">
      <xs:annotation>
        <xs:documentation>is this Specific Fan power?</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="HSPF">
      <xs:annotation>
        <xs:documentation>HSPF (Heating Seasonal Performance Factor) is a term used in
 the heating and cooling industry. HSPF is specifically used to measure the efficiency
 of air source heat pumps. The efficiency of air conditioners are often rated by the
 Heating Seasonal Performance Factor (HSPF) as defined by the Air Conditioning, Heating,
 and Refrigeration Institute in its standard 210/240 Performance Rating of Unitary Air-
Conditioning and Air-Source Heat Pump Equipment last updated in 2008.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="kWPerkW">
```

```
      <xs:annotation>
        <xs:documentation>???</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="kWPerTon">
      <xs:annotation>
        <xs:documentation>kiloWatts per Ton - power to weight ratio of an engine</
xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="LumensPerWatt">
      <xs:annotation>
        <xs:documentation>The ratio of luminous flux in lumens to power measured in
 watts.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="MechanicalEff">
      <xs:annotation>
        <xs:documentation>???</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="MotorEff">
      <xs:annotation>
        <xs:documentation>???</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="SEER">
      <xs:annotation>
        <xs:documentation>The Seasonal Energy Efficiency Ratio (SEER) has the same
 units of Btu/W·hr, but instead of being evaluated at a single operating condition, it
 represents the expected overall performance for a typical year's weather in a given
 location.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="ThermalEff">
      <xs:annotation>
        <xs:documentation>In thermodynamics, the thermal efficiency is a dimensionless
 performance measure of a device that uses thermal energy, such as a boiler, a furnace, or
 a refrigerator.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

Simple Type `TestConditionEnumType`

Namespace	http://www.iepmodel.net
Annotations	This is an enumeration of common test conditions at which solar and building equipment are certified or marketed. These include: AHRI - Air-Conditioning, Heating, and Refrigeration Institute http://www.ahrinet.org/ FullLoad - full load conditions of the equipment NEMA - National Electrical Manufacturers Association PTC - PV USA Test Conditions STC - Factory Standard Test Conditions http://www.sanfranciscosolar.com/stc4.html
Diagram	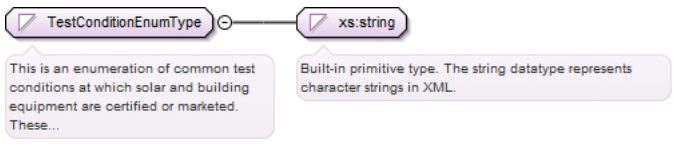
Type	restriction of xs:string
Facets	enumeration AHRI — Air-Conditioning, Heating and Refrigeration Institute enumeration Full Load enumeration NEMA — National Electrical Manufacturers Association enumeration PTC — ??? enumeration STC — ???

Used by	Attribute EfficiencyType/@TestCondition
Source	<xs:simpleType name="TestConditionEnumType"> <xs:annotation> <xs:documentation>This is an enumeration of common test conditions at which solar and building equipment are certified or marketed. These include: AHRI - Air-Conditioning, Heating, and Refrigeration Institute http://www.ahrinet.org/ FullLoad - full load conditions of the equipment NEMA - National Electrical Manufacturers Association PTC - PV USA Test Conditions STC - Factory Standard Test Conditions http://www.sanfranciscosolar.com/stc4.html</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:enumeration value="AHRI"> <xs:annotation> <xs:documentation>Air-Conditioning, Heating and Refrigeration Institute</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="Full Load"/> <xs:enumeration value="NEMA"> <xs:annotation> <xs:documentation>National Electrical Manufacturers Association</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="PTC"> <xs:annotation> <xs:documentation>???</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="STC"> <xs:annotation> <xs:documentation>???</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType>

Simple Type `CurrentEnumType`

Namespace	http://www.iepmodel.net
Annotations	Types of electrical current.
Diagram	
Type	restriction of xs:string
Facets	enumeration AC enumeration DC
Used by	Element CircuitConnectionType/CurrentType
Source	<xs:simpleType name="CurrentEnumType"> <xs:annotation> <xs:documentation>Types of electrical current.</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:enumeration value="AC"/> <xs:enumeration value="DC"/> </xs:restriction> </xs:simpleType>

Simple Type `ConductorEnumType`

Namespace	http://www.iepmodel.net
Annotations	Types of conductors.
Diagram	
Type	restriction of xs:string
Facets	enumeration Stranded Cu

	enumeration	Solid Cu
	enumeration	Stranded Al
Used by	Elements	CircuitConnectionType/Conductor, EquipmentGroundType/GroundingConductor
Source		

```
<xs:simpleType name="ConductorEnumType">
  <xs:annotation>
    <xs:documentation>Types of conductors.</xs:documentation>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:enumeration value="Stranded Cu"/>
    <xs:enumeration value="Solid Cu"/>
    <xs:enumeration value="Stranded Al"/>
  </xs:restriction>
</xs:simpleType>
```

Simple Type ConductorSizeEnumType

Namespace	http://www.iepmodel.net	
Annotations	Standard wire sizes in AWG or kcmil.	
Diagram		
Type	restriction of xs:string	
Facets	enumeration	12
	enumeration	10
	enumeration	8
	enumeration	6
	enumeration	4
	enumeration	3
	enumeration	2
	enumeration	1/0
	enumeration	2/0
	enumeration	3/0
	enumeration	4/0
	enumeration	250
	enumeration	350
	enumeration	400
	enumeration	500
Used by	Elements	CircuitConnectionType/ConductorSize, CombinerDefinitionType/MaxInputConductorSize, CombinerDefinitionType/MaxOutputConductorSize, CombinerDefinitionType/MinInputConductorSize, CombinerDefinitionType/MinOutputConductorSize, EquipmentGroundType/GroundingConductorSize
Source		

```
<xs:simpleType name="ConductorSizeEnumType">
  <xs:annotation>
    <xs:documentation>Standard wire sizes in AWG or kcmil.</xs:documentation>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:enumeration value="12"/>
    <xs:enumeration value="10"/>
    <xs:enumeration value="8"/>
    <xs:enumeration value="6"/>
    <xs:enumeration value="4"/>
    <xs:enumeration value="3"/>
    <xs:enumeration value="2"/>
    <xs:enumeration value="1/0"/>
    <xs:enumeration value="2/0"/>
    <xs:enumeration value="3/0"/>
    <xs:enumeration value="4/0"/>
    <xs:enumeration value="250"/>
    <xs:enumeration value="350"/>
    <xs:enumeration value="400"/>
    <xs:enumeration value="500"/>
  </xs:restriction>
```

```
</xs:simpleType>
```

Simple Type ConductorJacketEnumType

Namespace	http://www.iepmodel.net
Annotations	ISSUE / TO DO: Need to complete jacket types
Diagram	
Type	restriction of xs:string
Facets	enumeration bare enumeration USE enumeration USE-2 enumeration THWN enumeration THWN-2 enumeration THHN enumeration THHW
Used by	Elements CircuitConnectionType/ConductorJacket, EquipmentGroundType/GroundingConductorJacket
Source	<xs:simpleType name="ConductorJacketEnumType"> <xs:annotation> <xs:documentation>ISSUE / TO DO: Need to complete jacket types</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:enumeration value="bare"/> <xs:enumeration value="USE"/> <xs:enumeration value="USE-2"/> <xs:enumeration value="THWN"/> <xs:enumeration value="THWN-2"/> <xs:enumeration value="THHN"/> <xs:enumeration value="THHW"/> </xs:restriction> </xs:simpleType>

Simple Type SideOfPanelOcpdWhereConnectedEnumType

Namespace	http://www.iepmodel.net
Annotations	When an interconnection is made on an electrical panel with a breaker separating the supply side and load side of the panel, these list the two sides.
Diagram	
Type	restriction of xs:string
Facets	enumeration supply-side enumeration load-side
Used by	Element CircuitConnectionType/SideOfPanelOcpdWhereConnected
Source	<xs:simpleType name="SideOfPanelOcpdWhereConnectedEnumType"> <xs:annotation> <xs:documentation>When an interconnection is made on an electrical panel with a breaker separating the supply side and load side of the panel, these list the two sides.</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:enumeration value="supply-side"/> <xs:enumeration value="load-side"/> </xs:restriction> </xs:simpleType>

Simple Type LightingTechnologyEnumType

Namespace	http://www.iepmodel.net

Annotations	This is an enumeration of common lighting technologies.
Diagram	
Type	restriction of xs:string
Facets	enumeration: Incandescent enumeration: Halogen enumeration: Compact Fluorescent enumeration: Linear Fluorescent enumeration: High Intensity Discharge enumeration: LED enumeration: Induction enumeration: Plasma enumeration: Neon
Used by	Element LightingFixtureDefintionType/LightingTechnology
Source	<xs:simpleType name="LightingTechnologyEnumType"> <xs:annotation> <xs:documentation>This is an enumeration of common lighting technologies.</ xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:enumeration value="Incandescent"/> <xs:enumeration value="Halogen"/> <xs:enumeration value="Compact Fluorescent"/> <xs:enumeration value="Linear Fluorescent"/> <xs:enumeration value="High Intensity Discharge"/> <xs:enumeration value="LED"/> <xs:enumeration value="Induction"/> <xs:enumeration value="Plasma"/> <xs:enumeration value="Neon"/> </xs:restriction> </xs:simpleType>

Simple Type SwitchContactActionEnumType

Namespace	http://www.iepmodel.net
Annotations	Variations of switch contact operation. - SPST = single pole, single throw - DPST = double pole, single throw - 3PST = triple pole, single throw - SPDT = single pole, double throw (aka "changover switch")
Diagram	
Type	restriction of xs:string
Facets	enumeration: SPST enumeration: DPST enumeration: 3PST enumeration: SPDT
Used by	Element DisconnectSwitchDefinitionType/SwitchContact
Source	<xs:simpleType name="SwitchContactActionEnumType"> <xs:annotation> <xs:documentation>Variations of switch contact operation. - SPST = single pole, single throw - DPST = double pole, single throw - 3PST = triple pole, single throw - SPDT = single pole, double throw (aka "changover switch")</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:enumeration value="SPST"/> <xs:enumeration value="DPST"/> <xs:enumeration value="3PST"/>

```
    <xs:enumeration value="SPDT"/>
  </xs:restriction>
</xs:simpleType>
```

Simple Type `SwitchDutyEnumType`

Namespace	http://www.iepmodel.net
Diagram	
Type	restriction of xs:string
Facets	enumeration `General-Duty` enumeration `Heavy-Duty`
Used by	Element DisconnectSwitchDefinitionType/Duty

Source	<pre><xs:simpleType name="SwitchDutyEnumType">
	  <xs:restriction base="xs:string">
	    <xs:enumeration value="General-Duty"/>
	    <xs:enumeration value="Heavy-Duty"/>
	  </xs:restriction>
	</xs:simpleType></pre>

Simple Type `TiltEdgeEnumType`

Namespace	http://www.iepmodel.net
Annotations	When a module is tilted from its LayoutPlane, these are the possible edges on which the tilt can occur.
Diagram	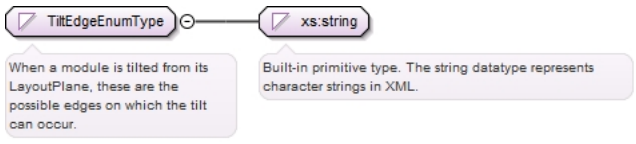
Type	restriction of xs:string
Facets	enumeration `bottom` enumeration `top` enumeration `left` enumeration `right`
Used by	Element PvModuleType/TiltEdge

Source	<pre><xs:simpleType name="TiltEdgeEnumType">
	  <xs:annotation>
	    <xs:documentation>When a module is tilted from its LayoutPlane, these are the possible edges on which the tilt can occur.</xs:documentation>
	  </xs:annotation>
	  <xs:restriction base="xs:string">
	    <xs:enumeration value="bottom"/>
	    <xs:enumeration value="top"/>
	    <xs:enumeration value="left"/>
	    <xs:enumeration value="right"/>
	  </xs:restriction>
	</xs:simpleType></pre>

Simple Type `PvModuleOrientationEnumType`

Namespace	http://www.iepmodel.net
Diagram	
Type	restriction of xs:string
Facets	enumeration `Portrait` enumeration `Landscape`

Used by	Element	PvArrayType/ModuleOrientation
Source	<xs:simpleType name="PvModuleOrientationEnumType"> <xs:restriction base="xs:string"> <xs:enumeration value="Portrait"/> <xs:enumeration value="Landscape"/> </xs:restriction> </xs:simpleType>	

Simple Type VolumeUnitEnumType

Namespace	http://www.iepmodel.net
Annotations	This is an enumeration of volume units of measurement. Taken directly from gbXML.
Diagram	
Type	restriction of xs:string
Facets	enumeration CubicCentimeters enumeration CubicFeet enumeration CubicInches enumeration CubicKilometers enumeration CubicMeters enumeration CubicMiles enumeration CubicMillimeters enumeration CubicYards enumeration Gallons enumeration Liters enumeration Foot-Acres
Used by	Attribute VolumeType/@Unit
Source	<xs:simpleType name="VolumeUnitEnumType"> <xs:annotation> <xs:documentation>This is an enumeration of volume units of measurement. Taken directly from gbXML.</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:enumeration value="CubicCentimeters"/> <xs:enumeration value="CubicFeet"/> <xs:enumeration value="CubicInches"/> <xs:enumeration value="CubicKilometers"/> <xs:enumeration value="CubicMeters"/> <xs:enumeration value="CubicMiles"/> <xs:enumeration value="CubicMillimeters"/> <xs:enumeration value="CubicYards"/> <xs:enumeration value="Gallons"/> <xs:enumeration value="Liters"/> <xs:enumeration value="Foot-Acres"/> </xs:restriction> </xs:simpleType>

Simple Type TemperatureUnitEnumType

Namespace	http://www.iepmodel.net
Annotations	This is an enumeration of temperature units of measurement.
Diagram	
Type	restriction of xs:string
Facets	enumeration C Celsius enumeration F Fahrenheit enumeration K Kelvin

	enumeration	R	Rankine A thermodynamic (absolute) temperature scale named after the Scottish engineer and physicist William John Macquorn Rankine, who proposed it in 1859.
	enumeration	Re	The Réaumur scale (°Ré, °Re, °R), also known as the "octogesimal division",[1] is a temperature scale in which the freezing and boiling points of water are set to 0 and 80 degrees respectively. The scale is named after René Antoine Ferchault de Réaumur, who first proposed something similar in 1730.[2] AT: why are we including this? Does someone have a use case?
Used by	Attribute	TemperatureType/@Unit	

Source

```
<xs:simpleType name="TemperatureUnitEnumType">
  <xs:annotation>
    <xs:documentation>This is an enumeration of temperature units of measurement.</
xs:documentation>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:enumeration value="C">
      <xs:annotation>
        <xs:documentation>Celsius</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="F">
      <xs:annotation>
        <xs:documentation>Fahrenheit</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="K">
      <xs:annotation>
        <xs:documentation>Kelvin</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="R">
      <xs:annotation>
        <xs:documentation>Rankine A thermodynamic (absolute) temperature scale named after
 the Scottish engineer and physicist William John Macquorn Rankine, who proposed it in
 1859.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="Re">
      <xs:annotation>
        <xs:documentation>The Réaumur scale (°Ré, °Re, °R), also known as the "octogesimal
 division",[1] is a temperature scale in which the freezing and boiling points of water
 are set to 0 and 80 degrees respectively. The scale is named after René Antoine Ferchault
 de Réaumur, who first proposed something similar in 1730.[2] AT: why are we including
 this? Does someone have a use case?</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

Simple Type FrequencyEnumType

Namespace	http://www.iepmodel.net
Annotations	
Diagram	
Type	restriction of xs:string
Facets	enumeration: Daily enumeration: Monthly enumeration: Yearly
Used by	Element: PeriodicityType/Recurring/Frequency

Source

```
<xs:simpleType name="FrequencyEnumType">
  <xs:annotation>
```

```
    <xs:documentation/>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:enumeration value="Daily"/>
    <xs:enumeration value="Monthly"/>
    <xs:enumeration value="Yearly"/>
  </xs:restriction>
</xs:simpleType>
```

Simple Type `DeterminationMethodEnumType`

Namespace	http://www.iepmodel.net
Diagram	
Type	restriction of xs:string
Facets	enumeration `Estimated` enumeration `Measured` enumeration `Incentive`
Used by	Element DeterminationMethodType/Method

Source	`<xs:simpleType name="DeterminationMethodEnumType">`
	`  <xs:restriction base="xs:string">`
	`  <xs:enumeration value="Estimated"/>`
	`  <xs:enumeration value="Measured"/>`
	`  <xs:enumeration value="Incentive"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

Simple Type `MonetaryUnitEnumType`

Namespace	http://www.iepmodel.net
Diagram	
Type	restriction of xs:string
Facets	enumeration `dollars` enumeration `cents`
Used by	Attribute MonetaryType/@Unit

Source	`<xs:simpleType name="MonetaryUnitEnumType">`
	`  <xs:restriction base="xs:string">`
	`  <xs:enumeration value="dollars"/>`
	`  <xs:enumeration value="cents"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

Simple Type `EmissionsUnitEnumType`

Namespace	http://www.iepmodel.net
Diagram	
Type	restriction of xs:string
Facets	enumeration `pounds` enumeration `tons` enumeration `kilograms`
Used by	Attribute EmissionsType/@Unit
Source	`<xs:simpleType name="EmissionsUnitEnumType">`

```
  <xs:restriction base="xs:string">
    <xs:enumeration value="pounds"/>
    <xs:enumeration value="tons"/>
    <xs:enumeration value="kilograms"/>
  </xs:restriction>
</xs:simpleType>
```

Simple Type `EmissionsEnumType`

Namespace	http://www.iepmodel.net
Diagram	
Type	restriction of xs:string
Facets	enumeration `CO2` enumeration `NOX` enumeration `SOX` enumeration `Methane`
Used by	Attribute EmissionsType/@Emissions

Source	`<xs:simpleType name="EmissionsEnumType">`
	`  <xs:restriction base="xs:string">`
	`  <xs:enumeration value="CO2"/>`
	`  <xs:enumeration value="NOX"/>`
	`  <xs:enumeration value="SOX"/>`
	`  <xs:enumeration value="Methane"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

Simple Type `hourIDType`

Namespace	http://www.iepmodel.net
Annotations	`This is a number from 1 to 24`
Diagram	
Type	restriction of xs:int
Facets	maxInclusive `24` minInclusive `1`
Used by	Elements ScheduleValueType/HourSpecified, hourID

Source	`<xs:simpleType name="hourIDType">`
	`  <xs:annotation>`
	`  <xs:documentation>This is a number from 1 to 24</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="xs:int">`
	`  <xs:maxInclusive value="24"/>`
	`  <xs:minInclusive value="1"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

Simple Type `dayTypeEnum`

Namespace	http://www.iepmodel.net
Diagram	
Type	restriction of xs:NMTOKEN
Facets	enumeration `Weekday` enumeration `Weekend`

	enumeration	Holiday
	enumeration	WeekendOrHoliday
	enumeration	HeatingDesignDay
	enumeration	CoolingDesignDay
	enumeration	Sun
	enumeration	Mon
	enumeration	Tue
	enumeration	Wed
	enumeration	Thu
	enumeration	Fri
	enumeration	Sat
	enumeration	All
Used by	Attribute	Day/@dayType

Source

```
<xs:simpleType name="dayTypeEnum">
  <xs:restriction base="xs:NMTOKEN">
    <xs:enumeration value="Weekday"/>
    <xs:enumeration value="Weekend"/>
    <xs:enumeration value="Holiday"/>
    <xs:enumeration value="WeekendOrHoliday"/>
    <xs:enumeration value="HeatingDesignDay"/>
    <xs:enumeration value="CoolingDesignDay"/>
    <xs:enumeration value="Sun"/>
    <xs:enumeration value="Mon"/>
    <xs:enumeration value="Tue"/>
    <xs:enumeration value="Wed"/>
    <xs:enumeration value="Thu"/>
    <xs:enumeration value="Fri"/>
    <xs:enumeration value="Sat"/>
    <xs:enumeration value="All"/>
  </xs:restriction>
</xs:simpleType>
```

Simple Type MeterDirectionEnumType

Namespace	http://www.iepmodel.net
Diagram	
Type	restriction of xs:string
Facets	enumeration bi-directional enumeration mono-directional
Used by	Element RevenueMeterType/DirectionType

Source

```
<xs:simpleType name="MeterDirectionEnumType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="bi-directional"/>
    <xs:enumeration value="mono-directional"/>
  </xs:restriction>
</xs:simpleType>
```

Simple Type MeterMeasurementMechanismEnumType

Namespace	http://www.iepmodel.net
Diagram	
Type	restriction of xs:string
Facets	enumeration current transducer enumeration inline electro-mechanical

Used by	Element	RevenueMeterType/MeasurementMechanism
Source	<xs:simpleType name="MeterMeasurementMechanismEnumType"> <xs:restriction base="xs:string"> <xs:enumeration value="current transducer"/> <xs:enumeration value="inline electro-mechanical"/> </xs:restriction> </xs:simpleType>	

Simple Type MeteringTypesEnumType

Namespace	http://www.iepmodel.net	
Diagram		
Type	restriction of xs:string	
Facets	enumeration	Individually Metered
	enumeration	Master Metered
Used by	Element	EnergyServiceType/Metering
Source	<xs:simpleType name="MeteringTypesEnumType"> <xs:restriction base="xs:string"> <xs:enumeration value="Individually Metered"/> <xs:enumeration value="Master Metered"/> </xs:restriction> </xs:simpleType>	

Simple Type UtilityTransformerConnectionTypesEnumType

Namespace	http://www.iepmodel.net	
Diagram		
Type	restriction of xs:string	
Facets	enumeration	Secondary
	enumeration	Transmission
	enumeration	Primary
Used by	Element	EnergyServiceType/UtilityTransformerConnection
Source	<xs:simpleType name="UtilityTransformerConnectionTypesEnumType"> <xs:restriction base="xs:string"> <xs:enumeration value="Secondary"/> <xs:enumeration value="Transmission"/> <xs:enumeration value="Primary"/> </xs:restriction> </xs:simpleType>	

Simple Type AngularUnitEnumType

Namespace	http://www.iepmodel.net	
Annotations	This is an enumeration of angular units of measurement.	
Diagram		
Type	restriction of xs:string	
Facets	enumeration	degrees
	enumeration	"in 12"
	enumeration	radians
Used by	Attribute	AngleType/@Unit

Source	<xs:simpleType name="AngularUnitEnumType"> <xs:annotation> <xs:documentation>This is an enumeration of angular units of measurement.</ xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:enumeration value="degrees"/> <xs:enumeration value=""in 12""/> <xs:enumeration value="radians"/> </xs:restriction> </xs:simpleType>

Simple Type `TimeUnitEnumType`

Namespace	http://www.iepmodel.net
Annotations	This is an enumeration of time units of measurement.
Diagram	
Type	restriction of xs:string
Facets	enumeration Day enumeration Hour enumeration Minute enumeration Month enumeration Second enumeration Week enumeration Year
Used by	Attribute TimeType/@Unit
Source	<xs:simpleType name="TimeUnitEnumType"> <xs:annotation> <xs:documentation>This is an enumeration of time units of measurement.</ xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:enumeration value="Day"/> <xs:enumeration value="Hour"/> <xs:enumeration value="Minute"/> <xs:enumeration value="Month"/> <xs:enumeration value="Second"/> <xs:enumeration value="Week"/> <xs:enumeration value="Year"/> </xs:restriction> </xs:simpleType>

Simple Type `WeightUnitEnumType`

Namespace	http://www.iepmodel.net
Annotations	This is an enumeration of weight units of measurement.
Diagram	
Type	restriction of xs:string
Facets	enumeration Kilograms enumeration Pounds enumeration Tons
Used by	Attribute WeightType/@Unit
Source	<xs:simpleType name="WeightUnitEnumType"> <xs:annotation> <xs:documentation>This is an enumeration of weight units of measurement.</ xs:documentation> </xs:annotation> <xs:restriction base="xs:string">

```
    <xs:enumeration value="Kilograms"/>
    <xs:enumeration value="Pounds"/>
    <xs:enumeration value="Tons"/>
  </xs:restriction>
</xs:simpleType>
```

Simple Type `VelocityUnitEnumType`

Namespace	http://www.iepmodel.net
Annotations	This is an enumeration of velocity units of measurement.
Diagram	
Type	restriction of xs:string
Facets	enumeration FeetPerMinute enumeration FeetPerSecond enumeration KilometerPerHour enumeration Knots enumeration MetersPerMinute enumeration MetersPerSecond enumeration MilesPerHour
Used by	Attribute VelocityType/@Unit
Source	<xs:simpleType name="VelocityUnitEnumType"> <xs:annotation> <xs:documentation>This is an enumeration of velocity units of measurement.</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:enumeration value="FeetPerMinute"/> <xs:enumeration value="FeetPerSecond"/> <xs:enumeration value="KilometerPerHour"/> <xs:enumeration value="Knots"/> <xs:enumeration value="MetersPerMinute"/> <xs:enumeration value="MetersPerSecond"/> <xs:enumeration value="MilesPerHour"/> </xs:restriction> </xs:simpleType>

Simple Type `DensityUnitEnumType`

Namespace	http://www.iepmodel.net
Annotations	This is an enumeration of density units of measurement.
Diagram	
Type	restriction of xs:string
Facets	enumeration GramsPerCubicCm enumeration KgPerCubicM enumeration LbsPerCubicFt enumeration LbsPerCubicIn
Used by	Attribute DensityType/@Unit
Source	<xs:simpleType name="DensityUnitEnumType"> <xs:annotation> <xs:documentation>This is an enumeration of density units of measurement.</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:enumeration value="GramsPerCubicCm"/> <xs:enumeration value="KgPerCubicM"/> <xs:enumeration value="LbsPerCubicFt"/> <xs:enumeration value="LbsPerCubicIn"/>

```
  </xs:restriction>
</xs:simpleType>
```

Simple Type NameType

Namespace	http://www.iepmodel.net
Diagram	
Type	xs:string
Source	<xs:simpleType name="NameType"> <xs:restriction base="xs:string"/> </xs:simpleType>

Simple Type dayEnumType

Namespace	http://www.iepmodel.net
Diagram	
Type	restriction of xs:NMTOKEN
Facets	enumeration Weekday enumeration Weekend enumeration Holiday enumeration WeekendOrHoliday enumeration HeatingDesignDay enumeration CoolingDesignDay enumeration Sun enumeration Mon enumeration Tue enumeration Wed enumeration Thu enumeration Fri enumeration Sat enumeration All
Used by	Attribute DayType/@dayType
Source	<xs:simpleType name="dayEnumType"> <xs:restriction base="xs:NMTOKEN"> <xs:enumeration value="Weekday"/> <xs:enumeration value="Weekend"/> <xs:enumeration value="Holiday"/> <xs:enumeration value="WeekendOrHoliday"/> <xs:enumeration value="HeatingDesignDay"/> <xs:enumeration value="CoolingDesignDay"/> <xs:enumeration value="Sun"/> <xs:enumeration value="Mon"/> <xs:enumeration value="Tue"/> <xs:enumeration value="Wed"/> <xs:enumeration value="Thu"/> <xs:enumeration value="Fri"/> <xs:enumeration value="Sat"/> <xs:enumeration value="All"/> </xs:restriction> </xs:simpleType>

Simple Type DaylightSavingsType

Namespace	http://www.iepmodel.net
Annotations	Allows for including daylight savings time

Diagram	
Type	xs:boolean
Used by	Element DaylightSavings

Source	`<xs:simpleType name="DaylightSavingsType">`
	`  <xs:annotation>`
	`  <xs:documentation>Allows for including daylight savings time</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="xs:boolean"/>`
	`</xs:simpleType>`

Simple Type `ConduitDiameterEnumType`

Namespace	http://www.iepmodel.net
Annotations	List of industry standard electrical conduit diameters in inches.
Diagram	
Type	restriction of xs:string
Facets	enumeration 1/2 enumeration 3/4 enumeration 1 enumeration 1 1/4 enumeration 1 1/2 enumeration 2
Used by	Element ConduitSegmentType/ConduitDiameter

Source	`<xs:simpleType name="ConduitDiameterEnumType">`
	`  <xs:annotation>`
	`  <xs:documentation>List of industry standard electrical conduit diameters in inches.</`
	`xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="xs:string">`
	`  <xs:enumeration value="1/2"/>`
	`  <xs:enumeration value="3/4"/>`
	`  <xs:enumeration value="1"/>`
	`  <xs:enumeration value="1 1/4"/>`
	`  <xs:enumeration value="1 1/2"/>`
	`  <xs:enumeration value="2"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

Simple Type `TypeOfConduitEnumType`

Namespace	http://www.iepmodel.net
Annotations	Standard types of electrical conduit.
Diagram	
Type	restriction of xs:string
Facets	enumeration EMT enumeration PVC enumeration Rigid
Used by	Element ConduitSegmentType/ConduitType

Source	`<xs:simpleType name="TypeOfConduitEnumType">`
	`  <xs:annotation>`
	`  <xs:documentation>Standard types of electrical conduit.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="xs:string">`

```
    <xs:enumeration value="EMT"/>
    <xs:enumeration value="PVC"/>
    <xs:enumeration value="Rigid"/>
  </xs:restriction>
</xs:simpleType>
```

Simple Type `OverCurrentProtectionDeviceEnumType`

Namespace	http://www.iepmodel.net
Annotations	Types of over current protection devices
Diagram	
Type	restriction of xs:string
Facets	enumeration: circuit breaker enumeration: fuse enumeration: none
Source	

```
<xs:simpleType name="OverCurrentProtectionDeviceEnumType">
  <xs:annotation>
    <xs:documentation>Types of over current protection devices</xs:documentation>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:enumeration value="circuit breaker"/>
    <xs:enumeration value="fuse"/>
    <xs:enumeration value="none"/>
  </xs:restriction>
</xs:simpleType>
```

Namespace: ""

Element(s)

Element `ProjectType / Name`

Namespace	No namespace
Annotations	This is a simple descriptive name
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	

```
<xs:element name="Name" type="xs:string" minOccurs="1" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>This is a simple descriptive name</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element `ProjectType / Description`

Namespace	No namespace
Annotations	A more general description of the project. Details are expected to be included at the Measure level
Diagram	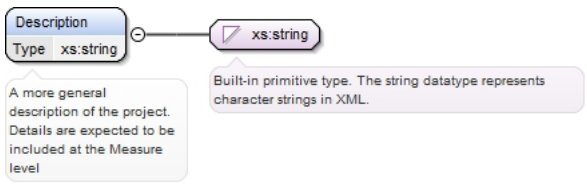

Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="Description" type="xs:string" minOccurs="1" maxOccurs="1"> <xs:annotation> <xs:documentation>A more general description of the project. Details are expected to be included at the Measure level</xs:documentation> </xs:annotation> </xs:element>

Element ProjectType / ProjectClassification

Namespace	No namespace
Diagram	
Type	ProjectClassificationEnumType
Properties	content: simple minOccurs: 1 maxOccurs: 1
Facets	enumeration Retrofit enumeration New Construction
Source	<xs:element name="ProjectClassification" type="ProjectClassificationEnumType" minOccurs="1" maxOccurs="1"/>

Element ProjectType / RealEstateClassification

Namespace	No namespace
Diagram	
Type	RealEstateClassificationEnumType
Properties	content: simple minOccurs: 1 maxOccurs: 1
Facets	enumeration Commercial enumeration Residential
Source	<xs:element name="RealEstateClassification" type="RealEstateClassificationEnumType" maxOccurs="1" minOccurs="1"/>

Element ProjectType / ApplicationID

Namespace	No namespace
Diagram	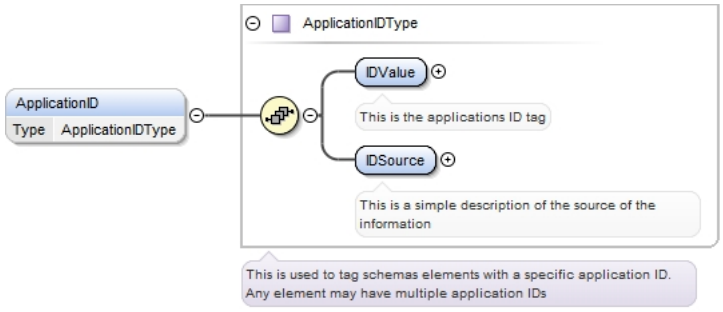
Type	ApplicationIDType

Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	IDValue , IDSource
Children	IDSource, IDValue
Instance	<ApplicationID xmlns="http://www.iepmodel.net"> <IDValue>{1,1}</IDValue> <IDSource>{1,1}</IDSource> </ApplicationID>
Source	<xs:element maxOccurs="unbounded" minOccurs="0" name="ApplicationID" type="ApplicationIDType"/>

Element ProjectType / Participant

Namespace	No namespace
Annotations	This references all of the consumers/customers
Diagram	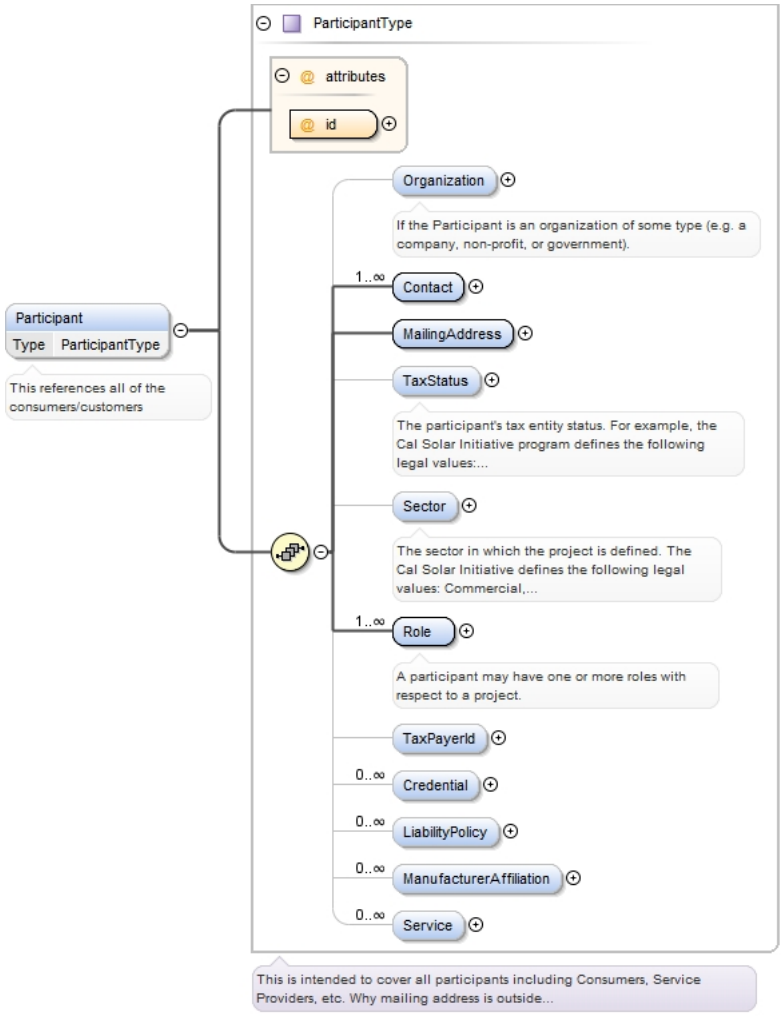
Type	ParticipantType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Organization{0,1} , Contact+ , MailingAddress , TaxStatus{0,1} , Sector{0,1} , Role+ , TaxPayerId{0,1} , Credential* , LiabilityPolicy* , ManufacturerAffiliation* , Service*
Children	Contact, Credential, LiabilityPolicy, MailingAddress, ManufacturerAffiliation, Organization, Role, Sector, Service, TaxPayerId, TaxStatus
Instance	<Participant id="">

```
  <Organization>{0,1}</Organization>
  <Contact>{1,unbounded}</Contact>
  <MailingAddress>{1,1}</MailingAddress>
  <TaxStatus>{0,1}</TaxStatus>
  <Sector>{0,1}</Sector>
  <Role>{1,unbounded}</Role>
  <TaxPayerId>{0,1}</TaxPayerId>
  <Credential>{0,unbounded}</Credential>
  <LiabilityPolicy>{0,unbounded}</LiabilityPolicy>
  <ManufacturerAffiliation>{0,unbounded}</ManufacturerAffiliation>
  <Service>{0,unbounded}</Service>
</Participant>
```

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			required

Source

```
<xs:element name="Participant" type="ParticipantType" minOccurs="0" maxOccurs="unbounded">
  <xs:annotation>
    <xs:documentation>This references all of the consumers/customers</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element ParticipantType / Organization

Namespace: No namespace

Annotations: If the Participant is an organization of some type (e.g. a company, non-profit, or government).

Diagram

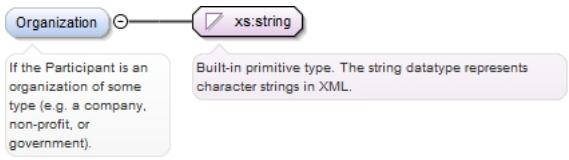

Type: xs:string

Properties

content:	simple
minOccurs:	0
maxOccurs:	1

Source

```
<xs:element name="Organization" type="xs:string" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>If the Participant is an organization of some type (e.g. a company,
 non-profit, or government).</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element ParticipantType / Contact

Namespace: No namespace

Diagram

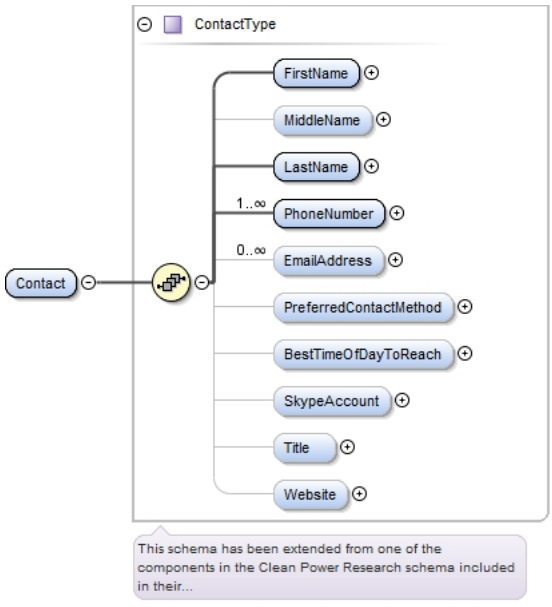

Type	ContactType
Properties	content: complex minOccurs: 1 maxOccurs: unbounded
Model	FirstName , MiddleName{0,1} , LastName , PhoneNumber+ , EmailAddress* , PreferredContactMethod{0,1} , BestTimeOfDayToReach{0,1} , SkypeAccount{0,1} , Title{0,1} , Website{0,1}
Children	BestTimeOfDayToReach, EmailAddress, FirstName, LastName, MiddleName, PhoneNumber, PreferredContactMethod, SkypeAccount, Title, Website
Instance	<Contact> <FirstName>{1,1}</FirstName> <MiddleName>{0,1}</MiddleName> <LastName>{1,1}</LastName> <PhoneNumber>{1,unbounded}</PhoneNumber> <EmailAddress>{0,unbounded}</EmailAddress> <PreferredContactMethod>{0,1}</PreferredContactMethod> <BestTimeOfDayToReach>{0,1}</BestTimeOfDayToReach> <SkypeAccount>{0,1}</SkypeAccount> <Title>{0,1}</Title> <Website>{0,1}</Website> </Contact>
Source	<xs:element name="Contact" type="ContactType" minOccurs="1" maxOccurs="unbounded"/>

Element ContactType / FirstName

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="FirstName" type="xs:string" minOccurs="1" maxOccurs="1"/>

Element ContactType / MiddleName

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="MiddleName" type="xs:string" minOccurs="0" maxOccurs="1"/>

Element ContactType / LastName

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 1

	maxOccurs: 1
Source	`<xs:element name="LastName" type="xs:string" minOccurs="1" maxOccurs="1"/>`

Element ContactType / PhoneNumber

Namespace	No namespace
Diagram	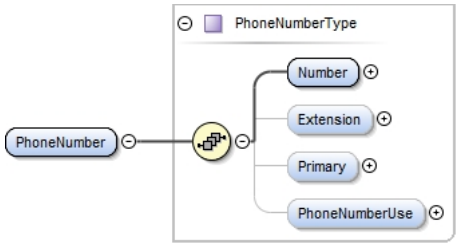
Type	PhoneNumberType
Properties	content: complex minOccurs: 1 maxOccurs: unbounded
Model	Number , Extension{0,1} , Primary{0,1} , PhoneNumberUse{0,1}
Children	Extension, Number, PhoneNumberUse, Primary

Instance	`<PhoneNumber>`
	`  <Number>{1,1}</Number>`
	`  <Extension>{0,1}</Extension>`
	`  <Primary>{0,1}</Primary>`
	`  <PhoneNumberUse>{0,1}</PhoneNumberUse>`
	`</PhoneNumber>`

Source	`<xs:element name="PhoneNumber" type="PhoneNumberType" minOccurs="1" maxOccurs="unbounded"/>`

Element PhoneNumberType / Number

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	`<xs:element name="Number" type="xs:string" minOccurs="1" maxOccurs="1"/>`

Element PhoneNumberType / Extension

Namespace	No namespace
Diagram	
Type	xs:int
Properties	content: simple minOccurs: 0 maxOccurs: 1 nillable: true
Source	`<xs:element name="Extension" type="xs:int" minOccurs="0" maxOccurs="1" nillable="true"/>`

Element PhoneNumberType / Primary

Namespace	No namespace
Diagram	
Type	xs:boolean
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="Primary" type="xs:boolean" minOccurs="0" maxOccurs="1"/>`

Element PhoneNumberType / PhoneNumberUse

Namespace	No namespace
Diagram	
Type	PhoneNumberEnumType
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	enumeration: Business enumeration: Business Fax enumeration: Home enumeration: Home Fax enumeration: Mobile enumeration: Pager enumeration: Skype
Source	`<xs:element name="PhoneNumberUse" type="PhoneNumberEnumType" minOccurs="0" maxOccurs="1"/>`

Element ContactType / EmailAddress

Namespace	No namespace
Diagram	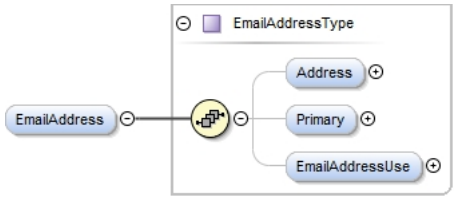
Type	EmailAddressType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Address{0,1} , Primary{0,1} , EmailAddressUse{0,1}
Children	Address, EmailAddressUse, Primary

Instance	`<EmailAddress>`
	`  <Address>{0,1}</Address>`
	`  <Primary>{0,1}</Primary>`
	`  <EmailAddressUse>{0,1}</EmailAddressUse>`
	`</EmailAddress>`

Source	`<xs:element name="EmailAddress" type="EmailAddressType" minOccurs="0" maxOccurs="unbounded"/>`

Element EmailAddressType / Address

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="Address" type="xs:string" minOccurs="0" maxOccurs="1"/>`

Element EmailAddressType / Primary

Namespace	No namespace
Diagram	
Type	xs:boolean
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="Primary" type="xs:boolean" minOccurs="0" maxOccurs="1"/>`

Element EmailAddressType / EmailAddressUse

Namespace	No namespace
Diagram	
Type	EmailAddressEnumType
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	enumeration Work enumeration Home enumeration Alternate
Source	`<xs:element name="EmailAddressUse" type="EmailAddressEnumType" minOccurs="0" maxOccurs="1"/>`

Element ContactType / PreferredContactMethod

Namespace	No namespace
Diagram	
Type	PreferredContactMethodEnumType
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	enumeration Home Phone enumeration Work Phone

	enumeration	Cell Phone
	enumeration	Email
Source	<xs:element name="PreferredContactMethod" type="PreferredContactMethodEnumType" minOccurs="0" maxOccurs="1"/>	

Element ContactType / BestTimeOfDayToReach

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="BestTimeOfDayToReach" type="xs:string" minOccurs="0" maxOccurs="1"/>

Element ContactType / SkypeAccount

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="SkypeAccount" type="xs:string" minOccurs="0" maxOccurs="1"/>

Element ContactType / Title

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Title" type="xs:string" minOccurs="0" maxOccurs="1"/>

Element ContactType / Website

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0

	maxOccurs: 1
Source	`<xs:element name="Website" type="xs:string" minOccurs="0" maxOccurs="1"/>`

Element ParticipantType / MailingAddress

Namespace	No namespace
Diagram	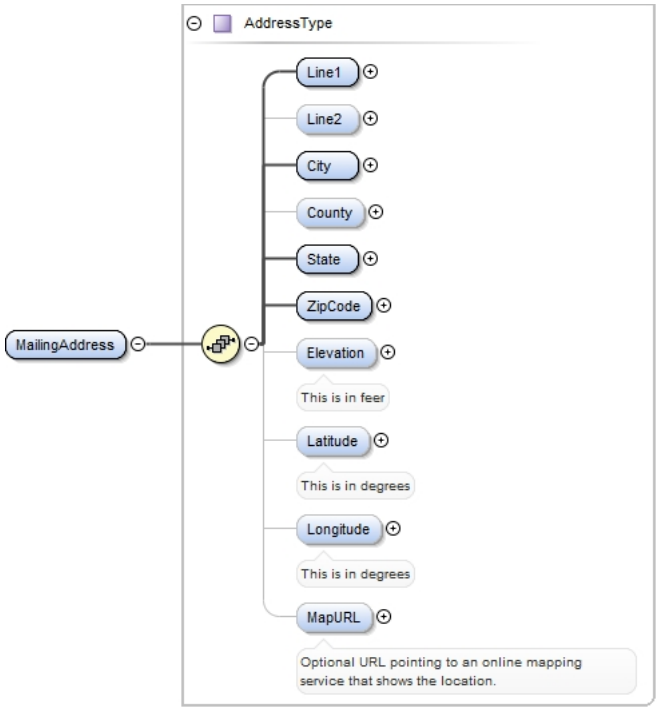
Type	AddressType
Properties	content: complex minOccurs: 1 maxOccurs: 1
Model	Line1 , Line2{0,1} , City , County{0,1} , State , ZipCode , Elevation{0,1} , Latitude{0,1} , Longitude{0,1} , MapURL{0,1}
Children	City, County, Elevation, Latitude, Line1, Line2, Longitude, MapURL, State, ZipCode

Instance	`<MailingAddress>`
	`  <Line1>{1,1}</Line1>`
	`  <Line2>{0,1}</Line2>`
	`  <City>{1,1}</City>`
	`  <County>{0,1}</County>`
	`  <State>{1,1}</State>`
	`  <ZipCode>{1,1}</ZipCode>`
	`  <Elevation>{0,1}</Elevation>`
	`  <Latitude>{0,1}</Latitude>`
	`  <Longitude>{0,1}</Longitude>`
	`  <MapURL>{0,1}</MapURL>`
	`</MailingAddress>`

Source	`<xs:element name="MailingAddress" type="AddressType" minOccurs="1" maxOccurs="1"/>`

Element AddressType / Line1

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple
Source	`<xs:element name="Line1" type="xs:string"/>`

Element AddressType / Line2

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="Line2" type="xs:string" minOccurs="0" maxOccurs="1"/>`

Element AddressType / City

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple
Source	`<xs:element name="City" type="xs:string"/>`

Element AddressType / County

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="County" type="xs:string" minOccurs="0" maxOccurs="1"/>`

Element AddressType / State

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 1
Source	`<xs:element name="State" type="xs:string" minOccurs="1"/>`

Element AddressType / ZipCode

Namespace	No namespace
Diagram	
Type	ZipCodeType

Properties	content:	simple
Facets	pattern	\d{5}|\d{5}-\d{4}
Source	<xs:element name="ZipCode" type="ZipCodeType"/>	

Element AddressType / Elevation

Namespace	No namespace
Annotations	This is in feer
Diagram	
Type	xs:float
Properties	content: simple minOccurs: 0 nillable: true
Source	<xs:element name="Elevation" type="xs:float" minOccurs="0" nillable="true"> <xs:annotation> <xs:documentation>This is in feer</xs:documentation> </xs:annotation> </xs:element>

Element AddressType / Latitude

Namespace	No namespace
Annotations	This is in degrees
Diagram	
Type	xs:float
Properties	content: simple minOccurs: 0 nillable: true
Source	<xs:element name="Latitude" type="xs:float" minOccurs="0" nillable="true"> <xs:annotation> <xs:documentation>This is in degrees</xs:documentation> </xs:annotation> </xs:element>

Element AddressType / Longitude

Namespace	No namespace
Annotations	This is in degrees
Diagram	
Type	xs:float
Properties	content: simple minOccurs: 0 nillable: true
Source	<xs:element name="Longitude" type="xs:float" minOccurs="0" nillable="true"> <xs:annotation> <xs:documentation>This is in degrees</xs:documentation> </xs:annotation> </xs:element>

Element AddressType / MapURL

Namespace	No namespace
Annotations	Optional URL pointing to an online mapping service that shows the location.
Diagram	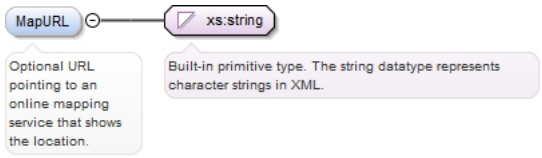
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="MapURL" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Optional URL pointing to an online mapping service that shows the location.</xs:documentation> </xs:annotation> </xs:element>

Element ParticipantType / TaxStatus

Namespace	No namespace
Annotations	The participant's tax entity status. For example, the Cal Solar Initiative program defines the following legal values: Corporation, Individual, LLC (Corporation), LLC (Non-Corporation), Partnership, Sole Proprietor, Tax Exempt. This may hold other values depending on the needs of the user.
Diagram	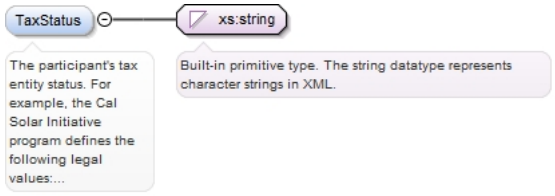
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="TaxStatus" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>The participant's tax entity status. For example, the Cal Solar Initiative program defines the following legal values: Corporation, Individual, LLC (Corporation), LLC (Non-Corporation), Partnership, Sole Proprietor, Tax Exempt. This may hold other values depending on the needs of the user.</xs:documentation> </xs:annotation> </xs:element>

Element ParticipantType / Sector

Namespace	No namespace
Annotations	The sector in which the project is defined. The Cal Solar Initiative defines the following legal values: Commercial, Government, Non-Profit, Residential. Other values can be used to support defined sectors used by other programs.
Diagram	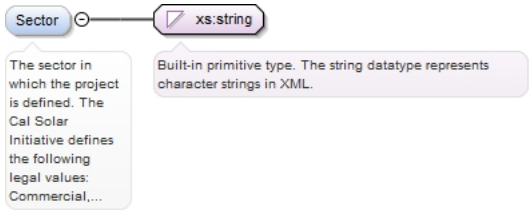
Type	xs:string

Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Source	<xs:element name="Sector" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>The sector in which the project is defined. The Cal Solar Initiative defines the following legal values: Commercial, Government, Non-Profit, Residential. Other values can be used to support defined sectors used by other programs.</xs:documentation> </xs:annotation> </xs:element>	

Element ParticipantType / Role

Namespace	No namespace
Annotations	A participant may have one or more roles with respect to a project.
Diagram	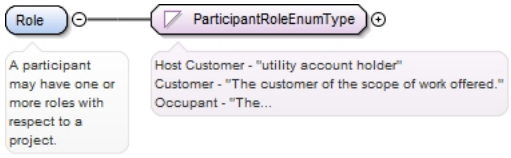
Type	ParticipantRoleEnumType
Properties	content: simple minOccurs: 1 maxOccurs: unbounded
Facets	enumeration: Host Customer enumeration: Customer enumeration: Occupant enumeration: PV System Owner enumeration: Incentive Payee enumeration: Seller enumeration: Installer enumeration: Referrer enumeration: Auditor
Source	<xs:element name="Role" type="ParticipantRoleEnumType" minOccurs="1" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>A participant may have one or more roles with respect to a project.</xs:documentation> </xs:annotation> </xs:element>

Element ParticipantType / TaxPayerId

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="TaxPayerId" type="xs:string" minOccurs="0" maxOccurs="1"/>

Element ParticipantType / Credential

Namespace	No namespace

Diagram	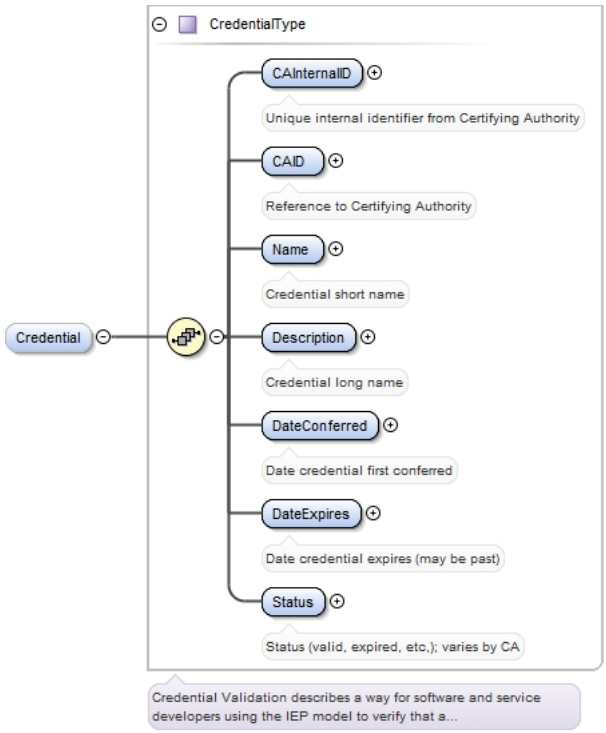
Type	CredentialType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	CAInternalID , CAID , Name , Description , DateConferred , DateExpires , Status
Children	CAID, CAInternalID, DateConferred, DateExpires, Description, Name, Status
Instance	<Credential> <CAInternalID>{1,1}</CAInternalID> <CAID>{1,1}</CAID> <Name>{1,1}</Name> <Description>{1,1}</Description> <DateConferred>{1,1}</DateConferred> <DateExpires>{1,1}</DateExpires> <Status>{1,1}</Status> </Credential>
Source	<xs:element name="Credential" type="CredentialType" minOccurs="0" maxOccurs="unbounded"/>

Element CredentialType / CAInternalID

Namespace	No namespace
Annotations	Unique internal identifier from Certifying Authority
Diagram	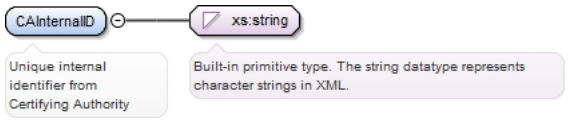
Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="CAInternalID" type="xs:string" minOccurs="1" maxOccurs="1"> <xs:annotation> <xs:documentation>Unique internal identifier from Certifying Authority</ xs:documentation> </xs:annotation> </xs:element>

Element CredentialType / CAID

Namespace	No namespace
Annotations	Reference to Certifying Authority
Diagram	
Type	xs:int
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="CAID" type="xs:int" minOccurs="1" maxOccurs="1"> <xs:annotation> <xs:documentation>Reference to Certifying Authority</xs:documentation> </xs:annotation> </xs:element>

Element CredentialType / Name

Namespace	No namespace
Annotations	Credential short name
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="Name" type="xs:string" minOccurs="1" maxOccurs="1"> <xs:annotation> <xs:documentation>Credential short name</xs:documentation> </xs:annotation> </xs:element>

Element CredentialType / Description

Namespace	No namespace
Annotations	Credential long name
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="Description" type="xs:string" minOccurs="1" maxOccurs="1"> <xs:annotation> <xs:documentation>Credential long name</xs:documentation> </xs:annotation> </xs:element>

Element CredentialType / DateConferred

Namespace	No namespace
Annotations	Date credential first conferred

Diagram	
Type	xs:date
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="DateConferred" type="xs:date" minOccurs="1" maxOccurs="1"> <xs:annotation> <xs:documentation>Date credential first conferred</xs:documentation> </xs:annotation> </xs:element>

Element CredentialType / DateExpires

Namespace	No namespace
Annotations	Date credential expires (may be past)
Diagram	
Type	xs:date
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="DateExpires" type="xs:date" minOccurs="1" maxOccurs="1"> <xs:annotation> <xs:documentation>Date credential expires (may be past)</xs:documentation> </xs:annotation> </xs:element>

Element CredentialType / Status

Namespace	No namespace
Annotations	Status (valid, expired, etc,); varies by CA
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="Status" type="xs:string" minOccurs="1" maxOccurs="1"> <xs:annotation> <xs:documentation>Status (valid, expired, etc,); varies by CA</xs:documentation> </xs:annotation> </xs:element>

Element ParticipantType / LiabilityPolicy

Namespace	No namespace
Diagram	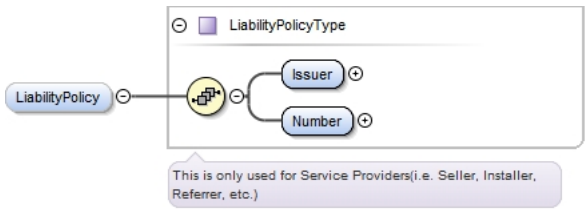

Type	LiabilityPolicyType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Issuer , Number
Children	Issuer, Number
Instance	<LiabilityPolicy> <Issuer>{1,1}</Issuer> <Number>{1,1}</Number> </LiabilityPolicy>
Source	<xs:element name="LiabilityPolicy" type="LiabilityPolicyType" minOccurs="0" maxOccurs="unbounded"/>

Element LiabilityPolicyType / Issuer

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="Issuer" type="xs:string" minOccurs="1" maxOccurs="1"/>

Element LiabilityPolicyType / Number

Namespace	No namespace
Diagram	
Type	xs:int
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="Number" type="xs:int" minOccurs="1" maxOccurs="1"/>

Element ParticipantType / ManufacturerAffiliation

Namespace	No namespace
Diagram	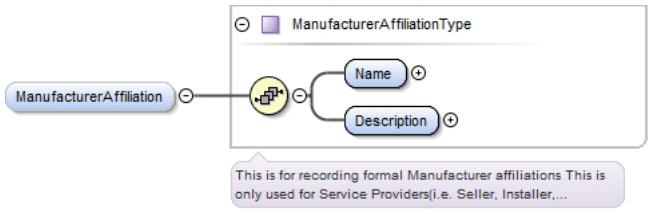
Type	ManufacturerAffiliationType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Name , Description
Children	Description, Name

Instance	<ManufacturerAffiliation> <Name>{1,1}</Name> <Description>{1,1}</Description> </ManufacturerAffiliation>
Source	<xs:element name="ManufacturerAffiliation" type="ManufacturerAffiliationType" minOccurs="0" maxOccurs="unbounded"/>

Element ManufacturerAffiliationType / Name

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="Name" type="xs:string" minOccurs="1" maxOccurs="1"/>

Element ManufacturerAffiliationType / Description

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="Description" type="xs:string" minOccurs="1" maxOccurs="1"/>

Element ParticipantType / Service

Namespace	No namespace
Diagram	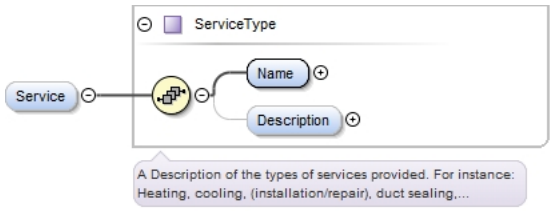
Type	ServiceType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Name , Description{0,1}
Children	Description, Name
Instance	<Service> <Name>{1,1}</Name> <Description>{0,1}</Description> </Service>
Source	<xs:element name="Service" type="ServiceType" minOccurs="0" maxOccurs="unbounded"/>

Element ServiceType / Name

Namespace	No namespace

Diagram	
Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	`<xs:element name="Name" type="xs:string" minOccurs="1" maxOccurs="1"/>`

Element ServiceType / Description

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1"/>`

Element ProjectType / ProjectInitiator

Namespace	No namespace
Diagram	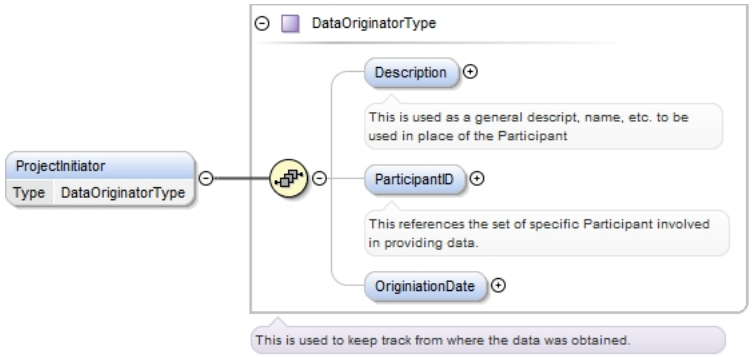
Type	DataOriginatorType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	Description{0,1} , ParticipantID{0,1} , OriginiationDate{0,1}
Children	Description, OriginiationDate, ParticipantID

Instance	`<ProjectInitiator xmlns="http://www.iepmodel.net">`
	`  <Description>{0,1}</Description>`
	`  <ParticipantID ParticipantID="">{0,1}</ParticipantID>`
	`  <OriginiationDate>{0,1}</OriginiationDate>`
	`</ProjectInitiator>`

Source	`<xs:element name="ProjectInitiator" type="DataOriginatorType" maxOccurs="1" minOccurs="0"/>`

Element ProjectType / DateInitiated

Namespace	No namespace
Annotations	The date that the project's definition was started (not it's actual implementation).

Diagram	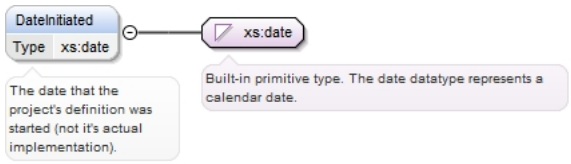
Type	xs:date
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source	`<xs:element name="DateInitiated" type="xs:date" minOccurs="0" maxOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>The date that the project's definition was started (not it's actual implementation).</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element ProjectType / DateProposed

Namespace	No namespace
Annotations	This is the date of the initial proposal
Diagram	
Type	xs:date
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source	`<xs:element name="DateProposed" type="xs:date" minOccurs="0" maxOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>This is the date of the initial proposal</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element ProjectType / DateClosed

Namespace	No namespace
Annotations	This is the date that the project was completed, i.e. signed off by the customer
Diagram	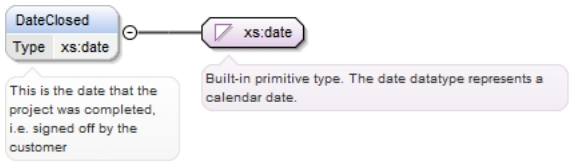
Type	xs:date
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source	`<xs:element name="DateClosed" type="xs:date" minOccurs="0" maxOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>This is the date that the project was completed, i.e. signed off by the customer</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element ProjectType / LeadSource

Namespace	No namespace

Annotations	This defines from where the lead originally came.
Diagram	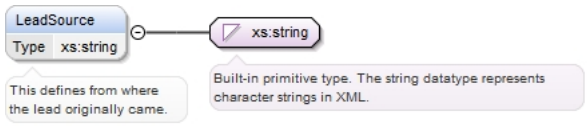
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="LeadSource" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This defines from where the lead originally came.</xs:documentation> </xs:annotation> </xs:element>

Element ProjectType / Site

Namespace	No namespace
Annotations	The site element describes the property on which the project is being considered or implemented. It describes ownership and jurisdictional information, as well as physical attributes. It inlcudes elements describing both buildings and grounds. The Site element is particularly useful for capturing site audit data prior to defining specific measures, including relevant data about locations for where proposed energy system equipment can be placed.

Diagram

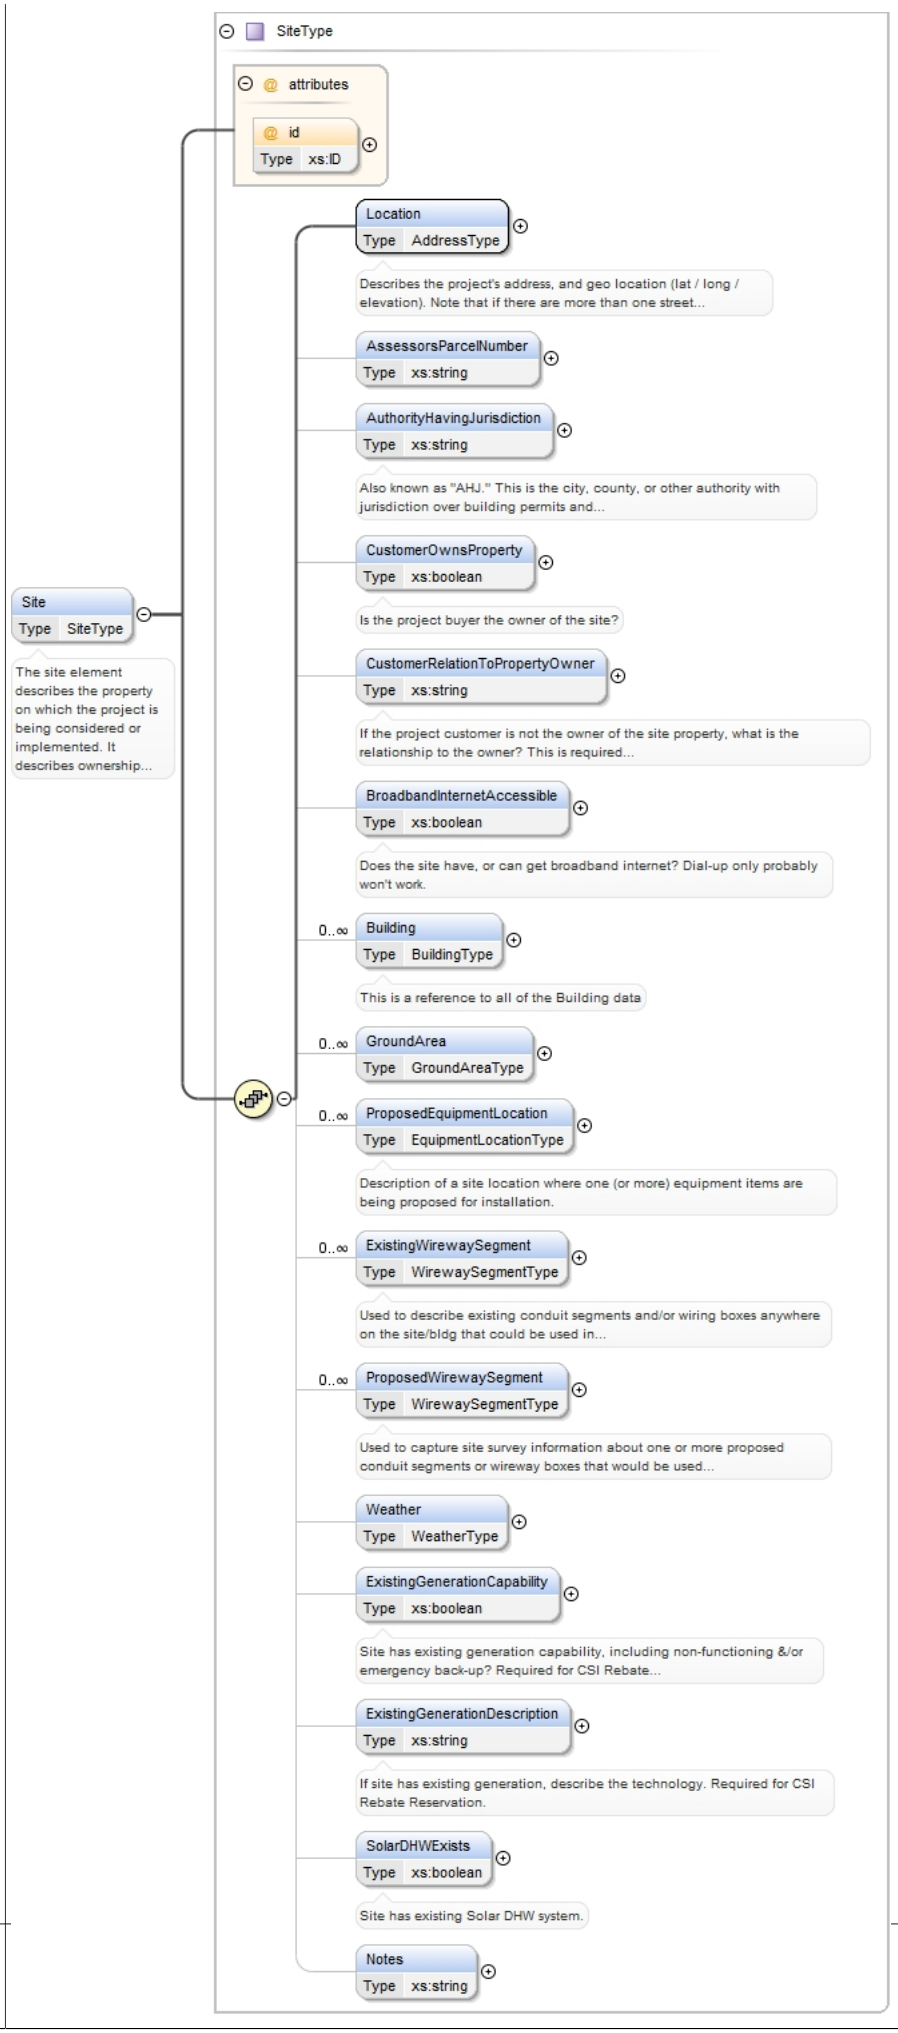
SiteType
attributes
id
Type xs:ID
Site
Type SiteType
The site element describes the property on which the project is being considered or implemented. It describes ownership...
Location
Type AddressType
Describes the project's address, and geo location (lat / long / elevation). Note that if there are more than one street...
AssessorsParcelNumber
Type xs:string
AuthorityHavingJurisdiction
Type xs:string
Also known as "AHJ." This is the city, county, or other authority with jurisdiction over building permits and...
CustomerOwnsProperty
Type xs:boolean
Is the project buyer the owner of the site?
CustomerRelationToPropertyOwner
Type xs:string
If the project customer is not the owner of the site property, what is the relationship to the owner? This is required...
BroadbandInternetAccessible
Type xs:boolean
Does the site have, or can get broadband internet? Dial-up only probably won't work.
0..∞
Building
Type BuildingType
This is a reference to all of the Building data
0..∞
GroundArea
Type GroundAreaType
0..∞
ProposedEquipmentLocation
Type EquipmentLocationType
Description of a site location where one (or more) equipment items are being proposed for installation.
0..∞
ExistingWirewaySegment
Type WirewaySegmentType
Used to describe existing conduit segments and/or wiring boxes anywhere on the site/bldg that could be used in...
0..∞
ProposedWirewaySegment
Type WirewaySegmentType
Used to capture site survey information about one or more proposed conduit segments or wireway boxes that would be used...
Weather
Type WeatherType
ExistingGenerationCapability
Type xs:boolean
Site has existing generation capability, including non-functioning &/or emergency back-up? Required for CSI Rebate...
ExistingGenerationDescription
Type xs:string
If site has existing generation, describe the technology. Required for CSI Rebate Reservation.
SolarDHWExists
Type xs:boolean
Site has existing Solar DHW system.
Notes
Type xs:string

Type	SiteType
Properties	content: complex minOccurs: 0
Model	Location , AssessorsParcelNumber{0,1} , AuthorityHavingJurisdiction{0,1} , CustomerOwnsProperty{0,1} , CustomerRelationToPropertyOwner{0,1} , BroadbandInternetAccessible{0,1} , Building* , GroundArea* , ProposedEquipmentLocation* , ExistingWirewaySegment* , ProposedWirewaySegment* , Weather{0,1} , ExistingGenerationCapability{0,1} , ExistingGenerationDescription{0,1} , SolarDHWExists{0,1} , Notes{0,1}
Children	AssessorsParcelNumber, AuthorityHavingJurisdiction, BroadbandInternetAccessible, Building, CustomerOwnsProperty, CustomerRelationToPropertyOwner, ExistingGenerationCapability, ExistingGenerationDescription, ExistingWirewaySegment, GroundArea, Location, Notes, ProposedEquipmentLocation, ProposedWirewaySegment, SolarDHWExists, Weather

Instance

```
<Site id="">
  <Location>{1,1}</Location>
  <AssessorsParcelNumber>{0,1}</AssessorsParcelNumber>
  <AuthorityHavingJurisdiction>{0,1}</AuthorityHavingJurisdiction>
  <CustomerOwnsProperty>{0,1}</CustomerOwnsProperty>
  <CustomerRelationToPropertyOwner>{0,1}</CustomerRelationToPropertyOwner>
  <BroadbandInternetAccessible>{0,1}</BroadbandInternetAccessible>
  <Building id="">{0,unbounded}</Building>
  <GroundArea id="">{0,unbounded}</GroundArea>
  <ProposedEquipmentLocation>{0,unbounded}</ProposedEquipmentLocation>
  <ExistingWirewaySegment EquipmentDefinitionIdRef="" Id="">{0,unbounded}</
ExistingWirewaySegment>
  <ProposedWirewaySegment EquipmentDefinitionIdRef="" Id="">{0,unbounded}</
ProposedWirewaySegment>
  <Weather>{0,1}</Weather>
  <ExistingGenerationCapability>{0,1}</ExistingGenerationCapability>
  <ExistingGenerationDescription>{0,1}</ExistingGenerationDescription>
  <SolarDHWExists>{0,1}</SolarDHWExists>
  <Notes>{0,1}</Notes>
</Site>
```

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			optional

Source

```
<xs:element name="Site" type="SiteType" minOccurs="0">
  <xs:annotation>
    <xs:documentation>The site element describes the property on which the project is
 being considered or implemented. It describes ownership and jurisdictional information,
 as well as physical attributes. It inlcudes elements describing both buildings and
 grounds. The Site element is particularly useful for capturing site audit data prior to
 defining specific measures, including relevant data about locations for where proposed
 energy system equipment can be placed.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element SiteType / Location

Namespace	No namespace
Annotations	Describes the project's address, and geo location (lat / long / elevation). Note that if there are more than one street address, the model forces these to be separate Sites/Projects. If a Building on the project site has more than one street address, only one is required to identify the location.

Diagram	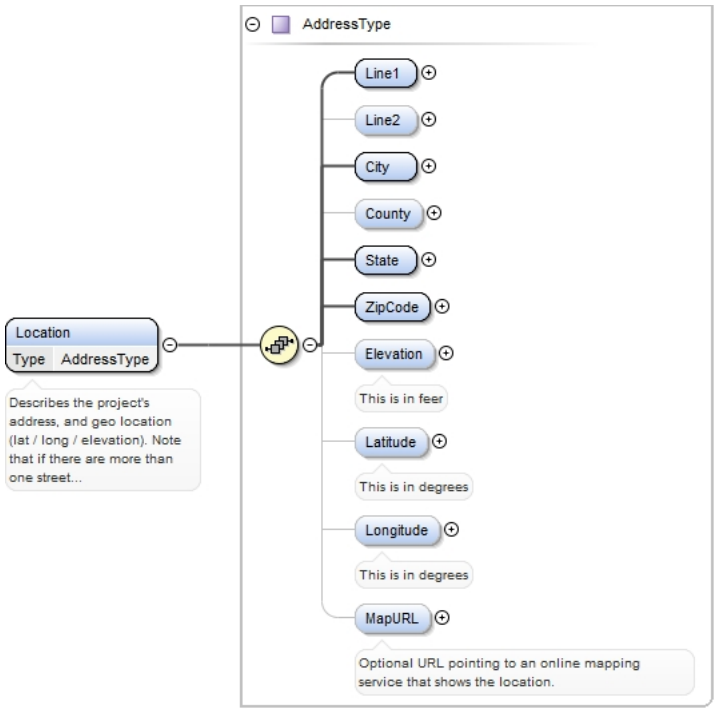
Type	AddressType
Properties	content: complex minOccurs: 1 maxOccurs: 1
Model	Line1 , Line2{0,1} , City , County{0,1} , State , ZipCode , Elevation{0,1} , Latitude{0,1} , Longitude{0,1} , MapURL{0,1}
Children	City, County, Elevation, Latitude, Line1, Line2, Longitude, MapURL, State, ZipCode
Instance	<Location> <Line1>{1,1}</Line1> <Line2>{0,1}</Line2> <City>{1,1}</City> <County>{0,1}</County> <State>{1,1}</State> <ZipCode>{1,1}</ZipCode> <Elevation>{0,1}</Elevation> <Latitude>{0,1}</Latitude> <Longitude>{0,1}</Longitude> <MapURL>{0,1}</MapURL> </Location>
Source	<xs:element maxOccurs="1" minOccurs="1" name="Location" type="AddressType"> <xs:annotation> <xs:documentation>Describes the project's address, and geo location (lat / long / elevation). Note that if there are more than one street address, the model forces these to be separate Sites/Projects. If a Building on the project site has more than one street address, only one is required to identify the location.</xs:documentation> </xs:annotation> </xs:element>

Element SiteType / AssessorsParcelNumber

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source	<xs:element maxOccurs="1" minOccurs="0" name="AssessorsParcelNumber" type="xs:string"/>

Element SiteType / AuthorityHavingJurisdiction

Namespace	No namespace
Annotations	Also known as "AHJ." This is the city, county, or other authority with jurisdiction over building permits and inspections.
Diagram	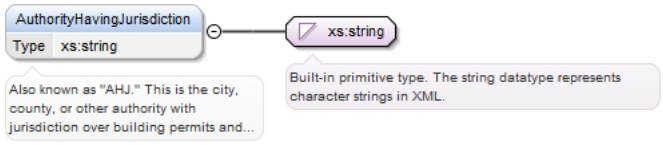
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element maxOccurs="1" minOccurs="0" name="AuthorityHavingJurisdiction" type="xs:string"> <xs:annotation> <xs:documentation>Also known as "AHJ." This is the city, county, or other authority with jurisdiction over building permits and inspections.</xs:documentation> </xs:annotation> </xs:element>

Element SiteType / CustomerOwnsProperty

Namespace	No namespace
Annotations	Is the project buyer the owner of the site?
Diagram	
Type	xs:boolean
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element maxOccurs="1" minOccurs="0" name="CustomerOwnsProperty" type="xs:boolean"> <xs:annotation> <xs:documentation>Is the project buyer the owner of the site?</xs:documentation> </xs:annotation> </xs:element>

Element SiteType / CustomerRelationToPropertyOwner

Namespace	No namespace
Annotations	If the project customer is not the owner of the site property, what is the relationship to the owner? This is required for CSI incentive application.
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element maxOccurs="1" minOccurs="0" name="CustomerRelationToPropertyOwner" type="xs:string"> <xs:annotation>

```
    <xs:documentation>If the project customer is not the owner of the site property,
 what is the relationship to the owner? This is required for CSI incentive application.</
xs:documentation>
  </xs:annotation>
</xs:element>
```

Element SiteType / BroadbandInternetAccessible

Namespace	No namespace
Annotations	Does the site have, or can get broadband internet? Dial-up only probably won't work.
Diagram	
Type	xs:boolean
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element maxOccurs="1" minOccurs="0" name="BroadbandInternetAccessible" type="xs:boolean"> <xs:annotation> <xs:documentation>Does the site have, or can get broadband internet? Dial-up only probably won't work.</xs:documentation> </xs:annotation> </xs:element>

Element SiteType / Building

Namespace	No namespace
Annotations	This is a reference to all of the Building data
Diagram	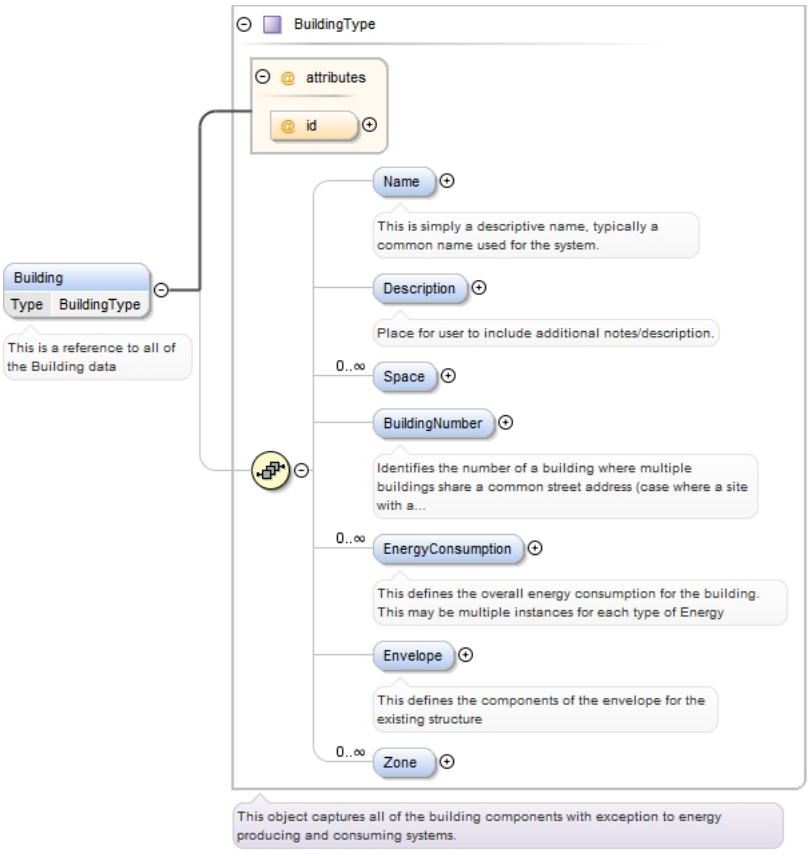
Type	BuildingType
Properties	content: complex

	minOccurs: 0 maxOccurs: unbounded
Model	Name{0,1} , Description{0,1} , Space* , BuildingNumber{0,1} , EnergyConsumption* , Envelope{0,1} , Zone*
Children	BuildingNumber, Description, EnergyConsumption, Envelope, Name, Space, Zone
Instance	<Building id=""> <Name>{0,1}</Name> <Description>{0,1}</Description> <Space id="">{0,unbounded}</Space> <BuildingNumber>{0,1}</BuildingNumber> <EnergyConsumption>{0,unbounded}</EnergyConsumption> <Envelope id="">{0,1}</Envelope> <Zone id="">{0,unbounded}</Zone> </Building>

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			optional

Source

```
<xs:element name="Building" type="BuildingType" minOccurs="0" maxOccurs="unbounded">
  <xs:annotation>
    <xs:documentation>This is a reference to all of the Building data</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element BuildingType / Name

Namespace	No namespace
Annotations	This is simply a descriptive name, typically a common name used for the system.
Diagram	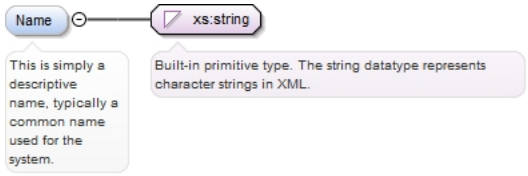
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source

```
<xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>This is simply a descriptive name, typically a common name used for
 the system.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element BuildingType / Description

Namespace	No namespace
Annotations	Place for user to include additional notes/description.
Diagram	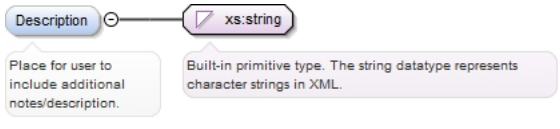
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source

```
<xs:element maxOccurs="1" minOccurs="0" name="Description" type="xs:string">
  <xs:annotation>
    <xs:documentation>Place for user to include additional notes/description.</
xs:documentation>
  </xs:annotation>
</xs:element>
```

Element `BuildingType / Space`

Namespace	No namespace

Diagram

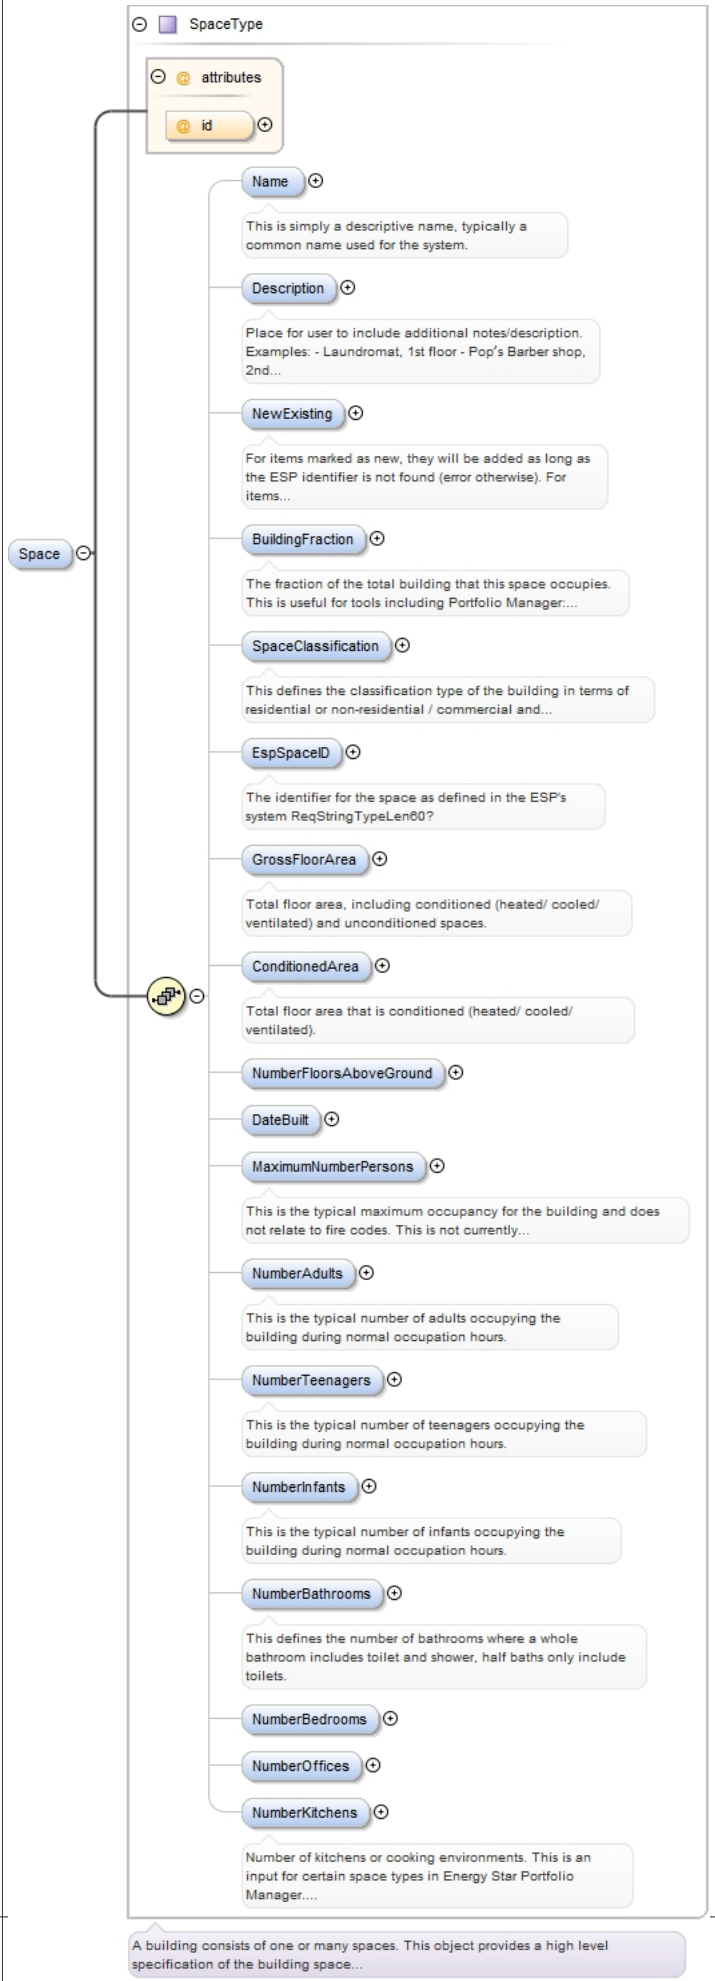
SpaceType
attributes
id
Space
Name
This is simply a descriptive name, typically a common name used for the system.
Description
Place for user to include additional notes/description. Examples: - Laundromat, 1st floor - Pop's Barber shop, 2nd...
NewExisting
For items marked as new, they will be added as long as the ESP identifier is not found (error otherwise). For items...
BuildingFraction
The fraction of the total building that this space occupies. This is useful for tools including Portfolio Manager:...
SpaceClassification
This defines the classification type of the building in terms of residential or non-residential / commercial and...
EspSpaceID
The identifier for the space as defined in the ESP's system ReqStringTypeLen60?
GrossFloorArea
Total floor area, including conditioned (heated/ cooled/ ventilated) and unconditioned spaces.
ConditionedArea
Total floor area that is conditioned (heated/ cooled/ ventilated).
NumberFloorsAboveGround
DateBuilt
MaximumNumberPersons
This is the typical maximum occupancy for the building and does not relate to fire codes. This is not currently...
NumberAdults
This is the typical number of adults occupying the building during normal occupation hours.
NumberTeenagers
This is the typical number of teenagers occupying the building during normal occupation hours.
NumberInfants
This is the typical number of infants occupying the building during normal occupation hours.
NumberBathrooms
This defines the number of bathrooms where a whole bathroom includes toilet and shower, half baths only include toilets.
NumberBedrooms
NumberOffices
NumberKitchens
Number of kitchens or cooking environments. This is an input for certain space types in Energy Star Portfolio Manager....
A building consists of one or many spaces. This object provides a high level specification of the building space...

Type	SpaceType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Name{0,1} , Description{0,1} , NewExisting{0,1} , BuildingFraction{0,1} , SpaceClassification{0,1} , EspSpaceID{0,1} , GrossFloorArea{0,1} , ConditionedArea{0,1} , NumberFloorsAboveGround{0,1} , DateBuilt{0,1} , MaximumNumberPersons{0,1} , NumberAdults{0,1} , NumberTeenagers{0,1} , NumberInfants{0,1} , NumberBathrooms{0,1} , NumberBedrooms{0,1} , NumberOffices{0,1} , NumberKitchens{0,1}
Children	BuildingFraction, ConditionedArea, DateBuilt, Description, EspSpaceID, GrossFloorArea, MaximumNumberPersons, Name, NewExisting, NumberAdults, NumberBathrooms, NumberBedrooms, NumberFloorsAboveGround, NumberInfants, NumberKitchens, NumberOffices, NumberTeenagers, SpaceClassification

Instance

```
<Space id="" xmlns="http://www.iepmodel.net">
  <Name>{0,1}</Name>
  <Description>{0,1}</Description>
  <NewExisting>{0,1}</NewExisting>
  <BuildingFraction>{0,1}</BuildingFraction>
  <SpaceClassification>{0,1}</SpaceClassification>
  <EspSpaceID>{0,1}</EspSpaceID>
  <GrossFloorArea Unit="SquareMeters">{0,1}</GrossFloorArea>
  <ConditionedArea Unit="SquareMeters">{0,1}</ConditionedArea>
  <NumberFloorsAboveGround>{0,1}</NumberFloorsAboveGround>
  <DateBuilt>{0,1}</DateBuilt>
  <MaximumNumberPersons>{0,1}</MaximumNumberPersons>
  <NumberAdults>{0,1}</NumberAdults>
  <NumberTeenagers>{0,1}</NumberTeenagers>
  <NumberInfants>{0,1}</NumberInfants>
  <NumberBathrooms>{0,1}</NumberBathrooms>
  <NumberBedrooms>{0,1}</NumberBedrooms>
  <NumberOffices>{0,1}</NumberOffices>
  <NumberKitchens>{0,1}</NumberKitchens>
</Space>
```

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			optional

Source

```
<xs:element name="Space" type="SpaceType" minOccurs="0" maxOccurs="unbounded"/>
```

Element BuildingType / BuildingNumber

Namespace	No namespace
Annotations	Identifies the number of a building where multiple buildings share a common street address (case where a site with a single address contains multiple buildings). Note that if a single Building has more than one street address, only one is required to identify the location.
Diagram	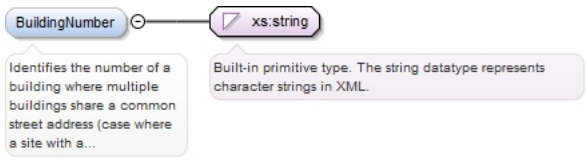
Type	xs:string
Properties	content: simple minOccurs: 0

Source

```
<xs:element minOccurs="0" name="BuildingNumber" type="xs:string">
  <xs:annotation>
    <xs:documentation>Identifies the number of a building where multiple buildings share
 a common street address (case where a site with a single address contains multiple
 buildings). Note that if a single Building has more than one street address, only one is
 required to identify the location.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element BuildingType / EnergyConsumption

Namespace	No namespace

Annotations	This defines the overall energy consumption for the building. This may be multiple instances for each type of Energy
Diagram	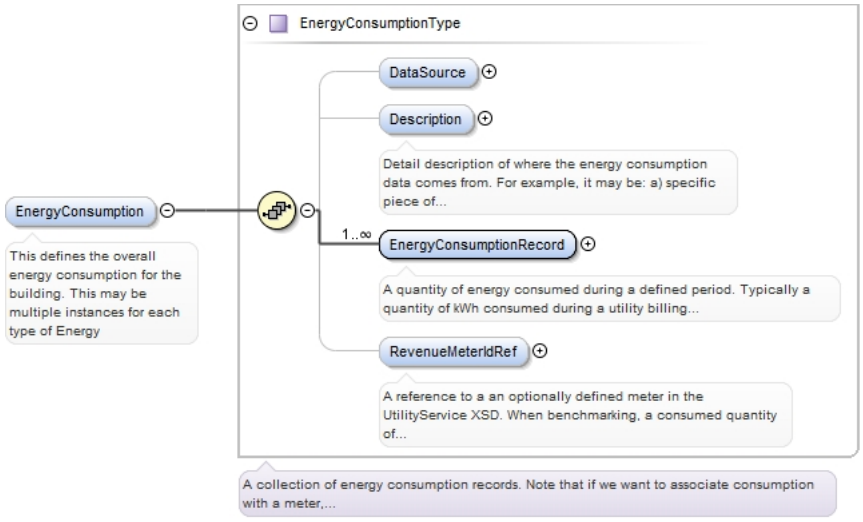
Type	EnergyConsumptionType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	DataSource{0,1} , Description{0,1} , EnergyConsumptionRecord+ , RevenueMeterIdRef{0,1}
Children	DataSource, Description, EnergyConsumptionRecord, RevenueMeterIdRef
Instance	<EnergyConsumption> <DataSource>{0,1}</DataSource> <Description>{0,1}</Description> <EnergyConsumptionRecord>{1,unbounded}</EnergyConsumptionRecord> <RevenueMeterIdRef>{0,1}</RevenueMeterIdRef> </EnergyConsumption>
Source	<xs:element name="EnergyConsumption" type="EnergyConsumptionType" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>This defines the overall energy consumption for the building. This may be multiple instances for each type of Energy</xs:documentation> </xs:annotation> </xs:element>

Element EnergyConsumptionType / DataSource

Namespace	No namespace
Diagram	
Type	ConsumptionDataSourceEnumType
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	enumeration: Utility Bill enumeration: Simulated enumeration: Rated enumeration: Measured
Source	<xs:element name="DataSource" type="ConsumptionDataSourceEnumType" minOccurs="0" maxOccurs="1"/>

Element EnergyConsumptionType / Description

Namespace	No namespace

Annotations	Detail description of where the energy consumption data comes from. For example, it may be: a) specific piece of software, b) customer's bill, c) measurements, d) etc. This field may contain information about who captured the data.
Diagram	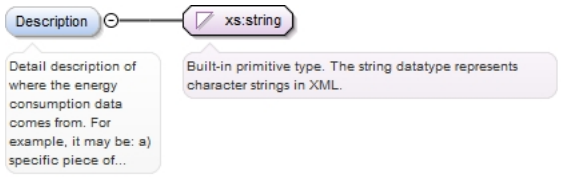
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Detail description of where the energy consumption data comes from. For example, it may be: a) specific piece of software, b) customer's bill, c) measurements, d) etc. This field may contain information about who captured the data.</xs:documentation> </xs:annotation> </xs:element>

Element EnergyConsumptionType / EnergyConsumptionRecord

Namespace	No namespace
Annotations	A quantity of energy consumed during a defined period. Typically a quantity of kWh consumed during a utility billing period.
Diagram	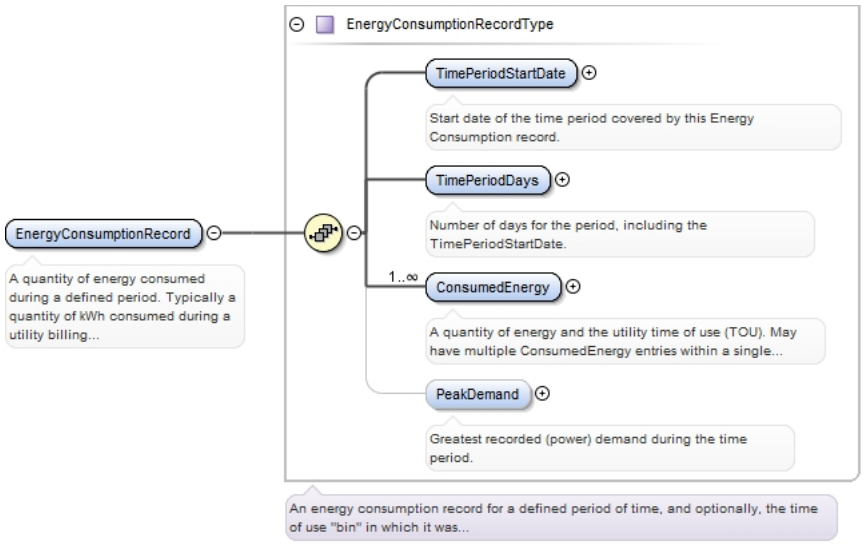
Type	EnergyConsumptionRecordType
Properties	content: complex minOccurs: 1 maxOccurs: unbounded
Model	TimePeriodStartDate , TimePeriodDays , ConsumedEnergy+ , PeakDemand{0,1}
Children	ConsumedEnergy, PeakDemand, TimePeriodDays, TimePeriodStartDate
Instance	<EnergyConsumptionRecord> <TimePeriodStartDate>{1,1}</TimePeriodStartDate> <TimePeriodDays>{1,1}</TimePeriodDays> <ConsumedEnergy>{1,unbounded}</ConsumedEnergy> <PeakDemand>{0,1}</PeakDemand> </EnergyConsumptionRecord>
Source	<xs:element name="EnergyConsumptionRecord" type="EnergyConsumptionRecordType" minOccurs="1" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>A quantity of energy consumed during a defined period. Typically a quantity of kWh consumed during a utility billing period.</xs:documentation>

```
  </xs:annotation>
</xs:element>
```

Element EnergyConsumptionRecordType / TimePeriodStartDate

Namespace	No namespace
Annotations	Start date of the time period covered by this Energy Consumption record.
Diagram	
Type	xs:date
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="TimePeriodStartDate" type="xs:date" minOccurs="1" maxOccurs="1"> <xs:annotation> <xs:documentation>Start date of the time period covered by this Energy Consumption record.</xs:documentation> </xs:annotation> </xs:element>

Element EnergyConsumptionRecordType / TimePeriodDays

Namespace	No namespace
Annotations	Number of days for the period, including the TimePeriodStartDate.
Diagram	
Type	xs:int
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="TimePeriodDays" type="xs:int" minOccurs="1" maxOccurs="1"> <xs:annotation> <xs:documentation>Number of days for the period, including the TimePeriodStartDate.</xs:documentation> </xs:annotation> </xs:element>

Element EnergyConsumptionRecordType / ConsumedEnergy

Namespace	No namespace
Annotations	A quantity of energy and the utility time of use (TOU). May have multiple ConsumedEnergy entries within a single EnergyConsumptionRecord to account for different types of energy (for example, electrcity and natural gas), as well as to account for multiple time periods.
Diagram	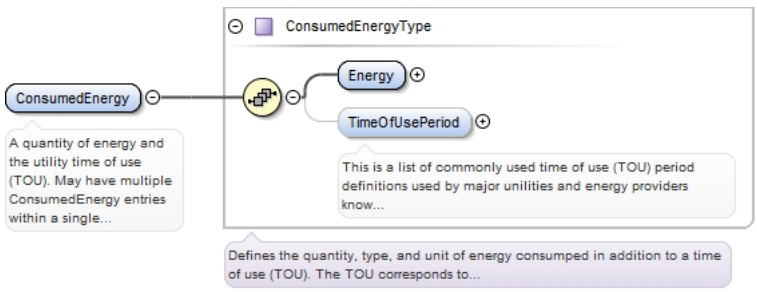
Type	ConsumedEnergyType

Properties	content: complex minOccurs: 1 maxOccurs: unbounded
Model	Energy , TimeOfUsePeriod{0,1}
Children	Energy, TimeOfUsePeriod
Instance	<ConsumedEnergy> <Energy Fuel="" FuelDesc="" Unit="" UnitDesc="">{1,1}</Energy> <TimeOfUsePeriod>{0,1}</TimeOfUsePeriod> </ConsumedEnergy>
Source	<xs:element name="ConsumedEnergy" type="ConsumedEnergyType" minOccurs="1" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>A quantity of energy and the utility time of use (TOU). May have multiple ConsumedEnergy entries within a single EnergyConsumptionRecord to account for different types of energy (for example, electrcity and natural gas), as well as to account for multiple time periods.</xs:documentation> </xs:annotation> </xs:element>

Element ConsumedEnergyType / Energy

Namespace	No namespace
Diagram	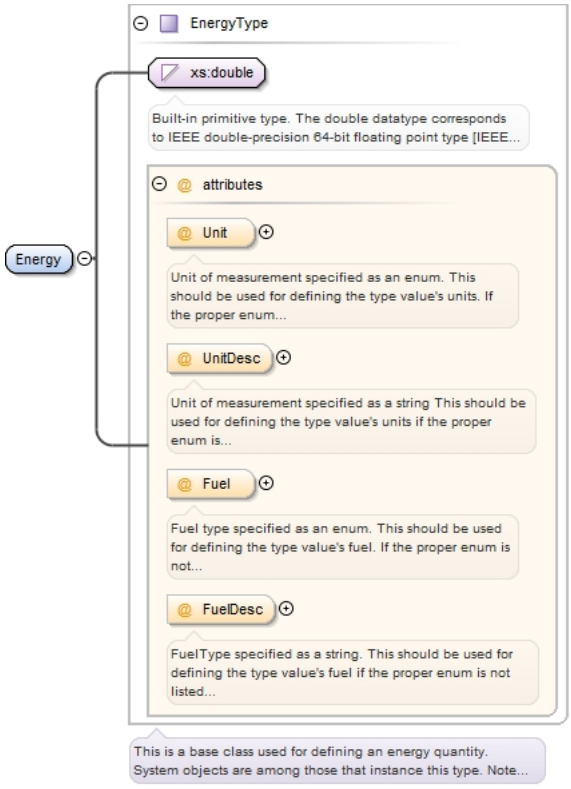
Type	EnergyType
Properties	content: complex minOccurs: 1 maxOccurs: 1

Attributes

QName	Type	Fixed	Default	Use
Fuel	EnergyClassEnumType			optional
	Fuel type specified as an enum. This should be used for defining the type value's fuel. If the proper enum is not listed, please use the FuelDesc field to specify the units. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the FuelDesc may contain a default type.			
FuelDesc	xs:string			optional

	QName	Type	Fixed	Default	Use
		FuelType specified as a string. This should be used for defining the type value's fuel if the proper enum is not listed in Fuel. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the FuelDesc may contain a default type.			
	Unit	EnergyUnitEnumType			optional
		Unit of measurement specified as an enum. This should be used for defining the type value's units. If the proper enum is not listed, please use the UnitDesc field to specify the units. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.			
	UnitDesc	xs:string			optional
		Unit of measurement specified as a string This should be used for defining the type value's units if the proper enum is not listed in Unit. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.			
Source	<xs:element name="Energy" type="EnergyType" minOccurs="1" maxOccurs="1"/>				

Element ConsumedEnergyType / TimeOfUsePeriod

Namespace	No namespace
Annotations	This is a list of commonly used time of use (TOU) period definitions used by major unilities and energy providers know by the authors. Typically, the rate structure (cost per unit of energy) varies with TOU.
Diagram	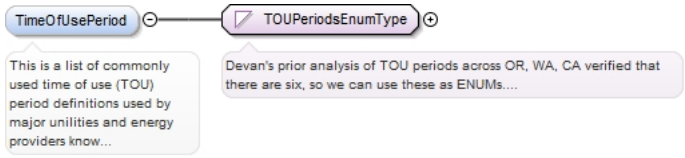
Type	TOUPeriodsEnumType
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	enumeration Base enumeration Off enumeration Off-Peak enumeration Off-Peak (P4) enumeration Pre-Peak enumeration Post-Peak enumeration Light Load enumeration Low Load enumeration Low Load A enumeration Low Load B enumeration Low Peak enumeration Part-Peak enumeration Partial Peak enumeration Intermediate Peak enumeration Semi-Peak enumeration Mid-Peak enumeration Mid-Peak (P2) enumeration On enumeration Peak enumeration On-Peak

	enumeration	On-Peak (P1)
	enumeration	On-Peak (P3)
	enumeration	Shoulder-Peak
	enumeration	Super-Peak
	enumeration	Heavy Load
	enumeration	High Peak
	enumeration	New Period
	enumeration	Summer Off-Peak
	enumeration	Summer Part-Peak
	enumeration	Summer Peak
	enumeration	Winter Off-Peak
	enumeration	Winter Part-Peak
	enumeration	Winter Peak

Source

```
<xs:element name="TimeOfUsePeriod" type="TOUPeriodsEnumType" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>This is a list of commonly used time of use (TOU) period definitions
 used by major unilities and energy providers know by the authors. Typically, the rate
 structure (cost per unit of energy) varies with TOU.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element EnergyConsumptionRecordType / PeakDemand

Namespace	No namespace
Annotations	Greatest recorded (power) demand during the time period.
Diagram	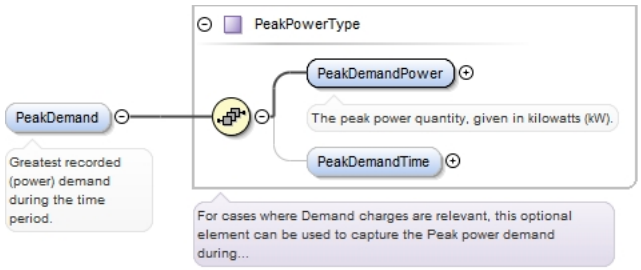
Type	PeakPowerType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	PeakDemandPower , PeakDemandTime{0,1}
Children	PeakDemandPower, PeakDemandTime
Instance	<PeakDemand> <PeakDemandPower>{1,1}</PeakDemandPower> <PeakDemandTime>{0,1}</PeakDemandTime> </PeakDemand>
Source	<xs:element name="PeakDemand" type="PeakPowerType" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Greatest recorded (power) demand during the time period.</xs:documentation> </xs:annotation> </xs:element>

Element PeakPowerType / PeakDemandPower

Namespace	No namespace
Annotations	The peak power quantity, given in kilowatts (kW).
Diagram	

Type	restriction of xs:float
Properties	content: simple minOccurs: 1 maxOccurs: 1
Facets	minInclusive 0
Source	<xs:element name="PeakDemandPower" minOccurs="1" maxOccurs="1"> <xs:annotation> <xs:documentation>The peak power quantity, given in kilowatts (kW).</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:float"> <xs:minInclusive value="0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PeakPowerType / PeakDemandTime

Namespace	No namespace
Diagram	
Type	xs:dateTime
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="PeakDemandTime" type="xs:dateTime" minOccurs="0" maxOccurs="1"/>

Element EnergyConsumptionType / RevenueMeterIdRef

Namespace	No namespace
Annotations	A reference to a an optionally defined meter in the UtilityService XSD. When benchmarking, a consumed quantity of energy must be associated to a defined revenue meter.
Diagram	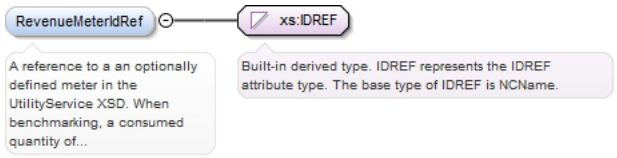
Type	xs:IDREF
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element maxOccurs="1" minOccurs="0" name="RevenueMeterIdRef" type="xs:IDREF"> <xs:annotation> <xs:documentation>A reference to a an optionally defined meter in the UtilityService XSD. When benchmarking, a consumed quantity of energy must be associated to a defined revenue meter.</xs:documentation> </xs:annotation> </xs:element>

Element BuildingType / Envelope

Namespace	No namespace
Annotations	This defines the components of the envelope for the existing structure

Diagram	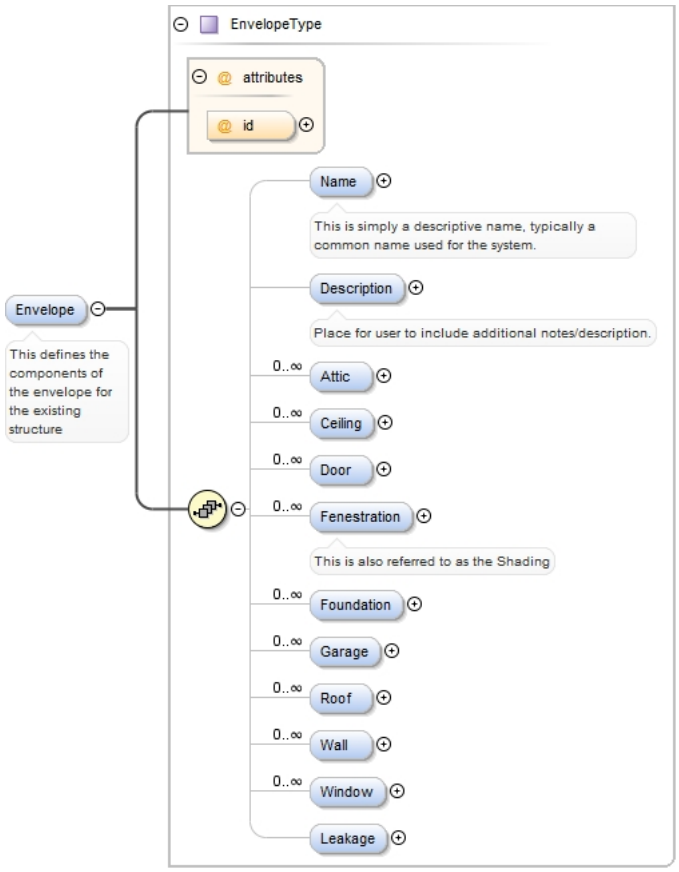
Type	EnvelopeType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	Name{0,1} , Description{0,1} , Attic* , Ceiling* , Door* , Fenestration* , Foundation* , Garage* , Roof* , Wall* , Window* , Leakage{0,1}
Children	Attic, Ceiling, Description, Door, Fenestration, Foundation, Garage, Leakage, Name, Roof, Wall, Window

Instance

```
<Envelope id="">
  <Name>{0,1}</Name>
  <Description>{0,1}</Description>
  <Attic id="">{0,unbounded}</Attic>
  <Ceiling id="">{0,unbounded}</Ceiling>
  <Door id="" UFactor="">{0,unbounded}</Door>
  <Fenestration id="">{0,unbounded}</Fenestration>
  <Foundation id="">{0,unbounded}</Foundation>
  <Garage id="">{0,unbounded}</Garage>
  <Roof id="">{0,unbounded}</Roof>
  <Wall id="">{0,unbounded}</Wall>
  <Window id="">{0,unbounded}</Window>
  <Leakage>{0,1}</Leakage>
</Envelope>
```

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			optional

Source

```
<xs:element name="Envelope" type="EnvelopeType" maxOccurs="1" minOccurs="0">
  <xs:annotation>
    <xs:documentation>This defines the components of the envelope for the existing
 structure</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element EnvelopeType / Name

Namespace	No namespace
Annotations	This is simply a descriptive name, typically a common name used for the system.

Diagram	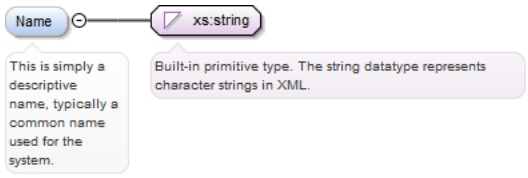
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This is simply a descriptive name, typically a common name used for the system.</xs:documentation> </xs:annotation> </xs:element>

Element EnvelopeType / Description

Namespace	No namespace
Annotations	Place for user to include additional notes/description.
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element maxOccurs="1" minOccurs="0" name="Description" type="xs:string"> <xs:annotation> <xs:documentation>Place for user to include additional notes/description.</xs:documentation> </xs:annotation> </xs:element>

Element EnvelopeType / Attic

Namespace	No namespace
Diagram	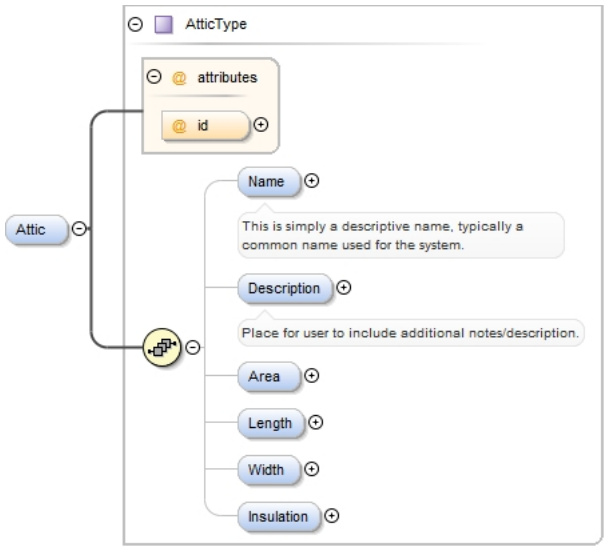
Type	AtticType
Properties	content: complex

	minOccurs: 0 maxOccurs: unbounded
Model	Name{0,1} , Description{0,1} , Area{0,1} , Length{0,1} , Width{0,1} , Insulation{0,1}
Children	Area, Description, Insulation, Length, Name, Width
Instance	<Attic id=""> <Name>{0,1}</Name> <Description>{0,1}</Description> <Area Unit="SquareMeters">{0,1}</Area> <Length Unit="Meters">{0,1}</Length> <Width Unit="Meters">{0,1}</Width> <Insulation>{0,1}</Insulation> </Attic>
Attributes	QName: id; Type: xs:IDREF; Fixed: ; Default: ; Use: optional
Source	<xs:element name="Attic" type="AtticType" minOccurs="0" maxOccurs="unbounded"/>

Element AtticType / Name

Namespace	No namespace
Annotations	This is simply a descriptive name, typically a common name used for the system.
Diagram	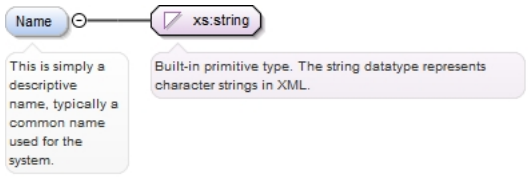
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This is simply a descriptive name, typically a common name used for the system.</xs:documentation> </xs:annotation> </xs:element>

Element AtticType / Description

Namespace	No namespace
Annotations	Place for user to include additional notes/description.
Diagram	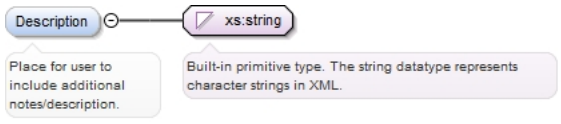
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element maxOccurs="1" minOccurs="0" name="Description" type="xs:string"> <xs:annotation> <xs:documentation>Place for user to include additional notes/description.</xs:documentation> </xs:annotation> </xs:element>

Element AtticType / Area

Namespace	No namespace

Diagram	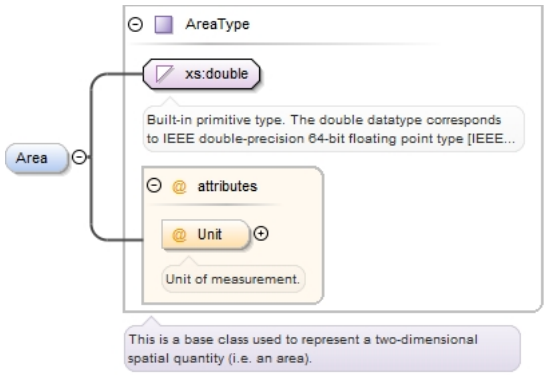
Type	AreaType
Properties	content: complex minOccurs: 0
Attributes	**QName** / **Unit**: **Type** AreaUnitEnumType; **Fixed**; **Default** SquareMeters; **Use** optional Unit of measurement.
Source	`<xs:element name="Area" type="AreaType" minOccurs="0"/>`

Element AtticType / Length

Namespace	No namespace
Diagram	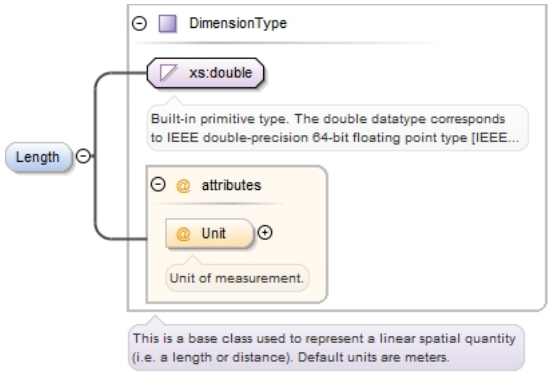
Type	DimensionType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Attributes	**QName** / **Unit**: **Type** DimensionUnitEnumType; **Fixed**; **Default** Meters; **Use** optional Unit of measurement.
Source	`<xs:element name="Length" type="DimensionType" minOccurs="0" maxOccurs="1"/>`

Element AtticType / Width

Namespace	No namespace

Diagram	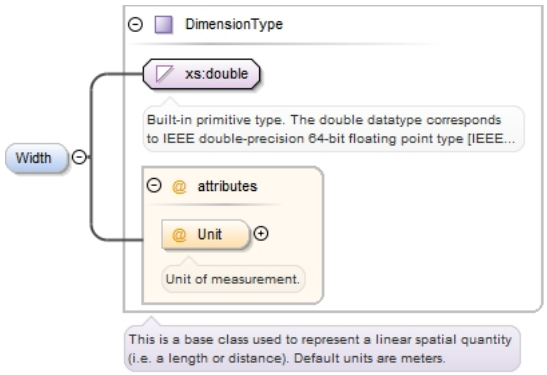
Type	DimensionType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Attributes	**QName**: **Unit**; **Type**: DimensionUnitEnumType; **Fixed**: ; **Default**: Meters; **Use**: optional Unit of measurement.
Source	`<xs:element name="Width" type="DimensionType" minOccurs="0" maxOccurs="1"/>`

Element AtticType / Insulation

Namespace	No namespace
Diagram	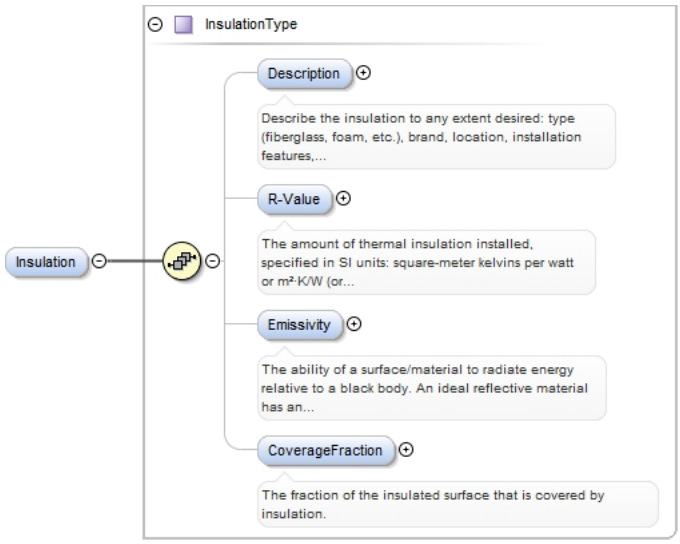
Type	InsulationType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	Description{0,1} , R-Value{0,1} , Emissivity{0,1} , CoverageFraction{0,1}
Children	CoverageFraction, Description, Emissivity, R-Value

Instance	`<Insulation>`
	`  <Description>{0,1}</Description>`
	`  <R-Value>{0,1}</R-Value>`
	`  <Emissivity>{0,1}</Emissivity>`
	`  <CoverageFraction>{0,1}</CoverageFraction>`
	`</Insulation>`

Source	`<xs:element name="Insulation" type="InsulationType" minOccurs="0" maxOccurs="1"/>`

Element InsulationType / Description

Namespace	No namespace
Annotations	Describe the insulation to any extent desired: type (fiberglass, foam, etc.), brand, location, installation features, etc. It is important to specify the units of measurement for R-value if one intends to use non-SI units. This is discouraged, as SI units are expected and indicated in the annotation of R-Value.
Diagram	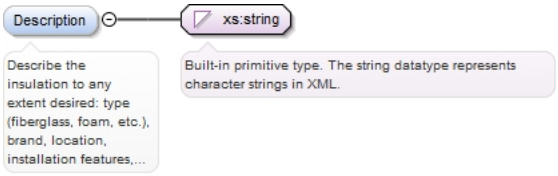
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Describe the insulation to any extent desired: type (fiberglass, foam, etc.), brand, location, installation features, etc. It is important to specify the units of measurement for R-value if one intends to use non-SI units. This is discouraged, as SI units are expected and indicated in the annotation of R-Value.</xs:documentation> </xs:annotation> </xs:element>

Element InsulationType / R-Value

Namespace	No namespace
Annotations	The amount of thermal insulation installed, specified in SI units: square-meter kelvins per watt or m²·K/W (or equivalently to m²·°C/W). Note that if you intend to use different units then this should be noted in the Description.
Diagram	
Type	restriction of xs:float
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minInclusive 0
Source	<xs:element name="R-Value" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>The amount of thermal insulation installed, specified in SI units: square-meter kelvins per watt or m²·K/W (or equivalently to m²·°C/W). Note that if you intend to use different units then this should be noted in the Description.</ xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:float"> <xs:minInclusive value="0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element InsulationType / Emissivity

Namespace	No namespace

Annotations	The ability of a surface/material to radiate energy relative to a black body. An ideal reflective material has an emissivity close to zero. An ideal black body has an emissivity of one.
Diagram	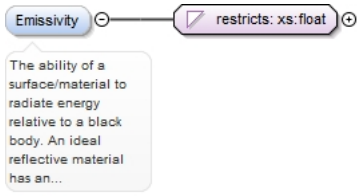
Type	restriction of xs:float
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 1 minInclusive 0
Source	<xs:element name="Emissivity" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>The ability of a surface/material to radiate energy relative to a black body. An ideal reflective material has an emissivity close to zero. An ideal black body has an emissivity of one.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:float"> <xs:minInclusive value="0"/> <xs:maxInclusive value="1"/> </xs:restriction> </xs:simpleType> </xs:element>

Element InsulationType / CoverageFraction

Namespace	No namespace
Annotations	The fraction of the insulated surface that is covered by insulation.
Diagram	
Type	restriction of xs:float
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 1 minInclusive 0
Source	<xs:element name="CoverageFraction" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>The fraction of the insulated surface that is covered by insulation.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:float"> <xs:minInclusive value="0"/> <xs:maxInclusive value="1"/> </xs:restriction> </xs:simpleType> </xs:element>

Element EnvelopeType / Ceiling

Namespace	No namespace

Diagram	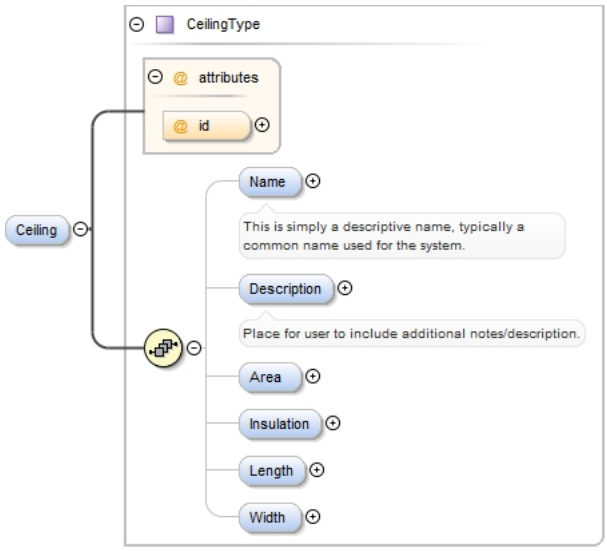
Type	CeilingType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Name{0,1} , Description{0,1} , Area{0,1} , Insulation{0,1} , Length{0,1} , Width{0,1}
Children	Area, Description, Insulation, Length, Name, Width

Instance	<pre><Ceiling id="">
	  <Name>{0,1}</Name>
	  <Description>{0,1}</Description>
	  <Area Unit="SquareMeters">{0,1}</Area>
	  <Insulation>{0,1}</Insulation>
	  <Length Unit="Meters">{0,1}</Length>
	  <Width Unit="Meters">{0,1}</Width>
	</Ceiling></pre>

Attributes	QName	Type	Fixed	Default	Use
	id	xs:IDREF			optional

Source	<pre><xs:element name="Ceiling" type="CeilingType" minOccurs="0" maxOccurs="unbounded"/></pre>

Element CeilingType / Name

Namespace	No namespace
Annotations	This is simply a descriptive name, typically a common name used for the system.
Diagram	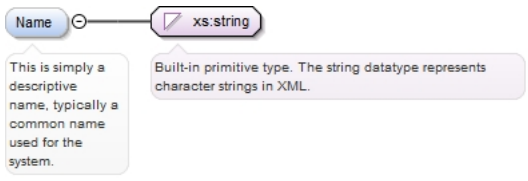
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source	<pre><xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">
	  <xs:annotation>
	  <xs:documentation>This is simply a descriptive name, typically a common name used for the system.</xs:documentation>
	  </xs:annotation>
	</xs:element></pre>

Element CeilingType / Description

Namespace	No namespace

Annotations	Place for user to include additional notes/description.
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element maxOccurs="1" minOccurs="0" name="Description" type="xs:string"> <xs:annotation> <xs:documentation>Place for user to include additional notes/description.</xs:documentation> </xs:annotation> </xs:element>

Element CeilingType / Area

Namespace	No namespace
Diagram	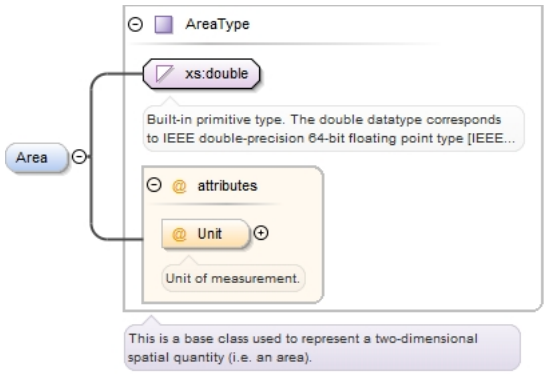
Type	AreaType
Properties	content: complex minOccurs: 0 maxOccurs: 1

Attributes

QName	Type	Fixed	Default	Use
Unit	AreaUnitEnumType		SquareMeters	optional
	Unit of measurement.			

Source

```
<xs:element name="Area" type="AreaType" minOccurs="0" maxOccurs="1"/>
```

Element CeilingType / Insulation

Namespace	No namespace

Diagram	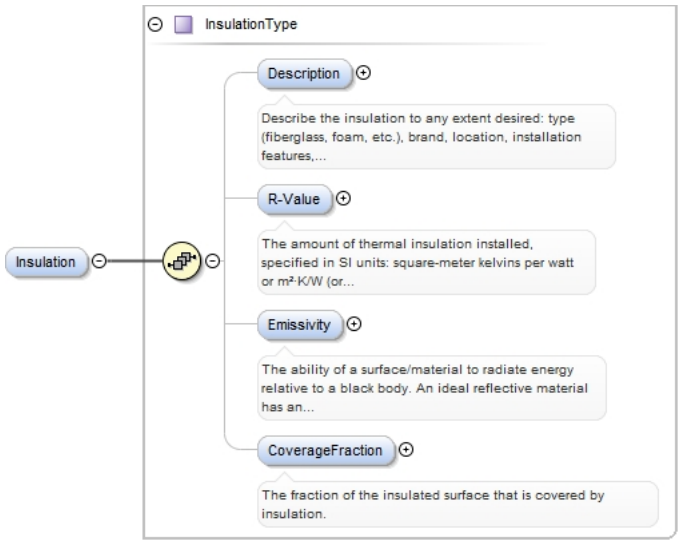
Type	InsulationType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	Description{0,1} , R-Value{0,1} , Emissivity{0,1} , CoverageFraction{0,1}
Children	CoverageFraction, Description, Emissivity, R-Value
Instance	<Insulation> <Description>{0,1}</Description> <R-Value>{0,1}</R-Value> <Emissivity>{0,1}</Emissivity> <CoverageFraction>{0,1}</CoverageFraction> </Insulation>
Source	<xs:element name="Insulation" type="InsulationType" minOccurs="0" maxOccurs="1"/>

Element CeilingType / Length

Namespace	No namespace
Diagram	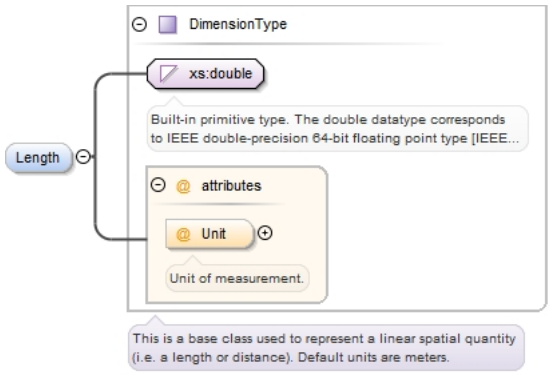
Type	DimensionType
Properties	content: complex minOccurs: 0 maxOccurs: 1

Attributes

QName	Type	Fixed	Default	Use
Unit	DimensionUnitEnumType		Meters	optional
	Unit of measurement.			

Source	<xs:element name="Length" type="DimensionType" minOccurs="0" maxOccurs="1"/>

Element CeilingType / Width

Namespace	No namespace
Diagram	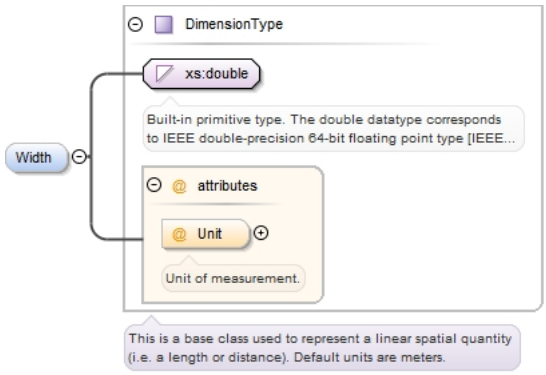
Type	DimensionType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **Unit** / DimensionUnitEnumType / / Meters / optional Unit of measurement.
Source	`<xs:element name="Width" type="DimensionType" minOccurs="0" maxOccurs="1"/>`

Element EnvelopeType / Door

Namespace	No namespace
Diagram	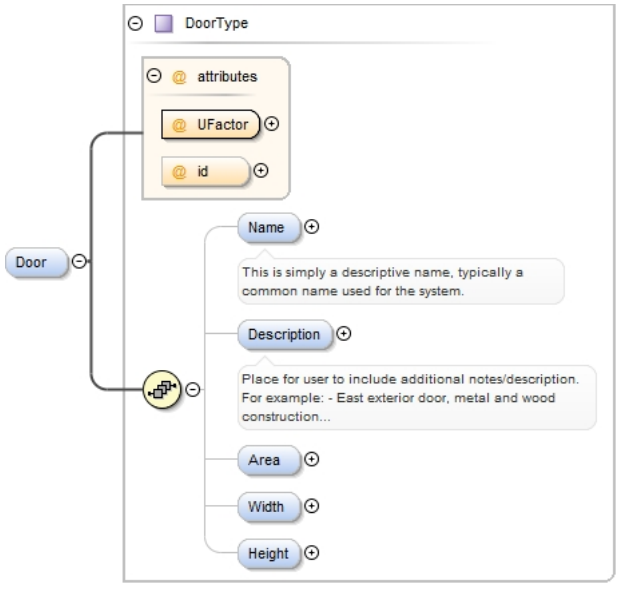
Type	DoorType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Name{0,1} , Description{0,1} , Area{0,1} , Width{0,1} , Height{0,1}
Children	Area, Description, Height, Name, Width

Instance	`<Door id="" UFactor="">`
	`  <Name>{0,1}</Name>`
	`  <Description>{0,1}</Description>`

```
  <Area Unit="SquareMeters">{0,1}</Area>
  <Width Unit="Meters">{0,1}</Width>
  <Height Unit="Meters">{0,1}</Height>
</Door>
```

Attributes

QName	Type	Fixed	Default	Use
UFactor	xs:double			required
id	xs:IDREF			optional

Source

```
<xs:element name="Door" type="DoorType" minOccurs="0" maxOccurs="unbounded"/>
```

Element DoorType / Name

Namespace	No namespace
Annotations	This is simply a descriptive name, typically a common name used for the system.
Diagram	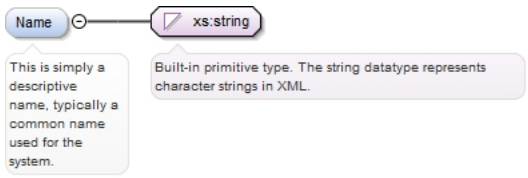
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source	`<xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>This is simply a descriptive name, typically a common name used for the system.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element DoorType / Description

Namespace	No namespace
Annotations	Place for user to include additional notes/description. For example: - East exterior door, metal and wood construction - Interior, upstairs bathroom door, wood construction
Diagram	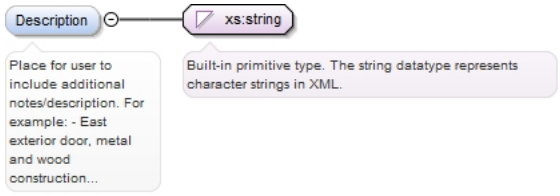
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source	`<xs:element maxOccurs="1" minOccurs="0" name="Description" type="xs:string">`
	`  <xs:annotation>`
	`  <xs:documentation>Place for user to include additional notes/description. For example: - East exterior door, metal and wood construction - Interior, upstairs bathroom door, wood construction</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element DoorType / Area

Namespace	No namespace

Diagram	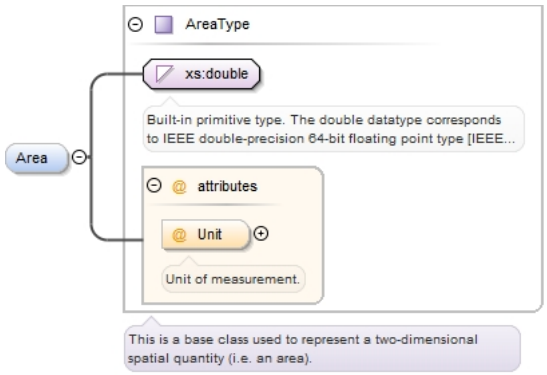
Type	AreaType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **Unit** / AreaUnitEnumType / / SquareMeters / optional Unit of measurement.
Source	`<xs:element name="Area" type="AreaType" minOccurs="0" maxOccurs="1"/>`

Element DoorType / Width

Namespace	No namespace
Diagram	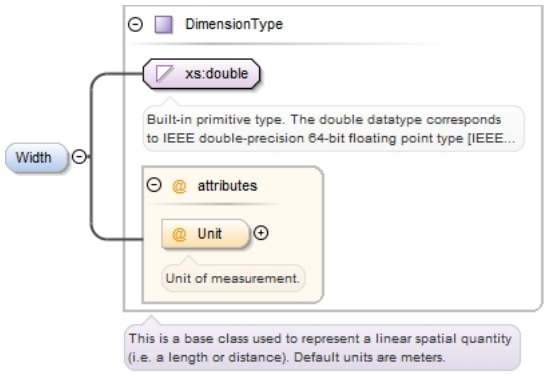
Type	DimensionType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **Unit** / DimensionUnitEnumType / / Meters / optional Unit of measurement.
Source	`<xs:element name="Width" type="DimensionType" minOccurs="0" maxOccurs="1"/>`

Element DoorType / Height

Namespace	No namespace

Diagram	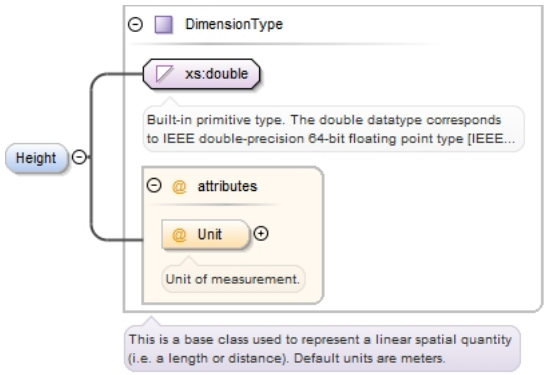
Type	DimensionType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **Unit** / DimensionUnitEnumType / / Meters / optional Unit of measurement.
Source	`<xs:element name="Height" type="DimensionType" minOccurs="0" maxOccurs="1"/>`

Element EnvelopeType / Fenestration

Namespace	No namespace
Annotations	This is also referred to as the Shading
Diagram	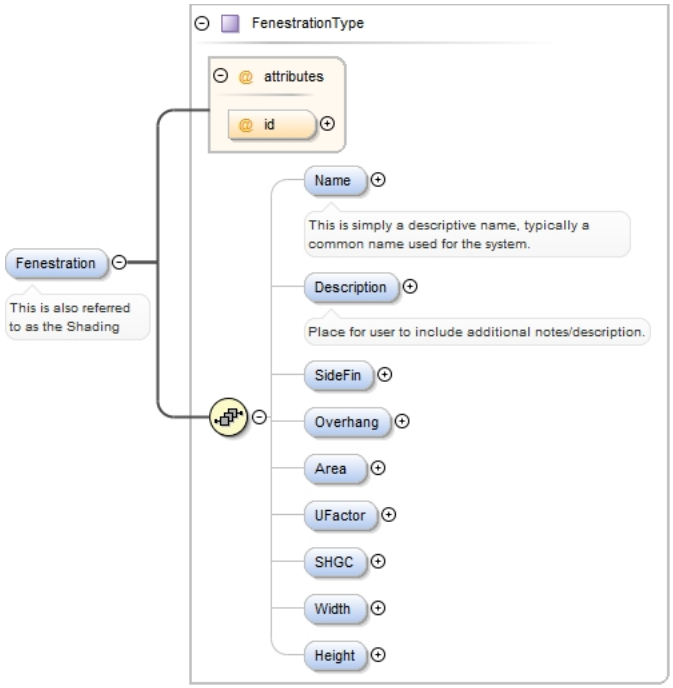
Type	FenestrationType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Name{0,1} , Description{0,1} , SideFin{0,1} , Overhang{0,1} , Area{0,1} , UFactor{0,1} , SHGC{0,1} , Width{0,1} , Height{0,1}
Children	Area, Description, Height, Name, Overhang, SHGC, SideFin, UFactor, Width
Instance	`<Fenestration id="">`

```
  <Name>{0,1}</Name>
  <Description>{0,1}</Description>
  <SideFin>{0,1}</SideFin>
  <Overhang>{0,1}</Overhang>
  <Area Unit="SquareMeters">{0,1}</Area>
  <UFactor>{0,1}</UFactor>
  <SHGC>{0,1}</SHGC>
  <Width Unit="Meters">{0,1}</Width>
  <Height Unit="Meters">{0,1}</Height>
</Fenestration>
```

Attributes

QName	Type	Fixed	Default	Use
id	xs:IDREF			optional

Source

```
<xs:element name="Fenestration" type="FenestrationType" minOccurs="0"
 maxOccurs="unbounded">
  <xs:annotation>
    <xs:documentation>This is also referred to as the Shading</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element FenestrationType / Name

Namespace: No namespace

Annotations: This is simply a descriptive name, typically a common name used for the system.

Diagram

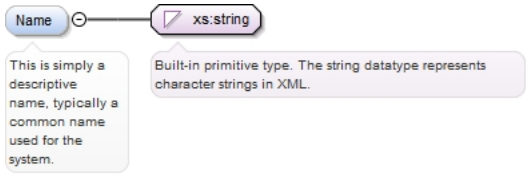

Type: xs:string

Properties

content:	simple
minOccurs:	0
maxOccurs:	1

Source

```
<xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>This is simply a descriptive name, typically a common name used for
 the system.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element FenestrationType / Description

Namespace: No namespace

Annotations: Place for user to include additional notes/description.

Diagram

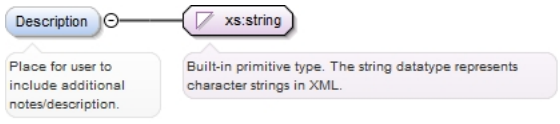

Type: xs:string

Properties

content:	simple
minOccurs:	0
maxOccurs:	1

Source

```
<xs:element maxOccurs="1" minOccurs="0" name="Description" type="xs:string">
  <xs:annotation>
    <xs:documentation>Place for user to include additional notes/description.</
xs:documentation>
  </xs:annotation>
</xs:element>
```

Element FenestrationType / SideFin

Namespace: No namespace

Diagram	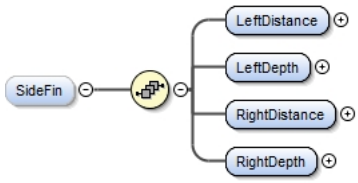
Properties	content: complex minOccurs: 0
Model	LeftDistance , LeftDepth , RightDistance , RightDepth
Children	LeftDepth, LeftDistance, RightDepth, RightDistance

Instance	`<SideFin>`
	`  <LeftDistance Unit="Meters">{1,1}</LeftDistance>`
	`  <LeftDepth Unit="Meters">{1,1}</LeftDepth>`
	`  <RightDistance Unit="Meters">{1,1}</RightDistance>`
	`  <RightDepth Unit="Meters">{1,1}</RightDepth>`
	`</SideFin>`

Source	`<xs:element name="SideFin" minOccurs="0">`
	`  <xs:complexType>`
	`  <xs:sequence>`
	`  <xs:element name="LeftDistance" type="DimensionType"/>`
	`  <xs:element name="LeftDepth" type="DimensionType"/>`
	`  <xs:element name="RightDistance" type="DimensionType"/>`
	`  <xs:element name="RightDepth" type="DimensionType"/>`
	`  </xs:sequence>`
	`  </xs:complexType>`
	`</xs:element>`

Element FenestrationType / SideFin / LeftDistance

Namespace	No namespace
Diagram	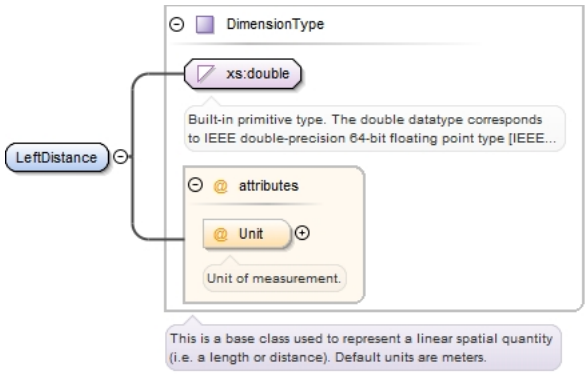
Type	DimensionType
Properties	content: complex

Attributes

QName	Type	Fixed	Default	Use
Unit	DimensionUnitEnumType		Meters	optional
	Unit of measurement.			

Source

```
<xs:element name="LeftDistance" type="DimensionType"/>
```

Element FenestrationType / SideFin / LeftDepth

Namespace	No namespace

Diagram	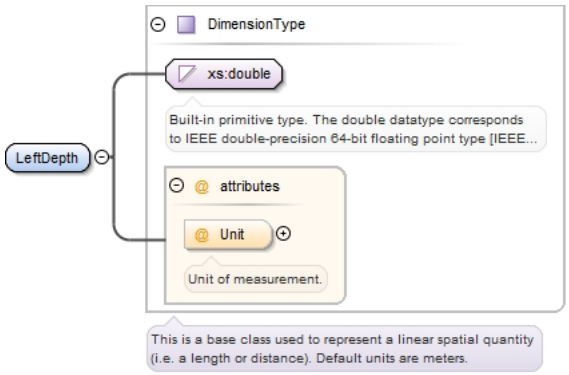
Type	DimensionType
Properties	content: complex
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **Unit** / DimensionUnitEnumType / / Meters / optional Unit of measurement.
Source	`<xs:element name="LeftDepth" type="DimensionType"/>`

Element FenestrationType / SideFin / RightDistance

Namespace	No namespace
Diagram	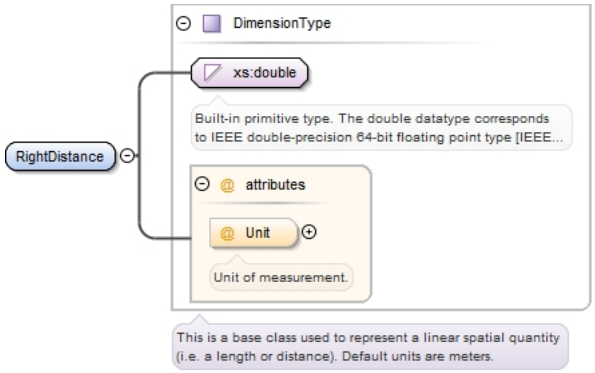
Type	DimensionType
Properties	content: complex
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **Unit** / DimensionUnitEnumType / / Meters / optional Unit of measurement.
Source	`<xs:element name="RightDistance" type="DimensionType"/>`

Element FenestrationType / SideFin / RightDepth

Namespace	No namespace

Diagram	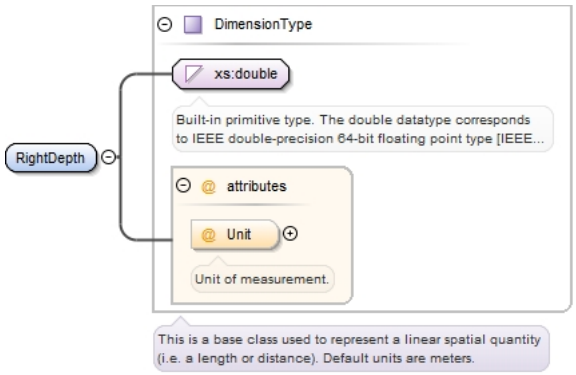
Type	DimensionType
Properties	content: complex
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **Unit** / DimensionUnitEnumType / / Meters / optional Unit of measurement.
Source	`<xs:element name="RightDepth" type="DimensionType"/>`

Element FenestrationType / Overhang

Namespace	No namespace
Diagram	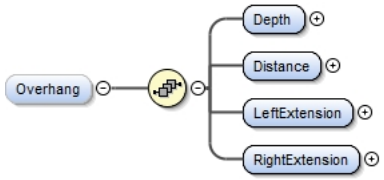
Properties	content: complex minOccurs: 0
Model	Depth , Distance , LeftExtension , RightExtension
Children	Depth, Distance, LeftExtension, RightExtension

Instance	`<Overhang>`
	`  <Depth Unit="Meters">{1,1}</Depth>`
	`  <Distance Unit="Meters">{1,1}</Distance>`
	`  <LeftExtension Unit="Meters">{1,1}</LeftExtension>`
	`  <RightExtension Unit="Meters">{1,1}</RightExtension>`
	`</Overhang>`

Source	`<xs:element name="Overhang" minOccurs="0">`
	`  <xs:complexType>`
	`  <xs:sequence>`
	`  <xs:element name="Depth" type="DimensionType"/>`
	`  <xs:element name="Distance" type="DimensionType"/>`
	`  <xs:element name="LeftExtension" type="DimensionType"/>`
	`  <xs:element name="RightExtension" type="DimensionType"/>`
	`  </xs:sequence>`
	`  </xs:complexType>`
	`</xs:element>`

Element FenestrationType / Overhang / Depth

Namespace	No namespace

Diagram	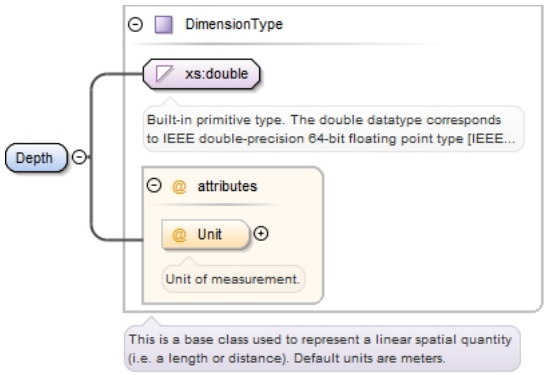
Type	DimensionType
Properties	content: complex
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **Unit** / DimensionUnitEnumType / / Meters / optional Unit of measurement.
Source	`<xs:element name="Depth" type="DimensionType"/>`

Element FenestrationType / Overhang / Distance

Namespace	No namespace
Diagram	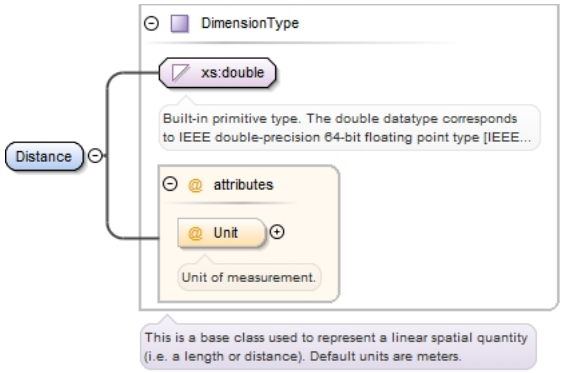
Type	DimensionType
Properties	content: complex
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **Unit** / DimensionUnitEnumType / / Meters / optional Unit of measurement.
Source	`<xs:element name="Distance" type="DimensionType"/>`

Element FenestrationType / Overhang / LeftExtension

Namespace	No namespace

Diagram	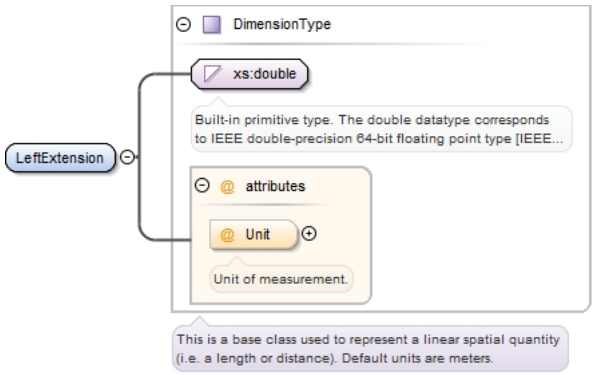
Type	DimensionType
Properties	content: complex
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **Unit** / DimensionUnitEnumType / / Meters / optional Unit of measurement.
Source	`<xs:element name="LeftExtension" type="DimensionType"/>`

Element FenestrationType / Overhang / RightExtension

Namespace	No namespace
Diagram	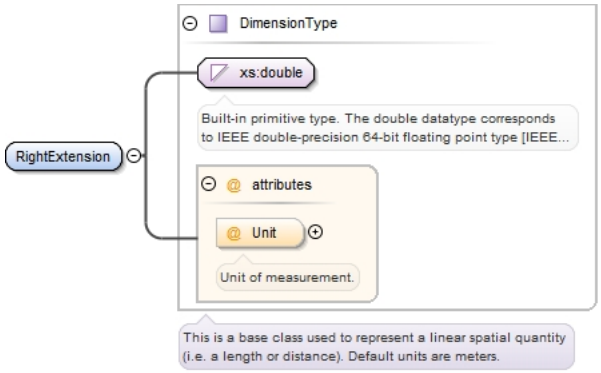
Type	DimensionType
Properties	content: complex
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **Unit** / DimensionUnitEnumType / / Meters / optional Unit of measurement.
Source	`<xs:element name="RightExtension" type="DimensionType"/>`

Element FenestrationType / Area

Namespace	No namespace

Diagram	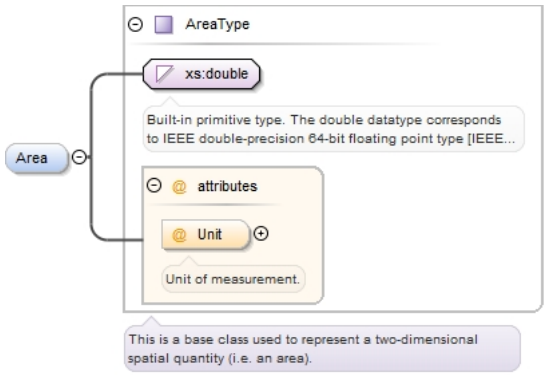
Type	AreaType
Properties	content: complex minOccurs: 0
Attributes	**QName** | **Type** | **Fixed** | **Default** | **Use** **Unit** | AreaUnitEnumType | | SquareMeters | optional Unit of measurement.
Source	`<xs:element name="Area" type="AreaType" minOccurs="0"/>`

Element FenestrationType / UFactor

Namespace	No namespace
Diagram	
Type	xs:double
Properties	content: simple minOccurs: 0
Source	`<xs:element name="UFactor" type="xs:double" minOccurs="0"/>`

Element FenestrationType / SHGC

Namespace	No namespace
Diagram	
Type	xs:double
Properties	content: simple minOccurs: 0
Source	`<xs:element name="SHGC" type="xs:double" minOccurs="0"/>`

Element FenestrationType / Width

Namespace	No namespace

Diagram	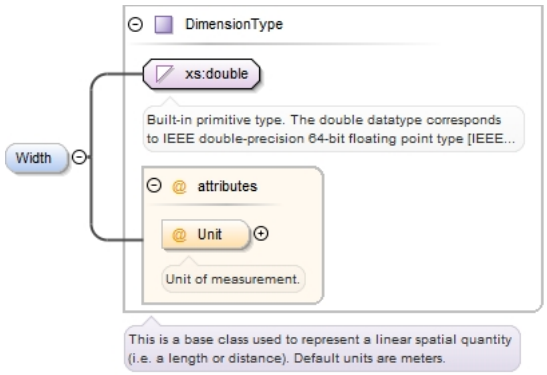
Type	DimensionType
Properties	content: complex minOccurs: 0
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **Unit** / DimensionUnitEnumType / / Meters / optional Unit of measurement.
Source	`<xs:element name="Width" type="DimensionType" minOccurs="0"/>`

Element FenestrationType / Height

Namespace	No namespace
Diagram	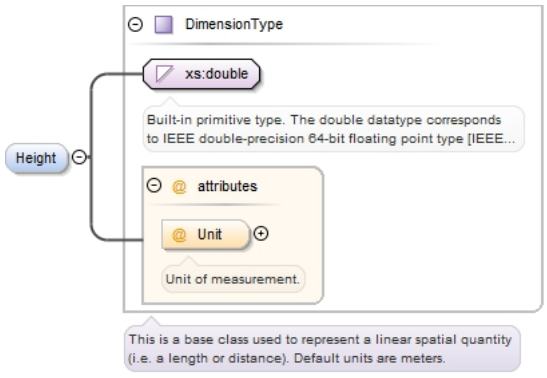
Type	DimensionType
Properties	content: complex minOccurs: 0
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **Unit** / DimensionUnitEnumType / / Meters / optional Unit of measurement.
Source	`<xs:element name="Height" type="DimensionType" minOccurs="0"/>`

Element EnvelopeType / Foundation

Namespace	No namespace

Diagram	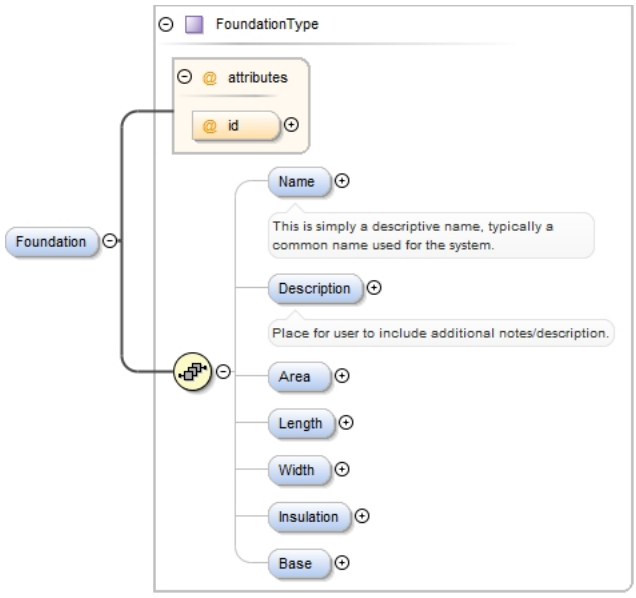
Type	FoundationType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Name{0,1} , Description{0,1} , Area{0,1} , Length{0,1} , Width{0,1} , Insulation{0,1} , Base{0,1}
Children	Area, Base, Description, Insulation, Length, Name, Width
Instance	<Foundation id=""> <Name>{0,1}</Name> <Description>{0,1}</Description> <Area Unit="SquareMeters">{0,1}</Area> <Length Unit="Meters">{0,1}</Length> <Width Unit="Meters">{0,1}</Width> <Insulation>{0,1}</Insulation> <Base>{0,1}</Base> </Foundation>
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **id** / xs:IDREF / / / optional
Source	<xs:element name="Foundation" type="FoundationType" minOccurs="0" maxOccurs="unbounded"/>

Element FoundationType / Name

Namespace	No namespace
Annotations	This is simply a descriptive name, typically a common name used for the system.
Diagram	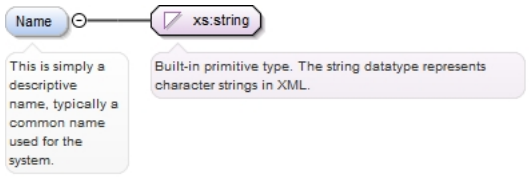
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This is simply a descriptive name, typically a common name used for the system.</xs:documentation> </xs:annotation> </xs:element>

Element FoundationType / Description

Namespace	No namespace
Annotations	Place for user to include additional notes/description.
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element maxOccurs="1" minOccurs="0" name="Description" type="xs:string"> <xs:annotation> <xs:documentation>Place for user to include additional notes/description.</xs:documentation> </xs:annotation> </xs:element>

Element FoundationType / Area

Namespace	No namespace
Diagram	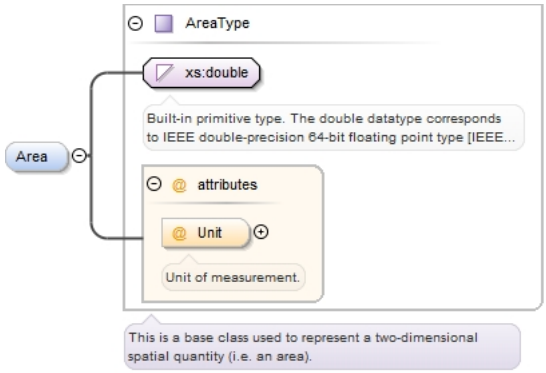
Type	AreaType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Attributes	QName: Unit; Type: AreaUnitEnumType; Fixed: ; Default: SquareMeters; Use: optional Unit of measurement.
Source	<xs:element name="Area" type="AreaType" minOccurs="0" maxOccurs="1"/>

Element FoundationType / Length

Namespace	No namespace

Diagram	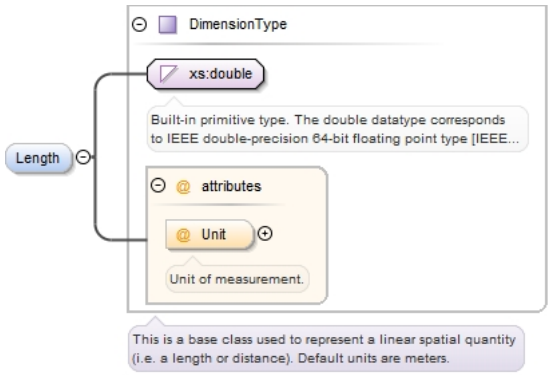
Type	DimensionType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **Unit** / DimensionUnitEnumType / / Meters / optional Unit of measurement.
Source	`<xs:element name="Length" type="DimensionType" minOccurs="0" maxOccurs="1"/>`

Element FoundationType / Width

Namespace	No namespace
Diagram	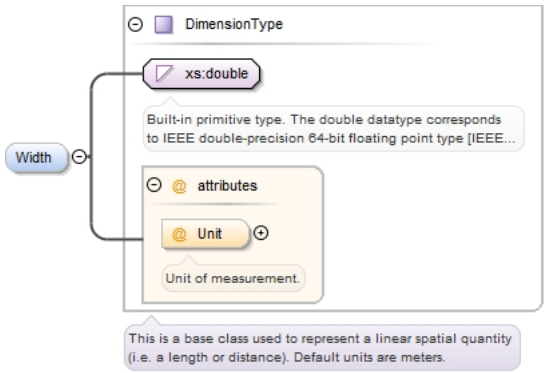
Type	DimensionType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **Unit** / DimensionUnitEnumType / / Meters / optional Unit of measurement.
Source	`<xs:element name="Width" type="DimensionType" minOccurs="0" maxOccurs="1"/>`

Element FoundationType / Insulation

Namespace	No namespace

Diagram	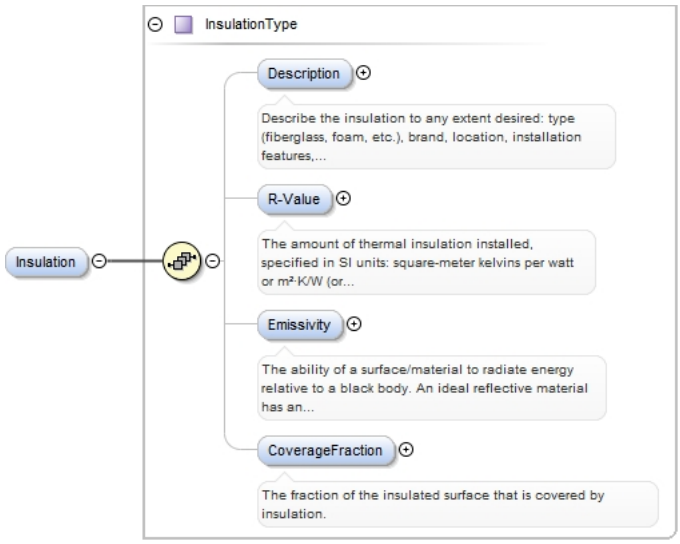
Type	InsulationType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	Description{0,1} , R-Value{0,1} , Emissivity{0,1} , CoverageFraction{0,1}
Children	CoverageFraction, Description, Emissivity, R-Value
Instance	<Insulation> <Description>{0,1}</Description> <R-Value>{0,1}</R-Value> <Emissivity>{0,1}</Emissivity> <CoverageFraction>{0,1}</CoverageFraction> </Insulation>
Source	<xs:element name="Insulation" type="InsulationType" minOccurs="0" maxOccurs="1"/>

Element FoundationType / Base

Namespace	No namespace
Diagram	
Type	FoundationBaseEnumType
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	enumeration: Crawlspace enumeration: Finished Basement enumeration: Unfinished Basement enumeration: SlabOnGrade enumeration: Raised Floor
Source	<xs:element name="Base" type="FoundationBaseEnumType" minOccurs="0" maxOccurs="1"/>

Element EnvelopeType / Garage

Namespace	No namespace

Diagram	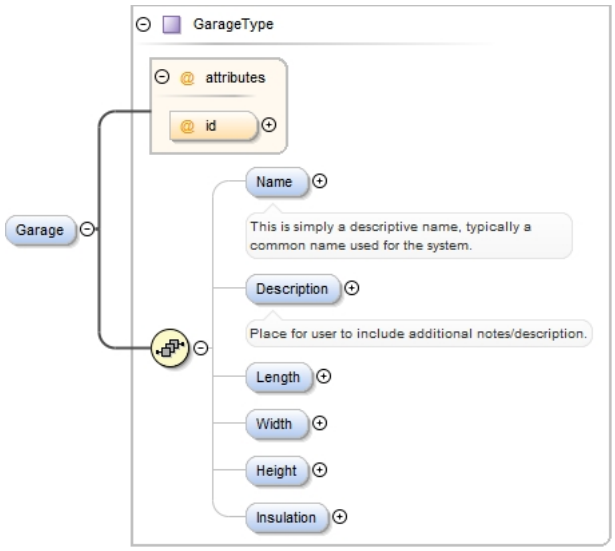
Type	GarageType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Name{0,1} , Description{0,1} , Length{0,1} , Width{0,1} , Height{0,1} , Insulation{0,1}
Children	Description, Height, Insulation, Length, Name, Width
Instance	<Garage id=""> <Name>{0,1}</Name> <Description>{0,1}</Description> <Length Unit="Meters">{0,1}</Length> <Width Unit="Meters">{0,1}</Width> <Height Unit="Meters">{0,1}</Height> <Insulation>{0,1}</Insulation> </Garage>

Attributes	QName	Type	Fixed	Default	Use
	id	xs:IDREF			optional

Source

```
<xs:element name="Garage" type="GarageType" minOccurs="0" maxOccurs="unbounded"/>
```

Element GarageType / Name

Namespace	No namespace
Annotations	This is simply a descriptive name, typically a common name used for the system.
Diagram	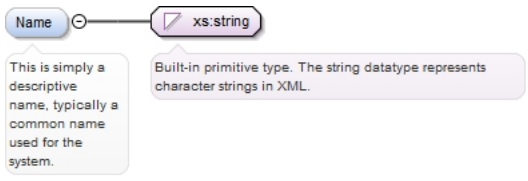
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source

```
<xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>This is simply a descriptive name, typically a common name used for
 the system.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element GarageType / Description

Namespace	No namespace

Annotations	Place for user to include additional notes/description.
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element maxOccurs="1" minOccurs="0" name="Description" type="xs:string"> <xs:annotation> <xs:documentation>Place for user to include additional notes/description.</xs:documentation> </xs:annotation> </xs:element>

Element GarageType / Length

Namespace	No namespace
Diagram	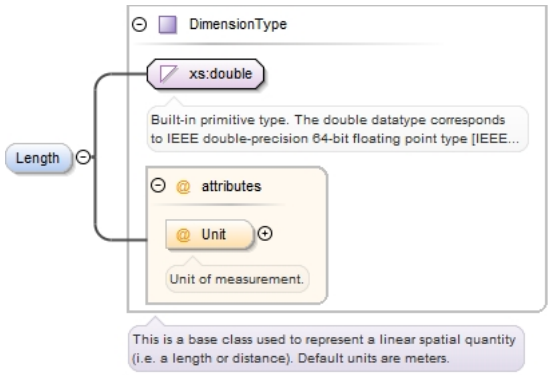
Type	DimensionType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Attributes	**QName** / **Unit**: **Type** DimensionUnitEnumType; **Fixed**; **Default** Meters; **Use** optional Unit of measurement.
Source	<xs:element name="Length" type="DimensionType" minOccurs="0" maxOccurs="1"/>

Element GarageType / Width

Namespace	No namespace
Diagram	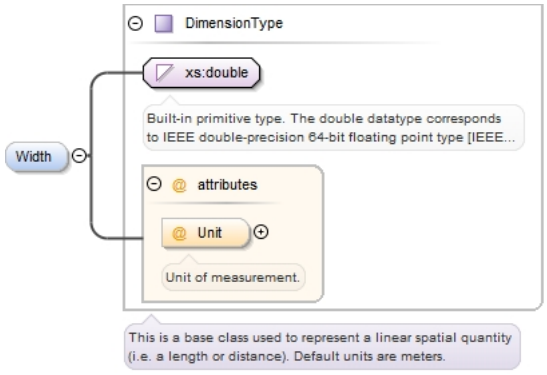
Type	DimensionType

Properties	content:	complex			
	minOccurs:	0			
	maxOccurs:	1			
Attributes	**QName**	**Type**	**Fixed**	**Default**	**Use**
	Unit	DimensionUnitEnumType		Meters	optional
		Unit of measurement.			
Source	<xs:element name="Width" type="DimensionType" minOccurs="0" maxOccurs="1"/>				

Element GarageType / Height

Namespace	No namespace
Diagram	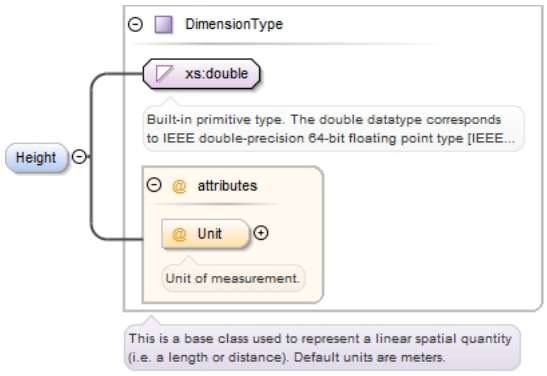
Type	DimensionType

Properties	content:	complex			
	minOccurs:	0			
	maxOccurs:	1			
Attributes	**QName**	**Type**	**Fixed**	**Default**	**Use**
	Unit	DimensionUnitEnumType		Meters	optional
		Unit of measurement.			
Source	<xs:element name="Height" type="DimensionType" minOccurs="0" maxOccurs="1"/>				

Element GarageType / Insulation

Namespace	No namespace
Diagram	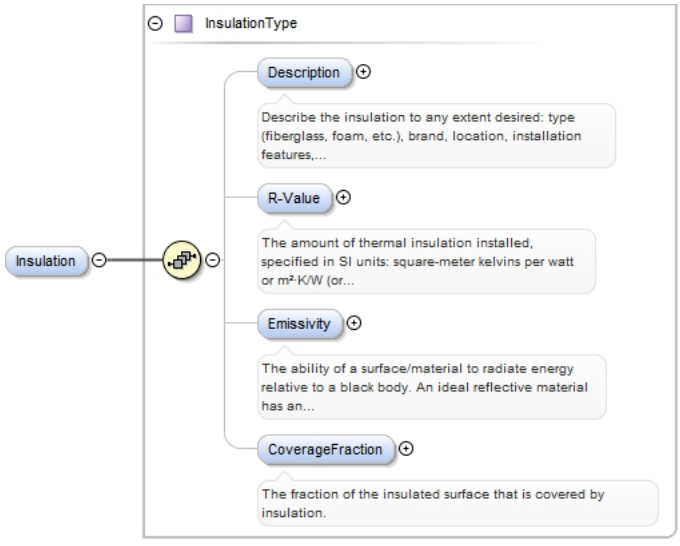
Type	InsulationType

Properties	content:	complex

	minOccurs: 0 maxOccurs: 1
Model	Description{0,1} , R-Value{0,1} , Emissivity{0,1} , CoverageFraction{0,1}
Children	CoverageFraction, Description, Emissivity, R-Value
Instance	<Insulation> <Description>{0,1}</Description> <R-Value>{0,1}</R-Value> <Emissivity>{0,1}</Emissivity> <CoverageFraction>{0,1}</CoverageFraction> </Insulation>
Source	<xs:element name="Insulation" type="InsulationType" minOccurs="0" maxOccurs="1"/>

Element EnvelopeType / Roof

Namespace	No namespace

Diagram	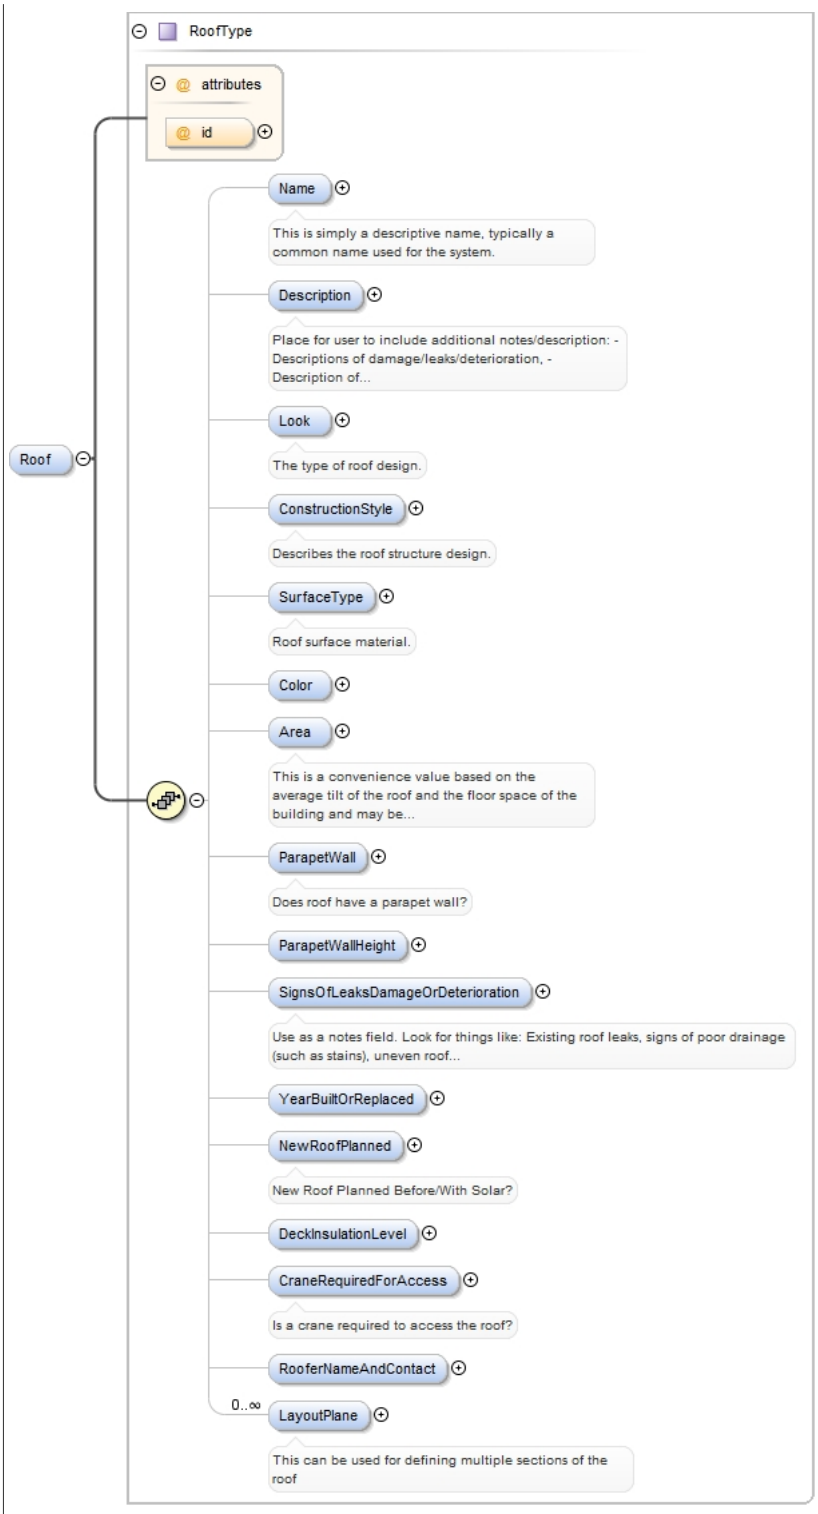
Type	RoofType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Name{0,1} , Description{0,1} , Look{0,1} , ConstructionStyle{0,1} , SurfaceType{0,1} , Color{0,1} , Area{0,1} , ParapetWall{0,1} , ParapetWallHeight{0,1} , SignsOfLeaksDamageOrDeterioration{0,1} , YearBuiltOrReplaced{0,1} , NewRoofPlanned{0,1} , DeckInsulationLevel{0,1} , CraneRequiredForAccess{0,1} , RooferNameAndContact{0,1} , LayoutPlane*

Children	Area, Color, ConstructionStyle, CraneRequiredForAccess, DeckInsulationLevel, Description, LayoutPlane, Look, Name, NewRoofPlanned, ParapetWall, ParapetWallHeight, RooferNameAndContact, SignsOfLeaksDamageOrDeterioration, SurfaceType, YearBuiltOrReplaced
Instance	<Roof id=""> <Name>{0,1}</Name> <Description>{0,1}</Description> <Look>{0,1}</Look> <ConstructionStyle>{0,1}</ConstructionStyle> <SurfaceType>{0,1}</SurfaceType> <Color>{0,1}</Color> <Area Unit="SquareMeters">{0,1}</Area> <ParapetWall>{0,1}</ParapetWall> <ParapetWallHeight Unit="Meters">{0,1}</ParapetWallHeight> <SignsOfLeaksDamageOrDeterioration>{0,1}</SignsOfLeaksDamageOrDeterioration> <YearBuiltOrReplaced>{0,1}</YearBuiltOrReplaced> <NewRoofPlanned>{0,1}</NewRoofPlanned> <DeckInsulationLevel>{0,1}</DeckInsulationLevel> <CraneRequiredForAccess>{0,1}</CraneRequiredForAccess> <RooferNameAndContact>{0,1}</RooferNameAndContact> <LayoutPlane id="">{0,unbounded}</LayoutPlane> </Roof>
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **id** / xs:IDREF / / / optional
Source	<xs:element name="Roof" type="RoofType" minOccurs="0" maxOccurs="unbounded"/>

Element RoofType / Name

Namespace	No namespace
Annotations	This is simply a descriptive name, typically a common name used for the system.
Diagram	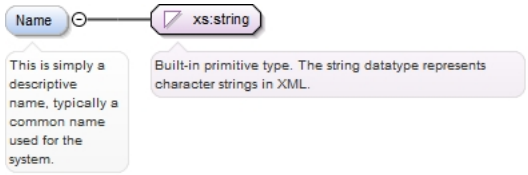
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This is simply a descriptive name, typically a common name used for the system.</xs:documentation> </xs:annotation> </xs:element>

Element RoofType / Description

Namespace	No namespace
Annotations	Place for user to include additional notes/description: - Descriptions of damage/leaks/deterioration, - Description of access requirements to chillers / air handlers / etc. - Was the customer told of their options if solar will outlive roof? - Attic accessibility - special requirements? Crane? Key?
Diagram	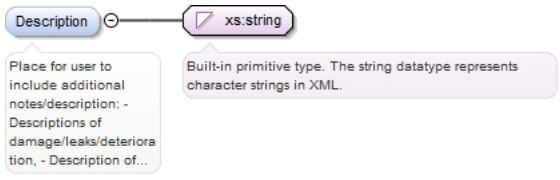
Type	xs:string
Properties	content: simple

	minOccurs:	0
	maxOccurs:	1
Source	<xs:element maxOccurs="1" minOccurs="0" name="Description" type="xs:string"> <xs:annotation> <xs:documentation>Place for user to include additional notes/description: - Descriptions of damage/leaks/deterioration, - Description of access requirements to chillers / air handlers / etc. - Was the customer told of their options if solar will outlive roof? - Attic accessibility - special requirements? Crane? Key?</xs:documentation> </xs:annotation> </xs:element>	

Element RoofType / Look

Namespace	No namespace	
Annotations	The type of roof design.	
Diagram		
Type	RoofLookEnumType	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	enumeration	Butterfly
	enumeration	Combination
	enumeration	Flat
	enumeration	Gable
	enumeration	Gambrel
	enumeration	Hip
	enumeration	Mansard
	enumeration	Shed
Source	<xs:element name="Look" type="RoofLookEnumType" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>The type of roof design.</xs:documentation> </xs:annotation> </xs:element>	

Element RoofType / ConstructionStyle

Namespace	No namespace	
Annotations	Describes the roof structure design.	
Diagram		
Type	RoofConstructionEnumType	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	enumeration	beams and purlins
	enumeration	rafters with attic
	enumeration	truss with attic
	enumeration	vaulted 2x
	enumeration	vaulted beams
Source	<xs:element name="ConstructionStyle" type="RoofConstructionEnumType" minOccurs="0" maxOccurs="1">	

```
  <xs:annotation>
    <xs:documentation>Describes the roof structure design.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element RoofType / SurfaceType

Namespace	No namespace
Annotations	Roof surface material.
Diagram	
Type	RoofSurfaceEnumType
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	enumeration: CalPac metal enumeration: composition roll enumeration: composition shingle enumeration: foam enumeration: heavy concrete tile enumeration: high-definition comp shingle enumeration: light weight concrete tile enumeration: single-ply membrane enumeration: slate enumeration: spanish barrel tile enumeration: standing seam metal enumeration: tar & gravel enumeration: wood shake

Source	`<xs:element name="SurfaceType" type="RoofSurfaceEnumType" minOccurs="0" maxOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>Roof surface material.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element RoofType / Color

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="Color" type="xs:string" minOccurs="0" maxOccurs="1"/>`

Element RoofType / Area

Namespace	No namespace
Annotations	This is a convenience value based on the average tilt of the roof and the floor space of the building and may be overridden by the LayoutPlane dimensions

Diagram	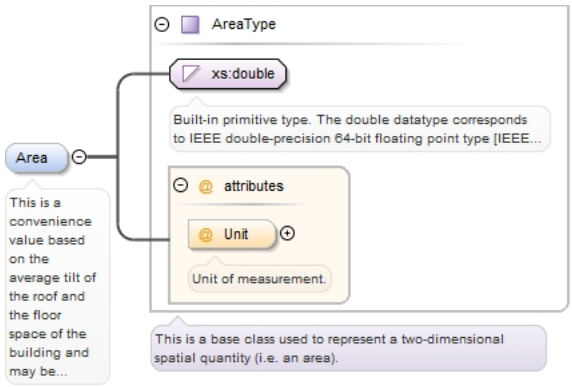
Type	AreaType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **Unit** / AreaUnitEnumType / / SquareMeters / optional Unit of measurement.

Source	`<xs:element name="Area" type="AreaType" minOccurs="0" maxOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>This is a convenience value based on the average tilt of the roof and the floor space of the building and may be overridden by the LayoutPlane dimensions</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element RoofType / ParapetWall

Namespace	No namespace
Annotations	Does roof have a parapet wall?
Diagram	
Type	xs:boolean
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source	`<xs:element name="ParapetWall" type="xs:boolean" minOccurs="0" maxOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>Does roof have a parapet wall?</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element RoofType / ParapetWallHeight

Namespace	No namespace

Diagram	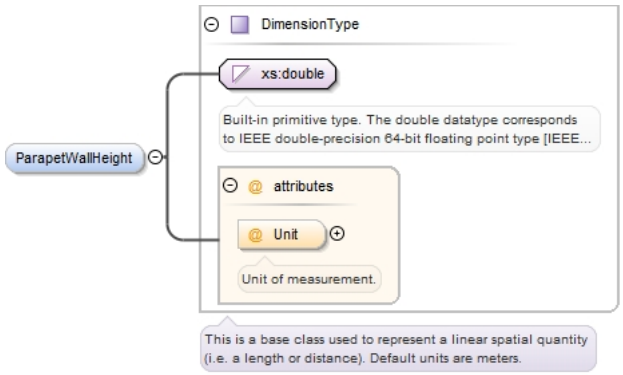
Type	DimensionType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **Unit** / DimensionUnitEnumType / / Meters / optional Unit of measurement.
Source	`<xs:element name="ParapetWallHeight" type="DimensionType" minOccurs="0" maxOccurs="1"/>`

Element RoofType / SignsOfLeaksDamageOrDeterioration

Namespace	No namespace
Annotations	Use as a notes field. Look for things like: Existing roof leaks, signs of poor drainage (such as stains), uneven roof decks, etc
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source	`<xs:element name="SignsOfLeaksDamageOrDeterioration" type="xs:string" minOccurs="0" maxOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>Use as a notes field. Look for things like: Existing roof leaks, signs of poor drainage (such as stains), uneven roof decks, etc</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element RoofType / YearBuiltOrReplaced

Namespace	No namespace
Diagram	
Type	restriction of xs:int
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minInclusive 0

Source	`<xs:element name="YearBuiltOrReplaced" minOccurs="0" maxOccurs="1">`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:int">`
	`  <xs:minInclusive value="0"/>`
	`  </xs:restriction>`

```
  </xs:simpleType>
</xs:element>
```

Element RoofType / NewRoofPlanned

Namespace	No namespace
Annotations	New Roof Planned Before/With Solar?
Diagram	
Type	xs:boolean
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="NewRoofPlanned" type="xs:boolean" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>New Roof Planned Before/With Solar?</xs:documentation> </xs:annotation> </xs:element>

Element RoofType / DeckInsulationLevel

Namespace	No namespace
Diagram	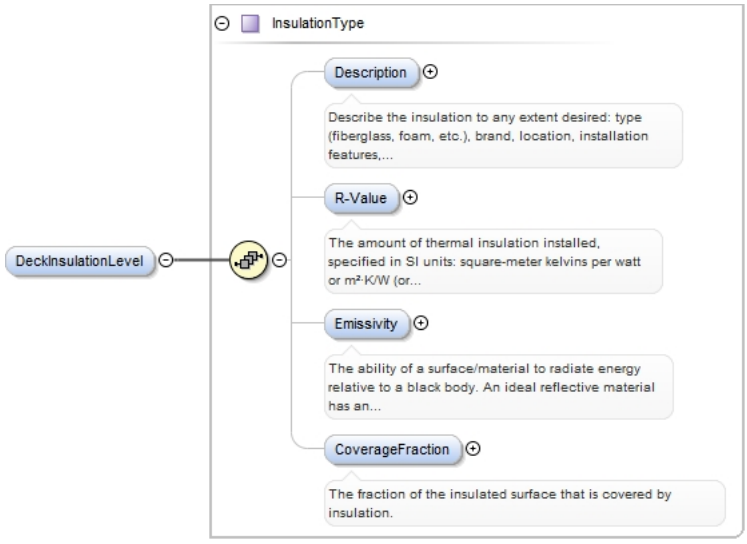
Type	InsulationType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	Description{0,1} , R-Value{0,1} , Emissivity{0,1} , CoverageFraction{0,1}
Children	CoverageFraction, Description, Emissivity, R-Value
Instance	<DeckInsulationLevel> <Description>{0,1}</Description> <R-Value>{0,1}</R-Value> <Emissivity>{0,1}</Emissivity> <CoverageFraction>{0,1}</CoverageFraction> </DeckInsulationLevel>
Source	<xs:element name="DeckInsulationLevel" type="InsulationType" minOccurs="0" maxOccurs="1"/>

Element RoofType / CraneRequiredForAccess

Namespace	No namespace
Annotations	Is a crane required to access the roof?

Diagram	
Type	xs:boolean
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source	`<xs:element name="CraneRequiredForAccess" type="xs:boolean" minOccurs="0" maxOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>Is a crane required to access the roof?</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element RoofType / RooferNameAndContact

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="RooferNameAndContact" type="xs:string" minOccurs="0" maxOccurs="1"/>`

Element RoofType / LayoutPlane

Namespace	No namespace
Annotations	This can be used for defining multiple sections of the roof

Diagram	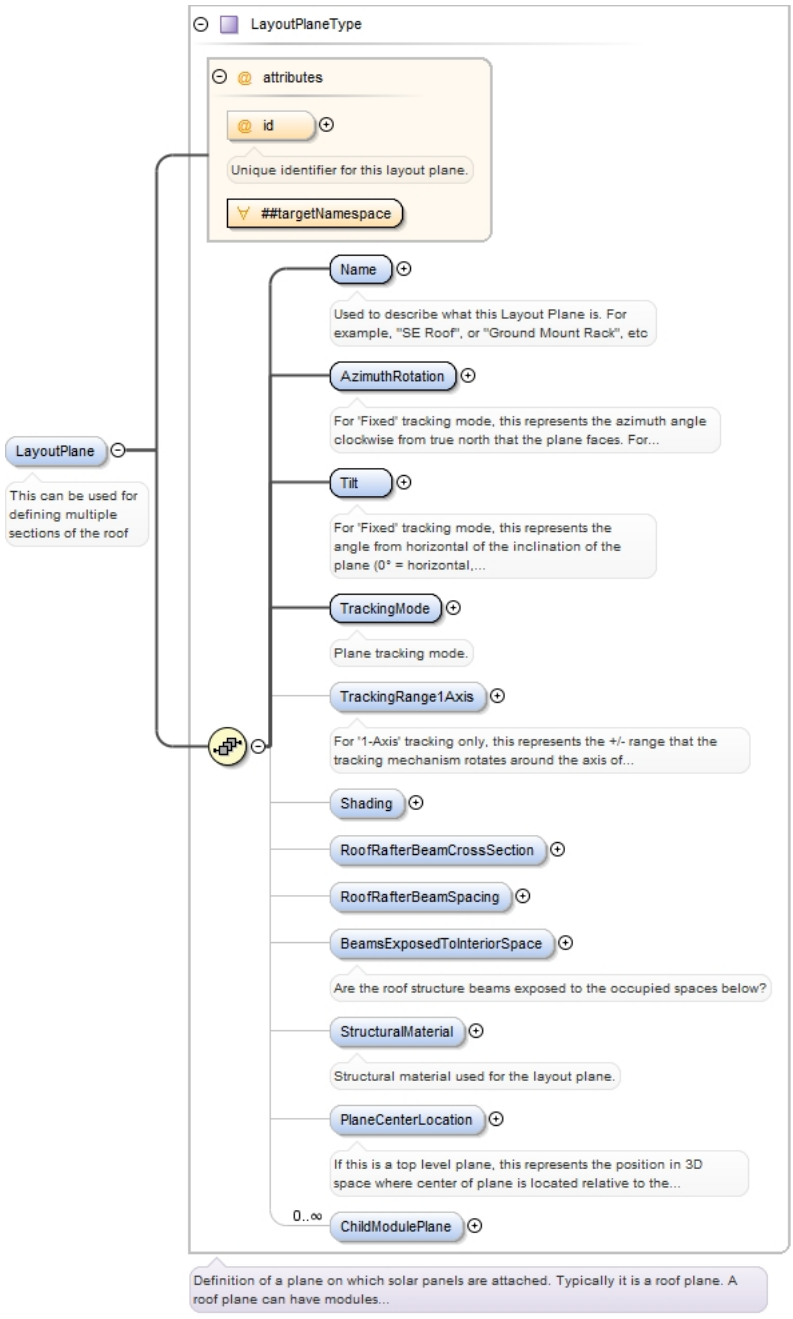
Type	LayoutPlaneType
Properties	content: `complex` minOccurs: `0` maxOccurs: `unbounded`
Model	Name , AzimuthRotation , Tilt , TrackingMode , TrackingRange1Axis{0,1} , Shading{0,1} , RoofRafterBeamCrossSection{0,1} , RoofRafterBeamSpacing{0,1} , BeamsExposedToInteriorSpace{0,1} , StructuralMaterial{0,1} , PlaneCenterLocation{0,1} , ChildModulePlane*
Children	AzimuthRotation, BeamsExposedToInteriorSpace, ChildModulePlane, Name, PlaneCenterLocation, RoofRafterBeamCrossSection, RoofRafterBeamSpacing, Shading, StructuralMaterial, Tilt, TrackingMode, TrackingRange1Axis

`Instance`	`<LayoutPlane id="" xmlns="http://www.iepmodel.net">`
	`  <Name>{1,1}</Name>`
	`  <AzimuthRotation>{1,1}</AzimuthRotation>`
	`  <Tilt>{1,1}</Tilt>`
	`  <TrackingMode>{1,1}</TrackingMode>`
	`  <TrackingRange1Axis>{0,1}</TrackingRange1Axis>`
	`  <Shading>{0,1}</Shading>`
	`  <RoofRafterBeamCrossSection>{0,1}</RoofRafterBeamCrossSection>`

```
  <RoofRafterBeamSpacing>{0,1}</RoofRafterBeamSpacing>
  <BeamsExposedToInteriorSpace>{0,1}</BeamsExposedToInteriorSpace>
  <StructuralMaterial>{0,1}</StructuralMaterial>
  <PlaneCenterLocation>{0,1}</PlaneCenterLocation>
  <ChildModulePlane id="">{0,unbounded}</ChildModulePlane>
</LayoutPlane>
```

Attributes

QName	Type	Fixed	Default	Use
ANY attribute from TARGET namespace 'http://www.iepmodel.net'				
id	xs:ID			optional
	Unique identifier for this layout plane.			

Source

```
<xs:element name="LayoutPlane" type="LayoutPlaneType" minOccurs="0" maxOccurs="unbounded">
  <xs:annotation>
    <xs:documentation>This can be used for defining multiple sections of the roof</
xs:documentation>
  </xs:annotation>
</xs:element>
```

Element EnvelopeType / Wall

Namespace	No namespace
Diagram	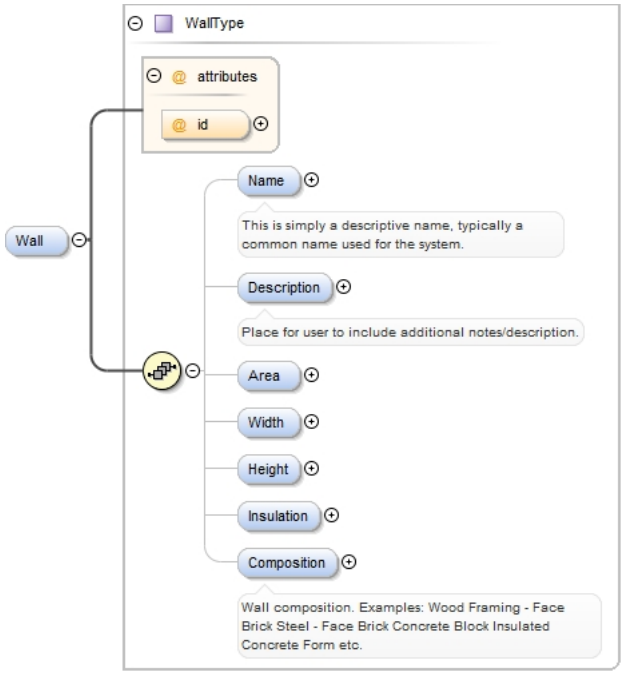
Type	WallType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Name{0,1} , Description{0,1} , Area{0,1} , Width{0,1} , Height{0,1} , Insulation{0,1} , Composition{0,1}
Children	Area, Composition, Description, Height, Insulation, Name, Width

Instance

```
<Wall id="">
  <Name>{0,1}</Name>
  <Description>{0,1}</Description>
  <Area Unit="SquareMeters">{0,1}</Area>
  <Width Unit="Meters">{0,1}</Width>
  <Height Unit="Meters">{0,1}</Height>
  <Insulation>{0,1}</Insulation>
  <Composition>{0,1}</Composition>
</Wall>
```

Attributes

QName	Type	Fixed	Default	Use
id	xs:IDREF			optional

Source	<xs:element name="Wall" type="WallType" minOccurs="0" maxOccurs="unbounded"/>

Element WallType / Name

Namespace	No namespace
Annotations	This is simply a descriptive name, typically a common name used for the system.
Diagram	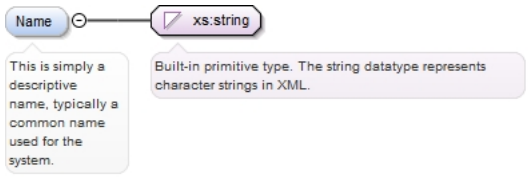
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This is simply a descriptive name, typically a common name used for the system.</xs:documentation> </xs:annotation> </xs:element>

Element WallType / Description

Namespace	No namespace
Annotations	Place for user to include additional notes/description.
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element maxOccurs="1" minOccurs="0" name="Description" type="xs:string"> <xs:annotation> <xs:documentation>Place for user to include additional notes/description.</xs:documentation> </xs:annotation> </xs:element>

Element WallType / Area

Namespace	No namespace
Diagram	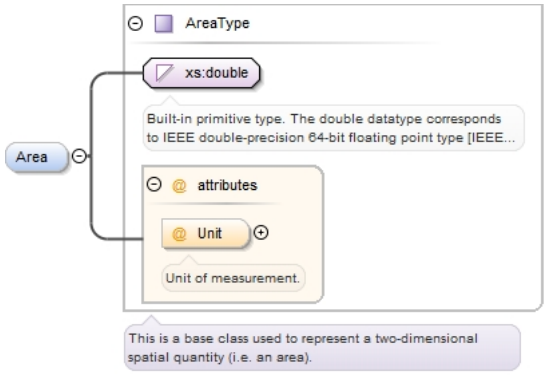

Type	AreaType				
Properties	content:	complex			
	minOccurs:	0			
Attributes	**QName**	**Type**	**Fixed**	**Default**	**Use**
	Unit	AreaUnitEnumType		SquareMeters	optional
		Unit of measurement.			
Source	<xs:element name="Area" type="AreaType" minOccurs="0"/>				

Element WallType / Width

Namespace	No namespace				
Diagram	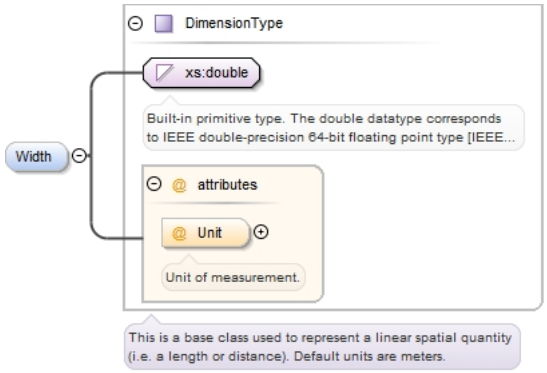				
Type	DimensionType				
Properties	content:	complex			
	minOccurs:	0			
	maxOccurs:	1			
Attributes	**QName**	**Type**	**Fixed**	**Default**	**Use**
	Unit	DimensionUnitEnumType		Meters	optional
		Unit of measurement.			
Source	<xs:element name="Width" type="DimensionType" minOccurs="0" maxOccurs="1"/>				

Element WallType / Height

Namespace	No namespace				
Diagram	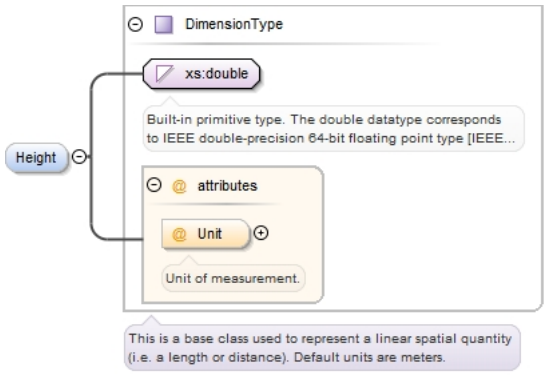				
Type	DimensionType				
Properties	content:	complex			
	minOccurs:	0			
	maxOccurs:	1			
Attributes	**QName**	**Type**	**Fixed**	**Default**	**Use**
	Unit	DimensionUnitEnumType		Meters	optional

	QName	Type	Fixed	Default	Use
		Unit of measurement.			
Source	<xs:element name="Height" type="DimensionType" minOccurs="0" maxOccurs="1"/>				

Element WallType / Insulation

Namespace	No namespace
Diagram	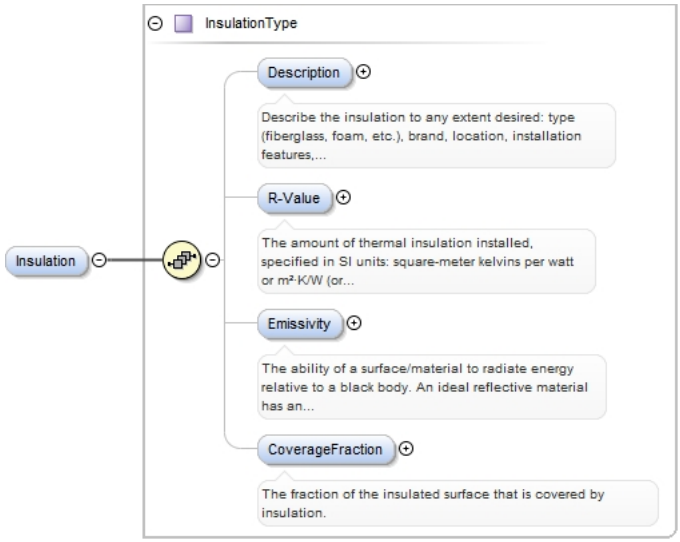
Type	InsulationType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	Description{0,1} , R-Value{0,1} , Emissivity{0,1} , CoverageFraction{0,1}
Children	CoverageFraction, Description, Emissivity, R-Value
Instance	<Insulation> <Description>{0,1}</Description> <R-Value>{0,1}</R-Value> <Emissivity>{0,1}</Emissivity> <CoverageFraction>{0,1}</CoverageFraction> </Insulation>
Source	<xs:element name="Insulation" type="InsulationType" minOccurs="0" maxOccurs="1"/>

Element WallType / Composition

Namespace	No namespace
Annotations	Wall composition. Examples: Wood Framing - Face Brick Steel - Face Brick Concrete Block Insulated Concrete Form etc.
Diagram	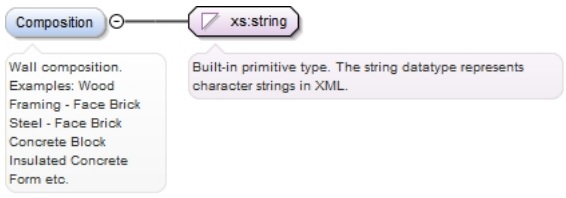
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source	<xs:element name="Composition" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Wall composition. Examples: Wood Framing - Face Brick Steel - Face Brick Concrete Block Insulated Concrete Form etc.</xs:documentation> </xs:annotation> </xs:element>

Element EnvelopeType / Window

Namespace	No namespace
Diagram	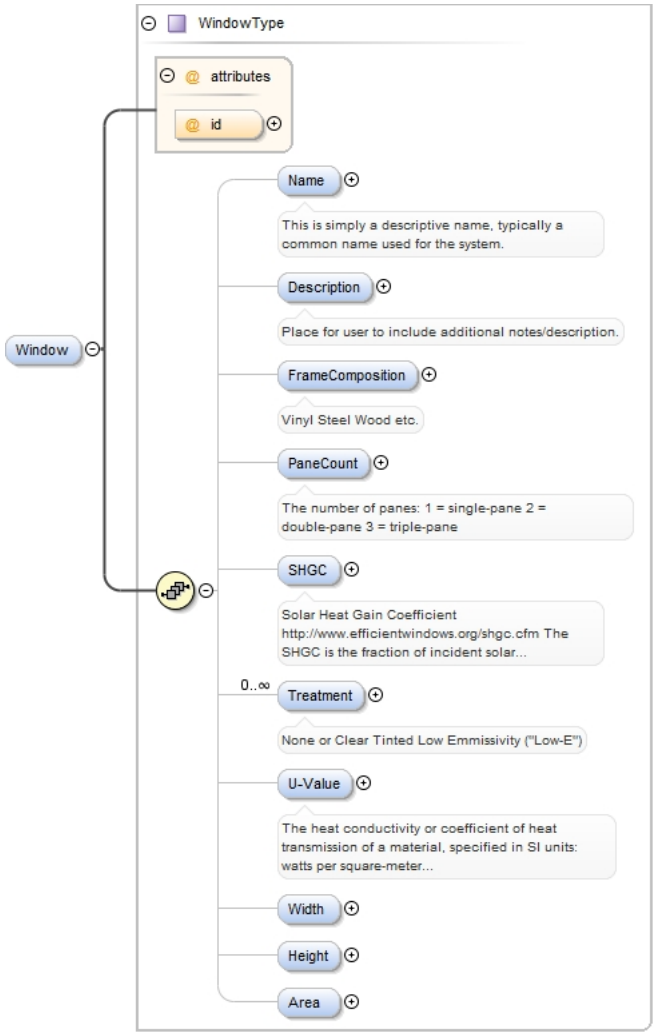
Type	WindowType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Name{0,1} , Description{0,1} , FrameComposition{0,1} , PaneCount{0,1} , SHGC{0,1} , Treatment* , U-Value{0,1} , Width{0,1} , Height{0,1} , Area{0,1}
Children	Area, Description, FrameComposition, Height, Name, PaneCount, SHGC, Treatment, U-Value, Width
Instance	<Window id=""> <Name>{0,1}</Name> <Description>{0,1}</Description> <FrameComposition>{0,1}</FrameComposition> <PaneCount>{0,1}</PaneCount> <SHGC>{0,1}</SHGC> <Treatment>{0,unbounded}</Treatment> <U-Value>{0,1}</U-Value> <Width Unit="Meters">{0,1}</Width> <Height Unit="Meters">{0,1}</Height> <Area Unit="SquareMeters">{0,1}</Area> </Window>

Attributes	QName	Type	Fixed	Default	Use
	id	xs:IDREF			optional
Source	<xs:element name="Window" type="WindowType" minOccurs="0" maxOccurs="unbounded"/>				

Element WindowType / Name

Namespace	No namespace
Annotations	This is simply a descriptive name, typically a common name used for the system.
Diagram	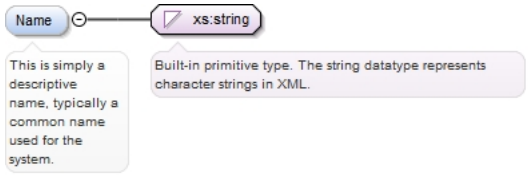
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This is simply a descriptive name, typically a common name used for the system.</xs:documentation> </xs:annotation> </xs:element>

Element WindowType / Description

Namespace	No namespace
Annotations	Place for user to include additional notes/description.
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element maxOccurs="1" minOccurs="0" name="Description" type="xs:string"> <xs:annotation> <xs:documentation>Place for user to include additional notes/description.</xs:documentation> </xs:annotation> </xs:element>

Element WindowType / FrameComposition

Namespace	No namespace
Annotations	Vinyl Steel Wood etc.
Diagram	
Type	xs:string
Properties	content: simple

	minOccurs: 0 maxOccurs: 1
Source	<xs:element name="FrameComposition" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Vinyl Steel Wood etc.</xs:documentation> </xs:annotation> </xs:element>

Element WindowType / PaneCount

Namespace	No namespace
Annotations	The number of panes: 1 = single-pane 2 = double-pane 3 = triple-pane
Diagram	
Type	restriction of xs:int
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minInclusive 1
Source	<xs:element name="PaneCount" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>The number of panes: 1 = single-pane 2 = double-pane 3 = triple-pane</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:int"> <xs:minInclusive value="1"/> </xs:restriction> </xs:simpleType> </xs:element>

Element WindowType / SHGC

Namespace	No namespace
Annotations	Solar Heat Gain Coefficient http://www.efficientwindows.org/shgc.cfm The SHGC is the fraction of incident solar radiation admitted through a window, both directly transmitted and absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's solar heat gain coefficient, the less solar heat it transmits.
Diagram	
Type	restriction of xs:float
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 1 minInclusive 0
Source	<xs:element name="SHGC" minOccurs="0" maxOccurs="1"> <xs:annotation>

```
    <xs:documentation>Solar Heat Gain Coefficient http://www.efficientwindows.org/shgc.cfm
 The SHGC is the fraction of incident solar radiation admitted through a window, both
 directly transmitted and absorbed and subsequently released inward. SHGC is expressed
 as a number between 0 and 1. The lower a window's solar heat gain coefficient, the less
 solar heat it transmits.</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:float">
      <xs:minInclusive value="0"/>
      <xs:maxInclusive value="1"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element WindowType / Treatment

Namespace	No namespace
Annotations	None or Clear Tinted Low Emmissivity ("Low-E")
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: unbounded
Source	<xs:element name="Treatment" type="xs:string" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>None or Clear Tinted Low Emmissivity ("Low-E")</xs:documentation> </xs:annotation> </xs:element>

Element WindowType / U-Value

Namespace	No namespace
Annotations	The heat conductivity or coefficient of heat transmission of a material, specified in SI units: watts per square-meter kelvins W/(m²·K) or equivalently W/(m²·°C). Note that if you intend to use different units then this should be noted in the Description.
Diagram	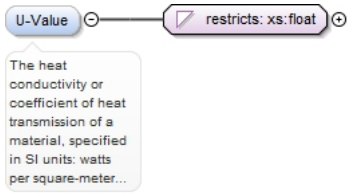
Type	restriction of xs:float
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minInclusive 0
Source	<xs:element name="U-Value" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>The heat conductivity or coefficient of heat transmission of a material, specified in SI units: watts per square-meter kelvins W/(m²·K) or equivalently W/(m²·°C). Note that if you intend to use different units then this should be noted in the Description.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:float"> <xs:minInclusive value="0"/> </xs:restriction>

```
  </xs:simpleType>
</xs:element>
```

Element WindowType / Width

Namespace	No namespace
Diagram	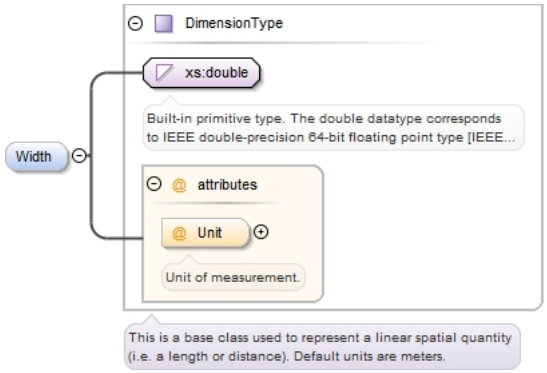
Type	DimensionType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **Unit** / DimensionUnitEnumType / / Meters / optional Unit of measurement.
Source	`<xs:element name="Width" type="DimensionType" minOccurs="0" maxOccurs="1"/>`

Element WindowType / Height

Namespace	No namespace
Diagram	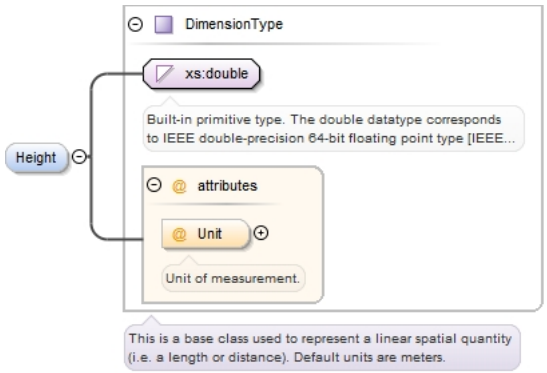
Type	DimensionType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **Unit** / DimensionUnitEnumType / / Meters / optional Unit of measurement.
Source	`<xs:element name="Height" type="DimensionType" minOccurs="0" maxOccurs="1"/>`

Element WindowType / Area

Namespace	No namespace

Diagram	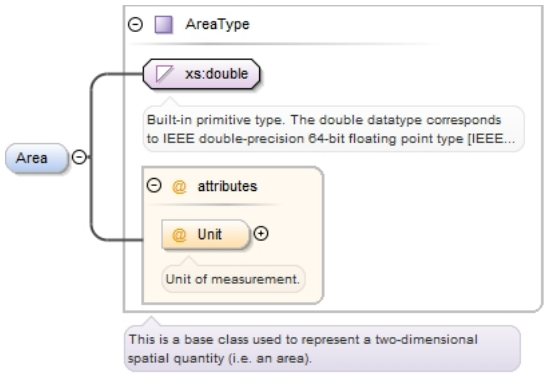
Type	AreaType
Properties	content: complex minOccurs: 0
Attributes	**QName** / **Unit**: **Type** AreaUnitEnumType; **Fixed**; **Default** SquareMeters; **Use** optional Unit of measurement.
Source	`<xs:element name="Area" type="AreaType" minOccurs="0"/>`

Element EnvelopeType / Leakage

Namespace	No namespace
Diagram	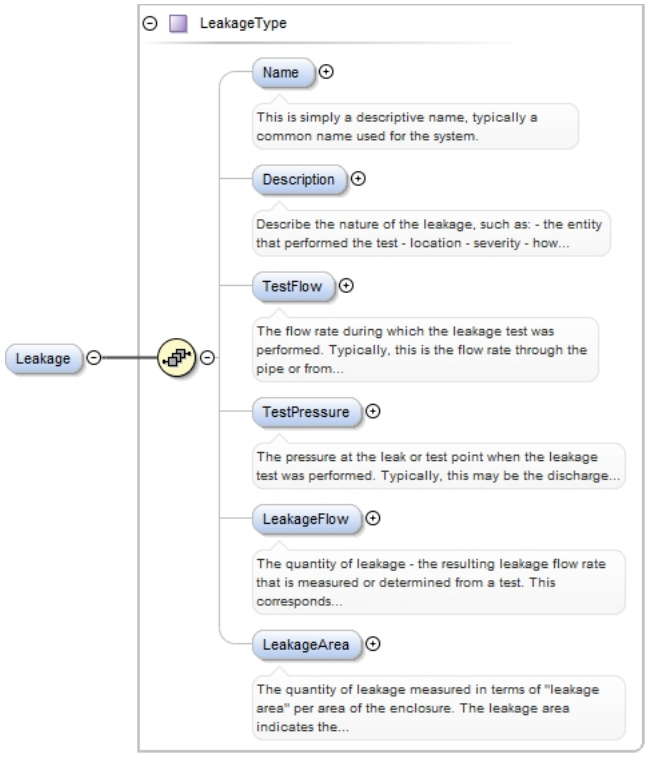
Type	LeakageType
Properties	content: complex minOccurs: 0
Model	Name{0,1} , Description{0,1} , TestFlow{0,1} , TestPressure{0,1} , LeakageFlow{0,1} , LeakageArea{0,1}
Children	Description, LeakageArea, LeakageFlow, Name, TestFlow, TestPressure

Instance	`<Leakage>`
	`  <Name>{0,1}</Name>`
	`  <Description>{0,1}</Description>`
	`  <TestFlow Unit="">{0,1}</TestFlow>`

```
  <TestPressure Unit="">{0,1}</TestPressure>
  <LeakageFlow Unit="">{0,1}</LeakageFlow>
  <LeakageArea Unit="SquareMeters">{0,1}</LeakageArea>
</Leakage>
```

Source

```
<xs:element minOccurs="0" name="Leakage" type="LeakageType"/>
```

Element LeakageType / Name

Namespace	No namespace
Annotations	This is simply a descriptive name, typically a common name used for the system.
Diagram	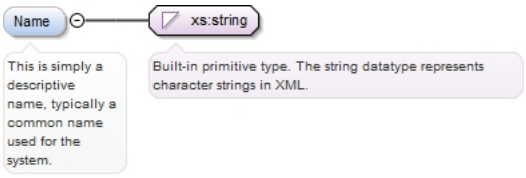
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source

```
<xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>This is simply a descriptive name, typically a common name used for
 the system.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element LeakageType / Description

Namespace	No namespace
Annotations	Describe the nature of the leakage, such as: - the entity that performed the test - location - severity - how discovered - systems, equipment affected - etc.
Diagram	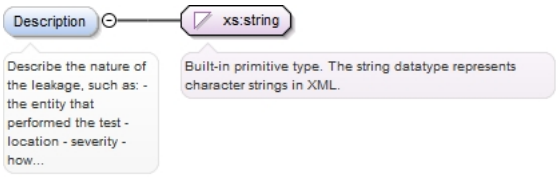
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source

```
<xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>Describe the nature of the leakage, such as: - the entity that
 performed the test - location - severity - how discovered - systems, equipment affected -
 etc.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element LeakageType / TestFlow

Namespace	No namespace
Annotations	The flow rate during which the leakage test was performed. Typically, this is the flow rate through the pipe or from the fan if a blower door or duct leakage test is performed. This flow rate correspondes to the Leakage Value.

Diagram	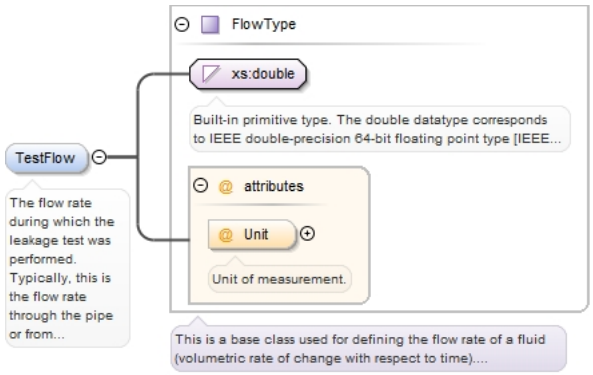
Type	FlowType
Properties	content: complex minOccurs: 0
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **Unit** / FlowUnitEnumType / / / optional Unit of measurement.

Source	`<xs:element minOccurs="0" name="TestFlow" type="FlowType">`
	`  <xs:annotation>`
	`  <xs:documentation>The flow rate during which the leakage test was performed. Typically, this is the flow rate through the pipe or from the fan if a blower door or duct leakage test is performed. This flow rate correspondes to the Leakage Value.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element LeakageType / TestPressure

Namespace	No namespace
Annotations	The pressure at the leak or test point when the leakage test was performed. Typically, this may be the discharge pressure of the fan if a blower door or duct leakage test is performed. This pressure corresponds to the Leakage Value.
Diagram	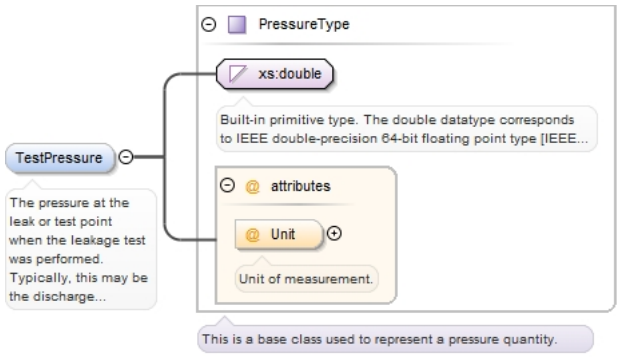
Type	PressureType
Properties	content: complex minOccurs: 0
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **Unit** / PressureUnitEnumType / / / optional Unit of measurement.

Source	`<xs:element minOccurs="0" name="TestPressure" type="PressureType">`
	`  <xs:annotation>`
	`  <xs:documentation>The pressure at the leak or test point when the leakage test was performed. Typically, this may be the discharge pressure of the fan if a blower door or duct leakage test is performed. This pressure corresponds to the Leakage Value.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element LeakageType / LeakageFlow

Namespace	No namespace
Annotations	The quantity of leakage - the resulting leakage flow rate that is measured or determined from a test. This corresponds to the Test Flow and Pressure.
Diagram	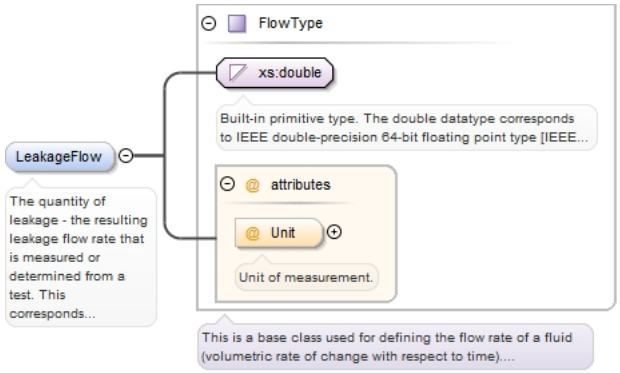
Type	FlowType
Properties	content: complex minOccurs: 0
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **Unit** / FlowUnitEnumType / / / optional Unit of measurement.

Source	`<xs:element minOccurs="0" name="LeakageFlow" type="FlowType">`
	`  <xs:annotation>`
	`  <xs:documentation>The quantity of leakage - the resulting leakage flow rate that is measured or determined from a test. This corresponds to the Test Flow and Pressure.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element LeakageType / LeakageArea

Namespace	No namespace
Annotations	The quantity of leakage measured in terms of "leakage area" per area of the enclosure. The leakage area indicates the effective net size (area) of the leak. The area of the enclosure typically refers to the floor-area of the enclosure being tested. This corresponds to the Test Flow and Pressure.
Diagram	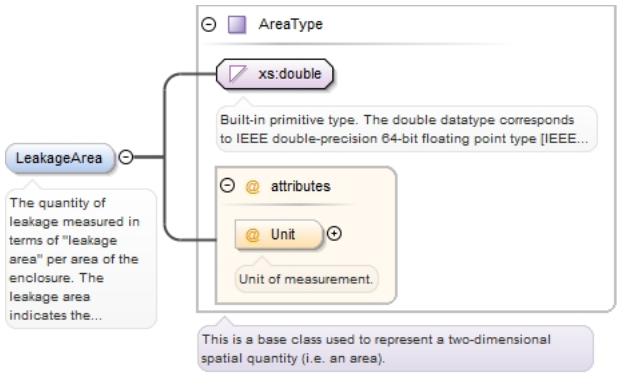
Type	AreaType
Properties	content: complex minOccurs: 0
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **Unit** / AreaUnitEnumType / / SquareMeters / optional Unit of measurement.

Source	<xs:element minOccurs="0" name="LeakageArea" type="AreaType"> <xs:annotation> <xs:documentation>The quantity of leakage measured in terms of "leakage area" per area of the enclosure. The leakage area indicates the effective net size (area) of the leak. The area of the enclosure typically refers to the floor-area of the enclosure being tested. This corresponds to the Test Flow and Pressure.</xs:documentation> </xs:annotation> </xs:element>

Element BuildingType / Zone

Namespace	No namespace
Diagram	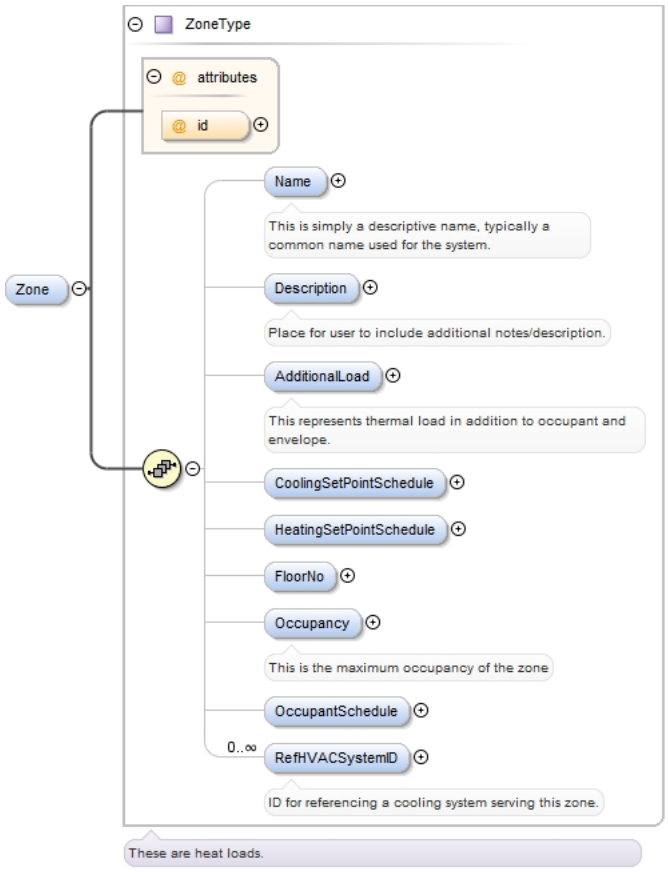
Type	ZoneType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Name{0,1} , Description{0,1} , AdditionalLoad{0,1} , CoolingSetPointSchedule{0,1} , HeatingSetPointSchedule{0,1} , FloorNo{0,1} , Occupancy{0,1} , OccupantSchedule{0,1} , RefHVACSystemID*
Children	AdditionalLoad, CoolingSetPointSchedule, Description, FloorNo, HeatingSetPointSchedule, Name, Occupancy, OccupantSchedule, RefHVACSystemID
Instance	<Zone id=""> <Name>{0,1}</Name> <Description>{0,1}</Description> <AdditionalLoad Fuel="Electricity" FuelDesc="Electricity" TestCondition="" Unit="" UnitDesc="kwh">{0,1 AdditionalLoad> <CoolingSetPointSchedule id="" type="">{0,1}</CoolingSetPointSchedule> <HeatingSetPointSchedule id="" type="">{0,1}</HeatingSetPointSchedule> <FloorNo>{0,1}</FloorNo> <Occupancy>{0,1}</Occupancy> <OccupantSchedule id="" type="">{0,1}</OccupantSchedule> <RefHVACSystemID>{0,unbounded}</RefHVACSystemID> </Zone>

Attributes	QName	Type	Fixed	Default	Use
	id	xs:ID			optional

Source	<xs:element name="Zone" type="ZoneType" minOccurs="0" maxOccurs="unbounded"/>

Element ZoneType / Name

Namespace	No namespace
Annotations	This is simply a descriptive name, typically a common name used for the system.
Diagram	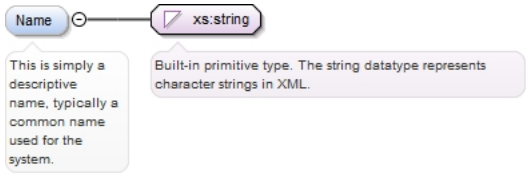
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This is simply a descriptive name, typically a common name used for the system.</xs:documentation> </xs:annotation> </xs:element>

Element ZoneType / Description

Namespace	No namespace
Annotations	Place for user to include additional notes/description.
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Place for user to include additional notes/description.</xs:documentation> </xs:annotation> </xs:element>

Element ZoneType / AdditionalLoad

Namespace	No namespace
Annotations	This represents thermal load in addition to occupant and envelope.

Diagram

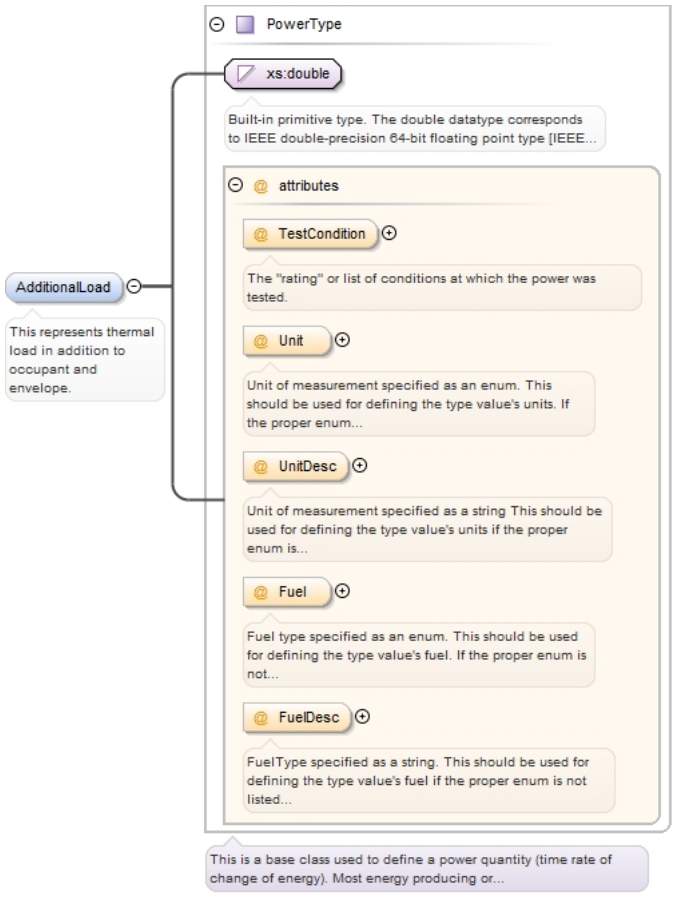

Type: PowerType

Properties

content:	complex
minOccurs:	0
maxOccurs:	1

Attributes

QName	Type	Fixed	Default	Use
Fuel	EnergyClassEnumType		Electricity	optional
	Fuel type specified as an enum. This should be used for defining the type value's fuel. If the proper enum is not listed, please use the FuelDesc field to specify the units. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the FuelDesc may contain a default type.			
FuelDesc	xs:string		Electricity	optional
	FuelType specified as a string. This should be used for defining the type value's fuel if the proper enum is not listed in Fuel. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the FuelDesc may contain a default type.			
TestCondition	xs:string			optional
	The "rating" or list of conditions at which the power was tested.			
Unit	PowerUnitEnumType			optional
	Unit of measurement specified as an enum. This should be used for defining the type value's units. If the proper enum is not listed, please use the UnitDesc field to specify the units. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.			
UnitDesc	xs:string		kwh	optional
	Unit of measurement specified as a string This should be used for defining the type value's units if the proper enum is not listed in Unit. These are all optional attributes in order to allow for a			

	QName	Type	Fixed	Default	Use
		simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.			

Source

```
<xs:element name="AdditionalLoad" type="PowerType" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>This represents thermal load in addition to occupant and envelope.</
xs:documentation>
  </xs:annotation>
</xs:element>
```

Element ZoneType / CoolingSetPointSchedule

Namespace	No namespace
Diagram	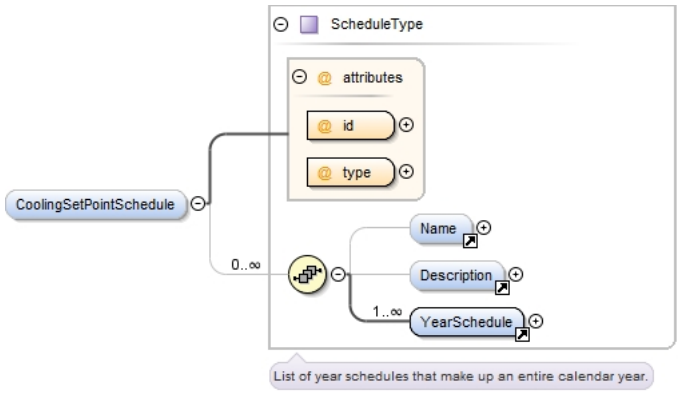
Type	ScheduleType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	Name{0,1} , Description{0,1} , YearSchedule+
Children	Description, Name, YearSchedule

Instance

```
<CoolingSetPointSchedule id="" type="" xmlns="http://www.iepmodel.net">
  <Name>{0,1}</Name>
  <Description>{0,1}</Description>
  <YearSchedule id="">{1,unbounded}</YearSchedule>
</CoolingSetPointSchedule>
```

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			required
type	scheduleEnumType			required

Source

```
<xs:element name="CoolingSetPointSchedule" type="ScheduleType" minOccurs="0"
 maxOccurs="1"/>
```

Element YearScheduleType / WeekScheduleId

Namespace	No namespace
Diagram	
Properties	content: complex minOccurs: 1 maxOccurs: 1

Attributes

QName	Type	Fixed	Default	Use
weekScheduleIdRef	xs:IDREF			required

Source

```
<xs:element minOccurs="1" maxOccurs="1" name="WeekScheduleId">
  <xs:complexType>
    <xs:attribute name="weekScheduleIdRef" type="xs:IDREF" use="required"/>
  </xs:complexType>
```

```
</xs:element>
```

Element ZoneType / HeatingSetPointSchedule

Namespace	No namespace
Diagram	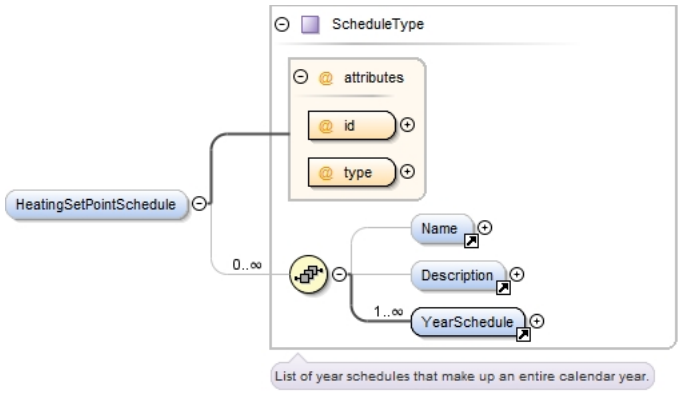
Type	ScheduleType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	Name{0,1} , Description{0,1} , YearSchedule+
Children	Description, Name, YearSchedule

Instance	`<HeatingSetPointSchedule id="" type="" xmlns="http://www.iepmodel.net">`
	`  <Name>{0,1}</Name>`
	`  <Description>{0,1}</Description>`
	`  <YearSchedule id="">{1,unbounded}</YearSchedule>`
	`</HeatingSetPointSchedule>`

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			required
type	scheduleEnumType			required

Source

```
<xs:element name="HeatingSetPointSchedule" type="ScheduleType" minOccurs="0"
 maxOccurs="1"/>
```

Element ZoneType / FloorNo

Namespace	No namespace
Diagram	
Type	xs:int
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source

```
<xs:element name="FloorNo" type="xs:int" minOccurs="0" maxOccurs="1"/>
```

Element ZoneType / Occupancy

Namespace	No namespace
Annotations	This is the maximum occupancy of the zone
Diagram	
Type	xs:int

Properties		
	content:	simple
	minOccurs:	0
	maxOccurs:	1

Source

```
<xs:element name="Occupancy" type="xs:int" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>This is the maximum occupancy of the zone</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element ZoneType / OccupantSchedule

Namespace	No namespace
Diagram	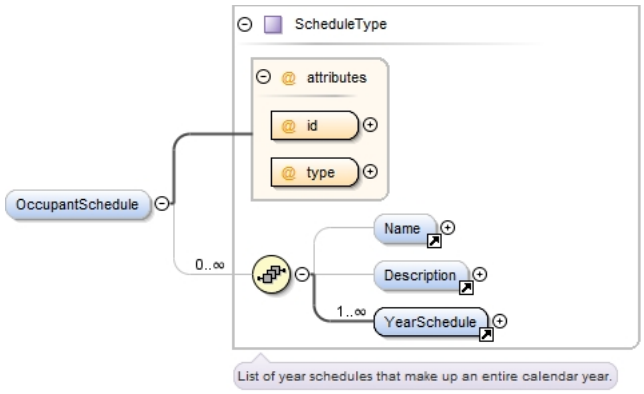
Type	ScheduleType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	Name{0,1} , Description{0,1} , YearSchedule+
Children	Description, Name, YearSchedule

Instance

```
<OccupantSchedule id="" type="" xmlns="http://www.iepmodel.net">
  <Name>{0,1}</Name>
  <Description>{0,1}</Description>
  <YearSchedule id="">{1,unbounded}</YearSchedule>
</OccupantSchedule>
```

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			required
type	scheduleEnumType			required

Source

```
<xs:element name="OccupantSchedule" type="ScheduleType" minOccurs="0" maxOccurs="1"/>
```

Element ZoneType / RefHVACSystemID

Namespace	No namespace
Annotations	ID for referencing a cooling system serving this zone.
Diagram	
Type	xs:IDREF
Properties	content: simple minOccurs: 0 maxOccurs: unbounded

Source

```
<xs:element name="RefHVACSystemID" type="xs:IDREF" minOccurs="0" maxOccurs="unbounded">
  <xs:annotation>
    <xs:documentation>ID for referencing a cooling system serving this zone.</
xs:documentation>
  </xs:annotation>
```

	`</xs:element>`

Element `SiteType / GroundArea`

Namespace	No namespace
Diagram	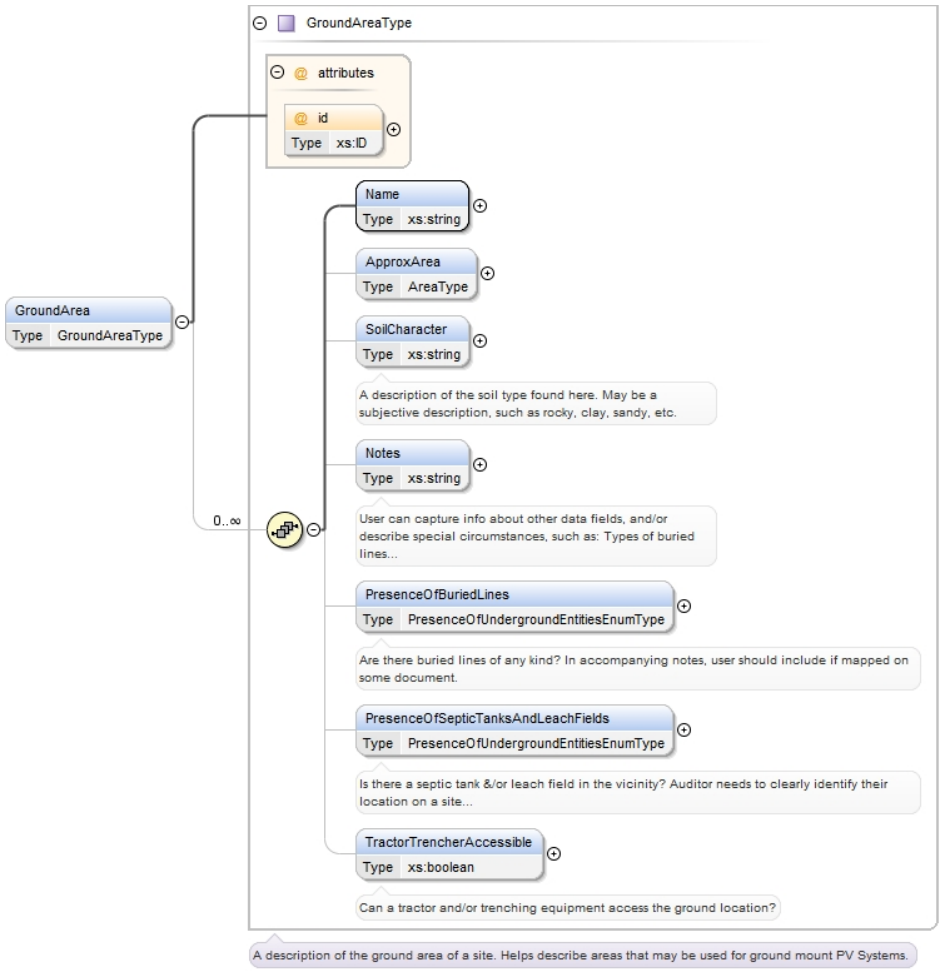
Type	GroundAreaType
Properties	content: `complex` minOccurs: `0` maxOccurs: `unbounded`
Model	Name , ApproxArea{0,1} , SoilCharacter{0,1} , Notes{0,1} , PresenceOfBuriedLines{0,1} , PresenceOfSepticTanksAndLeachFields{0,1} , TractorTrencherAccessible{0,1}
Children	ApproxArea, Name, Notes, PresenceOfBuriedLines, PresenceOfSepticTanksAndLeachFields, SoilCharacter, TractorTrencherAccessible

`Instance`	`<GroundArea id="">`
	`  <Name>{1,1}</Name>`
	`  <ApproxArea Unit="SquareMeters">{0,1}</ApproxArea>`
	`  <SoilCharacter>{0,1}</SoilCharacter>`
	`  <Notes>{0,1}</Notes>`
	`  <PresenceOfBuriedLines>{0,1}</PresenceOfBuriedLines>`
	`  <PresenceOfSepticTanksAndLeachFields>{0,1}</PresenceOfSepticTanksAndLeachFields>`
	`  <TractorTrencherAccessible>{0,1}</TractorTrencherAccessible>`
	`</GroundArea>`

Attributes	**QName** | **Type** | **Fixed** | **Default** | **Use** **id** | xs:ID | | | optional
`Source`	`<xs:element maxOccurs="unbounded" minOccurs="0" name="GroundArea" type="GroundAreaType"/>`

Element `GroundAreaType / Name`

Namespace	No namespace

Diagram	
Type	xs:string
Properties	content: simple
Source	`<xs:element name="Name" type="xs:string"/>`

Element GroundAreaType / ApproxArea

Namespace	No namespace
Diagram	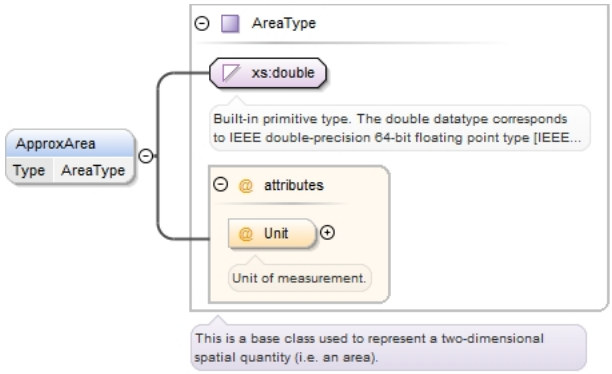
Type	AreaType
Properties	content: complex minOccurs: 0
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **Unit** / AreaUnitEnumType / / SquareMeters / optional Unit of measurement.
Source	`<xs:element minOccurs="0" name="ApproxArea" type="AreaType"/>`

Element GroundAreaType / SoilCharacter

Namespace	No namespace
Annotations	A description of the soil type found here. May be a subjective description, such as rocky, clay, sandy, etc.
Diagram	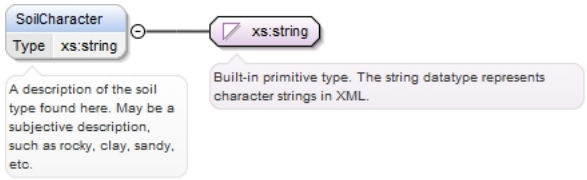
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source	`<xs:element maxOccurs="1" minOccurs="0" name="SoilCharacter" type="xs:string">`
	`  <xs:annotation>`
	`  <xs:documentation>A description of the soil type found here. May be a subjective description, such as rocky, clay, sandy, etc.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element GroundAreaType / Notes

Namespace	No namespace

Annotations	User can capture info about other data fields, and/or describe special circumstances, such as: Types of buried lines and how marked, Equipment &/or materials access issues, whether there is an existing professional soils report, if the site is in a biotic reserve (when applicable), &/or whether an environmental impact report has been done
Diagram	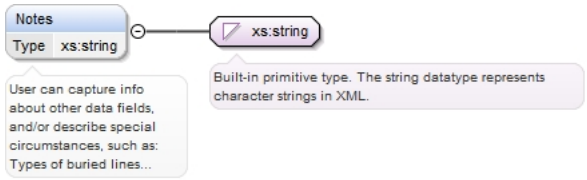
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element maxOccurs="1" minOccurs="0" name="Notes" type="xs:string"> <xs:annotation> <xs:documentation>User can capture info about other data fields, and/or describe special circumstances, such as: Types of buried lines and how marked, Equipment &/or materials access issues, whether there is an existing professional soils report, if the site is in a biotic reserve (when applicable), &/or whether an environmental impact report has been done</xs:documentation> </xs:annotation> </xs:element>

Element GroundAreaType / PresenceOfBuriedLines

Namespace	No namespace
Annotations	Are there buried lines of any kind? In accompanying notes, user should include if mapped on some document.
Diagram	
Type	PresenceOfUndergroundEntitiesEnumType
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	enumeration None enumeration Yes (location marked) enumeration Yes (location TBD)
Source	<xs:element maxOccurs="1" minOccurs="0" name="PresenceOfBuriedLines" type="PresenceOfUndergroundEntitiesEnumType"> <xs:annotation> <xs:documentation>Are there buried lines of any kind? In accompanying notes, user should include if mapped on some document.</xs:documentation> </xs:annotation> </xs:element>

Element GroundAreaType / PresenceOfSepticTanksAndLeachFields

Namespace	No namespace
Annotations	Is there a septic tank &/or leach field in the vicinity? Auditor needs to clearly identify their location on a site schematic.
Diagram	
Type	PresenceOfUndergroundEntitiesEnumType
Properties	content: simple

	minOccurs:	0
	maxOccurs:	1
Facets	enumeration	None
	enumeration	Yes (location marked)
	enumeration	Yes (location TBD)
Source	<xs:element maxOccurs="1" minOccurs="0" name="PresenceOfSepticTanksAndLeachFields" type="PresenceOfUndergroundEntitiesEnumType"> <xs:annotation> <xs:documentation>Is there a septic tank &/or leach field in the vicinity? Auditor needs to clearly identify their location on a site schematic.</xs:documentation> </xs:annotation> </xs:element>	

Element GroundAreaType / TractorTrencherAccessible

Namespace	No namespace
Annotations	Can a tractor and/or trenching equipment access the ground location?
Diagram	
Type	xs:boolean
Properties	content: simple
	minOccurs: 0
	maxOccurs: 1
Source	<xs:element maxOccurs="1" minOccurs="0" name="TractorTrencherAccessible" type="xs:boolean"> <xs:annotation> <xs:documentation>Can a tractor and/or trenching equipment access the ground location?</xs:documentation> </xs:annotation> </xs:element>

Element SiteType / ProposedEquipmentLocation

Namespace	No namespace
Annotations	Description of a site location where one (or more) equipment items are being proposed for installation.

Diagram	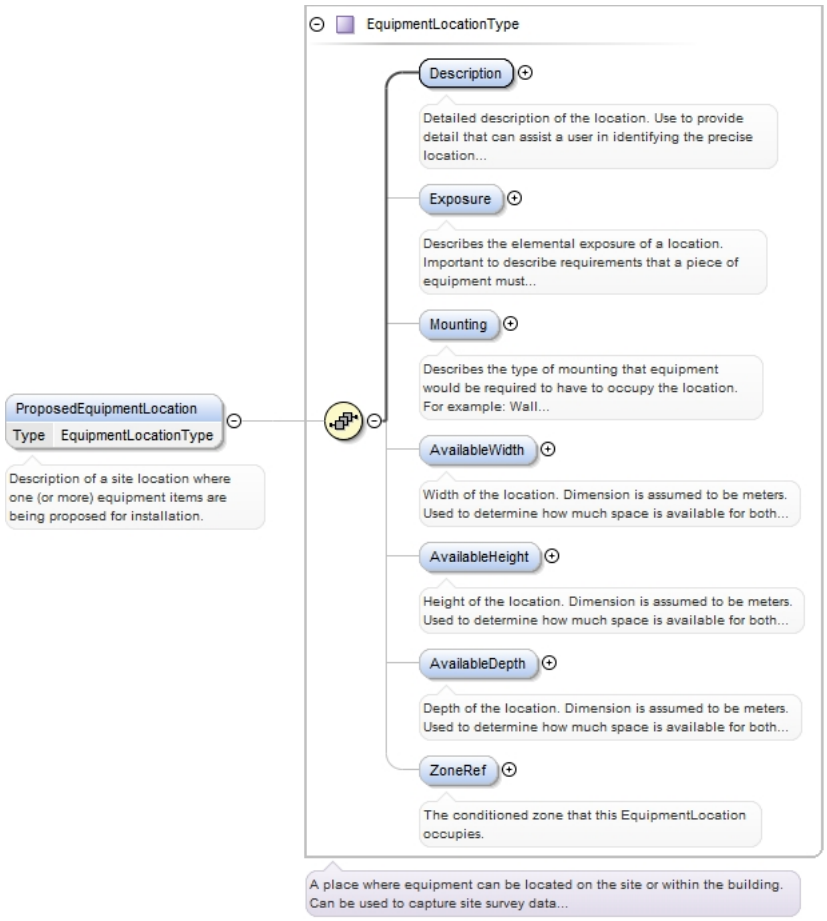
Type	EquipmentLocationType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Description , Exposure{0,1} , Mounting{0,1} , AvailableWidth{0,1} , AvailableHeight{0,1} , AvailableDepth{0,1} , ZoneRef{0,1}
Children	AvailableDepth, AvailableHeight, AvailableWidth, Description, Exposure, Mounting, ZoneRef
Instance	<ProposedEquipmentLocation xmlns="http://www.iepmodel.net"> <Description>{1,1}</Description> <Exposure>{0,1}</Exposure> <Mounting>{0,1}</Mounting> <AvailableWidth>{0,1}</AvailableWidth> <AvailableHeight>{0,1}</AvailableHeight> <AvailableDepth>{0,1}</AvailableDepth> <ZoneRef>{0,1}</ZoneRef> </ProposedEquipmentLocation>
Source	<xs:element maxOccurs="unbounded" minOccurs="0" name="ProposedEquipmentLocation" type="EquipmentLocationType"> <xs:annotation> <xs:documentation>Description of a site location where one (or more) equipment items are being proposed for installation.</xs:documentation> </xs:annotation> </xs:element>

Element SiteType / ExistingWirewaySegment

Namespace	No namespace
Annotations	Used to describe existing conduit segments and/or wiring boxes anywhere on the site/bldg that could be used in implementation of one or more measures.

Diagram	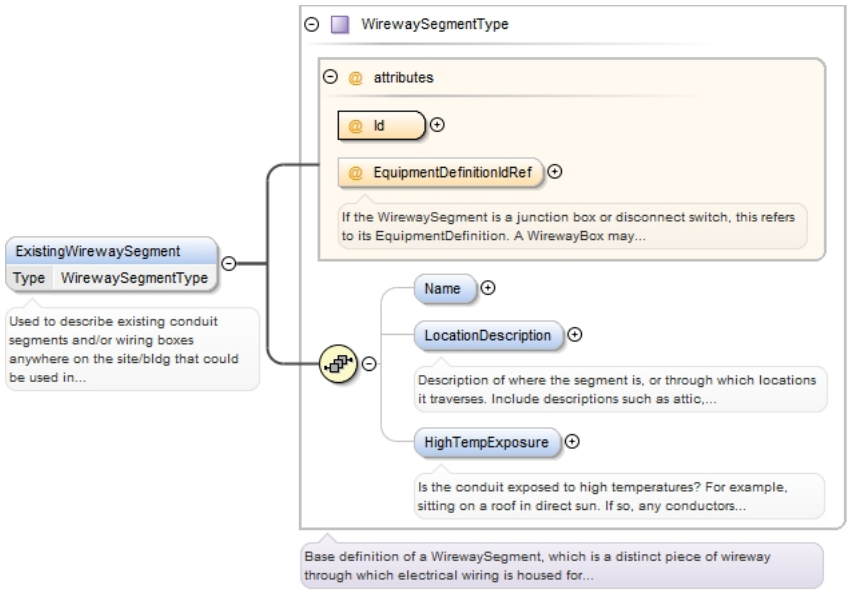
Type	WirewaySegmentType
Properties	content: `complex` minOccurs: `0` maxOccurs: `unbounded`
Model	Name{0,1} , LocationDescription{0,1} , HighTempExposure{0,1}
Children	HighTempExposure, LocationDescription, Name

Instance	`<ExistingWirewaySegment EquipmentDefinitionIdRef="" Id="" xmlns="http://www.iepmodel.net">`
	`  <Name>{0,1}</Name>`
	`  <LocationDescription>{0,1}</LocationDescription>`
	`  <HighTempExposure>{0,1}</HighTempExposure>`
	`</ExistingWirewaySegment>`

Attributes

QName	Type	Fixed	Default	Use
EquipmentDefinitionIdRef	IDREF			optional
	If the WirewaySegment is a junction box or disconnect switch, this refers to its EquipmentDefinition. A WirewayBox may be a pass through where multiple ConduitSegments are combined into a single ConduitSegment for example. A disconnect switch box may also be modeled as a WirewayBox, provided that the circuit(s) involved are simply disoconnected and not combined in any way. DO NOT use WirewayBox to represent a combiner, or distribution panel.			
Id	xs:ID			required

Source

```
<xs:element maxOccurs="unbounded" minOccurs="0" name="ExistingWirewaySegment"
 type="WirewaySegmentType">
  <xs:annotation>
    <xs:documentation>Used to describe existing conduit segments and/or wiring boxes
 anywhere on the site/bldg that could be used in implementation of one or more measures.</
xs:documentation>
  </xs:annotation>
</xs:element>
```

Element `SiteType / ProposedWirewaySegment`

Namespace	No namespace
Annotations	Used to capture site survey information about one or more proposed conduit segments or wireway boxes that would be used to support a new system.

Diagram	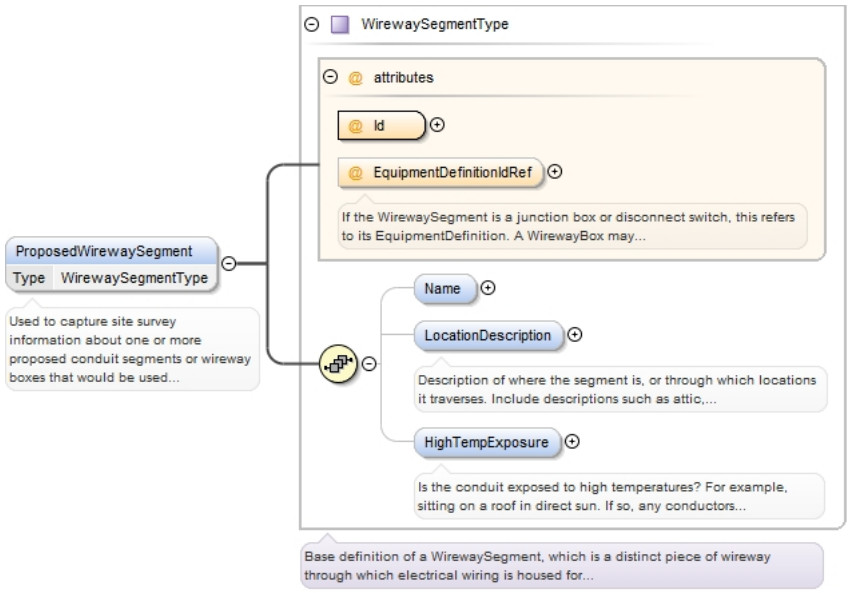
Type	WirewaySegmentType
Properties	content: `complex` minOccurs: `0` maxOccurs: `unbounded`
Model	Name{0,1} , LocationDescription{0,1} , HighTempExposure{0,1}
Children	HighTempExposure, LocationDescription, Name

Instance	`<ProposedWirewaySegment EquipmentDefinitionIdRef="" Id="" xmlns="http://www.iepmodel.net">`
	`  <Name>{0,1}</Name>`
	`  <LocationDescription>{0,1}</LocationDescription>`
	`  <HighTempExposure>{0,1}</HighTempExposure>`
	`</ProposedWirewaySegment>`

Attributes

QName	Type	Fixed	Default	Use
EquipmentDefinitionIdRef	IDREF			optional
	If the WirewaySegment is a junction box or disconnect switch, this refers to its EquipmentDefinition. A WirewayBox may be a pass through where multiple ConduitSegments are combined into a single ConduitSegment for example. A disconnect switch box may also be modeled as a WirewayBox, provided that the circuit(s) involved are simply disoconnected and not combined in any way. DO NOT use WirewayBox to represent a combiner, or distribution panel.			
Id	xs:ID			required

Source

```
<xs:element maxOccurs="unbounded" minOccurs="0" name="ProposedWirewaySegment"
 type="WirewaySegmentType">
  <xs:annotation>
    <xs:documentation>Used to capture site survey information about one or more proposed
 conduit segments or wireway boxes that would be used to support a new system.</
xs:documentation>
  </xs:annotation>
</xs:element>
```

Element `SiteType / Weather`

Namespace	No namespace

Diagram	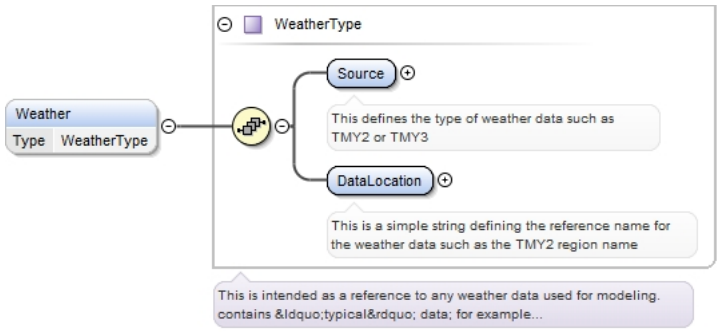
Type	WeatherType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	Source , DataLocation
Children	DataLocation, Source
Instance	<Weather xmlns="http://www.iepmodel.net"> <Source>{1,1}</Source> <DataLocation>{1,1}</DataLocation> </Weather>
Source	<xs:element maxOccurs="1" minOccurs="0" name="Weather" type="WeatherType"/>

Element SiteType / ExistingGenerationCapability

Namespace	No namespace
Annotations	Site has existing generation capability, including non-functioning &/or emergency back-up? Required for CSI Rebate Reservation.
Diagram	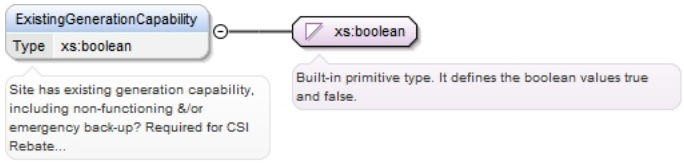
Type	xs:boolean
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element maxOccurs="1" minOccurs="0" name="ExistingGenerationCapability" type="xs:boolean"> <xs:annotation> <xs:documentation>Site has existing generation capability, including non-functioning &/or emergency back-up? Required for CSI Rebate Reservation.</xs:documentation> </xs:annotation> </xs:element>

Element SiteType / ExistingGenerationDescription

Namespace	No namespace
Annotations	If site has existing generation, describe the technology. Required for CSI Rebate Reservation.
Diagram	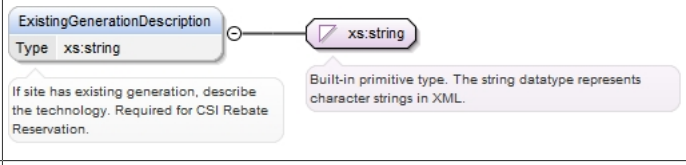
Type	xs:string
Properties	content: simple

	minOccurs: 0 maxOccurs: 1
Source	<xs:element maxOccurs="1" minOccurs="0" name="ExistingGenerationDescription" type="xs:string"> <xs:annotation> <xs:documentation>If site has existing generation, describe the technology. Required for CSI Rebate Reservation.</xs:documentation> </xs:annotation> </xs:element>

Element SiteType / SolarDHWExists

Namespace	No namespace
Annotations	Site has existing Solar DHW system.
Diagram	
Type	xs:boolean
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element maxOccurs="1" minOccurs="0" name="SolarDHWExists" type="xs:boolean"> <xs:annotation> <xs:documentation>Site has existing Solar DHW system.</xs:documentation> </xs:annotation> </xs:element>

Element SiteType / Notes

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element maxOccurs="1" minOccurs="0" name="Notes" type="xs:string"/>

Element ProjectType / Goal

Namespace	No namespace
Annotations	This is intended to define the customers and service providers high level goals for the project. Detailed goals are expected to be recorded at the Measure level
Diagram	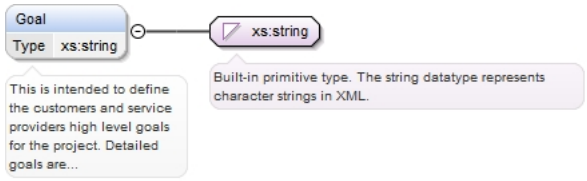
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: unbounded

Source	<xs:element name="Goal" type="xs:string" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>This is intended to define the customers and service providers high level goals for the project. Detailed goals are expected to be recorded at the Measure level</xs:documentation> </xs:annotation> </xs:element>

Element ProjectType / Measure

Namespace	No namespace
Annotations	This is a list of requested and/or proposed and/or additional optional measures

Diagram	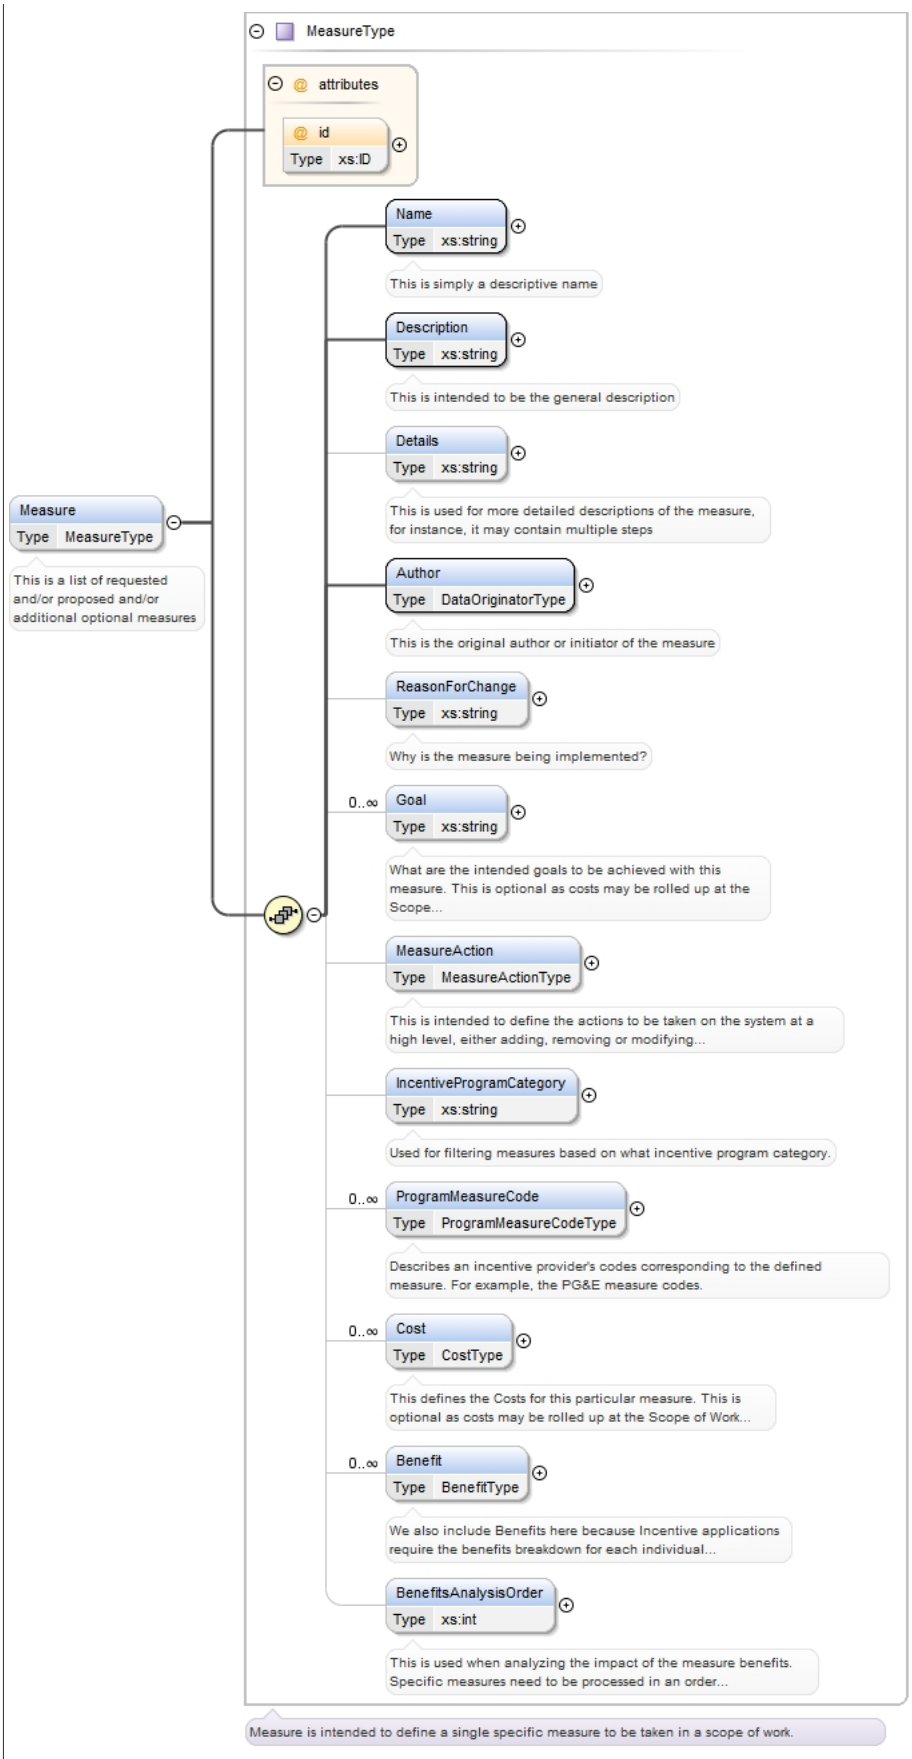
Type	MeasureType
Properties	content: complex

	minOccurs: 0 maxOccurs: unbounded
Model	Name , Description , Details{0,1} , Author , ReasonForChange{0,1} , Goal* , MeasureAction{0,1} , IncentiveProgramCategory{0,1} , ProgramMeasureCode* , Cost* , Benefit* , BenefitsAnalysisOrder{0,1}
Children	Author, Benefit, BenefitsAnalysisOrder, Cost, Description, Details, Goal, IncentiveProgramCategory, MeasureAction, Name, ProgramMeasureCode, ReasonForChange

Instance

```
<Measure id="">
  <Name>{1,1}</Name>
  <Description>{1,1}</Description>
  <Details>{0,1}</Details>
  <Author>{1,1}</Author>
  <ReasonForChange>{0,1}</ReasonForChange>
  <Goal>{0,unbounded}</Goal>
  <MeasureAction>{0,1}</MeasureAction>
  <IncentiveProgramCategory>{0,1}</IncentiveProgramCategory>
  <ProgramMeasureCode>{0,unbounded}</ProgramMeasureCode>
  <Cost>{0,unbounded}</Cost>
  <Benefit>{0,unbounded}</Benefit>
  <BenefitsAnalysisOrder>{0,1}</BenefitsAnalysisOrder>
</Measure>
```

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			optional

Source

```
<xs:element maxOccurs="unbounded" minOccurs="0" name="Measure" type="MeasureType">
  <xs:annotation>
    <xs:documentation>This is a list of requested and/or proposed and/or additional
 optional measures</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element MeasureType / Name

Namespace	No namespace
Annotations	This is simply a descriptive name
Diagram	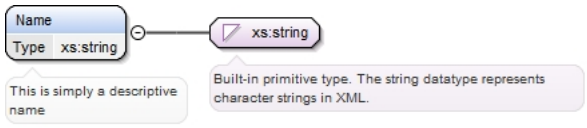
Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1

Source

```
<xs:element name="Name" type="xs:string" minOccurs="1" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>This is simply a descriptive name</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element MeasureType / Description

Namespace	No namespace
Annotations	This is intended to be the general description
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1

Source

```
<xs:element name="Description" type="xs:string" minOccurs="1" maxOccurs="1">
  <xs:annotation>
```

```
    <xs:documentation>This is intended to be the general description</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element MeasureType / Details

Namespace	No namespace
Annotations	This is used for more detailed descriptions of the measure, for instance, it may contain multiple steps
Diagram	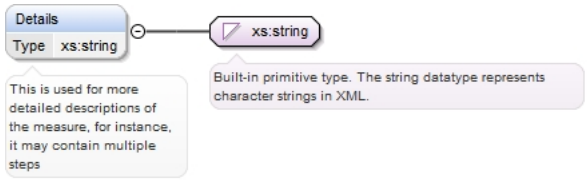
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Details" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This is used for more detailed descriptions of the measure, for instance, it may contain multiple steps</xs:documentation> </xs:annotation> </xs:element>

Element MeasureType / Author

Namespace	No namespace
Annotations	This is the original author or initiator of the measure
Diagram	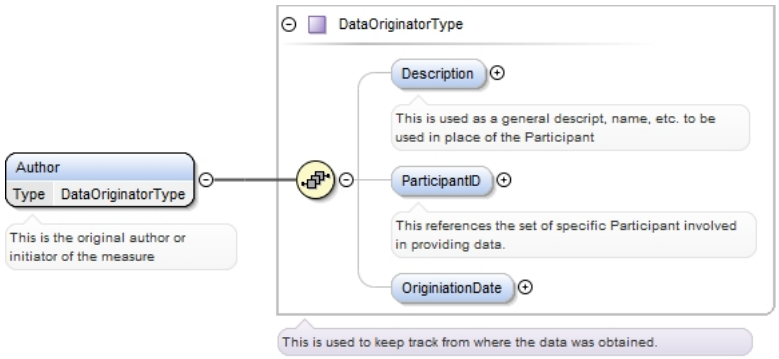
Type	DataOriginatorType
Properties	content: complex
Model	Description{0,1} , ParticipantID{0,1} , OriginiationDate{0,1}
Children	Description, OriginiationDate, ParticipantID
Instance	<Author xmlns="http://www.iepmodel.net"> <Description>{0,1}</Description> <ParticipantID ParticipantID="">{0,1}</ParticipantID> <OriginiationDate>{0,1}</OriginiationDate> </Author>
Source	<xs:element name="Author" type="DataOriginatorType"> <xs:annotation> <xs:documentation>This is the original author or initiator of the measure</xs:documentation> </xs:annotation> </xs:element>

Element MeasureType / ReasonForChange

Namespace	No namespace

Annotations	Why is the measure being implemented?
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="ReasonForChange" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Why is the measure being implemented?</xs:documentation> </xs:annotation> </xs:element>

Element MeasureType / Goal

Namespace	No namespace
Annotations	What are the intended goals to be achieved with this measure. This is optional as costs may be rolled up at the Scope of Work level
Diagram	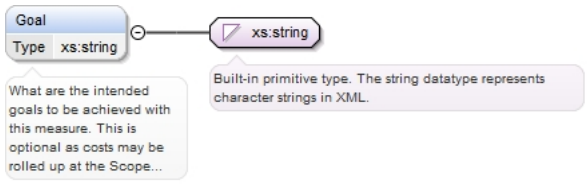
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: unbounded
Source	<xs:element name="Goal" type="xs:string" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>What are the intended goals to be achieved with this measure. This is optional as costs may be rolled up at the Scope of Work level</xs:documentation> </xs:annotation> </xs:element>

Element MeasureType / MeasureAction

Namespace	No namespace
Annotations	This is intended to define the actions to be taken on the system at a high level, either adding, removing or modifying the system
Diagram	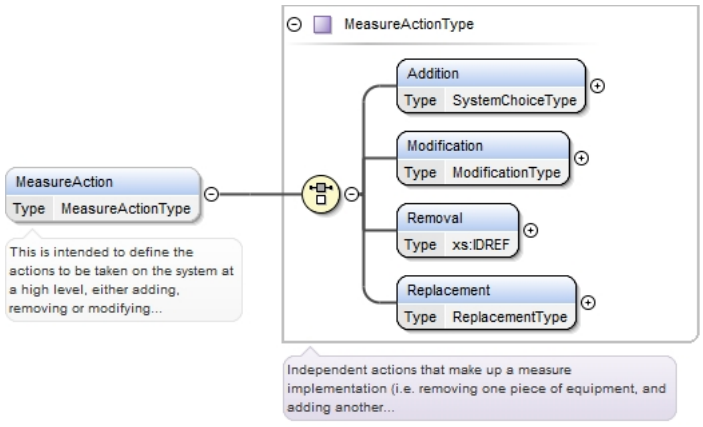
Type	MeasureActionType
Properties	content: complex

	minOccurs: 0 maxOccurs: 1
Model	Addition | Modification | Removal | Replacement
Children	Addition, Modification, Removal, Replacement
Instance	<MeasureAction> <Addition>{1,1}</Addition> <Modification>{1,1}</Modification> <Removal>{1,1}</Removal> <Replacement>{1,1}</Replacement> </MeasureAction>
Source	<xs:element name="MeasureAction" type="MeasureActionType" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This is intended to define the actions to be taken on the system at a high level, either adding, removing or modifying the system</xs:documentation> </xs:annotation> </xs:element>

Element MeasureActionType / Addition

Namespace	No namespace
Diagram	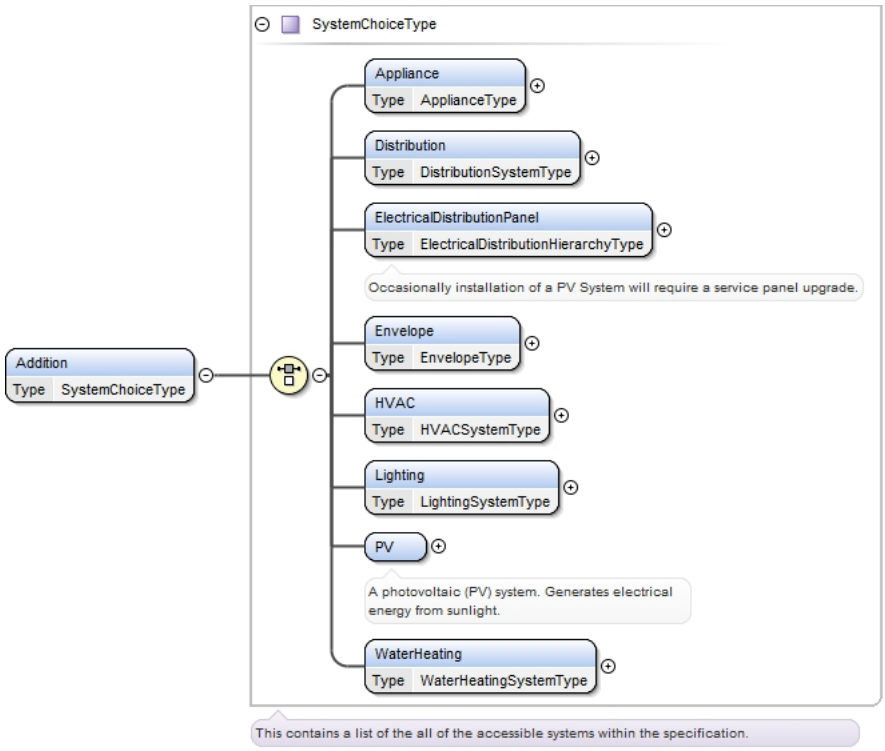
Type	SystemChoiceType
Properties	content: complex minOccurs: 1 maxOccurs: 1
Model	Appliance | Distribution | ElectricalDistributionPanel | Envelope | HVAC | Lighting | PV | WaterHeating
Children	Appliance, Distribution, ElectricalDistributionPanel, Envelope, HVAC, Lighting, PV, WaterHeating
Instance	<Addition> <Appliance>{1,1}</Appliance> <Distribution id="">{1,1}</Distribution> <ElectricalDistributionPanel>{1,1}</ElectricalDistributionPanel> <Envelope id="">{1,1}</Envelope> <HVAC id="">{1,1}</HVAC> <Lighting>{1,1}</Lighting> <PV>{1,1}</PV> <WaterHeating id="">{1,1}</WaterHeating> </Addition>
Source	<xs:element name="Addition" type="SystemChoiceType" maxOccurs="1" minOccurs="1"/>

Element SystemChoiceType / Appliance

Namespace	No namespace
Diagram	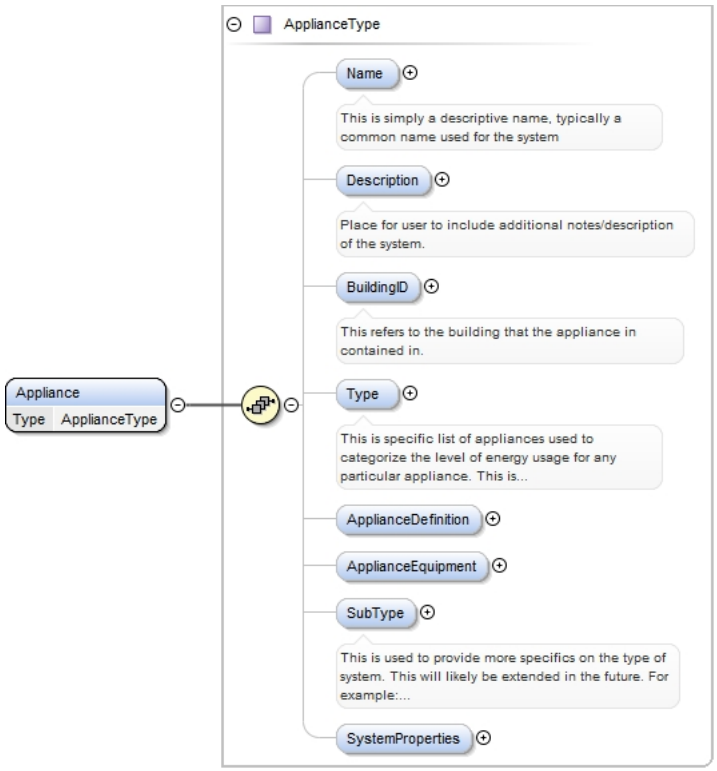
Type	ApplianceType
Properties	content: complex minOccurs: 1
Model	Name{0,1} , Description{0,1} , BuildingID{0,1} , Type{0,1} , ApplianceDefinition{0,1} , ApplianceEquipment{0,1} , SubType{0,1} , SystemProperties{0,1}
Children	ApplianceDefinition, ApplianceEquipment, BuildingID, Description, Name, SubType, SystemProperties, Type
Instance	<Appliance> <Name>{0,1}</Name> <Description>{0,1}</Description> <BuildingID>{0,1}</BuildingID> <Type>{0,1}</Type> <ApplianceDefinition Id="">{0,1}</ApplianceDefinition> <ApplianceEquipment EquipmentDefinitionIdRef="" Id="">{0,1}</ApplianceEquipment> <SubType>{0,1}</SubType> <SystemProperties>{0,1}</SystemProperties> </Appliance>
Source	<xs:element minOccurs="1" name="Appliance" type="ApplianceType"/>

Element ApplianceType / Name

Namespace	No namespace
Annotations	This is simply a descriptive name, typically a common name used for the system
Diagram	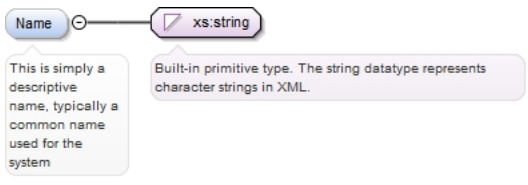
Type	xs:string
Properties	content: simple minOccurs: 0

	maxOccurs: 1
Source	<xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This is simply a descriptive name, typically a common name used for the system</xs:documentation> </xs:annotation> </xs:element>

Element ApplianceType / Description

Namespace	No namespace
Annotations	Place for user to include additional notes/description of the system.
Diagram	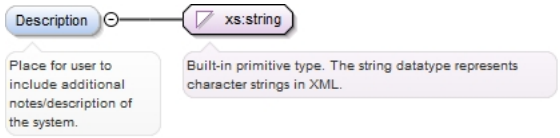
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Place for user to include additional notes/description of the system.</xs:documentation> </xs:annotation> </xs:element>

Element ApplianceType / BuildingID

Namespace	No namespace
Annotations	This refers to the building that the appliance in contained in.
Diagram	
Type	xs:IDREF
Properties	content: simple minOccurs: 0 nillable: false
Source	<xs:element minOccurs="0" name="BuildingID" nillable="false" type="xs:IDREF"> <xs:annotation> <xs:documentation>This refers to the building that the appliance in contained in.</xs:documentation> </xs:annotation> </xs:element>

Element ApplianceType / Type

Namespace	No namespace
Annotations	This is specific list of appliances used to categorize the level of energy usage for any particular appliance. This is intended to be used as a simple description of the system and is suited for use with the SaveEnergy123 tool: https://saveenergy123.com/
Diagram	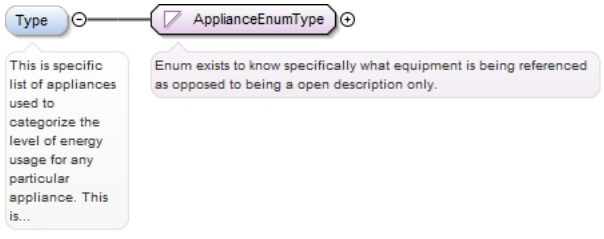

Type	ApplianceEnumType	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	enumeration	Dishwasher
	enumeration	Dryer
	enumeration	Microwave
	enumeration	Stove
	enumeration	Range
	enumeration	Refrigerator
	enumeration	Stove
	enumeration	Washer
	enumeration	Computer
	enumeration	FishTank
	enumeration	Other
	enumeration	TV
	enumeration	DVR Digital Video Recorder
	enumeration	WellPump

Source

```
<xs:element name="Type" type="ApplianceEnumType" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>This is specific list of appliances used to categorize the level
 of energy usage for any particular appliance. This is intended to be used as a simple
 description of the system and is suited for use with the SaveEnergy123 tool: https://
saveenergy123.com/</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element ApplianceType / ApplianceDefinition

Namespace	No namespace

Diagram

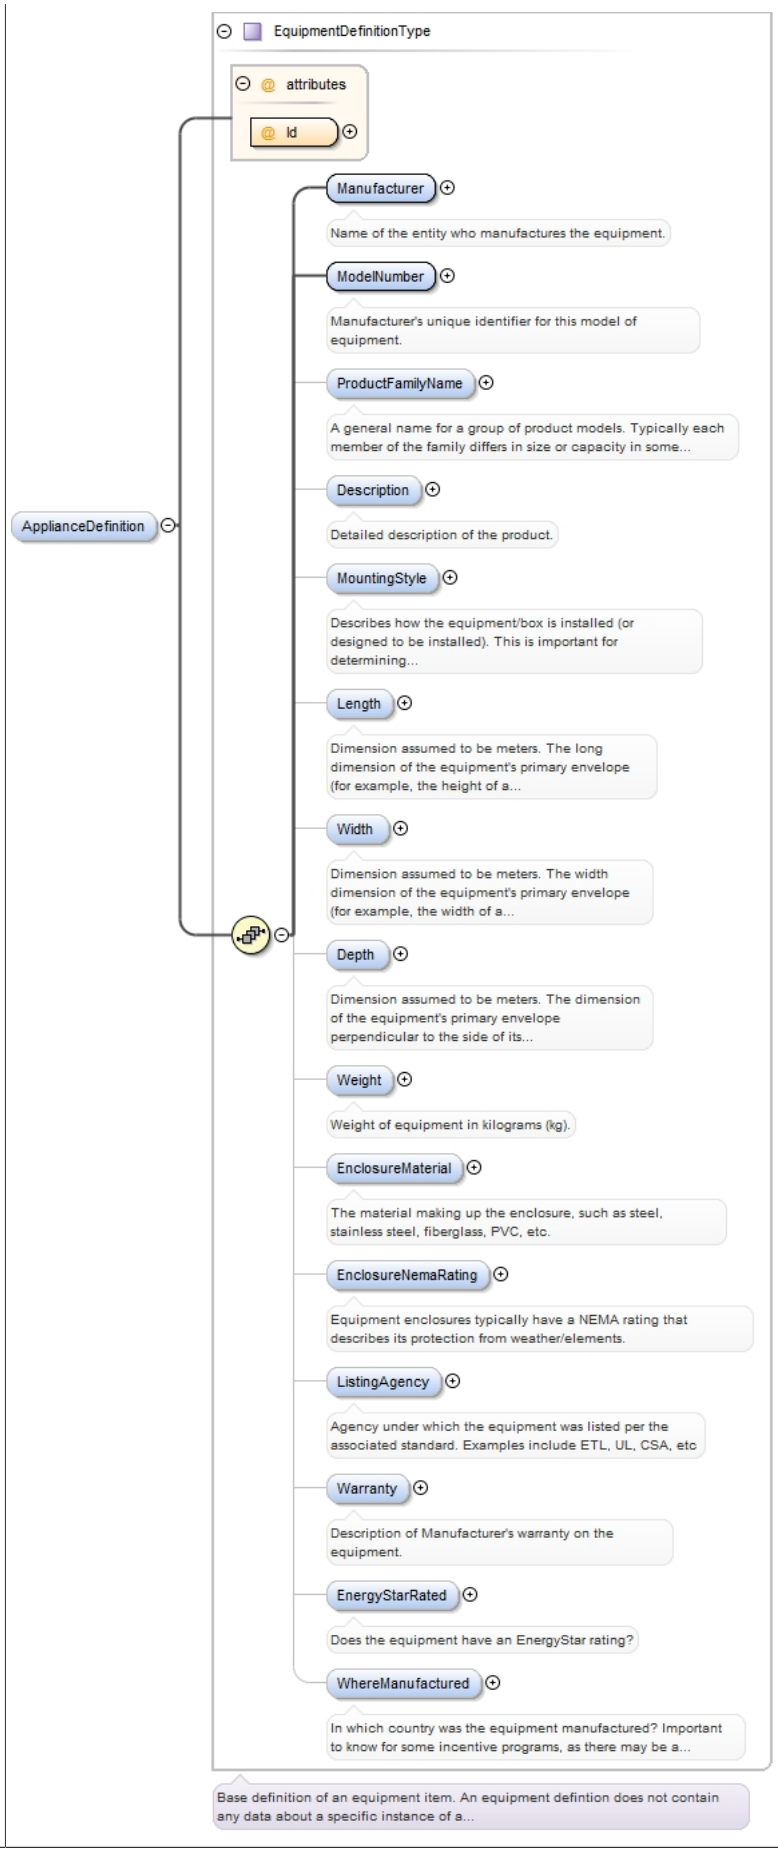
EquipmentDefinitionType
attributes
Id
ApplianceDefinition
Manufacturer
Name of the entity who manufactures the equipment.
ModelNumber
Manufacturer's unique identifier for this model of equipment.
ProductFamilyName
A general name for a group of product models. Typically each member of the family differs in size or capacity in some...
Description
Detailed description of the product.
MountingStyle
Describes how the equipment/box is installed (or designed to be installed). This is important for determining...
Length
Dimension assumed to be meters. The long dimension of the equipment's primary envelope (for example, the height of a...
Width
Dimension assumed to be meters. The width dimension of the equipment's primary envelope (for example, the width of a...
Depth
Dimension assumed to be meters. The dimension of the equipment's primary envelope perpendicular to the side of its...
Weight
Weight of equipment in kilograms (kg).
EnclosureMaterial
The material making up the enclosure, such as steel, stainless steel, fiberglass, PVC, etc.
EnclosureNemaRating
Equipment enclosures typically have a NEMA rating that describes its protection from weather/elements.
ListingAgency
Agency under which the equipment was listed per the associated standard. Examples include ETL, UL, CSA, etc
Warranty
Description of Manufacturer's warranty on the equipment.
EnergyStarRated
Does the equipment have an EnergyStar rating?
WhereManufactured
In which country was the equipment manufactured? Important to know for some incentive programs, as there may be a...
Base definition of an equipment item. An equipment defintion does not contain any data about a specific instance of a...

Type	EquipmentDefinitionType
Properties	content: complex minOccurs: 0
Model	Manufacturer , ModelNumber , ProductFamilyName{0,1} , Description{0,1} , MountingStyle{0,1} , Length{0,1} , Width{0,1} , Depth{0,1} , Weight{0,1} , EnclosureMaterial{0,1} , EnclosureNemaRating{0,1} , ListingAgency{0,1} , Warranty{0,1} , EnergyStarRated{0,1} , WhereManufactured{0,1}
Children	Depth, Description, EnclosureMaterial, EnclosureNemaRating, EnergyStarRated, Length, ListingAgency, Manufacturer, ModelNumber, MountingStyle, ProductFamilyName, Warranty, Weight, WhereManufactured, Width
Instance	<ApplianceDefinition Id="" xmlns="http://www.iepmodel.net"> <Manufacturer>{1,1}</Manufacturer> <ModelNumber>{1,1}</ModelNumber> <ProductFamilyName>{0,1}</ProductFamilyName> <Description>{0,1}</Description> <MountingStyle>{0,1}</MountingStyle> <Length>{0,1}</Length> <Width>{0,1}</Width> <Depth>{0,1}</Depth> <Weight>{0,1}</Weight> <EnclosureMaterial>{0,1}</EnclosureMaterial> <EnclosureNemaRating>{0,1}</EnclosureNemaRating> <ListingAgency>{0,1}</ListingAgency> <Warranty>{0,1}</Warranty> <EnergyStarRated>{0,1}</EnergyStarRated> <WhereManufactured>{0,1}</WhereManufactured> </ApplianceDefinition>

Attributes

QName	Type	Fixed	Default	Use
Id	xs:ID			required

Source

```
<xs:element name="ApplianceDefinition" type="EquipmentDefinitionType" minOccurs="0"/>
```

Element ApplianceType / ApplianceEquipment

Namespace	No namespace

Diagram	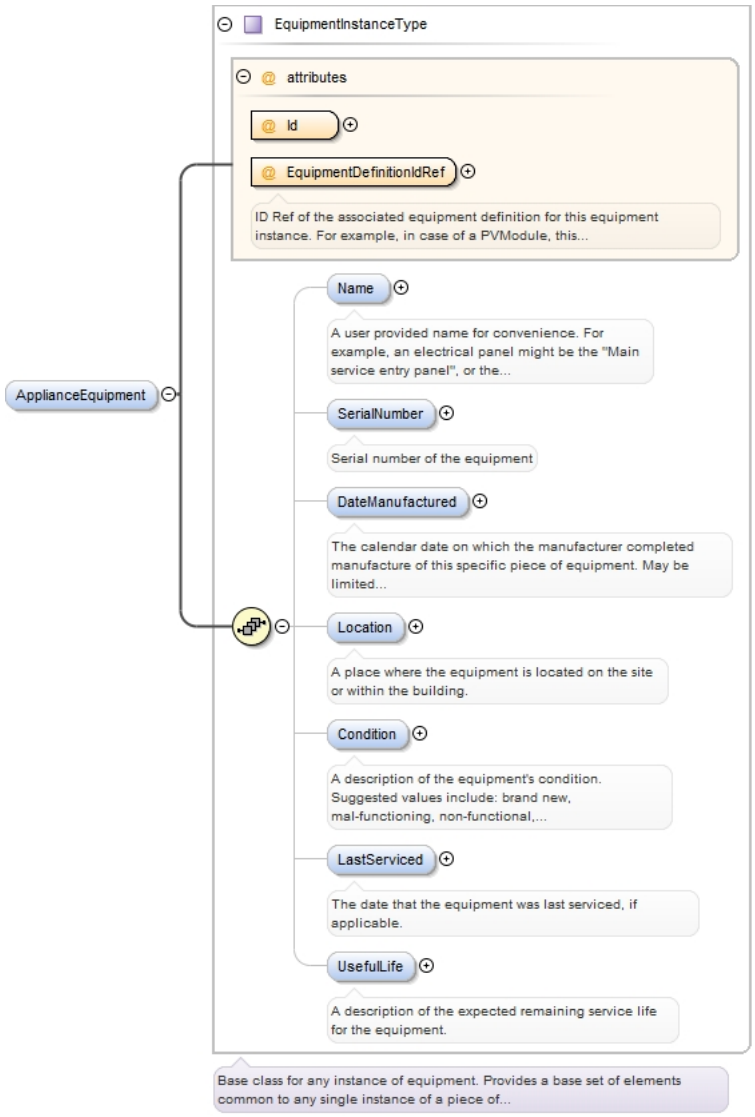
Type	EquipmentInstanceType
Properties	content: `complex` minOccurs: `0`
Model	Name{0,1} , SerialNumber{0,1} , DateManufactured{0,1} , Location{0,1} , Condition{0,1} , LastServiced{0,1} , UsefulLife{0,1}
Children	Condition, DateManufactured, LastServiced, Location, Name, SerialNumber, UsefulLife

`Instance`	`<ApplianceEquipment EquipmentDefinitionIdRef="" Id="" xmlns="http://www.iepmodel.net">`
	`  <Name>{0,1}</Name>`
	`  <SerialNumber>{0,1}</SerialNumber>`
	`  <DateManufactured>{0,1}</DateManufactured>`
	`  <Location>{0,1}</Location>`
	`  <Condition>{0,1}</Condition>`
	`  <LastServiced>{0,1}</LastServiced>`
	`  <UsefulLife>{0,1}</UsefulLife>`
	`</ApplianceEquipment>`

Attributes

QName	Type	Fixed	Default	Use
EquipmentDefinitionIdRef	IDREF			required
	ID Ref of the associated equipment definition for this equipment instance. For example, in case of a PVModule, this would be the ID of the PvModuleDefinition element that describes this particular PV module instance.			
Id	xs:ID			required

`Source`

```
<xs:element minOccurs="0" name="ApplianceEquipment" type="EquipmentInstanceType"/>
```

Element ApplianceType / SubType

Namespace	No namespace
Annotations	This is used to provide more specifics on the type of system. This will likely be extended in the future. For example: type of computer, type of TV, etc.
Diagram	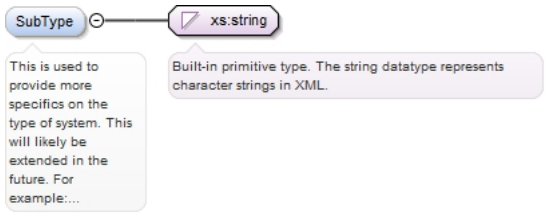
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="SubType" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This is used to provide more specifics on the type of system. This will likely be extended in the future. For example: type of computer, type of TV, etc.</xs:documentation> </xs:annotation> </xs:element>

Element ApplianceType / SystemProperties

Namespace	No namespace

Diagram	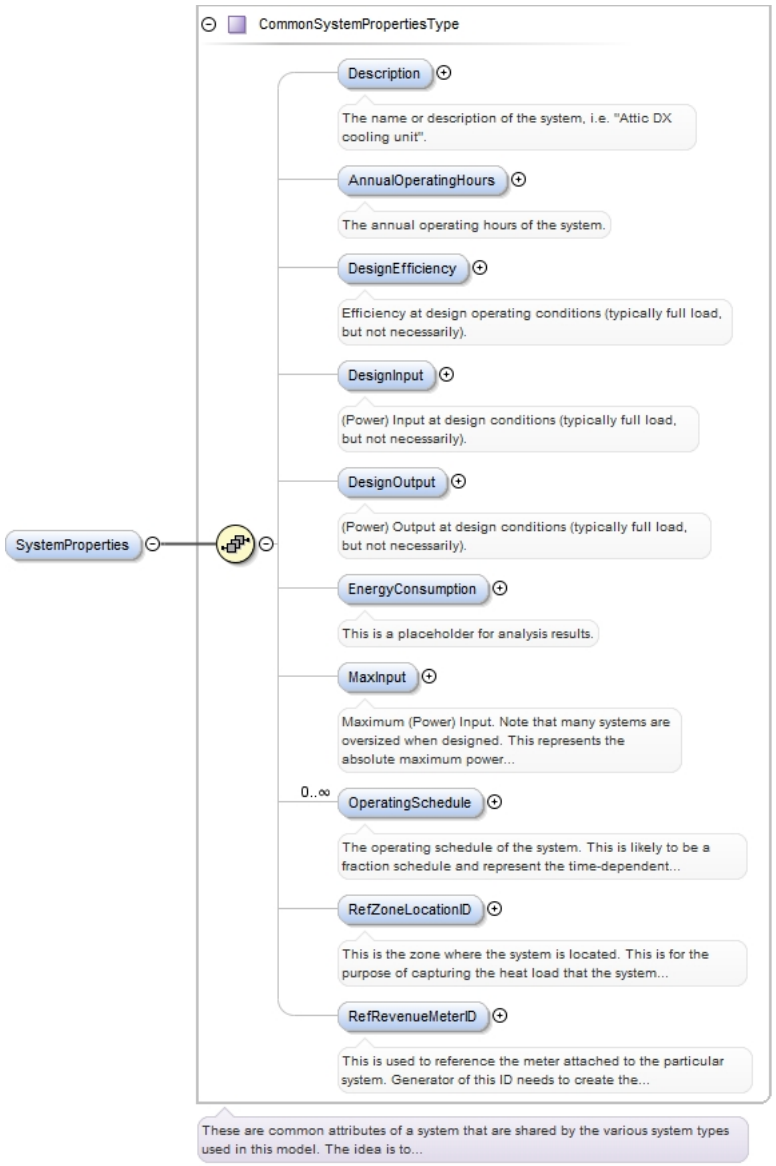
Type	CommonSystemPropertiesType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	Description{0,1} , AnnualOperatingHours{0,1} , DesignEfficiency{0,1} , DesignInput{0,1} , DesignOutput{0,1} , EnergyConsumption{0,1} , MaxInput{0,1} , OperatingSchedule* , RefZoneLocationID{0,1} , RefRevenueMeterID{0,1}
Children	AnnualOperatingHours, Description, DesignEfficiency, DesignInput, DesignOutput, EnergyConsumption, MaxInput, OperatingSchedule, RefRevenueMeterID, RefZoneLocationID
Instance	<SystemProperties> <Description>{0,1}</Description> <AnnualOperatingHours>{0,1}</AnnualOperatingHours> <DesignEfficiency TestCondition="" Unit="" UnitDesc="">{0,1}</DesignEfficiency> <DesignInput Fuel="Electricity" FuelDesc="Electricity" TestCondition="" Unit="" UnitDesc="kwh">{0,1}</DesignInput> <DesignOutput Fuel="Electricity" FuelDesc="Electricity" TestCondition="" Unit="" UnitDesc="kwh">{0,1}</DesignOutput> <EnergyConsumption>{0,1}</EnergyConsumption> <MaxInput Fuel="Electricity" FuelDesc="Electricity" TestCondition="" Unit="" UnitDesc="kwh">{0,1}</MaxInput> <OperatingSchedule>{0,unbounded}</OperatingSchedule> <RefZoneLocationID>{0,1}</RefZoneLocationID> <RefRevenueMeterID>{0,1}</RefRevenueMeterID> </SystemProperties>

Source	<xs:element name="SystemProperties" type="CommonSystemPropertiesType" minOccurs="0" maxOccurs="1"/>

Element CommonSystemPropertiesType / Description

Namespace	No namespace
Annotations	The name or description of the system, i.e. "Attic DX cooling unit".
Diagram	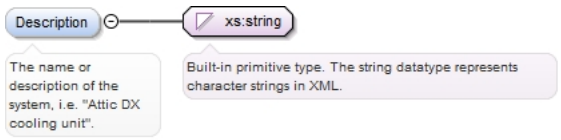
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>The name or description of the system, i.e. "Attic DX cooling unit".</xs:documentation> </xs:annotation> </xs:element>

Element CommonSystemPropertiesType / AnnualOperatingHours

Namespace	No namespace
Annotations	The annual operating hours of the system.
Diagram	
Type	restriction of xs:int
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minInclusive 0
Source	<xs:element name="AnnualOperatingHours" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>The annual operating hours of the system.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:int"> <xs:minInclusive value="0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element CommonSystemPropertiesType / DesignEfficiency

Namespace	No namespace
Annotations	Efficiency at design operating conditions (typically full load, but not necessarily).

Diagram	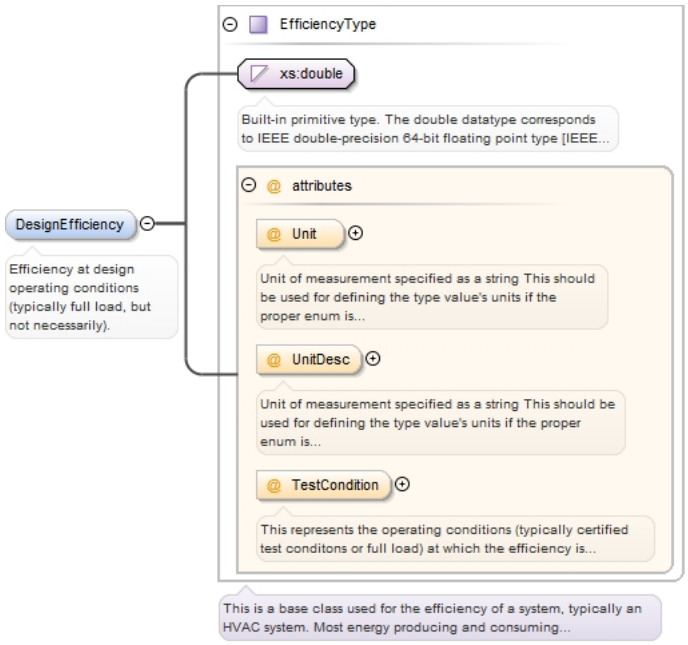
Type	EfficiencyType
Properties	content: `complex` minOccurs: `0` maxOccurs: `1`

Attributes

QName	Type	Fixed	Default	Use
TestCondition	TestConditionEnumType			optional
	This represents the operating conditions (typically certified test conditons or full load) at which the efficiency is realized. Note that at other conditions, the efficiency may be a different value.			
Unit	EfficiencyUnitEnumType			optional
	Unit of measurement specified as a string This should be used for defining the type value's units if the proper enum is not listed in Unit. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.			
UnitDesc	xs:string			optional
	Unit of measurement specified as a string This should be used for defining the type value's units if the proper enum is not listed in Unit. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.			

Source

```
<xs:element name="DesignEfficiency" type="EfficiencyType" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>Efficiency at design operating conditions (typically full load, but
 not necessarily).</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element CommonSystemPropertiesType / DesignInput

Namespace	No namespace
Annotations	(Power) Input at design conditions (typically full load, but not necessarily).

Diagram

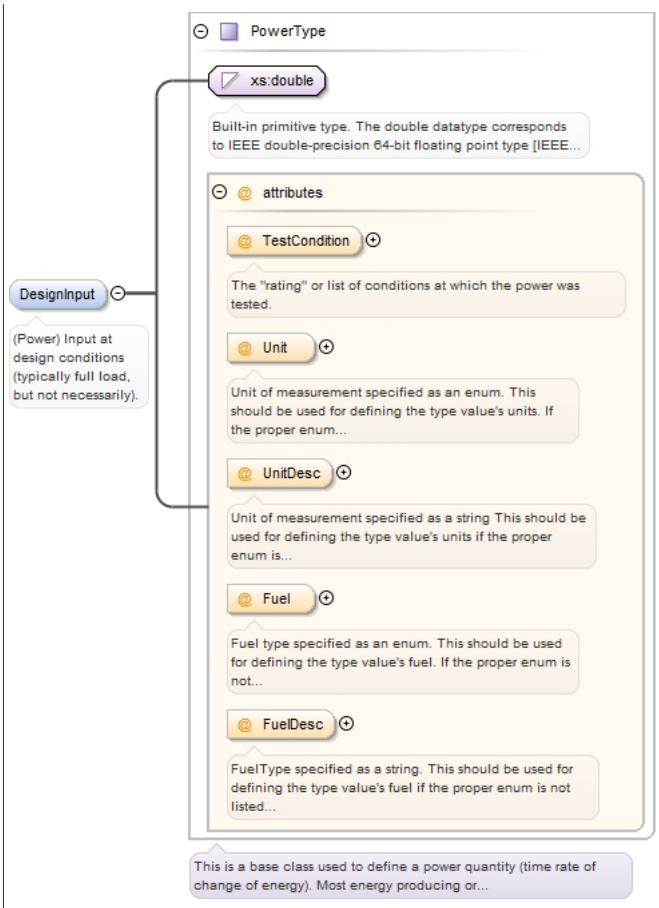

Type: PowerType

Properties

content:	complex
minOccurs:	0
maxOccurs:	1

Attributes

QName	Type	Fixed	Default	Use
Fuel	EnergyClassEnumType		Electricity	optional
	Fuel type specified as an enum. This should be used for defining the type value's fuel. If the proper enum is not listed, please use the FuelDesc field to specify the units. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the FuelDesc may contain a default type.			
FuelDesc	xs:string		Electricity	optional
	FuelType specified as a string. This should be used for defining the type value's fuel if the proper enum is not listed in Fuel. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the FuelDesc may contain a default type.			
TestCondition	xs:string			optional
	The "rating" or list of conditions at which the power was tested.			
Unit	PowerUnitEnumType			optional
	Unit of measurement specified as an enum. This should be used for defining the type value's units. If the proper enum is not listed, please use the UnitDesc field to specify the units. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.			
UnitDesc	xs:string		kwh	optional
	Unit of measurement specified as a string This should be used for defining the type value's units if the proper enum is not listed in Unit. These are all optional attributes in order to allow for a			

	QName	Type	Fixed	Default	Use
		simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.			

Source

```
<xs:element name="DesignInput" type="PowerType" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>(Power) Input at design conditions (typically full load, but not
 necessarily).</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element CommonSystemPropertiesType / DesignOutput

Namespace	No namespace
Annotations	(Power) Output at design conditions (typically full load, but not necessarily).
Diagram	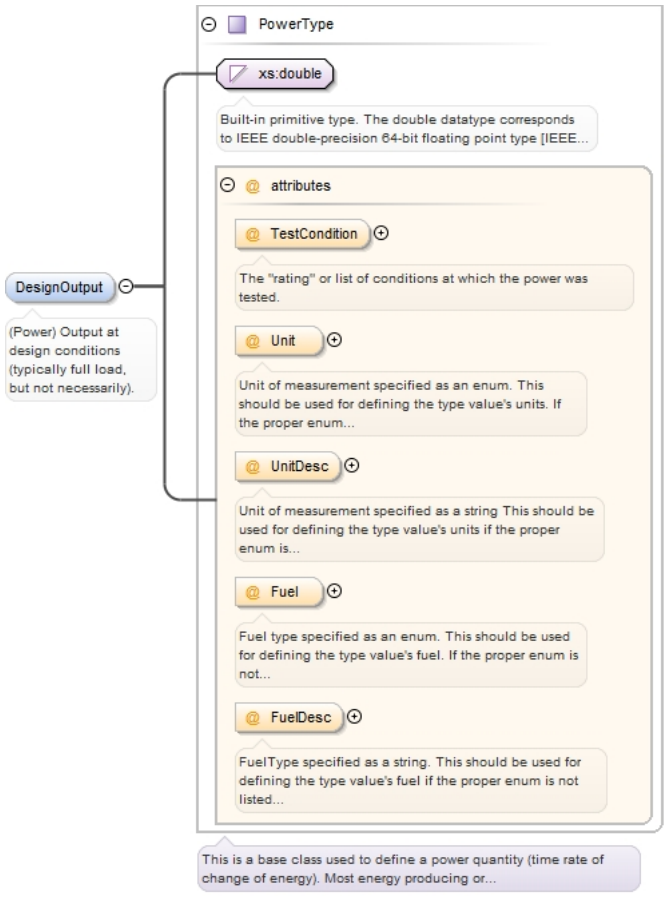
Type	PowerType
Properties	content: complex minOccurs: 0 maxOccurs: 1

Attributes

QName	Type	Fixed	Default	Use
Fuel	EnergyClassEnumType		Electricity	optional
	Fuel type specified as an enum. This should be used for defining the type value's fuel. If the proper enum is not listed, please use the FuelDesc field to specify the units. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the FuelDesc may contain a default type.			
FuelDesc	xs:string		Electricity	optional
	FuelType specified as a string. This should be used for defining the type value's fuel if the proper enum is not listed in Fuel. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the FuelDesc may contain a default type.			

QName	Type	Fixed	Default	Use
TestCondition	xs:string			optional
	The "rating" or list of conditions at which the power was tested.			
Unit	PowerUnitEnumType			optional
	Unit of measurement specified as an enum. This should be used for defining the type value's units. If the proper enum is not listed, please use the UnitDesc field to specify the units. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.			
UnitDesc	xs:string		kwh	optional
	Unit of measurement specified as a string This should be used for defining the type value's units if the proper enum is not listed in Unit. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.			

Source

```
<xs:element name="DesignOutput" type="PowerType" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>(Power) Output at design conditions (typically full load, but not
 necessarily).</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element CommonSystemPropertiesType / EnergyConsumption

Namespace	No namespace
Annotations	This is a placeholder for analysis results.
Diagram	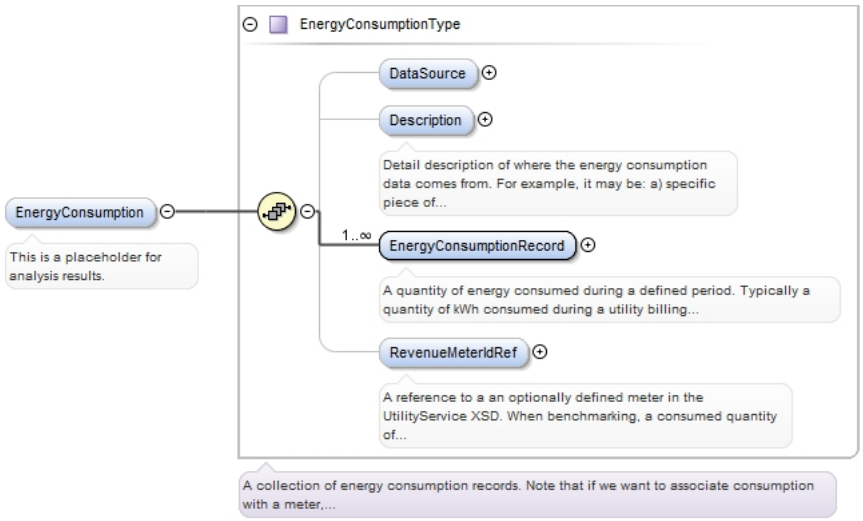
Type	EnergyConsumptionType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	DataSource{0,1} , Description{0,1} , EnergyConsumptionRecord+ , RevenueMeterIdRef{0,1}
Children	DataSource, Description, EnergyConsumptionRecord, RevenueMeterIdRef
Instance	<EnergyConsumption> <DataSource>{0,1}</DataSource> <Description>{0,1}</Description> <EnergyConsumptionRecord>{1,unbounded}</EnergyConsumptionRecord> <RevenueMeterIdRef>{0,1}</RevenueMeterIdRef> </EnergyConsumption>
Source	<xs:element name="EnergyConsumption" type="EnergyConsumptionType" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This is a placeholder for analysis results.</xs:documentation> </xs:annotation> </xs:element>

Element CommonSystemPropertiesType / MaxInput

Namespace	No namespace
Annotations	Maximum (Power) Input. Note that many systems are oversized when designed. This represents the absolute maximum power consumption of the equipment.
Diagram	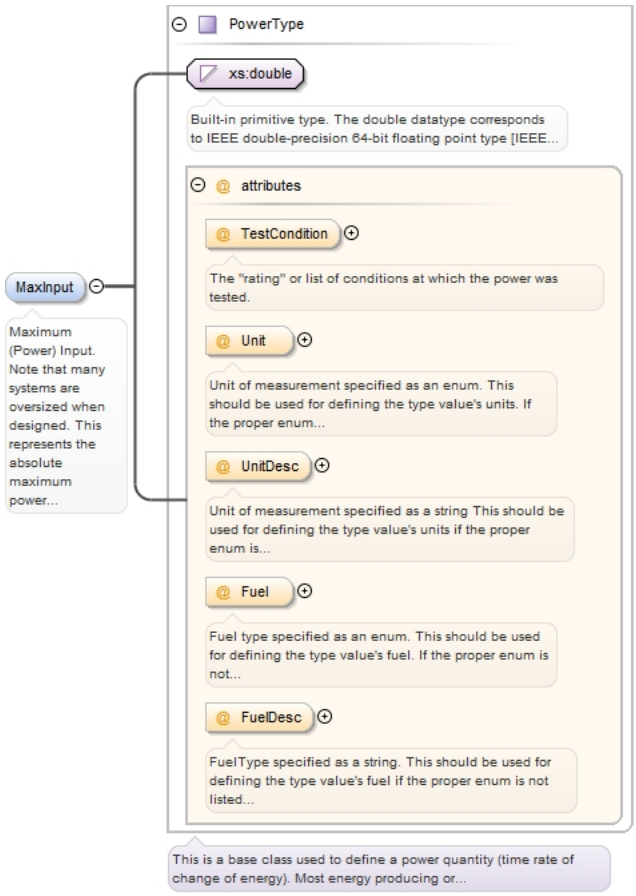
Type	PowerType

Properties

content:	complex
minOccurs:	0
maxOccurs:	1

Attributes

QName	Type	Fixed	Default	Use
Fuel	EnergyClassEnumType		Electricity	optional
	Fuel type specified as an enum. This should be used for defining the type value's fuel. If the proper enum is not listed, please use the FuelDesc field to specify the units. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the FuelDesc may contain a default type.			
FuelDesc	xs:string		Electricity	optional
	FuelType specified as a string. This should be used for defining the type value's fuel if the proper enum is not listed in Fuel. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the FuelDesc may contain a default type.			
TestCondition	xs:string			optional
	The "rating" or list of conditions at which the power was tested.			
Unit	PowerUnitEnumType			optional
	Unit of measurement specified as an enum. This should be used for defining the type value's units. If the proper enum is not listed, please use the UnitDesc field to specify the units. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.			

QName	Type	Fixed	Default	Use
UnitDesc	xs:string		kwh	optional
	Unit of measurement specified as a string This should be used for defining the type value's units if the proper enum is not listed in Unit. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.			

Source

```
<xs:element name="MaxInput" type="PowerType" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>Maximum (Power) Input. Note that many systems are oversized when designed. This represents the absolute maximum power consumption of the equipment.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element CommonSystemPropertiesType / OperatingSchedule

Namespace	No namespace
Annotations	The operating schedule of the system. This is likely to be a fraction schedule and represent the time-dependent capacity of the system. Note that particular systems, such as HVAC system, have additional schedules such as temperature schedules. This references the IDREF of a complete Schedules element at the Project level
Diagram	
Type	xs:IDREF
Properties	content: simple minOccurs: 0 maxOccurs: unbounded

Source

```
<xs:element name="OperatingSchedule" type="xs:IDREF" minOccurs="0" maxOccurs="unbounded">
  <xs:annotation>
    <xs:documentation>The operating schedule of the system. This is likely to be a fraction schedule and represent the time-dependent capacity of the system. Note that particular systems, such as HVAC system, have additional schedules such as temperature schedules. This references the IDREF of a complete Schedules element at the Project level</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element CommonSystemPropertiesType / RefZoneLocationID

Namespace	No namespace
Annotations	This is the zone where the system is located. This is for the purpose of capturing the heat load that the system introduces to its environment.
Diagram	
Type	xs:IDREF
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source

```
<xs:element name="RefZoneLocationID" type="xs:IDREF" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>This is the zone where the system is located. This is for the purpose of capturing the heat load that the system introduces to its environment.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element CommonSystemPropertiesType / RefRevenueMeterID

Namespace	No namespace
Annotations	This is used to reference the meter attached to the particular system. Generator of this ID needs to create the RevenueMeter first in the UtilityService schema in order to link back here.
Diagram	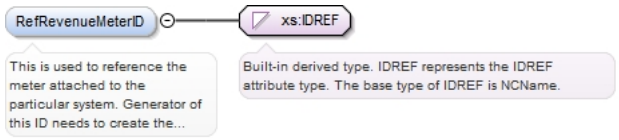
Type	xs:IDREF
Properties	content: simple minOccurs: 0
Source	<xs:element minOccurs="0" name="RefRevenueMeterID" type="xs:IDREF"> <xs:annotation> <xs:documentation>This is used to reference the meter attached to the particular system. Generator of this ID needs to create the RevenueMeter first in the UtilityService schema in order to link back here.</xs:documentation> </xs:annotation> </xs:element>

Element SystemChoiceType / Distribution

Namespace	No namespace
Diagram	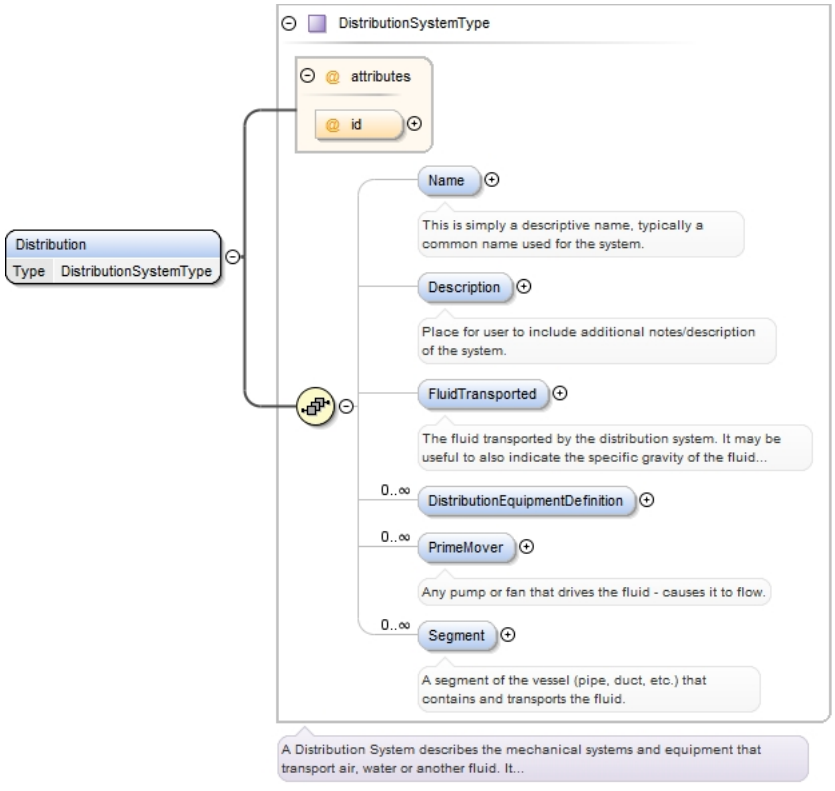
Type	DistributionSystemType
Properties	content: complex
Model	Name{0,1} , Description{0,1} , FluidTransported{0,1} , DistributionEquipmentDefinition* , PrimeMover* , Segment*
Children	Description, DistributionEquipmentDefinition, FluidTransported, Name, PrimeMover, Segment
Instance	<Distribution id=""> <Name>{0,1}</Name> <Description>{0,1}</Description> <FluidTransported>{0,1}</FluidTransported>

```
  <DistributionEquipmentDefinition Id="">{0,unbounded}</DistributionEquipmentDefinition>
  <PrimeMover id="">{0,unbounded}</PrimeMover>
  <Segment id="">{0,unbounded}</Segment>
</Distribution>
```

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			optional

Source

```
<xs:element form="unqualified" name="Distribution" type="DistributionSystemType"/>
```

Element DistributionSystemType / Name

Namespace	No namespace
Annotations	This is simply a descriptive name, typically a common name used for the system.
Diagram	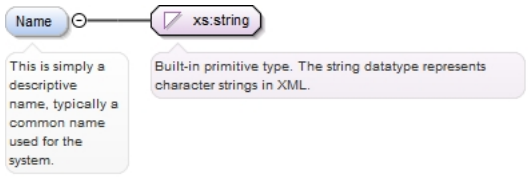
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source

```
<xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>This is simply a descriptive name, typically a common name used for
 the system.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element DistributionSystemType / Description

Namespace	No namespace
Annotations	Place for user to include additional notes/description of the system.
Diagram	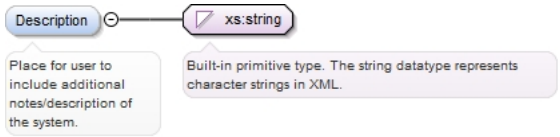
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source

```
<xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>Place for user to include additional notes/description of the
 system.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element DistributionSystemType / FluidTransported

Namespace	No namespace
Annotations	The fluid transported by the distribution system. It may be useful to also indicate the specific gravity of the fluid if it is not a common one. Examples: Air Water Glycol Oil, specific gravity = 0.8 Heat Transfer Fluid

Diagram	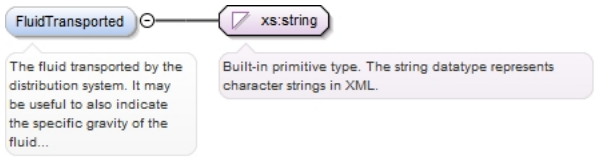
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="FluidTransported" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>The fluid transported by the distribution system. It may be useful to also indicate the specific gravity of the fluid if it is not a common one. Examples: Air Water Glycol Oil, specific gravity = 0.8 Heat Transfer Fluid</xs:documentation> </xs:annotation> </xs:element>

Element DistributionSystemType / DistributionEquipmentDefinition

Namespace	No namespace

Diagram

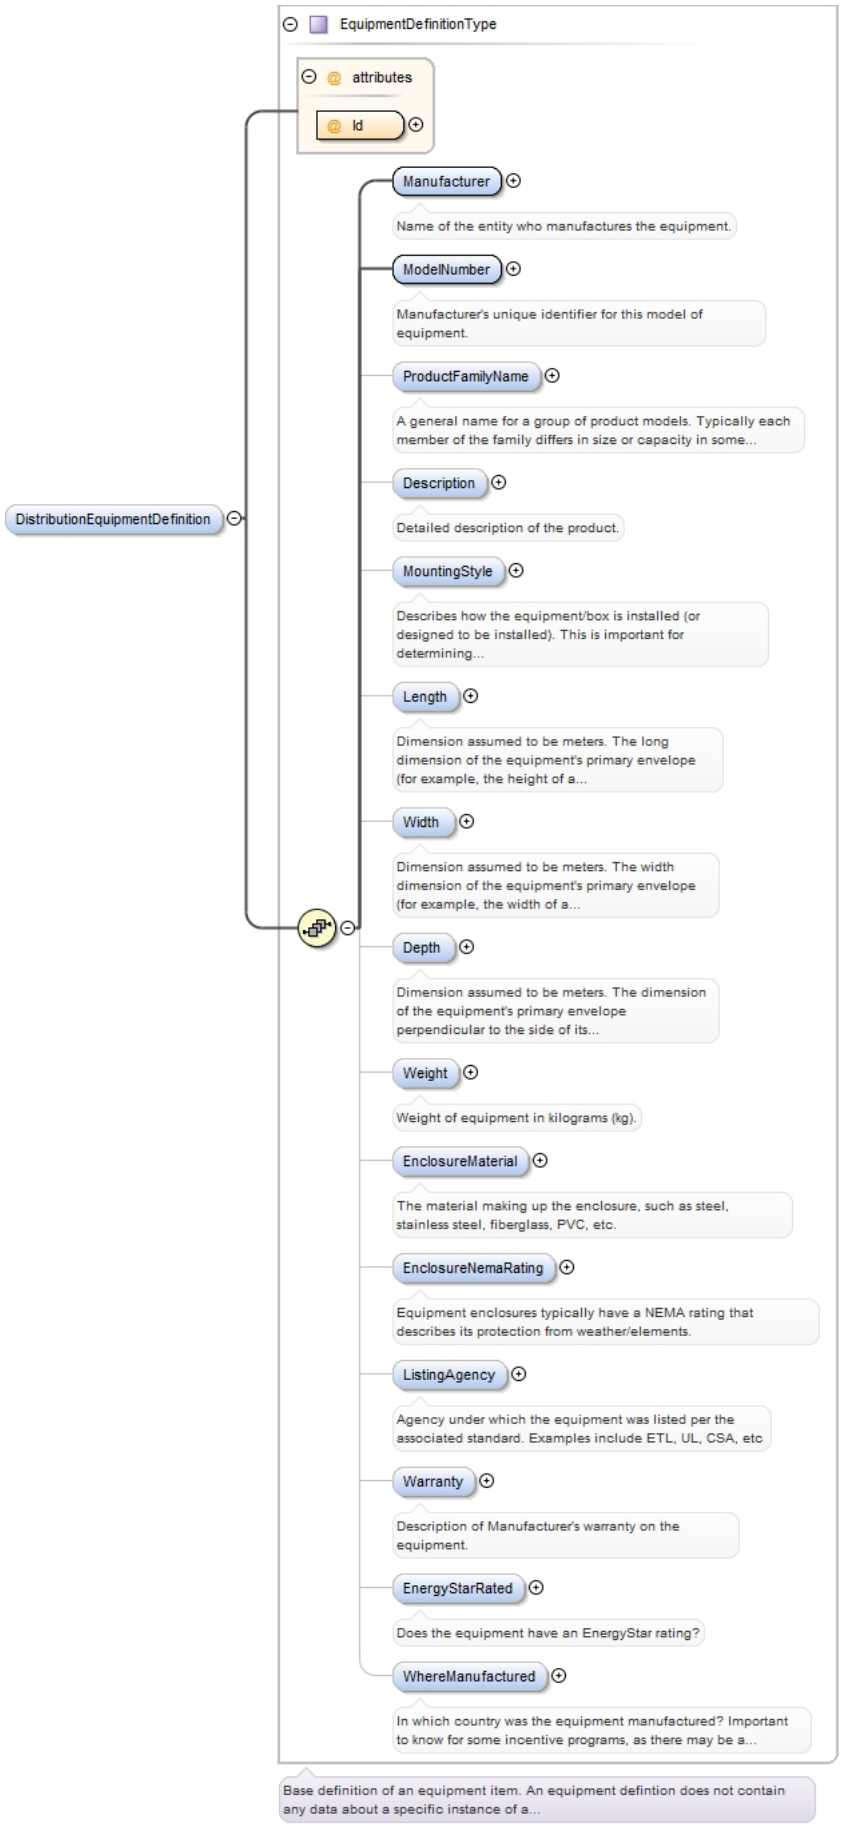
EquipmentDefinitionType
attributes
Id
Manufacturer
Name of the entity who manufactures the equipment.
ModelNumber
Manufacturer's unique identifier for this model of equipment.
ProductFamilyName
A general name for a group of product models. Typically each member of the family differs in size or capacity in some...
Description
Detailed description of the product.
MountingStyle
Describes how the equipment/box is installed (or designed to be installed). This is important for determining...
Length
Dimension assumed to be meters. The long dimension of the equipment's primary envelope (for example, the height of a...
Width
Dimension assumed to be meters. The width dimension of the equipment's primary envelope (for example, the width of a...
Depth
Dimension assumed to be meters. The dimension of the equipment's primary envelope perpendicular to the side of its...
Weight
Weight of equipment in kilograms (kg).
EnclosureMaterial
The material making up the enclosure, such as steel, stainless steel, fiberglass, PVC, etc.
EnclosureNemaRating
Equipment enclosures typically have a NEMA rating that describes its protection from weather/elements.
ListingAgency
Agency under which the equipment was listed per the associated standard. Examples include ETL, UL, CSA, etc
Warranty
Description of Manufacturer's warranty on the equipment.
EnergyStarRated
Does the equipment have an EnergyStar rating?
WhereManufactured
In which country was the equipment manufactured? Important to know for some incentive programs, as there may be a...
Base definition of an equipment item. An equipment defintion does not contain any data about a specific instance of a...
DistributionEquipmentDefinition

Type	EquipmentDefinitionType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Manufacturer , ModelNumber , ProductFamilyName{0,1} , Description{0,1} , MountingStyle{0,1} , Length{0,1} , Width{0,1} , Depth{0,1} , Weight{0,1} , EnclosureMaterial{0,1} , EnclosureNemaRating{0,1} , ListingAgency{0,1} , Warranty{0,1} , EnergyStarRated{0,1} , WhereManufactured{0,1}
Children	Depth, Description, EnclosureMaterial, EnclosureNemaRating, EnergyStarRated, Length, ListingAgency, Manufacturer, ModelNumber, MountingStyle, ProductFamilyName, Warranty, Weight, WhereManufactured, Width
Instance	<DistributionEquipmentDefinition Id="" xmlns="http://www.iepmodel.net"> <Manufacturer>{1,1}</Manufacturer> <ModelNumber>{1,1}</ModelNumber> <ProductFamilyName>{0,1}</ProductFamilyName> <Description>{0,1}</Description> <MountingStyle>{0,1}</MountingStyle> <Length>{0,1}</Length> <Width>{0,1}</Width> <Depth>{0,1}</Depth> <Weight>{0,1}</Weight> <EnclosureMaterial>{0,1}</EnclosureMaterial> <EnclosureNemaRating>{0,1}</EnclosureNemaRating> <ListingAgency>{0,1}</ListingAgency> <Warranty>{0,1}</Warranty> <EnergyStarRated>{0,1}</EnergyStarRated> <WhereManufactured>{0,1}</WhereManufactured> </DistributionEquipmentDefinition>

Attributes	QName	Type	Fixed	Default	Use
	Id	xs:ID			required

Source	<xs:element maxOccurs="unbounded" minOccurs="0" name="DistributionEquipmentDefinition" type="EquipmentDefinitionType"/>

Element DistributionSystemType / PrimeMover

Namespace	No namespace
Annotations	Any pump or fan that drives the fluid - causes it to flow.

Diagram	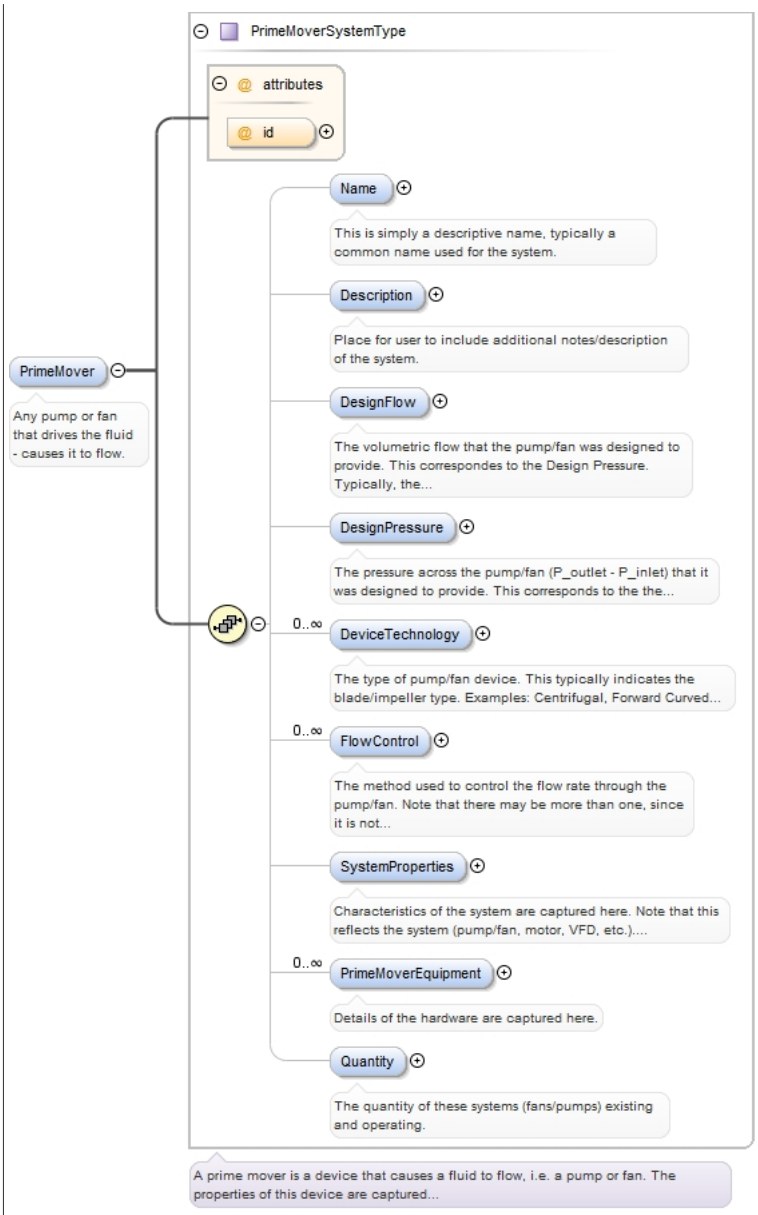
Type	PrimeMoverSystemType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Name{0,1} , Description{0,1} , DesignFlow{0,1} , DesignPressure{0,1} , DeviceTechnology* , FlowControl* , SystemProperties{0,1} , PrimeMoverEquipment* , Quantity{0,1}
Children	Description, DesignFlow, DesignPressure, DeviceTechnology, FlowControl, Name, PrimeMoverEquipment, Quantity, SystemProperties
Instance	<PrimeMover id=""> <Name>{0,1}</Name> <Description>{0,1}</Description> <DesignFlow Unit="">{0,1}</DesignFlow> <DesignPressure Unit="">{0,1}</DesignPressure> <DeviceTechnology>{0,unbounded}</DeviceTechnology> <FlowControl>{0,unbounded}</FlowControl> <SystemProperties>{0,1}</SystemProperties> <PrimeMoverEquipment EquipmentDefinitionIdRef="" Id="">{0,unbounded}</PrimeMoverEquipment> <Quantity>{0,1}</Quantity> </PrimeMover>

Attributes	QName	Type	Fixed	Default	Use
	id	xs:ID			optional

Source

```
<xs:element name="PrimeMover" type="PrimeMoverSystemType" minOccurs="0"
 maxOccurs="unbounded">
  <xs:annotation>
    <xs:documentation>Any pump or fan that drives the fluid - causes it to flow.</
xs:documentation>
  </xs:annotation>
</xs:element>
```

Element PrimeMoverSystemType / Name

Namespace	No namespace
Annotations	This is simply a descriptive name, typically a common name used for the system.
Diagram	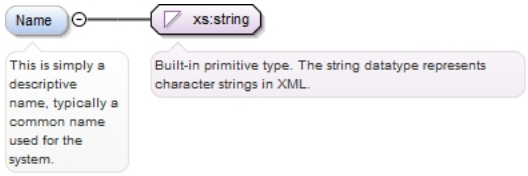
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This is simply a descriptive name, typically a common name used for the system.</xs:documentation> </xs:annotation> </xs:element>

Element PrimeMoverSystemType / Description

Namespace	No namespace
Annotations	Place for user to include additional notes/description of the system.
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Place for user to include additional notes/description of the system.</xs:documentation> </xs:annotation> </xs:element>

Element PrimeMoverSystemType / DesignFlow

Namespace	No namespace
Annotations	The volumetric flow that the pump/fan was designed to provide. This correspondes to the Design Pressure. Typically, the design pressure and design flow represent the maximum efficiency point on the manufacturer fan/pump curve. Typically, this is not the maximum flow that the device can provide.

Diagram	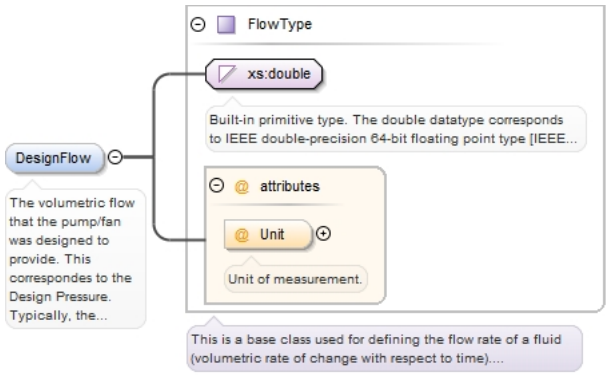
Type	FlowType
Properties	content: complex minOccurs: 0 maxOccurs: 1

Attributes

QName	Type	Fixed	Default	Use
Unit	FlowUnitEnumType			optional
	Unit of measurement.			

Source

```
<xs:element name="DesignFlow" type="FlowType" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>The volumetric flow that the pump/fan was designed to provide. This
 correspondes to the Design Pressure. Typically, the design pressure and design flow
 represent the maximum efficiency point on the manufacturer fan/pump curve. Typically,
 this is not the maximum flow that the device can provide.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element PrimeMoverSystemType / DesignPressure

Namespace	No namespace
Annotations	The pressure across the pump/fan (P_outlet - P_inlet) that it was designed to provide. This corresponds to the the Design Flow. Typically, the design pressure and design flow represent the maximum efficiency point on the manufacturer fan/pump curve. Typically, this is not the maximum pressure across the device.
Diagram	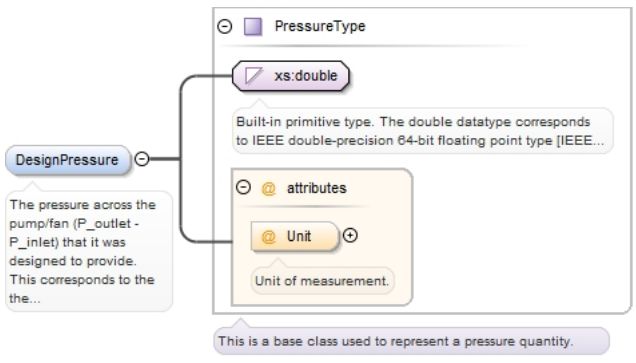
Type	PressureType
Properties	content: complex minOccurs: 0 maxOccurs: 1

Attributes

QName	Type	Fixed	Default	Use
Unit	PressureUnitEnumType			optional
	Unit of measurement.			

Source

```
<xs:element name="DesignPressure" type="PressureType" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>The pressure across the pump/fan (P_outlet - P_inlet) that it was
 designed to provide. This corresponds to the the Design Flow. Typically, the design
```

```
 pressure and design flow represent the maximum efficiency point on the manufacturer
 fan/pump curve. Typically, this is not the maximum pressure across the device.</
xs:documentation>
  </xs:annotation>
</xs:element>
```

Element PrimeMoverSystemType / DeviceTechnology

Namespace	No namespace
Annotations	The type of pump/fan device. This typically indicates the blade/impeller type. Examples: Centrifugal, Forward Curved Centrifugal, Backward Curved Centrifugal, Radial Blade Centrifugal, Airfoil Centrifugal, Plenum Axial, Propeller Axial, Turbine
Diagram	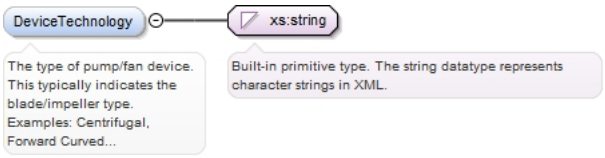
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: unbounded

Source	`<xs:element name="DeviceTechnology" type="xs:string" minOccurs="0" maxOccurs="unbounded">`
	`  <xs:annotation>`
	`  <xs:documentation>`The type of pump/fan device. This typically indicates the blade/impeller type. Examples: Centrifugal, Forward Curved Centrifugal, Backward Curved Centrifugal, Radial Blade Centrifugal, Airfoil Centrifugal, Plenum Axial, Propeller Axial, Turbine`</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element PrimeMoverSystemType / FlowControl

Namespace	No namespace
Annotations	The method used to control the flow rate through the pump/fan. Note that there may be more than one, since it is not uncommon (though somewhat inefficient) to find a VFD and throttle used. Examples: Valve-Manual/Automatic Damper-Manual/Automatic Variable Speed Variable Pitch Blade Inlet Guide Vane Outlet Damper
Diagram	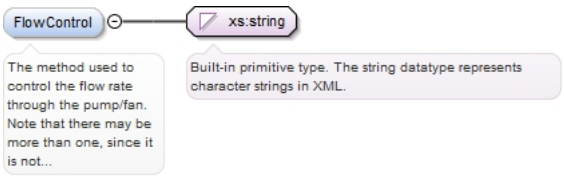
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: unbounded

Source	`<xs:element name="FlowControl" type="xs:string" minOccurs="0" maxOccurs="unbounded">`
	`  <xs:annotation>`
	`  <xs:documentation>`The method used to control the flow rate through the pump/fan. Note that there may be more than one, since it is not uncommon (though somewhat inefficient) to find a VFD and throttle used. Examples: Valve-Manual/Automatic Damper-Manual/Automatic Variable Speed Variable Pitch Blade Inlet Guide Vane Outlet Damper`</xs:documentation>`
	`  </xs:annotation>`

```
</xs:element>
```

Element PrimeMoverSystemType / SystemProperties

Namespace	No namespace
Annotations	Characteristics of the system are captured here. Note that this reflects the system (pump/fan, motor, VFD, etc.). Properties of the individual components may be captured in equipment attributes.
Diagram	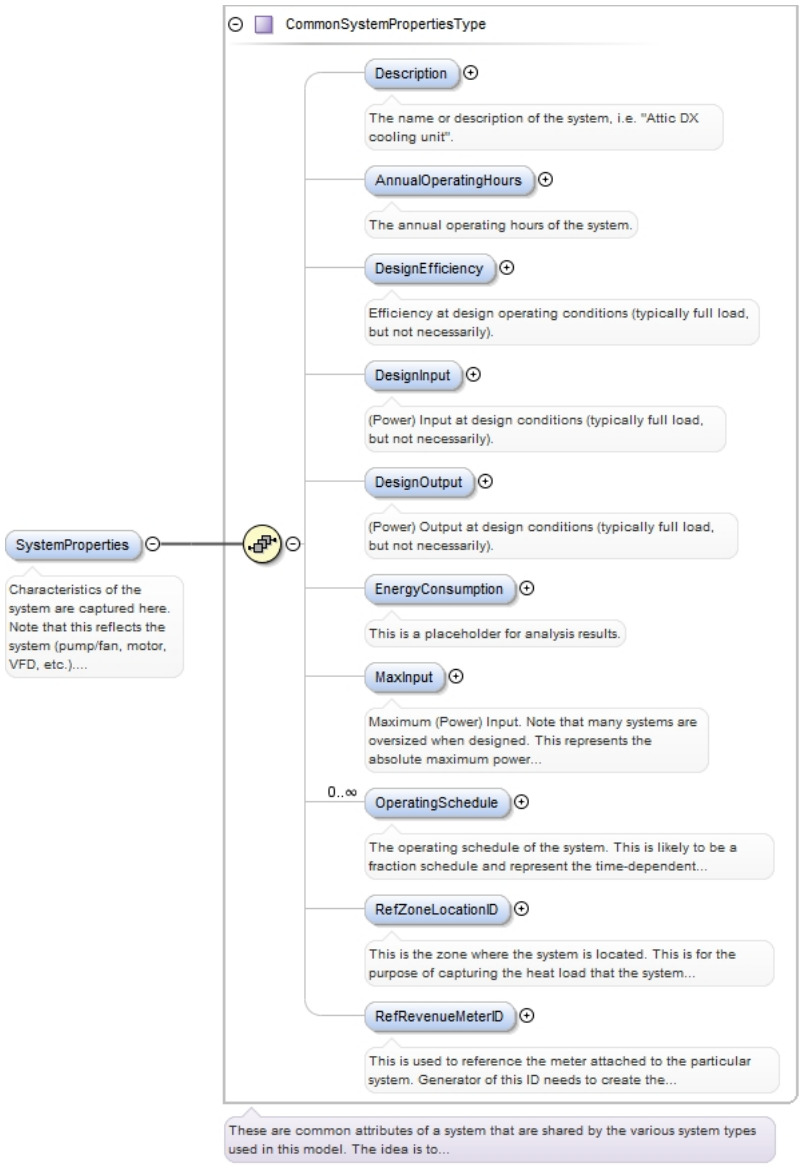
Type	CommonSystemPropertiesType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	Description{0,1} , AnnualOperatingHours{0,1} , DesignEfficiency{0,1} , DesignInput{0,1} , DesignOutput{0,1} , EnergyConsumption{0,1} , MaxInput{0,1} , OperatingSchedule* , RefZoneLocationID{0,1} , RefRevenueMeterID{0,1}
Children	AnnualOperatingHours, Description, DesignEfficiency, DesignInput, DesignOutput, EnergyConsumption, MaxInput, OperatingSchedule, RefRevenueMeterID, RefZoneLocationID
Instance	<SystemProperties> <Description>{0,1}</Description> <AnnualOperatingHours>{0,1}</AnnualOperatingHours> <DesignEfficiency TestCondition="" Unit="" UnitDesc="">{0,1}</DesignEfficiency> <DesignInput Fuel="Electricity" FuelDesc="Electricity" TestCondition="" Unit="" UnitDesc="kwh">{0,1}</DesignInput>

```
  <DesignOutput Fuel="Electricity" FuelDesc="Electricity" TestCondition="" Unit="" UnitDesc="kwh">{0,1}<
DesignOutput>
  <EnergyConsumption>{0,1}</EnergyConsumption>
  <MaxInput Fuel="Electricity" FuelDesc="Electricity" TestCondition="" Unit="" UnitDesc="kwh">{0,1}</
MaxInput>
  <OperatingSchedule>{0,unbounded}</OperatingSchedule>
  <RefZoneLocationID>{0,1}</RefZoneLocationID>
  <RefRevenueMeterID>{0,1}</RefRevenueMeterID>
</SystemProperties>
```

Source

```
<xs:element name="SystemProperties" type="CommonSystemPropertiesType" minOccurs="0"
 maxOccurs="1">
  <xs:annotation>
    <xs:documentation>Characteristics of the system are captured here. Note that this
 reflects the system (pump/fan, motor, VFD, etc.). Properties of the individual components
 may be captured in equipment attributes.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element PrimeMoverSystemType / PrimeMoverEquipment

Namespace	No namespace
Annotations	Details of the hardware are captured here.
Diagram	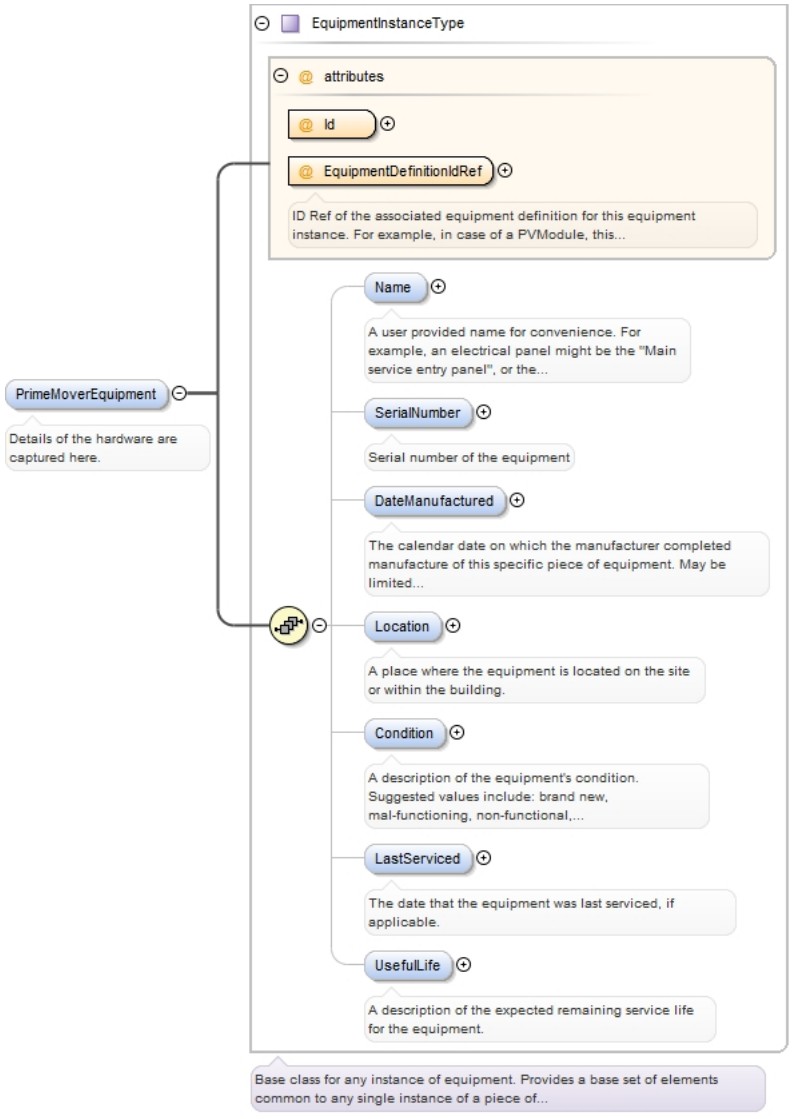
Type	EquipmentInstanceType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded

Model	Name{0,1} , SerialNumber{0,1} , DateManufactured{0,1} , Location{0,1} , Condition{0,1} , LastServiced{0,1} , UsefulLife{0,1}
Children	Condition, DateManufactured, LastServiced, Location, Name, SerialNumber, UsefulLife
Instance	<PrimeMoverEquipment EquipmentDefinitionIdRef="" Id="" xmlns="http://www.iepmodel.net"> <Name>{0,1}</Name> <SerialNumber>{0,1}</SerialNumber> <DateManufactured>{0,1}</DateManufactured> <Location>{0,1}</Location> <Condition>{0,1}</Condition> <LastServiced>{0,1}</LastServiced> <UsefulLife>{0,1}</UsefulLife> </PrimeMoverEquipment>

Attributes

QName	Type	Fixed	Default	Use
EquipmentDefinitionIdRef	IDREF			required
	ID Ref of the associated equipment definition for this equipment instance. For example, in case of a PVModule, this would be the ID of the PvModuleDefinition element that describes this particular PV module instance.			
Id	xs:ID			required

Source

```
<xs:element name="PrimeMoverEquipment" type="EquipmentInstanceType" minOccurs="0"
 maxOccurs="unbounded">
  <xs:annotation>
    <xs:documentation>Details of the hardware are captured here.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element PrimeMoverSystemType / Quantity

Namespace	No namespace
Annotations	The quantity of these systems (fans/pumps) existing and operating.
Diagram	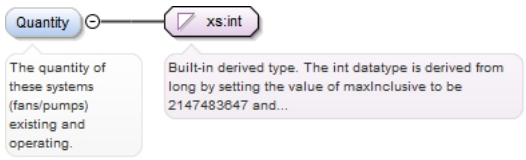
Type	xs:int

Properties

content:	simple
minOccurs:	0
maxOccurs:	1

Source

```
<xs:element name="Quantity" type="xs:int" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>The quantity of these systems (fans/pumps) existing and operating.</
xs:documentation>
  </xs:annotation>
</xs:element>
```

Element DistributionSystemType / Segment

Namespace	No namespace
Annotations	A segment of the vessel (pipe, duct, etc.) that contains and transports the fluid.

Diagram

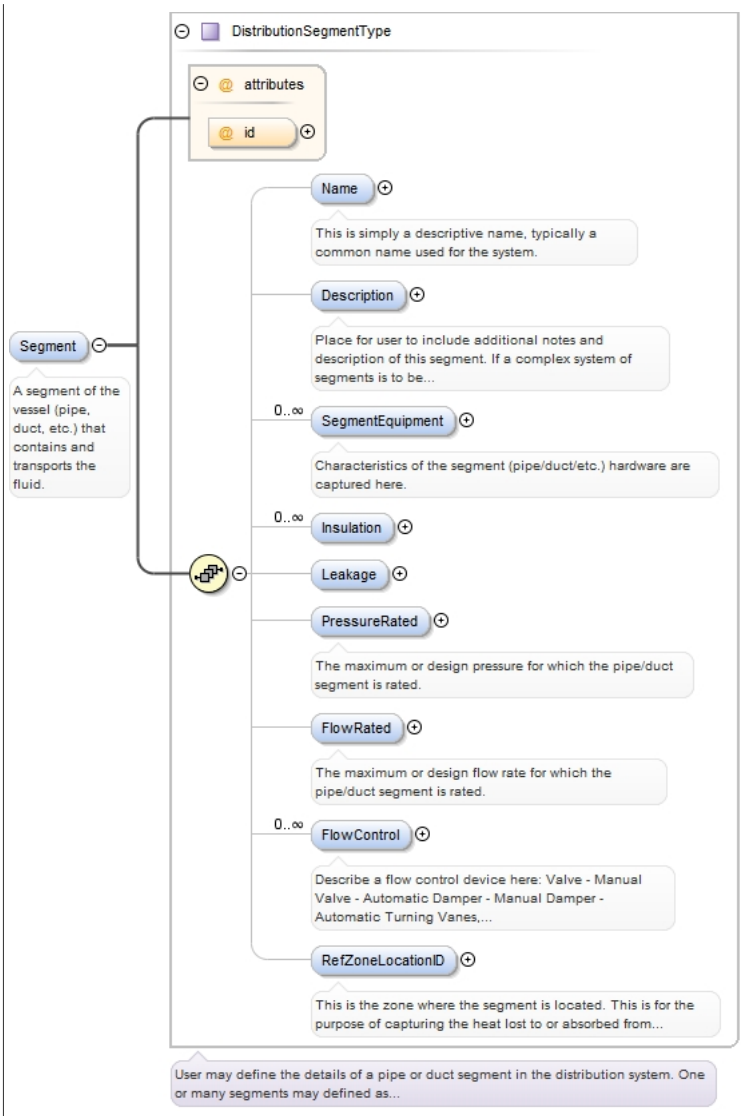

Type: DistributionSegmentType

Properties

content:	complex
minOccurs:	0
maxOccurs:	unbounded

Model: Name{0,1} , Description{0,1} , SegmentEquipment* , Insulation* , Leakage{0,1} , PressureRated{0,1} , FlowRated{0,1} , FlowControl* , RefZoneLocationID{0,1}

Children: Description, FlowControl, FlowRated, Insulation, Leakage, Name, PressureRated, RefZoneLocationID, SegmentEquipment

Instance

```
<Segment id="">
  <Name>{0,1}</Name>
  <Description>{0,1}</Description>
  <SegmentEquipment EquipmentDefinitionIdRef="" Id="">{0,unbounded}</SegmentEquipment>
  <Insulation>{0,unbounded}</Insulation>
  <Leakage>{0,1}</Leakage>
  <PressureRated Unit="">{0,1}</PressureRated>
  <FlowRated Unit="">{0,1}</FlowRated>
  <FlowControl>{0,unbounded}</FlowControl>
  <RefZoneLocationID>{0,1}</RefZoneLocationID>
</Segment>
```

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			optional

Source

```
<xs:element maxOccurs="unbounded" minOccurs="0" name="Segment"
 type="DistributionSegmentType">
  <xs:annotation>
```

```
    <xs:documentation>A segment of the vessel (pipe, duct, etc.) that contains and
 transports the fluid.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element DistributionSegmentType / Name

Namespace	No namespace
Annotations	This is simply a descriptive name, typically a common name used for the system.
Diagram	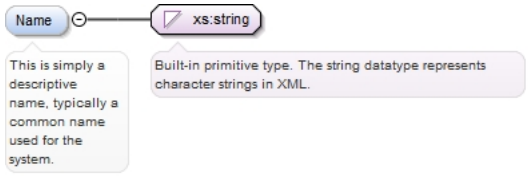
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This is simply a descriptive name, typically a common name used for the system.</xs:documentation> </xs:annotation> </xs:element>

Element DistributionSegmentType / Description

Namespace	No namespace
Annotations	Place for user to include additional notes and description of this segment. If a complex system of segments is to be defined, it would be useful to describe the system here. Other quantities or features may also be described here, such as the loss coefficient (i.e. pressure drop due to fluid friction).
Diagram	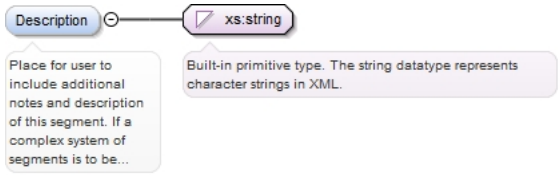
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Place for user to include additional notes and description of this segment. If a complex system of segments is to be defined, it would be useful to describe the system here. Other quantities or features may also be described here, such as the loss coefficient (i.e. pressure drop due to fluid friction).</xs:documentation> </xs:annotation> </xs:element>

Element DistributionSegmentType / SegmentEquipment

Namespace	No namespace
Annotations	Characteristics of the segment (pipe/duct/etc.) hardware are captured here.

Diagram	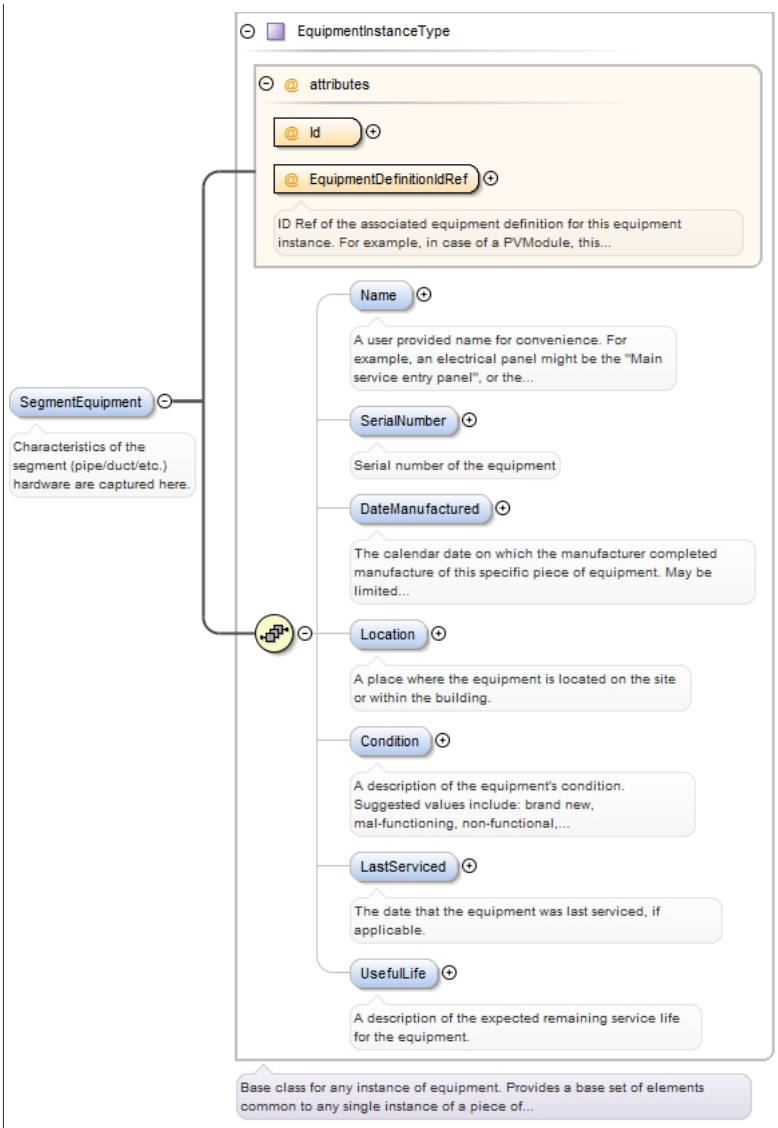
Type	EquipmentInstanceType
Properties	content: `complex` minOccurs: `0` maxOccurs: `unbounded`
Model	Name{0,1} , SerialNumber{0,1} , DateManufactured{0,1} , Location{0,1} , Condition{0,1} , LastServiced{0,1} , UsefulLife{0,1}
Children	Condition, DateManufactured, LastServiced, Location, Name, SerialNumber, UsefulLife

`Instance`	`<SegmentEquipment EquipmentDefinitionIdRef="" Id="" xmlns="http://www.iepmodel.net">`
	`  <Name>{0,1}</Name>`
	`  <SerialNumber>{0,1}</SerialNumber>`
	`  <DateManufactured>{0,1}</DateManufactured>`
	`  <Location>{0,1}</Location>`
	`  <Condition>{0,1}</Condition>`
	`  <LastServiced>{0,1}</LastServiced>`
	`  <UsefulLife>{0,1}</UsefulLife>`
	`</SegmentEquipment>`

Attributes

QName	Type	Fixed	Default	Use
EquipmentDefinitionIdRef	IDREF			required
	ID Ref of the associated equipment definition for this equipment instance. For example, in case of a PVModule, this would be the ID of the PvModuleDefinition element that describes this particular PV module instance.			
Id	xs:ID			required

Source	<xs:element name="SegmentEquipment" type="EquipmentInstanceType" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>Characteristics of the segment (pipe/duct/etc.) hardware are captured here.</xs:documentation> </xs:annotation> </xs:element>

Element DistributionSegmentType / Insulation

Namespace	No namespace
Diagram	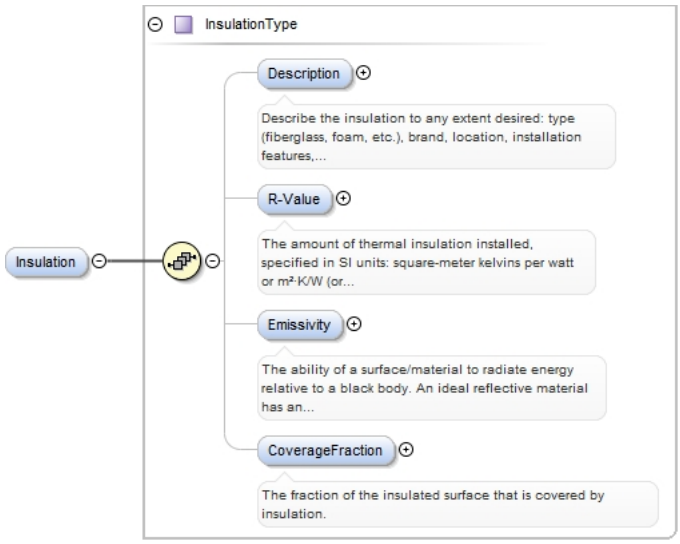
Type	InsulationType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Description{0,1} , R-Value{0,1} , Emissivity{0,1} , CoverageFraction{0,1}
Children	CoverageFraction, Description, Emissivity, R-Value
Instance	<Insulation> <Description>{0,1}</Description> <R-Value>{0,1}</R-Value> <Emissivity>{0,1}</Emissivity> <CoverageFraction>{0,1}</CoverageFraction> </Insulation>
Source	<xs:element maxOccurs="unbounded" minOccurs="0" name="Insulation" type="InsulationType"/>

Element DistributionSegmentType / Leakage

Namespace	No namespace

Diagram	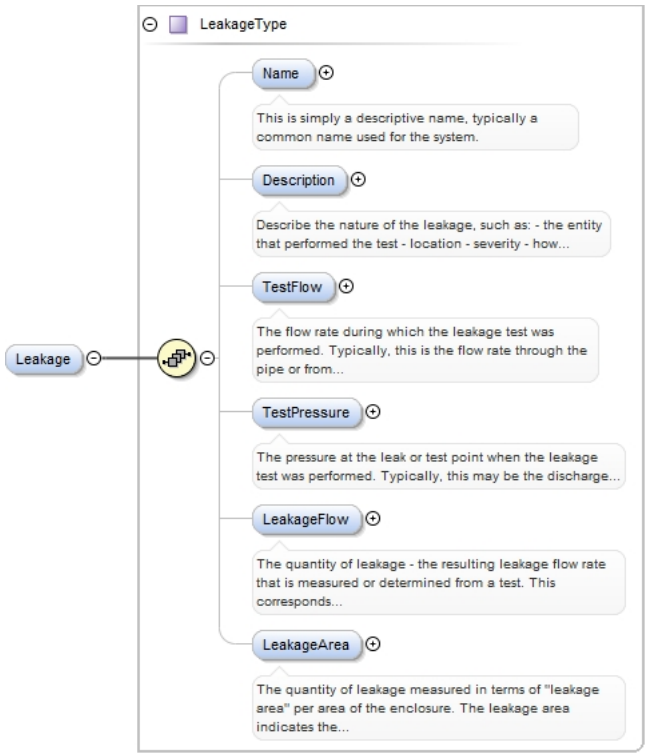
Type	LeakageType
Properties	content: complex minOccurs: 0
Model	Name{0,1} , Description{0,1} , TestFlow{0,1} , TestPressure{0,1} , LeakageFlow{0,1} , LeakageArea{0,1}
Children	Description, LeakageArea, LeakageFlow, Name, TestFlow, TestPressure
Instance	<Leakage> <Name>{0,1}</Name> <Description>{0,1}</Description> <TestFlow Unit="">{0,1}</TestFlow> <TestPressure Unit="">{0,1}</TestPressure> <LeakageFlow Unit="">{0,1}</LeakageFlow> <LeakageArea Unit="SquareMeters">{0,1}</LeakageArea> </Leakage>
Source	<xs:element minOccurs="0" name="Leakage" type="LeakageType"/>

Element DistributionSegmentType / PressureRated

Namespace	No namespace
Annotations	The maximum or design pressure for which the pipe/duct segment is rated.
Diagram	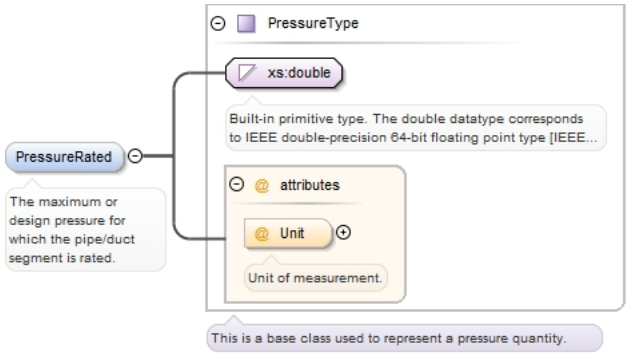
Type	PressureType
Properties	content: complex minOccurs: 0

	maxOccurs: 1

Attributes	QName	Type	Fixed	Default	Use
	Unit	PressureUnitEnumType			optional
		Unit of measurement.			

Source

```
<xs:element name="PressureRated" type="PressureType" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>The maximum or design pressure for which the pipe/duct segment is
 rated.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element DistributionSegmentType / FlowRated

Namespace	No namespace
Annotations	The maximum or design flow rate for which the pipe/duct segment is rated.
Diagram	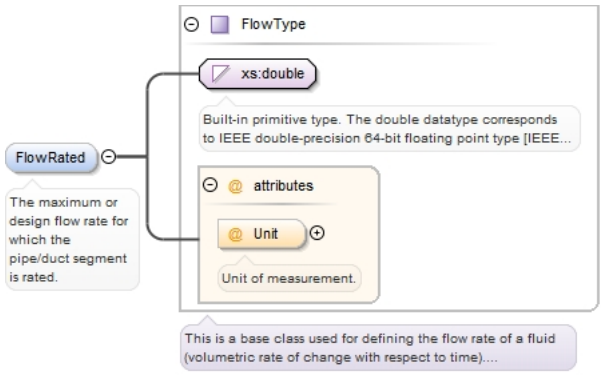

Type	FlowType

Properties	
content:	complex
minOccurs:	0
maxOccurs:	1

Attributes	QName	Type	Fixed	Default	Use
	Unit	FlowUnitEnumType			optional
		Unit of measurement.			

Source

```
<xs:element name="FlowRated" type="FlowType" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>The maximum or design flow rate for which the pipe/duct segment is
 rated.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element DistributionSegmentType / FlowControl

Namespace	No namespace
Annotations	Describe a flow control device here: Valve - Manual Valve - Automatic Damper - Manual Damper - Automatic Turning Vanes, loss coefficient 0.24
Diagram	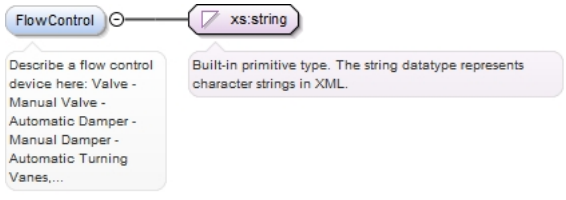

Type	xs:string

Properties	
content:	simple
minOccurs:	0

	maxOccurs: unbounded
Source	<xs:element maxOccurs="unbounded" minOccurs="0" name="FlowControl" type="xs:string"> <xs:annotation> <xs:documentation>Describe a flow control device here: Valve - Manual Valve - Automatic Damper - Manual Damper - Automatic Turning Vanes, loss coefficient 0.24</xs:documentation> </xs:annotation> </xs:element>

Element DistributionSegmentType / RefZoneLocationID

Namespace	No namespace
Annotations	This is the zone where the segment is located. This is for the purpose of capturing the heat lost to or absorbed from the environment by the fluid in the segment.
Diagram	
Type	xs:IDREF
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element maxOccurs="1" minOccurs="0" name="RefZoneLocationID" type="xs:IDREF"> <xs:annotation> <xs:documentation>This is the zone where the segment is located. This is for the purpose of capturing the heat lost to or absorbed from the environment by the fluid in the segment.</xs:documentation> </xs:annotation> </xs:element>

Element SystemChoiceType / ElectricalDistributionPanel

Namespace	No namespace
Annotations	Occasionally installation of a PV System will require a service panel upgrade.
Diagram	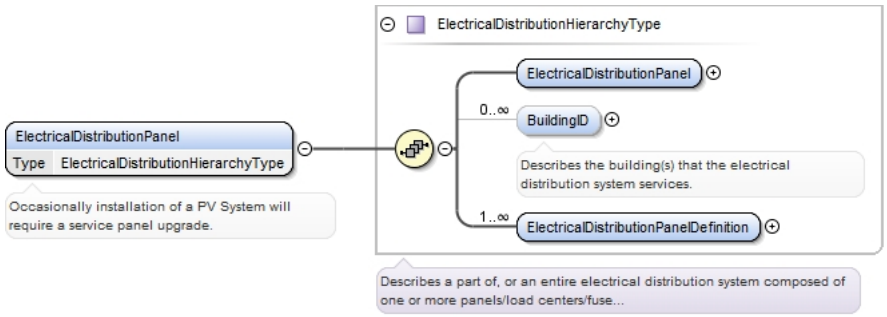
Type	ElectricalDistributionHierarchyType
Properties	content: complex maxOccurs: 1
Model	ElectricalDistributionPanel , BuildingID* , ElectricalDistributionPanelDefinition+
Children	BuildingID, ElectricalDistributionPanel, ElectricalDistributionPanelDefinition
Instance	<ElectricalDistributionPanel xmlns="http://www.iepmodel.net"> <ElectricalDistributionPanel EquipmentDefinitionIdRef="" Id="">{1,1}</ElectricalDistributionPanel> <BuildingID>{0,unbounded}</BuildingID> <ElectricalDistributionPanelDefinition Id="">{1,unbounded}</ElectricalDistributionPanelDefinition> </ElectricalDistributionPanel>
Source	<xs:element maxOccurs="1" name="ElectricalDistributionPanel" type="ElectricalDistributionHierarchyType"> <xs:annotation> <xs:documentation>Occasionally installation of a PV System will require a service panel upgrade.</xs:documentation>

```
  </xs:annotation>
</xs:element>
```

Element SystemChoiceType / Envelope

Namespace	No namespace
Diagram	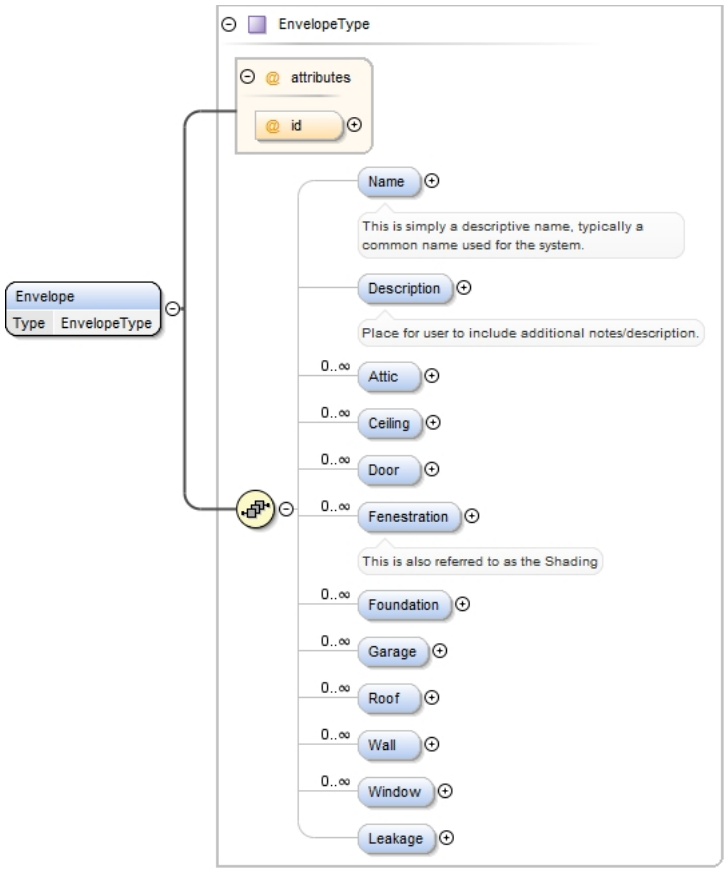
Type	EnvelopeType
Properties	content: complex nillable: false
Model	Name{0,1} , Description{0,1} , Attic* , Ceiling* , Door* , Fenestration* , Foundation* , Garage* , Roof* , Wall* , Window* , Leakage{0,1}
Children	Attic, Ceiling, Description, Door, Fenestration, Foundation, Garage, Leakage, Name, Roof, Wall, Window

Instance

```
<Envelope id="">
  <Name>{0,1}</Name>
  <Description>{0,1}</Description>
  <Attic id="">{0,unbounded}</Attic>
  <Ceiling id="">{0,unbounded}</Ceiling>
  <Door id="" UFactor="">{0,unbounded}</Door>
  <Fenestration id="">{0,unbounded}</Fenestration>
  <Foundation id="">{0,unbounded}</Foundation>
  <Garage id="">{0,unbounded}</Garage>
  <Roof id="">{0,unbounded}</Roof>
  <Wall id="">{0,unbounded}</Wall>
  <Window id="">{0,unbounded}</Window>
  <Leakage>{0,1}</Leakage>
</Envelope>
```

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			optional

Source

```
<xs:element name="Envelope" nillable="false" type="EnvelopeType"/>
```

Element SystemChoiceType / HVAC

Namespace	No namespace

Diagram	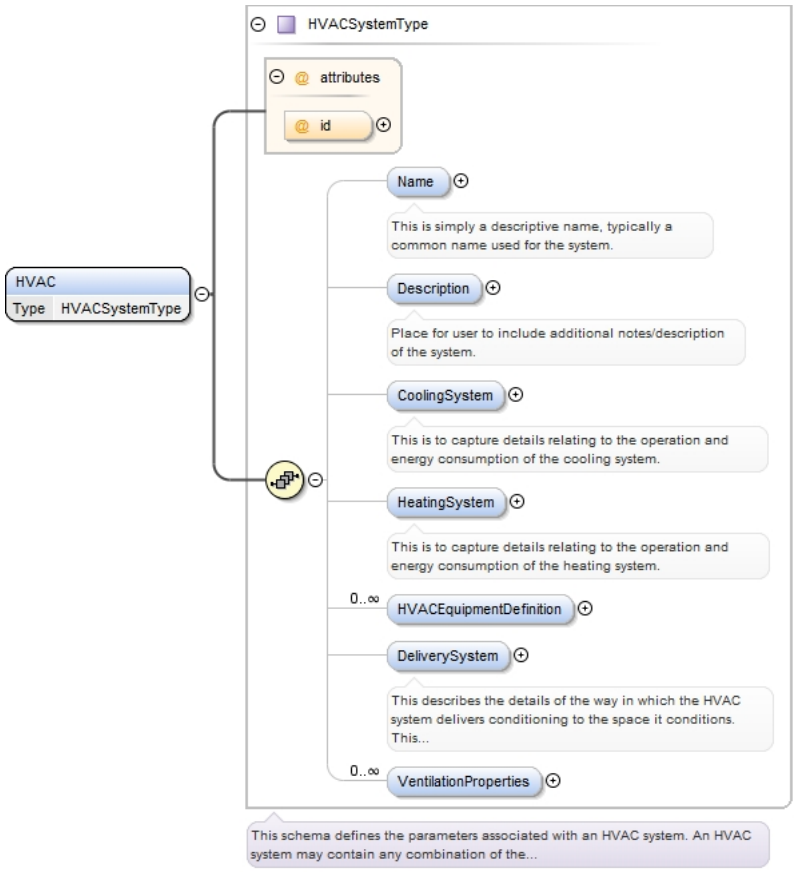
Type	HVACSystemType
Properties	content: complex
Model	Name{0,1} , Description{0,1} , CoolingSystem{0,1} , HeatingSystem{0,1} , HVACEquipmentDefinition* , DeliverySystem{0,1} , VentilationProperties*
Children	CoolingSystem, DeliverySystem, Description, HVACEquipmentDefinition, HeatingSystem, Name, VentilationProperties

Instance	`<HVAC id="">`
	`  <Name>{0,1}</Name>`
	`  <Description>{0,1}</Description>`
	`  <CoolingSystem>{0,1}</CoolingSystem>`
	`  <HeatingSystem>{0,1}</HeatingSystem>`
	`  <HVACEquipmentDefinition Id="">{0,unbounded}</HVACEquipmentDefinition>`
	`  <DeliverySystem>{0,1}</DeliverySystem>`
	`  <VentilationProperties>{0,unbounded}</VentilationProperties>`
	`</HVAC>`

Attributes	**QName** | **Type** | **Fixed** | **Default** | **Use** **id** | xs:ID | | | optional
Source	`<xs:element name="HVAC" type="HVACSystemType"/>`

Element HVACSystemType / Name

Namespace	No namespace
Annotations	This is simply a descriptive name, typically a common name used for the system.
Diagram	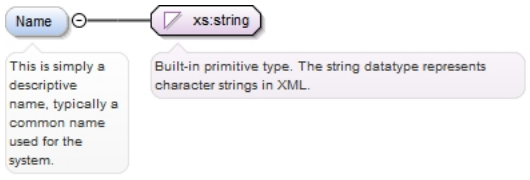
Type	xs:string
Properties	content: simple

	minOccurs:	0
	maxOccurs:	1
Source	<xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This is simply a descriptive name, typically a common name used for the system.</xs:documentation> </xs:annotation> </xs:element>	

Element HVACSystemType / Description

Namespace	No namespace	
Annotations	Place for user to include additional notes/description of the system.	
Diagram		
Type	xs:string	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Source	<xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Place for user to include additional notes/description of the system.</xs:documentation> </xs:annotation> </xs:element>	

Element HVACSystemType / CoolingSystem

Namespace	No namespace	
Annotations	This is to capture details relating to the operation and energy consumption of the cooling system.	
Diagram	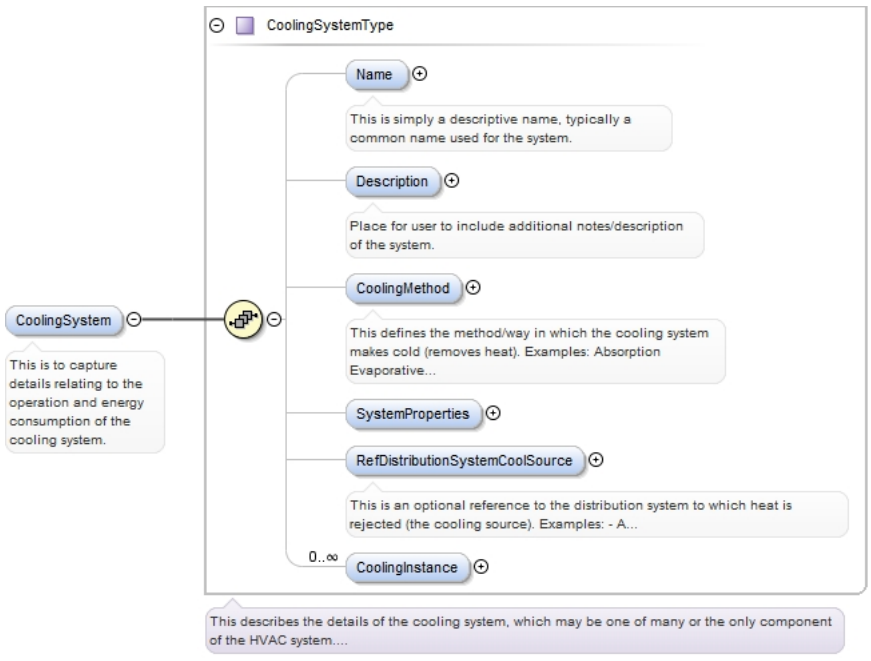	
Type	CoolingSystemType	
Properties	content:	complex
	minOccurs:	0
	maxOccurs:	1

Model	Name{0,1} , Description{0,1} , CoolingMethod{0,1} , SystemProperties{0,1} , RefDistributionSystemCoolSource{0,1} , CoolingInstance*
Children	CoolingInstance, CoolingMethod, Description, Name, RefDistributionSystemCoolSource, SystemProperties
Instance	<CoolingSystem> <Name>{0,1}</Name> <Description>{0,1}</Description> <CoolingMethod>{0,1}</CoolingMethod> <SystemProperties>{0,1}</SystemProperties> <RefDistributionSystemCoolSource>{0,1}</RefDistributionSystemCoolSource> <CoolingInstance EquipmentDefinitionIdRef="" Id="">{0,unbounded}</CoolingInstance> </CoolingSystem>
Source	<xs:element name="CoolingSystem" type="CoolingSystemType" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This is to capture details relating to the operation and energy consumption of the cooling system.</xs:documentation> </xs:annotation> </xs:element>

Element CoolingSystemType / Name

Namespace	No namespace
Annotations	This is simply a descriptive name, typically a common name used for the system.
Diagram	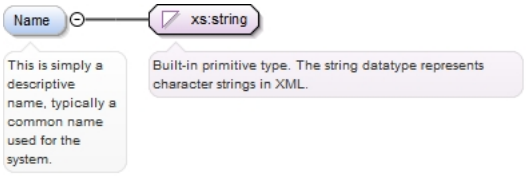
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This is simply a descriptive name, typically a common name used for the system.</xs:documentation> </xs:annotation> </xs:element>

Element CoolingSystemType / Description

Namespace	No namespace
Annotations	Place for user to include additional notes/description of the system.
Diagram	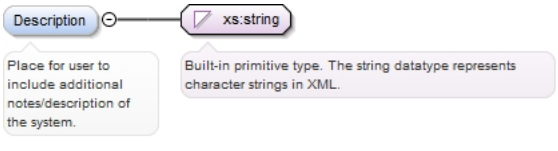
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Place for user to include additional notes/description of the system.</xs:documentation> </xs:annotation> </xs:element>

Element CoolingSystemType / CoolingMethod

Namespace	No namespace

Annotations	This defines the method/way in which the cooling system makes cold (removes heat). Examples: Absorption Evaporative Refrigeration – Air Rejection Refrigeration – Water Rejection Hydronic Coils Refrigerant (Direct Expansion, DX) Coils
Diagram	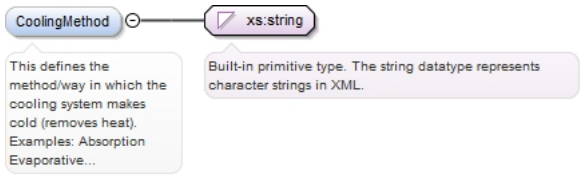
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="CoolingMethod" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This defines the method/way in which the cooling system makes cold (removes heat). Examples: Absorption Evaporative Refrigeration – Air Rejection Refrigeration – Water Rejection Hydronic Coils Refrigerant (Direct Expansion, DX) Coils</xs:documentation> </xs:annotation> </xs:element>

Element CoolingSystemType / SystemProperties

Namespace	No namespace

Diagram	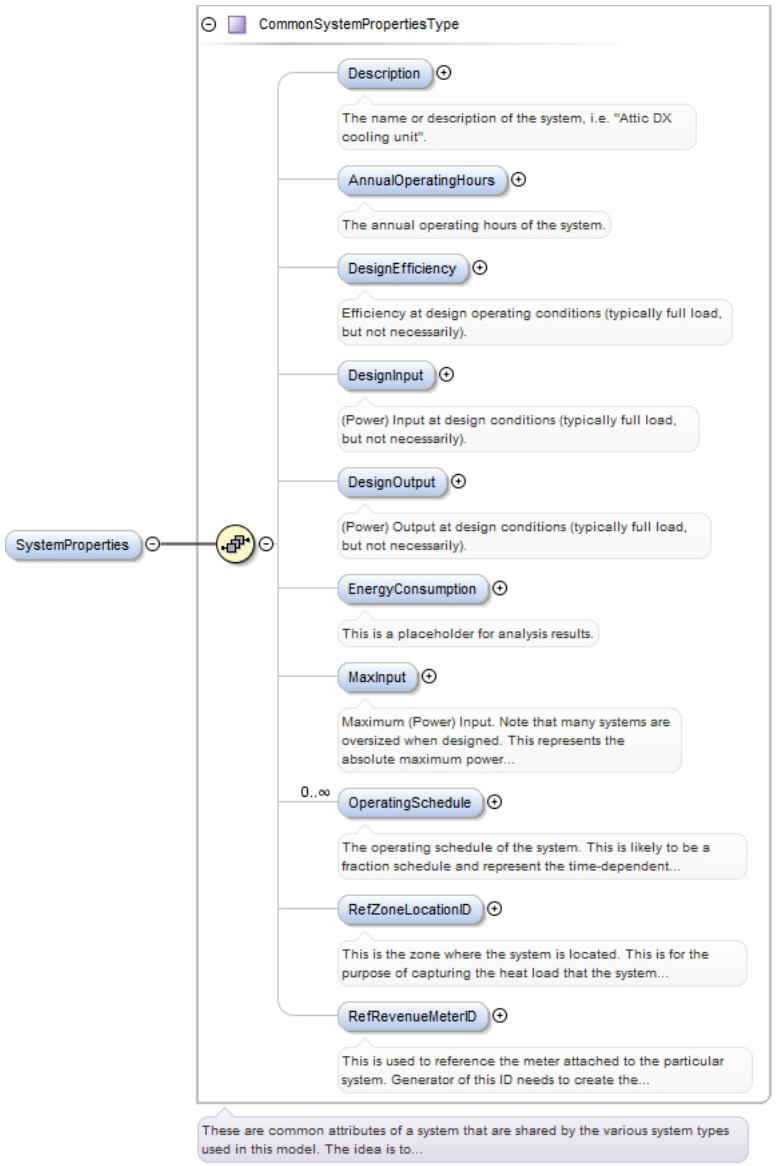
Type	CommonSystemPropertiesType
Properties	content: complex minOccurs: 0
Model	Description{0,1} , AnnualOperatingHours{0,1} , DesignEfficiency{0,1} , DesignInput{0,1} , DesignOutput{0,1} , EnergyConsumption{0,1} , MaxInput{0,1} , OperatingSchedule* , RefZoneLocationID{0,1} , RefRevenueMeterID{0,1}
Children	AnnualOperatingHours, Description, DesignEfficiency, DesignInput, DesignOutput, EnergyConsumption, MaxInput, OperatingSchedule, RefRevenueMeterID, RefZoneLocationID
Instance	<SystemProperties> <Description>{0,1}</Description> <AnnualOperatingHours>{0,1}</AnnualOperatingHours> <DesignEfficiency TestCondition="" Unit="" UnitDesc="">{0,1}</DesignEfficiency> <DesignInput Fuel="Electricity" FuelDesc="Electricity" TestCondition="" Unit="" UnitDesc="kwh">{0,1}</DesignInput> <DesignOutput Fuel="Electricity" FuelDesc="Electricity" TestCondition="" Unit="" UnitDesc="kwh">{0,1}</DesignOutput> <EnergyConsumption>{0,1}</EnergyConsumption> <MaxInput Fuel="Electricity" FuelDesc="Electricity" TestCondition="" Unit="" UnitDesc="kwh">{0,1}</MaxInput> <OperatingSchedule>{0,unbounded}</OperatingSchedule> <RefZoneLocationID>{0,1}</RefZoneLocationID> <RefRevenueMeterID>{0,1}</RefRevenueMeterID> </SystemProperties>
Source	<xs:element name="SystemProperties" type="CommonSystemPropertiesType" minOccurs="0"/>

Element CoolingSystemType / RefDistributionSystemCoolSource

Namespace	No namespace
Annotations	This is an optional reference to the distribution system to which heat is rejected (the cooling source). Examples: - A geothermal heat pump may reference a water loop that cycles to a pond or to piping in the ground. - An air handler with chilled water coils would reference the chilled water loop that serves the coils. - A water-cooled chiller or condenser would reference a condenser water loop.
Diagram	
Type	xs:IDREF
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element maxOccurs="1" minOccurs="0" name="RefDistributionSystemCoolSource" type="xs:IDREF"> <xs:annotation> <xs:documentation>This is an optional reference to the distribution system to which heat is rejected (the cooling source). Examples: - A geothermal heat pump may reference a water loop that cycles to a pond or to piping in the ground. - An air handler with chilled water coils would reference the chilled water loop that serves the coils. - A water-cooled chiller or condenser would reference a condenser water loop.</xs:documentation> </xs:annotation> </xs:element>

Element CoolingSystemType / CoolingInstance

Namespace	No namespace

Diagram	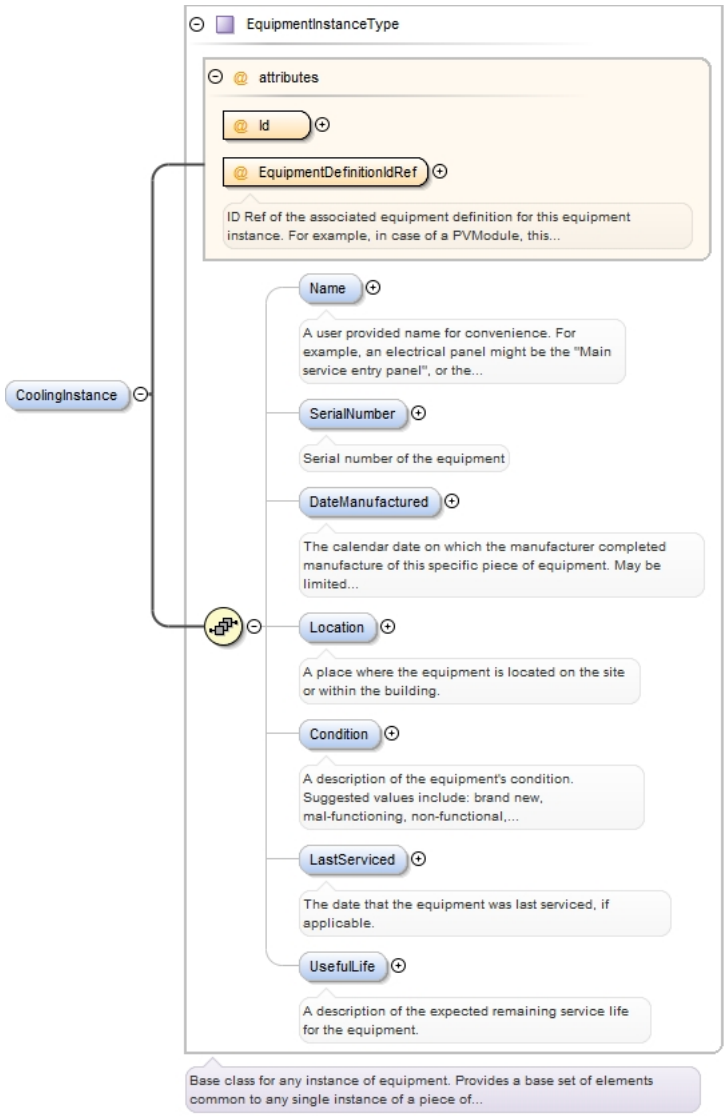
Type	EquipmentInstanceType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded nillable: false
Model	Name{0,1} , SerialNumber{0,1} , DateManufactured{0,1} , Location{0,1} , Condition{0,1} , LastServiced{0,1} , UsefulLife{0,1}
Children	Condition, DateManufactured, LastServiced, Location, Name, SerialNumber, UsefulLife
Instance	<CoolingInstance EquipmentDefinitionIdRef="" Id="" xmlns="http://www.iepmodel.net"> <Name>{0,1}</Name> <SerialNumber>{0,1}</SerialNumber> <DateManufactured>{0,1}</DateManufactured> <Location>{0,1}</Location> <Condition>{0,1}</Condition> <LastServiced>{0,1}</LastServiced> <UsefulLife>{0,1}</UsefulLife> </CoolingInstance>

Attributes

QName	Type	Fixed	Default	Use
EquipmentDefinitionIdRef	IDREF			required
	ID Ref of the associated equipment definition for this equipment instance. For example, in case of a PVModule, this would be the ID of the PvModuleDefinition element that describes this particular PV module instance.			

	QName	Type	Fixed	Default	Use
	Id	xs:ID			required
Source	<xs:element maxOccurs="unbounded" minOccurs="0" name="CoolingInstance" nillable="false" type="EquipmentInstanceType"/>				

Element HVACSystemType / HeatingSystem

Namespace	No namespace
Annotations	This is to capture details relating to the operation and energy consumption of the heating system.
Diagram	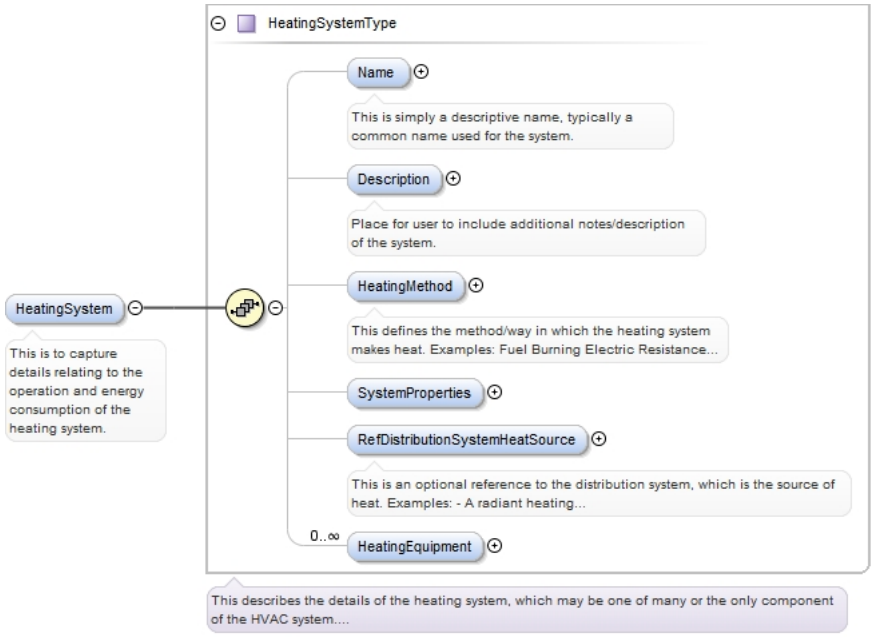
Type	HeatingSystemType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	Name{0,1} , Description{0,1} , HeatingMethod{0,1} , SystemProperties{0,1} , RefDistributionSystemHeatSource{0,1} , HeatingEquipment*
Children	Description, HeatingEquipment, HeatingMethod, Name, RefDistributionSystemHeatSource, SystemProperties
Instance	<HeatingSystem> <Name>{0,1}</Name> <Description>{0,1}</Description> <HeatingMethod>{0,1}</HeatingMethod> <SystemProperties>{0,1}</SystemProperties> <RefDistributionSystemHeatSource>{0,1}</RefDistributionSystemHeatSource> <HeatingEquipment EquipmentDefinitionIdRef="" Id="">{0,unbounded}</HeatingEquipment> </HeatingSystem>
Source	<xs:element name="HeatingSystem" type="HeatingSystemType" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This is to capture details relating to the operation and energy consumption of the heating system.</xs:documentation> </xs:annotation> </xs:element>

Element HeatingSystemType / Name

Namespace	No namespace
Annotations	This is simply a descriptive name, typically a common name used for the system.

Diagram	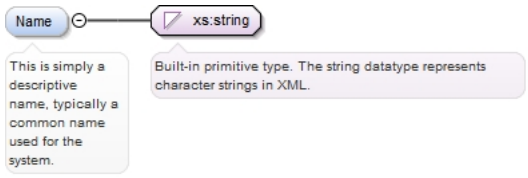
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This is simply a descriptive name, typically a common name used for the system.</xs:documentation> </xs:annotation> </xs:element>

Element HeatingSystemType / Description

Namespace	No namespace
Annotations	Place for user to include additional notes/description of the system.
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Place for user to include additional notes/description of the system.</xs:documentation> </xs:annotation> </xs:element>

Element HeatingSystemType / HeatingMethod

Namespace	No namespace
Annotations	This defines the method/way in which the heating system makes heat. Examples: Fuel Burning Electric Resistance Refrigeration – Air-Source Refrigeration – Water-Source Hydronic Coils
Diagram	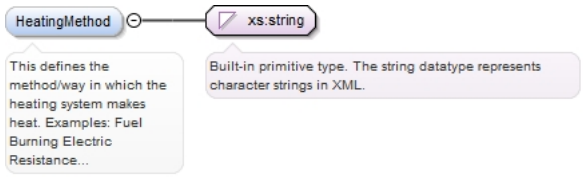
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="HeatingMethod" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This defines the method/way in which the heating system makes heat. Examples: Fuel Burning Electric Resistance Refrigeration – Air-Source Refrigeration – Water-Source Hydronic Coils</xs:documentation>

```
  </xs:annotation>
</xs:element>
```

Element HeatingSystemType / SystemProperties

Namespace	No namespace
Diagram	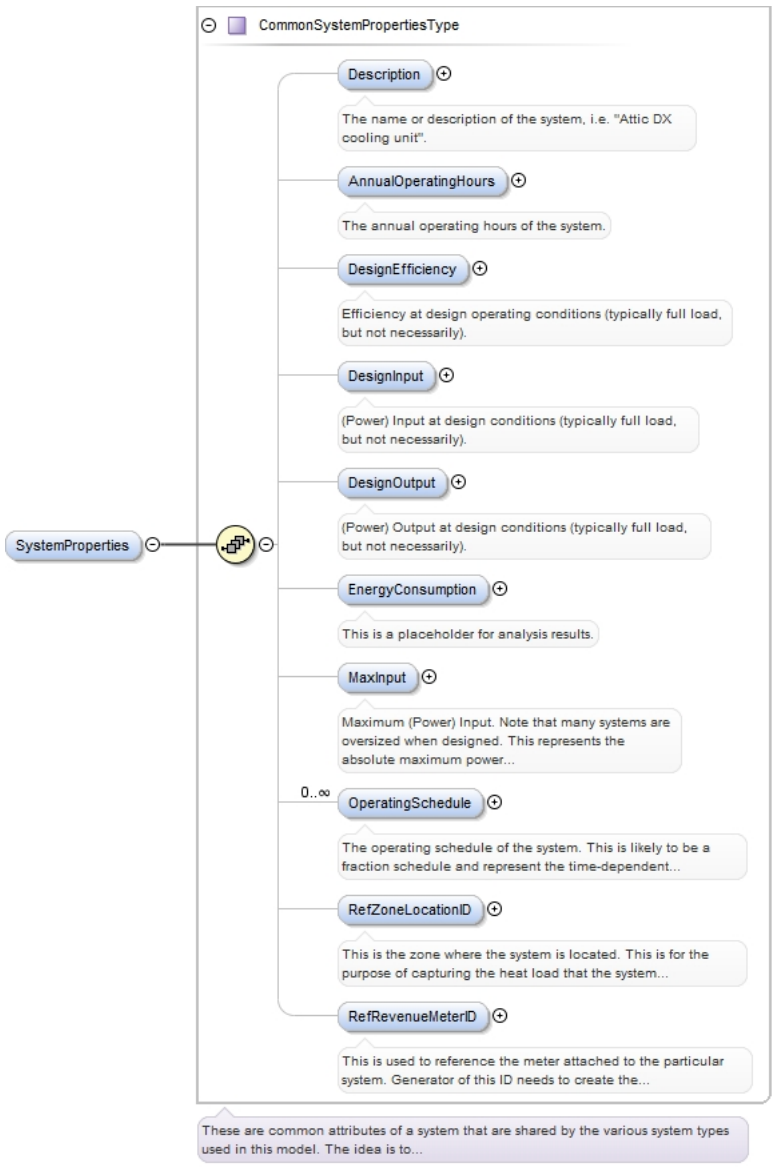
Type	CommonSystemPropertiesType
Properties	content: complex minOccurs: 0
Model	Description{0,1} , AnnualOperatingHours{0,1} , DesignEfficiency{0,1} , DesignInput{0,1} , DesignOutput{0,1} , EnergyConsumption{0,1} , MaxInput{0,1} , OperatingSchedule* , RefZoneLocationID{0,1} , RefRevenueMeterID{0,1}
Children	AnnualOperatingHours, Description, DesignEfficiency, DesignInput, DesignOutput, EnergyConsumption, MaxInput, OperatingSchedule, RefRevenueMeterID, RefZoneLocationID
Instance	<SystemProperties> <Description>{0,1}</Description> <AnnualOperatingHours>{0,1}</AnnualOperatingHours> <DesignEfficiency TestCondition="" Unit="" UnitDesc="">{0,1}</DesignEfficiency> <DesignInput Fuel="Electricity" FuelDesc="Electricity" TestCondition="" Unit="" UnitDesc="kwh">{0,1}</DesignInput> <DesignOutput Fuel="Electricity" FuelDesc="Electricity" TestCondition="" Unit="" UnitDesc="kwh">{0,1}</DesignOutput> <EnergyConsumption>{0,1}</EnergyConsumption> <MaxInput Fuel="Electricity" FuelDesc="Electricity" TestCondition="" Unit="" UnitDesc="kwh">{0,1}</MaxInput>

	<OperatingSchedule>{0,unbounded}</OperatingSchedule> <RefZoneLocationID>{0,1}</RefZoneLocationID> <RefRevenueMeterID>{0,1}</RefRevenueMeterID> </SystemProperties>
Source	<xs:element name="SystemProperties" type="CommonSystemPropertiesType" minOccurs="0"/>

Element HeatingSystemType / RefDistributionSystemHeatSource

Namespace	No namespace
Annotations	This is an optional reference to the distribution system, which is the source of heat. Examples: - A radiant heating system may consist of "radiators" and this references the hot water loop that serves it. - An air handler with hot water coils may reference the hot water loop that serves the coils. - A heat pump would reference the water loop from which it absorbs heat when it is in heating mode.
Diagram	
Type	xs:IDREF
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element maxOccurs="1" minOccurs="0" name="RefDistributionSystemHeatSource" type="xs:IDREF"> <xs:annotation> <xs:documentation>This is an optional reference to the distribution system, which is the source of heat. Examples: - A radiant heating system may consist of "radiators" and this references the hot water loop that serves it. - An air handler with hot water coils may reference the hot water loop that serves the coils. - A heat pump would reference the water loop from which it absorbs heat when it is in heating mode.</xs:documentation> </xs:annotation> </xs:element>

Element HeatingSystemType / HeatingEquipment

Namespace	No namespace

Diagram	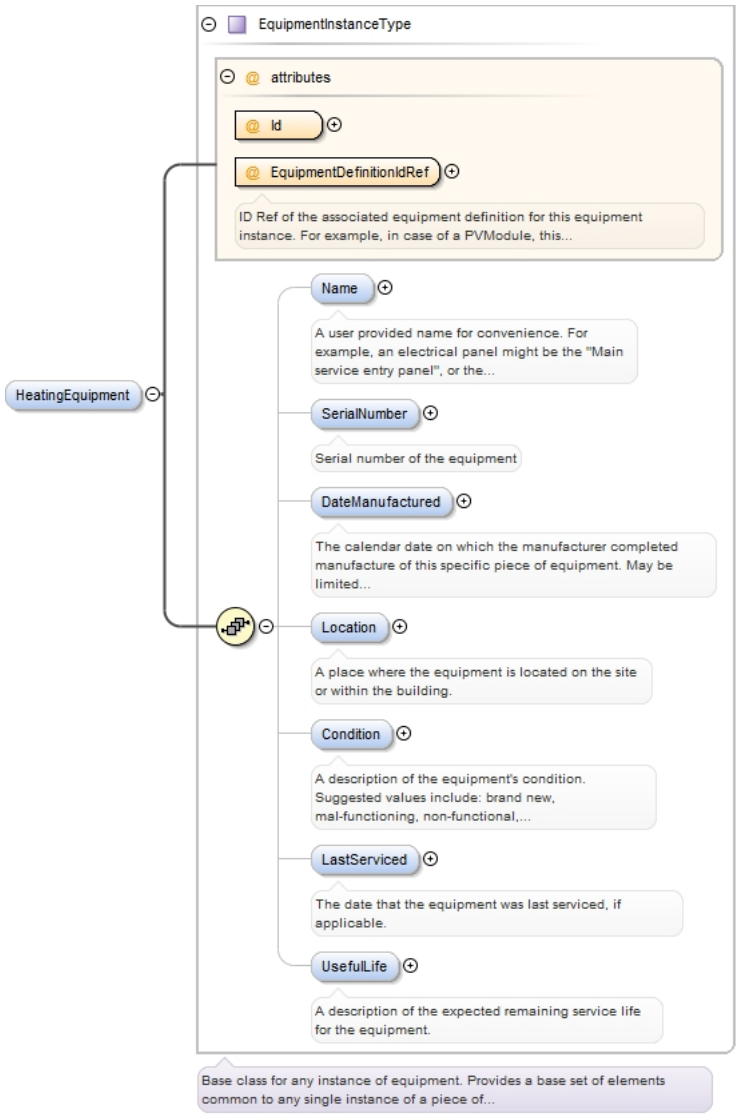
Type	EquipmentInstanceType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded nillable: false
Model	Name{0,1} , SerialNumber{0,1} , DateManufactured{0,1} , Location{0,1} , Condition{0,1} , LastServiced{0,1} , UsefulLife{0,1}
Children	Condition, DateManufactured, LastServiced, Location, Name, SerialNumber, UsefulLife

Instance	`<HeatingEquipment EquipmentDefinitionIdRef="" Id="" xmlns="http://www.iepmodel.net">`
	`  <Name>{0,1}</Name>`
	`  <SerialNumber>{0,1}</SerialNumber>`
	`  <DateManufactured>{0,1}</DateManufactured>`
	`  <Location>{0,1}</Location>`
	`  <Condition>{0,1}</Condition>`
	`  <LastServiced>{0,1}</LastServiced>`
	`  <UsefulLife>{0,1}</UsefulLife>`
	`</HeatingEquipment>`

Attributes

QName	Type	Fixed	Default	Use
EquipmentDefinitionIdRef	IDREF			required
	ID Ref of the associated equipment definition for this equipment instance. For example, in case of a PVModule, this would be the ID of the PvModuleDefinition element that describes this particular PV module instance.			

	QName	Type	Fixed	Default	Use
	Id	xs:ID			required
Source	<xs:element name="HeatingEquipment" maxOccurs="unbounded" minOccurs="0" nillable="false" type="EquipmentInstanceType"/>				

Element HVACSystemType / HVACEquipmentDefinition

Namespace	No namespace

Diagram

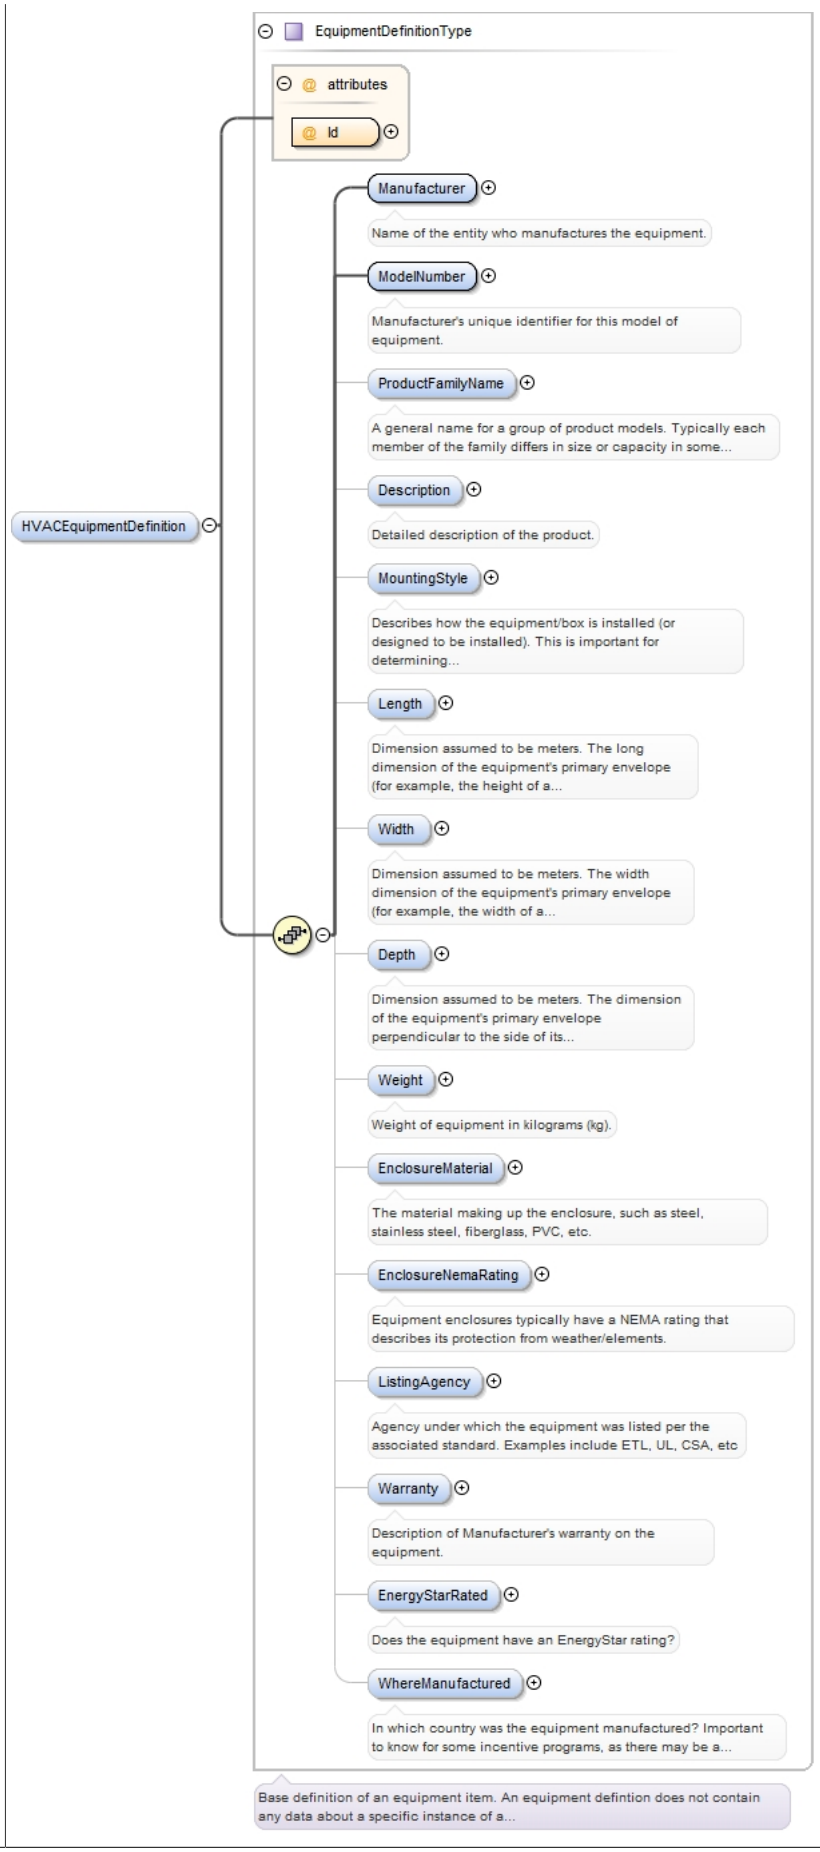
EquipmentDefinitionType
attributes
Id
HVACEquipmentDefinition
Manufacturer
Name of the entity who manufactures the equipment.
ModelNumber
Manufacturer's unique identifier for this model of equipment.
ProductFamilyName
A general name for a group of product models. Typically each member of the family differs in size or capacity in some...
Description
Detailed description of the product.
MountingStyle
Describes how the equipment/box is installed (or designed to be installed). This is important for determining...
Length
Dimension assumed to be meters. The long dimension of the equipment's primary envelope (for example, the height of a...
Width
Dimension assumed to be meters. The width dimension of the equipment's primary envelope (for example, the width of a...
Depth
Dimension assumed to be meters. The dimension of the equipment's primary envelope perpendicular to the side of its...
Weight
Weight of equipment in kilograms (kg).
EnclosureMaterial
The material making up the enclosure, such as steel, stainless steel, fiberglass, PVC, etc.
EnclosureNemaRating
Equipment enclosures typically have a NEMA rating that describes its protection from weather/elements.
ListingAgency
Agency under which the equipment was listed per the associated standard. Examples include ETL, UL, CSA, etc
Warranty
Description of Manufacturer's warranty on the equipment.
EnergyStarRated
Does the equipment have an EnergyStar rating?
WhereManufactured
In which country was the equipment manufactured? Important to know for some incentive programs, as there may be a...
Base definition of an equipment item. An equipment defintion does not contain any data about a specific instance of a...

Type	EquipmentDefinitionType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Manufacturer , ModelNumber , ProductFamilyName{0,1} , Description{0,1} , MountingStyle{0,1} , Length{0,1} , Width{0,1} , Depth{0,1} , Weight{0,1} , EnclosureMaterial{0,1} , EnclosureNemaRating{0,1} , ListingAgency{0,1} , Warranty{0,1} , EnergyStarRated{0,1} , WhereManufactured{0,1}
Children	Depth, Description, EnclosureMaterial, EnclosureNemaRating, EnergyStarRated, Length, ListingAgency, Manufacturer, ModelNumber, MountingStyle, ProductFamilyName, Warranty, Weight, WhereManufactured, Width
Instance	<HVACEquipmentDefinition Id="" xmlns="http://www.iepmodel.net"> <Manufacturer>{1,1}</Manufacturer> <ModelNumber>{1,1}</ModelNumber> <ProductFamilyName>{0,1}</ProductFamilyName> <Description>{0,1}</Description> <MountingStyle>{0,1}</MountingStyle> <Length>{0,1}</Length> <Width>{0,1}</Width> <Depth>{0,1}</Depth> <Weight>{0,1}</Weight> <EnclosureMaterial>{0,1}</EnclosureMaterial> <EnclosureNemaRating>{0,1}</EnclosureNemaRating> <ListingAgency>{0,1}</ListingAgency> <Warranty>{0,1}</Warranty> <EnergyStarRated>{0,1}</EnergyStarRated> <WhereManufactured>{0,1}</WhereManufactured> </HVACEquipmentDefinition>

Attributes

QName	Type	Fixed	Default	Use
Id	xs:ID			required

Source

```
<xs:element maxOccurs="unbounded" minOccurs="0" name="HVACEquipmentDefinition"
 type="EquipmentDefinitionType"/>
```

Element HVACSystemType / DeliverySystem

Namespace	No namespace
Annotations	This describes the details of the way in which the HVAC system delivers conditioning to the space it conditions. This allows the user to define ducting or piping etc. This includes an optional reference to a distribution system.
Diagram	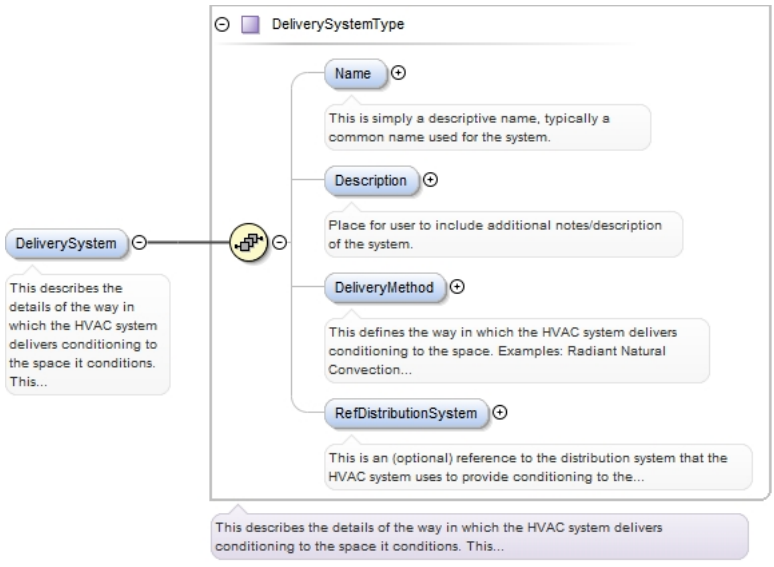
Type	DeliverySystemType
Properties	content: complex minOccurs: 0
Model	Name{0,1} , Description{0,1} , DeliveryMethod{0,1} , RefDistributionSystem{0,1}
Children	DeliveryMethod, Description, Name, RefDistributionSystem
Instance	<DeliverySystem>

	<Name>{0,1}</Name> <Description>{0,1}</Description> <DeliveryMethod>{0,1}</DeliveryMethod> <RefDistributionSystem>{0,1}</RefDistributionSystem> </DeliverySystem>
Source	<xs:element minOccurs="0" name="DeliverySystem" type="DeliverySystemType"> <xs:annotation> <xs:documentation>This describes the details of the way in which the HVAC system delivers conditioning to the space it conditions. This allows the user to define ducting or piping etc. This includes an optional reference to a distribution system.</xs:documentation> </xs:annotation> </xs:element>

Element DeliverySystemType / Name

Namespace	No namespace
Annotations	This is simply a descriptive name, typically a common name used for the system.
Diagram	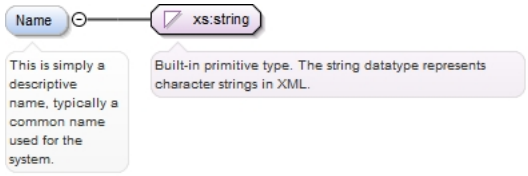
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This is simply a descriptive name, typically a common name used for the system.</xs:documentation> </xs:annotation> </xs:element>

Element DeliverySystemType / Description

Namespace	No namespace
Annotations	Place for user to include additional notes/description of the system.
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Place for user to include additional notes/description of the system.</xs:documentation> </xs:annotation> </xs:element>

Element DeliverySystemType / DeliveryMethod

Namespace	No namespace
Annotations	This defines the way in which the HVAC system delivers conditioning to the space. Examples: Radiant Natural Convection

	Forced Convection
Diagram	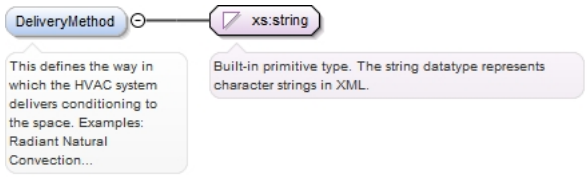
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="DeliveryMethod" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This defines the way in which the HVAC system delivers conditioning to the space. Examples: Radiant Natural Convection Forced Convection</xs:documentation> </xs:annotation> </xs:element>

Element DeliverySystemType / RefDistributionSystem

Namespace	No namespace
Annotations	This is an (optional) reference to the distribution system that the HVAC system uses to provide conditioning to the space.
Diagram	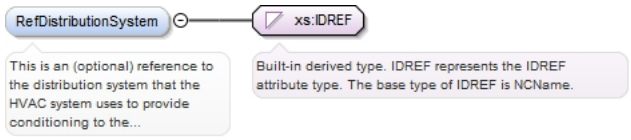
Type	xs:IDREF
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element maxOccurs="1" minOccurs="0" name="RefDistributionSystem" type="xs:IDREF"> <xs:annotation> <xs:documentation>This is an (optional) reference to the distribution system that the HVAC system uses to provide conditioning to the space.</xs:documentation> </xs:annotation> </xs:element>

Element HVACSystemType / VentilationProperties

Namespace	No namespace
Diagram	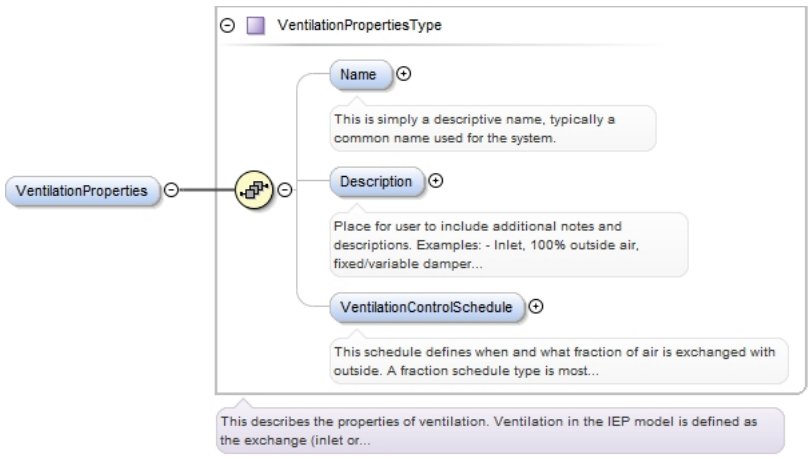
Type	VentilationPropertiesType
Properties	content: complex

	minOccurs: 0 maxOccurs: unbounded
Model	Name{0,1} , Description{0,1} , VentilationControlSchedule{0,1}
Children	Description, Name, VentilationControlSchedule
Instance	<VentilationProperties> <Name>{0,1}</Name> <Description>{0,1}</Description> <VentilationControlSchedule>{0,1}</VentilationControlSchedule> </VentilationProperties>
Source	<xs:element maxOccurs="unbounded" minOccurs="0" name="VentilationProperties" type="VentilationPropertiesType"/>

Element VentilationPropertiesType / Name

Namespace	No namespace
Annotations	This is simply a descriptive name, typically a common name used for the system.
Diagram	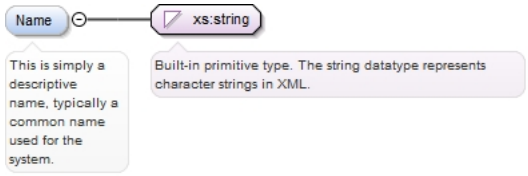
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This is simply a descriptive name, typically a common name used for the system.</xs:documentation> </xs:annotation> </xs:element>

Element VentilationPropertiesType / Description

Namespace	No namespace
Annotations	Place for user to include additional notes and descriptions. Examples: - Inlet, 100% outside air, fixed/variable damper - Exhaust, fixed/variable damper - Outside air economizer system - Natural: Windows, manual/auto control - Exhaust, relief vent - Whole house fan It may be appropriate to define the nominal (maximum, 100%) outside air flow rate, particularly when the Ventilation Control Schedule is a fraction schedule type. This would be useful when the ventilation type is natural or if no Delivery System is defined. It may be appropriate to define the flow rate units (cubic-feet per minute) if the Ventilation Control Schedule type is a value schedule.
Diagram	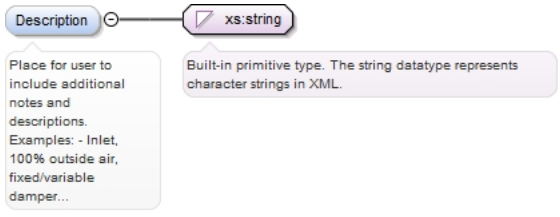
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source	<xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Place for user to include additional notes and descriptions. Examples: - Inlet, 100% outside air, fixed/variable damper - Exhaust, fixed/variable damper - Outside air economizer system - Natural: Windows, manual/auto control - Exhaust, relief vent - Whole house fan It may be appropriate to define the nominal (maximum, 100%) outside air flow rate, particularly when the Ventilation Control Schedule is a fraction schedule type. This would be useful when the ventilation type is natural or if no Delivery System is defined. It may be appropriate to define the flow rate units (cubic-feet per minute) if the Ventilation Control Schedule type is a value schedule.</xs:documentation> </xs:annotation> </xs:element>

Element VentilationPropertiesType / VentilationControlSchedule

Namespace	No namespace
Annotations	This schedule defines when and what fraction of air is exchanged with outside. A fraction schedule type is most appropriate. The nominal (100%) flow rate would reflect the Delivery System flow rate at the given conditions. Alternatively, if the ventilation type is natural, the user may define the maximum flow rate in the Description. Another option would be to define a value schedule and indicate in the description what the units of the schedule values represent (i.e. cubic-feet per minute).
Diagram	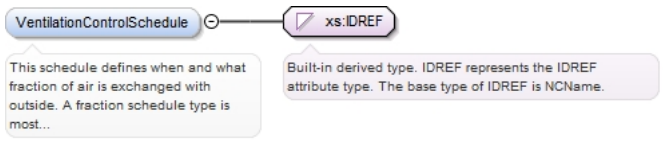
Type	xs:IDREF
Properties	content: simple minOccurs: 0
Source	<xs:element minOccurs="0" name="VentilationControlSchedule" type="xs:IDREF"> <xs:annotation> <xs:documentation>This schedule defines when and what fraction of air is exchanged with outside. A fraction schedule type is most appropriate. The nominal (100%) flow rate would reflect the Delivery System flow rate at the given conditions. Alternatively, if the ventilation type is natural, the user may define the maximum flow rate in the Description. Another option would be to define a value schedule and indicate in the description what the units of the schedule values represent (i.e. cubic-feet per minute).</xs:documentation> </xs:annotation> </xs:element>

Element SystemChoiceType / Lighting

Namespace	No namespace
Diagram	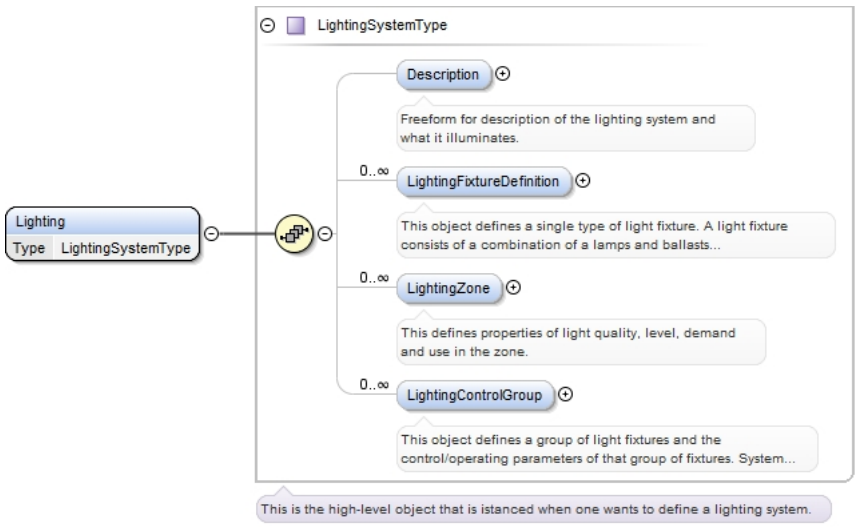

Type	LightingSystemType
Properties	content: complex nillable: false
Model	Description{0,1} , LightingFixtureDefinition* , LightingZone* , LightingControlGroup*
Children	Description, LightingControlGroup, LightingFixtureDefinition, LightingZone
Instance	<Lighting> <Description>{0,1}</Description> <LightingFixtureDefinition Id="">{0,unbounded}</LightingFixtureDefinition> <LightingZone id="">{0,unbounded}</LightingZone> <LightingControlGroup id="">{0,unbounded}</LightingControlGroup> </Lighting>
Source	<xs:element name="Lighting" nillable="false" type="LightingSystemType"/>

Element LightingSystemType / Description

Namespace	No namespace
Annotations	Freeform for description of the lighting system and what it illuminates.
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Freeform for description of the lighting system and what it illuminates.</xs:documentation> </xs:annotation> </xs:element>

Element LightingSystemType / LightingFixtureDefinition

Namespace	No namespace
Annotations	This object defines a single type of light fixture. A light fixture consists of a combination of a lamps and ballasts (optional) as well as the container and mounting accessories.

Diagram


LightingFixtureDefintionType
EquipmentDefinitionType (extension base)
attributes
Id
Manufacturer
Name of the entity who manufactures the equipment.
ModelNumber
Manufacturer's unique identifier for this model of equipment.
ProductFamilyName
A general name for a group of product models. Typically each member of the family differs in size or capacity in some...
Description
Detailed description of the product.
MountingStyle
Describes how the equipment/box is installed (or designed to be installed). This is important for determining...
Length
Dimension assumed to be meters. The long dimension of the equipment's primary envelope (for example, the height of a...
Width
Dimension assumed to be meters. The width dimension of the equipment's primary envelope (for example, the width of a...
Depth
Dimension assumed to be meters. The dimension of the equipment's primary envelope perpendicular to the side of its...
Weight
Weight of equipment in kilograms (kg).
EnclosureMaterial
The material making up the enclosure, such as steel, stainless steel, fiberglass, PVC, etc.
EnclosureNemaRating
Equipment enclosures typically have a NEMA rating that describes its protection from weather/elements.
ListingAgency
Agency under which the equipment was listed per the associated standard. Examples include ETL, UL, CSA, etc
Warranty
Description of Manufacturer's warranty on the equipment.
EnergyStarRated
Does the equipment have an EnergyStar rating?
WhereManufactured
In which country was the equipment manufactured? Important to know for some incentive programs, as there may be a...
Base definition of an equipment item. An equipment defintion does not contain any data about a specific instance of a...
FixtureEfficiency
Fixture Efficiency The fraction of light created by the lamp and ballast combination that escapes the light fixture.
FixtureUplight
LightingFixtureDefinition
This object defines a single type of light fixture. A light fixture consists of a combination of a lamps and ballasts...

Type	LightingFixtureDefintionType
Type hierarchy	• EquipmentDefinitionType • LightingFixtureDefintionType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Manufacturer , ModelNumber , ProductFamilyName{0,1} , Description{0,1} , MountingStyle{0,1} , Length{0,1} , Width{0,1} , Depth{0,1} , Weight{0,1} , EnclosureMaterial{0,1} , EnclosureNemaRating{0,1} , ListingAgency{0,1} , Warranty{0,1} , EnergyStarRated{0,1} , WhereManufactured{0,1} , FixtureEfficiency{0,1} , FixtureUplight{0,1} , FixtureDownlight{0,1} , FixtureIESFile* , LightingTechnology{0,1} , LampProperties{0,1} , BallastProperties{0,1}
Children	BallastProperties, Depth, Description, EnclosureMaterial, EnclosureNemaRating, EnergyStarRated, FixtureDownlight, FixtureEfficiency, FixtureIESFile, FixtureUplight, LampProperties, Length, LightingTechnology, ListingAgency, Manufacturer, ModelNumber, MountingStyle, ProductFamilyName, Warranty, Weight, WhereManufactured, Width

Instance

```
<LightingFixtureDefinition Id="" xmlns="http://www.iepmodel.net">
  <Manufacturer>{1,1}</Manufacturer>
  <ModelNumber>{1,1}</ModelNumber>
  <ProductFamilyName>{0,1}</ProductFamilyName>
  <Description>{0,1}</Description>
  <MountingStyle>{0,1}</MountingStyle>
  <Length>{0,1}</Length>
  <Width>{0,1}</Width>
  <Depth>{0,1}</Depth>
  <Weight>{0,1}</Weight>
  <EnclosureMaterial>{0,1}</EnclosureMaterial>
  <EnclosureNemaRating>{0,1}</EnclosureNemaRating>
  <ListingAgency>{0,1}</ListingAgency>
  <Warranty>{0,1}</Warranty>
  <EnergyStarRated>{0,1}</EnergyStarRated>
  <WhereManufactured>{0,1}</WhereManufactured>
  <FixtureEfficiency>{0,1}</FixtureEfficiency>
  <FixtureUplight>{0,1}</FixtureUplight>
  <FixtureDownlight>{0,1}</FixtureDownlight>
  <FixtureIESFile>{0,unbounded}</FixtureIESFile>
  <LightingTechnology>{0,1}</LightingTechnology>
  <LampProperties Id="">{0,1}</LampProperties>
  <BallastProperties Id="">{0,1}</BallastProperties>
</LightingFixtureDefinition>
```

Attributes

QName	Type	Fixed	Default	Use
Id	xs:ID			required

Source

```
<xs:element maxOccurs="unbounded" minOccurs="0" name="LightingFixtureDefinition"
 type="LightingFixtureDefintionType">
  <xs:annotation>
    <xs:documentation>This object defines a single type of light fixture. A light fixture
 consists of a combination of a lamps and ballasts (optional) as well as the container and
 mounting accessories.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element LightingFixtureDefintionType / FixtureEfficiency

Namespace	No namespace
Annotations	Fixture Efficiency The fraction of light created by the lamp and ballast combination that escapes the light fixture.
Diagram	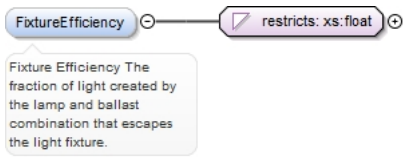
Type	restriction of xs:float
Properties	content: simple minOccurs: 0
Facets	maxInclusive 1

	minInclusive 0
Source	<xs:element minOccurs="0" name="FixtureEfficiency"> <xs:annotation> <xs:documentation>Fixture Efficiency The fraction of light created by the lamp and ballast combination that escapes the light fixture.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:float"> <xs:minInclusive value="0"/> <xs:maxInclusive value="1"/> </xs:restriction> </xs:simpleType> </xs:element>

Element LightingFixtureDefintionType / FixtureUplight

Namespace	No namespace
Annotations	Fixture Uplight The fraction of light that escapes the light fixture that escapes in the upward direction. Fixture uplight and fixture downlight should sum to 1.
Diagram	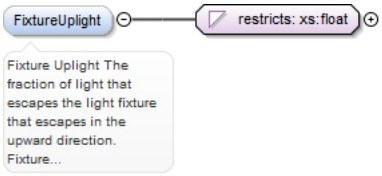
Type	restriction of xs:float
Properties	content: simple minOccurs: 0
Facets	maxInclusive 1 minInclusive 0
Source	<xs:element minOccurs="0" name="FixtureUplight"> <xs:annotation> <xs:documentation>Fixture Uplight The fraction of light that escapes the light fixture that escapes in the upward direction. Fixture uplight and fixture downlight should sum to 1.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:float"> <xs:minInclusive value="0"/> <xs:maxInclusive value="1"/> </xs:restriction> </xs:simpleType> </xs:element>

Element LightingFixtureDefintionType / FixtureDownlight

Namespace	No namespace
Annotations	Fixture Uplight The fraction of light that escapes the light fixture that escapes in the downward direction. Fixture uplight and fixture downlight should sum to 1.
Diagram	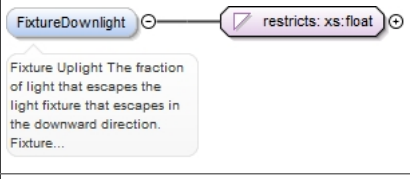
Type	restriction of xs:float
Properties	content: simple minOccurs: 0
Facets	maxInclusive 1 minInclusive 0
Source	<xs:element minOccurs="0" name="FixtureDownlight">

```
  <xs:annotation>
    <xs:documentation>Fixture Uplight The fraction of light that escapes the light fixture
 that escapes in the downward direction. Fixture uplight and fixture downlight should sum
 to 1.</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:float">
      <xs:minInclusive value="0"/>
      <xs:maxInclusive value="1"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element LightingFixtureDefintionType / FixtureIESFile

Namespace	No namespace
Annotations	This element has not been fully implemented at this time. The IES file is created by ____ and contains... In the future, this element may contain the actual IES file converted to a suitable format such as text or binary.
Diagram	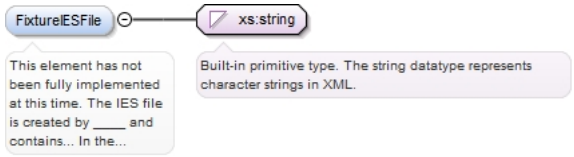
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: unbounded
Source	<xs:element maxOccurs="unbounded" minOccurs="0" name="FixtureIESFile" type="xs:string"> <xs:annotation> <xs:documentation>This element has not been fully implemented at this time. The IES file is created by ____ and contains... In the future, this element may contain the actual IES file converted to a suitable format such as text or binary.</xs:documentation> </xs:annotation> </xs:element>

Element LightingFixtureDefintionType / LightingTechnology

Namespace	No namespace
Annotations	The type of technology that is used to create light. This is also a general indication of the lamp type.
Diagram	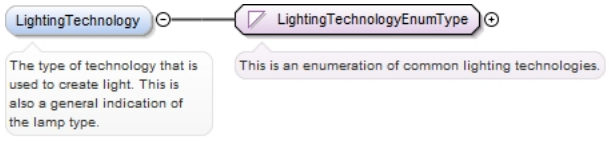
Type	LightingTechnologyEnumType
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	enumeration: Incandescent enumeration: Halogen enumeration: Compact Fluorescent enumeration: Linear Fluorescent enumeration: High Intensity Discharge enumeration: LED enumeration: Induction

	enumeration	Plasma
	enumeration	Neon
Source	<xs:element name="LightingTechnology" type="LightingTechnologyEnumType" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>The type of technology that is used to create light. This is also a general indication of the lamp type.</xs:documentation> </xs:annotation> </xs:element>	

Element LightingFixtureDefintionType / LampProperties

Namespace	No namespace
Annotations	These are common attributes of a lamp.

Diagram

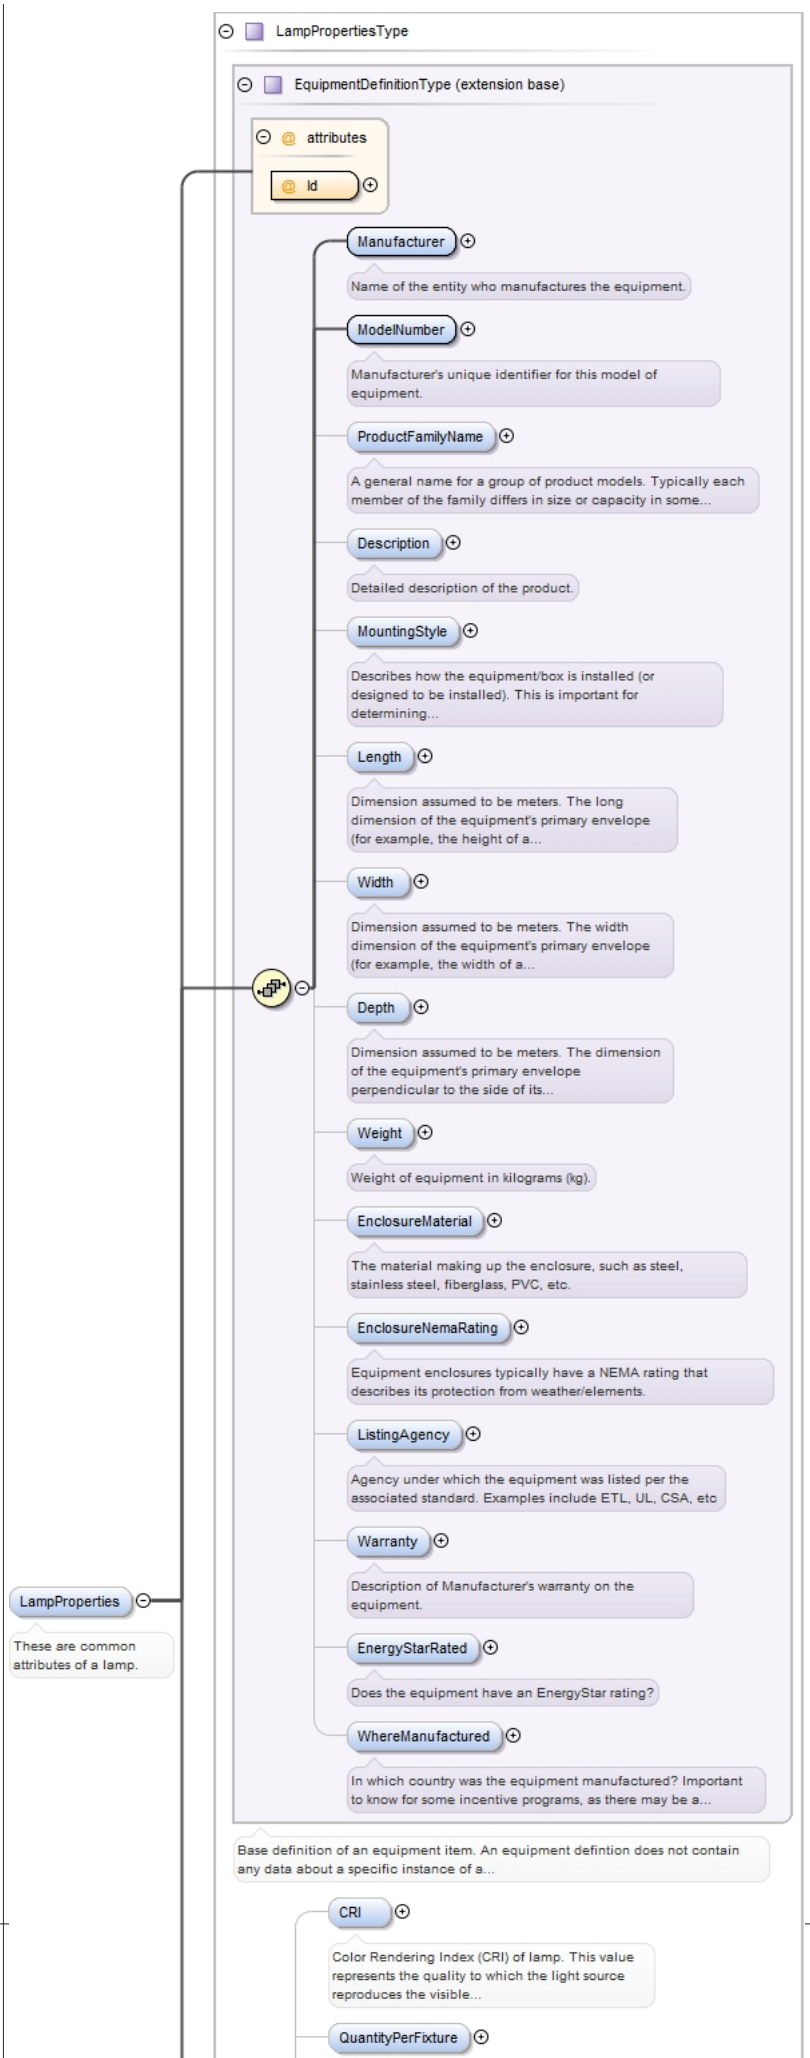
LampPropertiesType
EquipmentDefinitionType (extension base)
attributes
Id
Manufacturer
Name of the entity who manufactures the equipment.
ModelNumber
Manufacturer's unique identifier for this model of equipment.
ProductFamilyName
A general name for a group of product models. Typically each member of the family differs in size or capacity in some...
Description
Detailed description of the product.
MountingStyle
Describes how the equipment/box is installed (or designed to be installed). This is important for determining...
Length
Dimension assumed to be meters. The long dimension of the equipment's primary envelope (for example, the height of a...
Width
Dimension assumed to be meters. The width dimension of the equipment's primary envelope (for example, the width of a...
Depth
Dimension assumed to be meters. The dimension of the equipment's primary envelope perpendicular to the side of its...
Weight
Weight of equipment in kilograms (kg).
EnclosureMaterial
The material making up the enclosure, such as steel, stainless steel, fiberglass, PVC, etc.
EnclosureNemaRating
Equipment enclosures typically have a NEMA rating that describes its protection from weather/elements.
ListingAgency
Agency under which the equipment was listed per the associated standard. Examples include ETL, UL, CSA, etc
Warranty
Description of Manufacturer's warranty on the equipment.
EnergyStarRated
Does the equipment have an EnergyStar rating?
WhereManufactured
In which country was the equipment manufactured? Important to know for some incentive programs, as there may be a...
Base definition of an equipment item. An equipment defintion does not contain any data about a specific instance of a...
CRI
Color Rendering Index (CRI) of lamp. This value represents the quality to which the light source reproduces the visible...
QuantityPerFixture
LampProperties
These are common attributes of a lamp.

Type	LampPropertiesType
Type hierarchy	• EquipmentDefinitionType • LampPropertiesType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	Manufacturer , ModelNumber , ProductFamilyName{0,1} , Description{0,1} , MountingStyle{0,1} , Length{0,1} , Width{0,1} , Depth{0,1} , Weight{0,1} , EnclosureMaterial{0,1} , EnclosureNemaRating{0,1} , ListingAgency{0,1} , Warranty{0,1} , EnergyStarRated{0,1} , WhereManufactured{0,1} , CRI{0,1} , QuantityPerFixture{0,1} , WattsNominal{0,1} , ColorTemperature{0,1} , InitialLumens{0,1} , MeanLumens{0,1} , SPRatio{0,1}
Children	CRI, ColorTemperature, Depth, Description, EnclosureMaterial, EnclosureNemaRating, EnergyStarRated, InitialLumens, Length, ListingAgency, Manufacturer, MeanLumens, ModelNumber, MountingStyle, ProductFamilyName, QuantityPerFixture, SPRatio, Warranty, WattsNominal, Weight, WhereManufactured, Width

Instance

```
<LampProperties Id="" xmlns="http://www.iepmodel.net">
  <Manufacturer>{1,1}</Manufacturer>
  <ModelNumber>{1,1}</ModelNumber>
  <ProductFamilyName>{0,1}</ProductFamilyName>
  <Description>{0,1}</Description>
  <MountingStyle>{0,1}</MountingStyle>
  <Length>{0,1}</Length>
  <Width>{0,1}</Width>
  <Depth>{0,1}</Depth>
  <Weight>{0,1}</Weight>
  <EnclosureMaterial>{0,1}</EnclosureMaterial>
  <EnclosureNemaRating>{0,1}</EnclosureNemaRating>
  <ListingAgency>{0,1}</ListingAgency>
  <Warranty>{0,1}</Warranty>
  <EnergyStarRated>{0,1}</EnergyStarRated>
  <WhereManufactured>{0,1}</WhereManufactured>
  <CRI>{0,1}</CRI>
  <QuantityPerFixture>{0,1}</QuantityPerFixture>
  <WattsNominal>{0,1}</WattsNominal>
  <ColorTemperature>{0,1}</ColorTemperature>
  <InitialLumens>{0,1}</InitialLumens>
  <MeanLumens>{0,1}</MeanLumens>
  <SPRatio>{0,1}</SPRatio>
</LampProperties>
```

Attributes

QName	Type	Fixed	Default	Use
Id	xs:ID			required

Source

```
<xs:element name="LampProperties" type="LampPropertiesType" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>These are common attributes of a lamp.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element LampPropertiesType / CRI

Namespace	No namespace
Annotations	Color Rendering Index (CRI) of lamp. This value represents the quality to which the light source reproduces the visible light spectrum.
Diagram	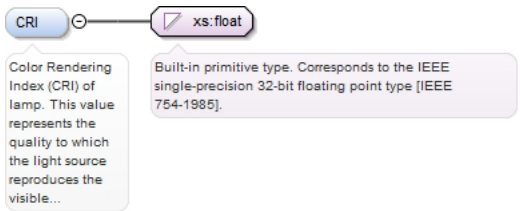
Type	xs:float
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source

```
<xs:element name="CRI" type="xs:float" minOccurs="0" maxOccurs="1">
  <xs:annotation>
```

```
    <xs:documentation>Color Rendering Index (CRI) of lamp. This value represents
 the quality to which the light source reproduces the visible light spectrum.</
xs:documentation>
  </xs:annotation>
</xs:element>
```

Element LampPropertiesType / QuantityPerFixture

Namespace	No namespace
Annotations	The number of lamps per fixture. Note that the definition of "fixture" is subject to the surveyor. This detail should be described included in the Description element of Lighting Fixture Type.
Diagram	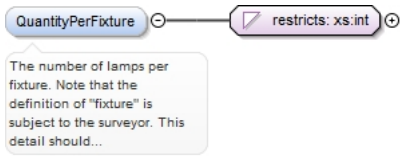
Type	restriction of xs:int
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minInclusive 0
Source	

```
<xs:element name="QuantityPerFixture" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>The number of lamps per fixture. Note that the definition of
 "fixture" is subject to the surveyor. This detail should be described included in the
 Description element of Lighting Fixture Type.</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:int">
      <xs:minInclusive value="0"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element LampPropertiesType / WattsNominal

Namespace	No namespace
Annotations	Nominal wattage of the lamp (value listed on lamp label or nameplate). Note that this doesn't represent the actual input power of a ballasted fixture.
Diagram	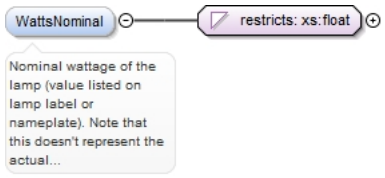
Type	restriction of xs:float
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minExclusive 0
Source	

```
<xs:element name="WattsNominal" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>Nominal wattage of the lamp (value listed on lamp label or
 nameplate). Note that this doesn't represent the actual input power of a ballasted
 fixture.</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:float">
      <xs:minExclusive value="0"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element LampPropertiesType / ColorTemperature

Namespace	No namespace
Annotations	The lamp color temperature as measured in Kelvin.
Diagram	
Type	restriction of xs:float
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minInclusive 0
Source	<xs:element name="ColorTemperature" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>The lamp color temperature as measured in Kelvin.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:float"> <xs:minInclusive value="0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element LampPropertiesType / InitialLumens

Namespace	No namespace
Annotations	Light output (in Lumens) when lamp is first powered.
Diagram	
Type	restriction of xs:int
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minInclusive 0
Source	<xs:element name="InitialLumens" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Light output (in Lumens) when lamp is first powered.</ xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:int"> <xs:minInclusive value="0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element LampPropertiesType / MeanLumens

Namespace	No namespace
Annotations	Average light output over the lifetime of the lamp.
Diagram	
Type	restriction of xs:int
Properties	content: simple

	minOccurs:	0
	maxOccurs:	1
Facets	minInclusive	0

Source

```
<xs:element name="MeanLumens" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>Average light output over the lifetime of the lamp.</
xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:int">
      <xs:minInclusive value="0"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element LampPropertiesType / SPRatio

Namespace	No namespace	
Annotations	SP Ratio.	
Diagram		
Type	restriction of xs:float	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	minInclusive	0

Source

```
<xs:element name="SPRatio" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>SP Ratio.</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:float">
      <xs:minInclusive value="0"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element LightingFixtureDefintionType / BallastProperties

Namespace	No namespace
Annotations	These are attributes of the ballast. There doesn't need to be a ballast.

Diagram

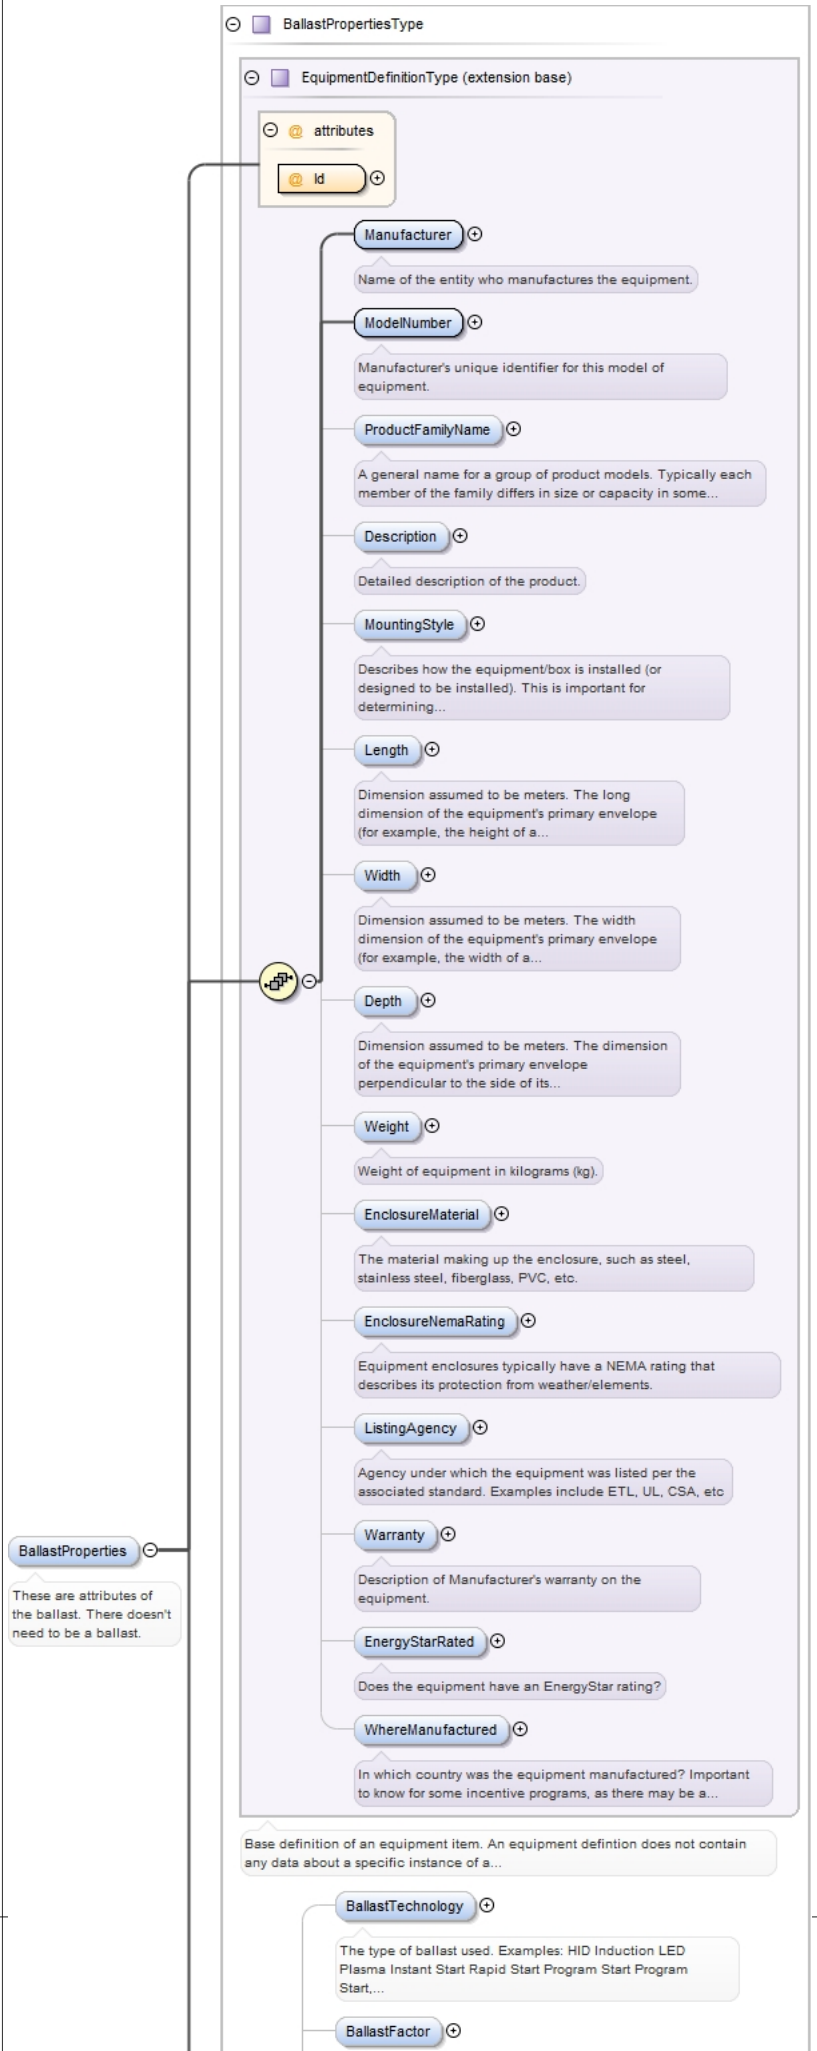
BallastPropertiesType
EquipmentDefinitionType (extension base)
attributes
Id
Manufacturer
Name of the entity who manufactures the equipment.
ModelNumber
Manufacturer's unique identifier for this model of equipment.
ProductFamilyName
A general name for a group of product models. Typically each member of the family differs in size or capacity in some...
Description
Detailed description of the product.
MountingStyle
Describes how the equipment/box is installed (or designed to be installed). This is important for determining...
Length
Dimension assumed to be meters. The long dimension of the equipment's primary envelope (for example, the height of a...
Width
Dimension assumed to be meters. The width dimension of the equipment's primary envelope (for example, the width of a...
Depth
Dimension assumed to be meters. The dimension of the equipment's primary envelope perpendicular to the side of its...
Weight
Weight of equipment in kilograms (kg).
EnclosureMaterial
The material making up the enclosure, such as steel, stainless steel, fiberglass, PVC, etc.
EnclosureNemaRating
Equipment enclosures typically have a NEMA rating that describes its protection from weather/elements.
ListingAgency
Agency under which the equipment was listed per the associated standard. Examples include ETL, UL, CSA, etc
Warranty
Description of Manufacturer's warranty on the equipment.
EnergyStarRated
Does the equipment have an EnergyStar rating?
WhereManufactured
In which country was the equipment manufactured? Important to know for some incentive programs, as there may be a...
Base definition of an equipment item. An equipment defintion does not contain any data about a specific instance of a...
BallastTechnology
The type of ballast used. Examples: HID Induction LED Plasma Instant Start Rapid Start Program Start Program Start,...
BallastFactor
BallastProperties
These are attributes of the ballast. There doesn't need to be a ballast.

Type	BallastPropertiesType
Type hierarchy	• EquipmentDefinitionType • BallastPropertiesType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	Manufacturer , ModelNumber , ProductFamilyName{0,1} , Description{0,1} , MountingStyle{0,1} , Length{0,1} , Width{0,1} , Depth{0,1} , Weight{0,1} , EnclosureMaterial{0,1} , EnclosureNemaRating{0,1} , ListingAgency{0,1} , Warranty{0,1} , EnergyStarRated{0,1} , WhereManufactured{0,1} , BallastTechnology{0,1} , BallastFactor{0,1} , QuantityPerFixture{0,1} , PowerFactor{0,1} , THD{0,1}
Children	BallastFactor, BallastTechnology, Depth, Description, EnclosureMaterial, EnclosureNemaRating, EnergyStarRated, Length, ListingAgency, Manufacturer, ModelNumber, MountingStyle, PowerFactor, ProductFamilyName, QuantityPerFixture, THD, Warranty, Weight, WhereManufactured, Width
Instance	<BallastProperties Id="" xmlns="http://www.iepmodel.net"> <Manufacturer>{1,1}</Manufacturer> <ModelNumber>{1,1}</ModelNumber> <ProductFamilyName>{0,1}</ProductFamilyName> <Description>{0,1}</Description> <MountingStyle>{0,1}</MountingStyle> <Length>{0,1}</Length> <Width>{0,1}</Width> <Depth>{0,1}</Depth> <Weight>{0,1}</Weight> <EnclosureMaterial>{0,1}</EnclosureMaterial> <EnclosureNemaRating>{0,1}</EnclosureNemaRating> <ListingAgency>{0,1}</ListingAgency> <Warranty>{0,1}</Warranty> <EnergyStarRated>{0,1}</EnergyStarRated> <WhereManufactured>{0,1}</WhereManufactured> <BallastTechnology>{0,1}</BallastTechnology> <BallastFactor>{0,1}</BallastFactor> <QuantityPerFixture>{0,1}</QuantityPerFixture> <PowerFactor>{0,1}</PowerFactor> <THD>{0,1}</THD> </BallastProperties>

Attributes

QName	Type	Fixed	Default	Use
Id	xs:ID			required

Source

```
<xs:element name="BallastProperties" type="BallastPropertiesType" minOccurs="0"
 maxOccurs="1">
  <xs:annotation>
    <xs:documentation>These are attributes of the ballast. There doesn't need to be a
 ballast.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element BallastPropertiesType / BallastTechnology

Namespace	No namespace
Annotations	The type of ballast used. Examples: HID Induction LED Plasma Instant Start Rapid Start Program Start Program Start, Dimming Program Start, Bi-Level Program Start, Multi-Level
Diagram	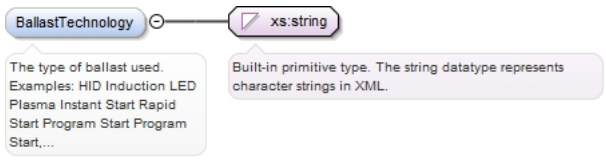
Type	xs:string
Properties	content: simple

	minOccurs: 0 maxOccurs: 1
Source	<xs:element name="BallastTechnology" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>The type of ballast used. Examples: HID Induction LED Plasma Instant Start Rapid Start Program Start Program Start, Dimming Program Start, Bi-Level Program Start, Multi-Level</xs:documentation> </xs:annotation> </xs:element>

Element BallastPropertiesType / BallastFactor

Namespace	No namespace
Annotations	Ballast factor indicates the power output of the ballast relative to a standard. This value typically varies from 0.5 to 1.5 and is typically falls 0.75 to 1.2. A value of zero may indicate that no ballast is used.
Diagram	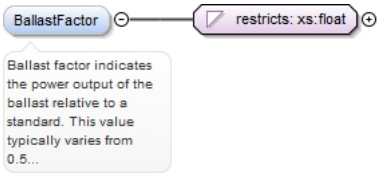
Type	restriction of xs:float
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minInclusive 0
Source	<xs:element name="BallastFactor" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Ballast factor indicates the power output of the ballast relative to a standard. This value typically varies from 0.5 to 1.5 and is typically falls 0.75 to 1.2. A value of zero may indicate that no ballast is used.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:float"> <xs:minInclusive value="0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element BallastPropertiesType / QuantityPerFixture

Namespace	No namespace
Annotations	The number of ballasts per fixture. Note that the definition of "fixture" is subject to the surveyor. This detail should be described included in the Description element of Lighting System.
Diagram	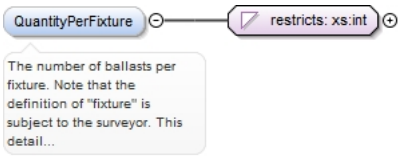
Type	restriction of xs:int
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minInclusive 0
Source	<xs:element name="QuantityPerFixture" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>The number of ballasts per fixture. Note that the definition of "fixture" is subject to the surveyor. This detail should be described included in the Description element of Lighting System.</xs:documentation>

```
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:int">
      <xs:minInclusive value="0"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element BallastPropertiesType / PowerFactor

Namespace	No namespace
Annotations	This is the power factor of the ballast.
Diagram	
Type	restriction of xs:float
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minInclusive 0
Source	<xs:element name="PowerFactor" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This is the power factor of the ballast.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:float"> <xs:minInclusive value="0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element BallastPropertiesType / THD

Namespace	No namespace
Annotations	Total Harmonic Distortion
Diagram	
Type	restriction of xs:float
Properties	content: simple minOccurs: 0
Facets	maxInclusive 1 minInclusive 0
Source	<xs:element minOccurs="0" name="THD"> <xs:annotation> <xs:documentation>Total Harmonic Distortion</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:float"> <xs:minInclusive value="0"/> <xs:maxInclusive value="1"/> </xs:restriction> </xs:simpleType> </xs:element>

Element LightingSystemType / LightingZone

Namespace	No namespace
Annotations	This defines properties of light quality, level, demand and use in the zone.

Diagram	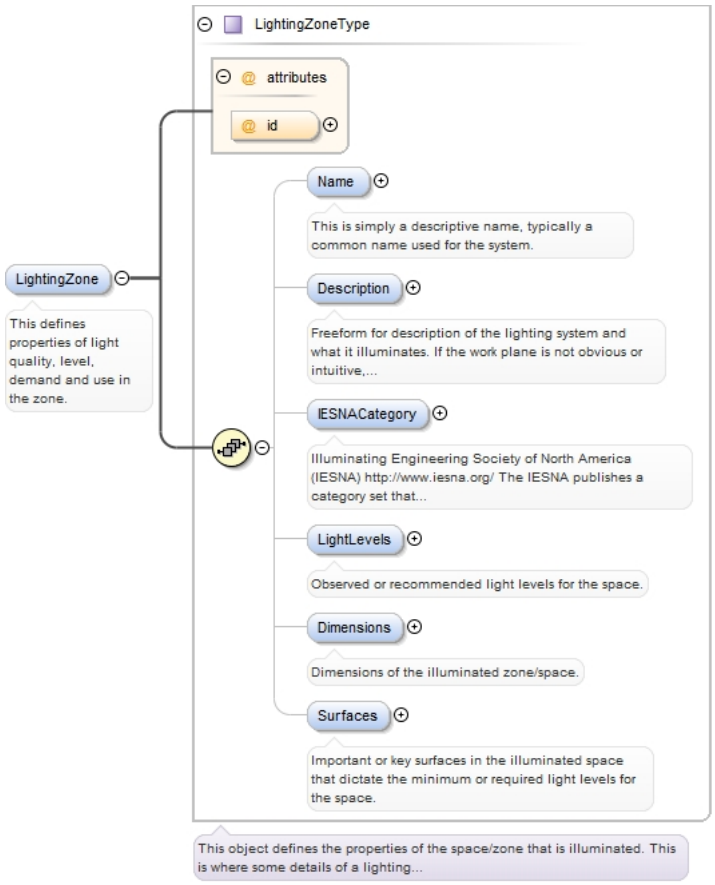
Type	LightingZoneType
Properties	content: `complex` minOccurs: `0` maxOccurs: `unbounded`
Model	Name{0,1} , Description{0,1} , IESNACategory{0,1} , LightLevels{0,1} , Dimensions{0,1} , Surfaces{0,1}
Children	Description, Dimensions, IESNACategory, LightLevels, Name, Surfaces

`Instance`	`<LightingZone id="">`
	`  <Name>{0,1}</Name>`
	`  <Description>{0,1}</Description>`
	`  <IESNACategory>{0,1}</IESNACategory>`
	`  <LightLevels>{0,1}</LightLevels>`
	`  <Dimensions>{0,1}</Dimensions>`
	`  <Surfaces>{0,1}</Surfaces>`
	`</LightingZone>`

Attributes	**QName**: **id** — **Type**: xs:ID — **Fixed**: — **Default**: — **Use**: optional

`Source`	`<xs:element maxOccurs="unbounded" minOccurs="0" name="LightingZone" type="LightingZoneType">`
	`  <xs:annotation>`
	`  <xs:documentation>This defines properties of light quality, level, demand and use in the zone.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element `LightingZoneType / Name`

Namespace	No namespace
Annotations	`This is simply a descriptive name, typically a common name used for the system.`

Diagram	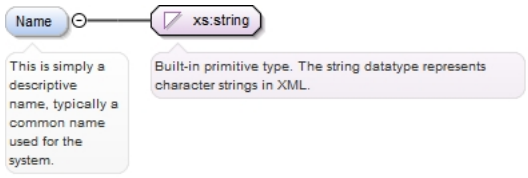
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This is simply a descriptive name, typically a common name used for the system.</xs:documentation> </xs:annotation> </xs:element>

Element LightingZoneType / Description

Namespace	No namespace
Annotations	Freeform for description of the lighting system and what it illuminates. If the work plane is not obvious or intuitive, it should be defined here.
Diagram	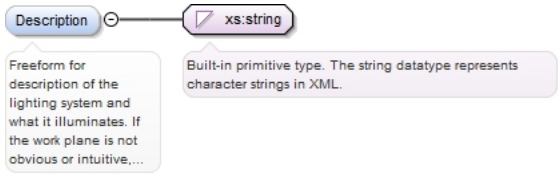
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Freeform for description of the lighting system and what it illuminates. If the work plane is not obvious or intuitive, it should be defined here.</xs:documentation> </xs:annotation> </xs:element>

Element LightingZoneType / IESNACategory

Namespace	No namespace
Annotations	Illuminating Engineering Society of North America (IESNA) http://www.iesna.org/ The IESNA publishes a category set that describes the use case for lighting in a space. This listing can be found here:
Diagram	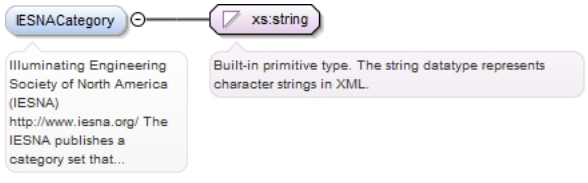
Type	xs:string
Properties	content: simple minOccurs: 0
Source	<xs:element minOccurs="0" name="IESNACategory" type="xs:string"> <xs:annotation> <xs:documentation>Illuminating Engineering Society of North America (IESNA) http://www.iesna.org/ The IESNA publishes a category set that describes the use case for lighting in a space. This listing can be found here:</xs:documentation>

```
  </xs:annotation>
</xs:element>
```

Element LightingZoneType / LightLevels

Namespace	No namespace
Annotations	Observed or recommended light levels for the space.
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0
Source	<xs:element minOccurs="0" name="LightLevels" type="xs:string"> <xs:annotation> <xs:documentation>Observed or recommended light levels for the space.</ xs:documentation> </xs:annotation> </xs:element>

Element LightingZoneType / Dimensions

Namespace	No namespace
Annotations	Dimensions of the illuminated zone/space.
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0
Source	<xs:element minOccurs="0" name="Dimensions" type="xs:string"> <xs:annotation> <xs:documentation>Dimensions of the illuminated zone/space.</xs:documentation> </xs:annotation> </xs:element>

Element LightingZoneType / Surfaces

Namespace	No namespace
Annotations	Important or key surfaces in the illuminated space that dictate the minimum or required light levels for the space.
Diagram	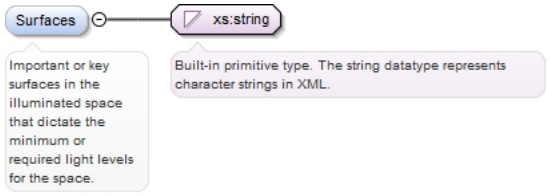
Type	xs:string
Properties	content: simple minOccurs: 0
Source	<xs:element minOccurs="0" name="Surfaces" type="xs:string"> <xs:annotation> <xs:documentation>Important or key surfaces in the illuminated space that dictate the minimum or required light levels for the space.</xs:documentation> </xs:annotation> </xs:element>

Element LightingSystemType / LightingControlGroup

Namespace	No namespace

Annotations	This object defines a group of light fixtures and the control/operating parameters of that group of fixtures. System properties are contained here.
Diagram	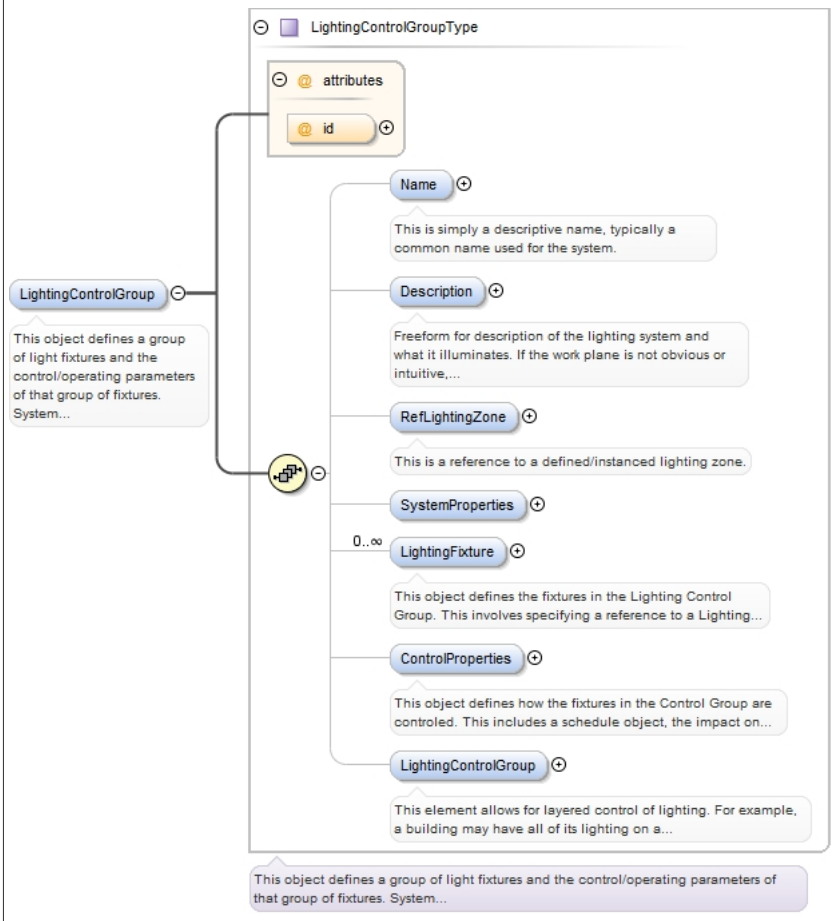
Type	LightingControlGroupType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Name{0,1} , Description{0,1} , RefLightingZone{0,1} , SystemProperties{0,1} , LightingFixture* , ControlProperties{0,1} , LightingControlGroup{0,1}
Children	ControlProperties, Description, LightingControlGroup, LightingFixture, Name, RefLightingZone, SystemProperties
Instance	<LightingControlGroup id=""> <Name>{0,1}</Name> <Description>{0,1}</Description> <RefLightingZone>{0,1}</RefLightingZone> <SystemProperties>{0,1}</SystemProperties> <LightingFixture EquipmentDefinitionIdRef="" Id="">{0,unbounded}</LightingFixture> <ControlProperties>{0,1}</ControlProperties> <LightingControlGroup id="">{0,1}</LightingControlGroup> </LightingControlGroup>

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			optional

Source

```
<xs:element maxOccurs="unbounded" minOccurs="0" name="LightingControlGroup"
 type="LightingControlGroupType">
  <xs:annotation>
    <xs:documentation>This object defines a group of light fixtures and the control/
operating parameters of that group of fixtures. System properties are contained here.</
xs:documentation>
  </xs:annotation>
</xs:element>
```

Element LightingControlGroupType / Name

Namespace	No namespace

Annotations	This is simply a descriptive name, typically a common name used for the system.
Diagram	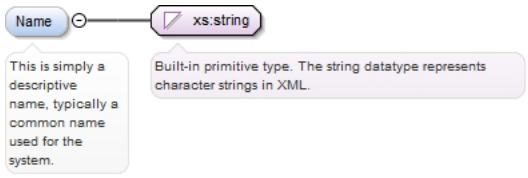
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This is simply a descriptive name, typically a common name used for the system.</xs:documentation> </xs:annotation> </xs:element>

Element LightingControlGroupType / Description

Namespace	No namespace
Annotations	Freeform for description of the lighting system and what it illuminates. If the work plane is not obvious or intuitive, it should be defined here.
Diagram	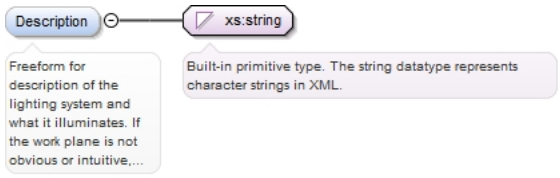
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Freeform for description of the lighting system and what it illuminates. If the work plane is not obvious or intuitive, it should be defined here.</xs:documentation> </xs:annotation> </xs:element>

Element LightingControlGroupType / RefLightingZone

Namespace	No namespace
Annotations	This is a reference to a defined/instanced lighting zone.
Diagram	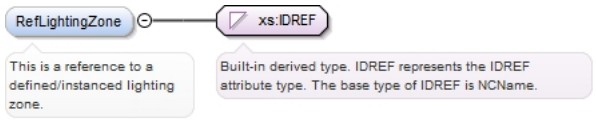
Type	xs:IDREF
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element maxOccurs="1" minOccurs="0" name="RefLightingZone" type="xs:IDREF"> <xs:annotation> <xs:documentation>This is a reference to a defined/instanced lighting zone.</xs:documentation> </xs:annotation> </xs:element>

Element LightingControlGroupType / SystemProperties

Namespace	No namespace
Diagram	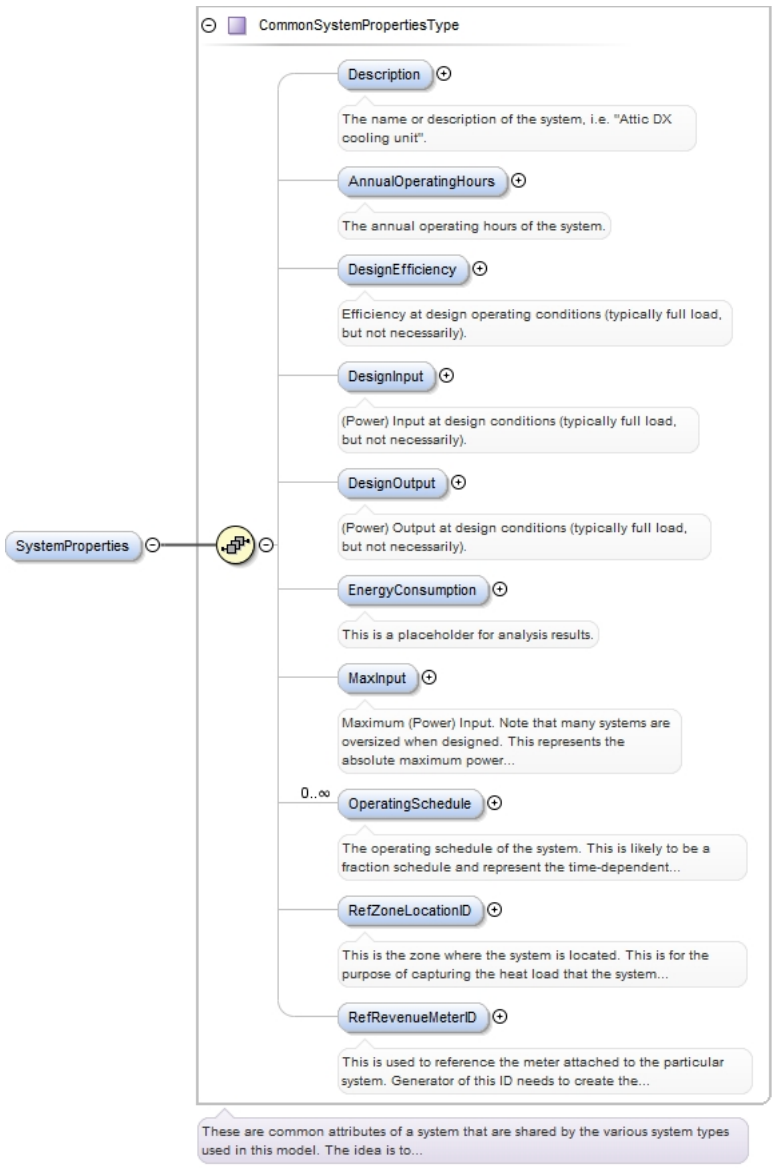
Type	CommonSystemPropertiesType
Properties	content: complex minOccurs: 0
Model	Description{0,1} , AnnualOperatingHours{0,1} , DesignEfficiency{0,1} , DesignInput{0,1} , DesignOutput{0,1} , EnergyConsumption{0,1} , MaxInput{0,1} , OperatingSchedule* , RefZoneLocationID{0,1} , RefRevenueMeterID{0,1}
Children	AnnualOperatingHours, Description, DesignEfficiency, DesignInput, DesignOutput, EnergyConsumption, MaxInput, OperatingSchedule, RefRevenueMeterID, RefZoneLocationID
Instance	<SystemProperties> <Description>{0,1}</Description> <AnnualOperatingHours>{0,1}</AnnualOperatingHours> <DesignEfficiency TestCondition="" Unit="" UnitDesc="">{0,1}</DesignEfficiency> <DesignInput Fuel="Electricity" FuelDesc="Electricity" TestCondition="" Unit="" UnitDesc="kwh">{0,1}</DesignInput> <DesignOutput Fuel="Electricity" FuelDesc="Electricity" TestCondition="" Unit="" UnitDesc="kwh">{0,1}</DesignOutput> <EnergyConsumption>{0,1}</EnergyConsumption> <MaxInput Fuel="Electricity" FuelDesc="Electricity" TestCondition="" Unit="" UnitDesc="kwh">{0,1}</MaxInput> <OperatingSchedule>{0,unbounded}</OperatingSchedule> <RefZoneLocationID>{0,1}</RefZoneLocationID>

	<RefRevenueMeterID>{0,1}</RefRevenueMeterID> </SystemProperties>
Source	<xs:element minOccurs="0" name="SystemProperties" type="CommonSystemPropertiesType"/>

Element LightingControlGroupType / LightingFixture

Namespace	No namespace
Annotations	This object defines the fixtures in the Lighting Control Group. This involves specifying a reference to a Lighting Fixture Type defined in the Lighting System and a quantity of the Fixture Type.
Diagram	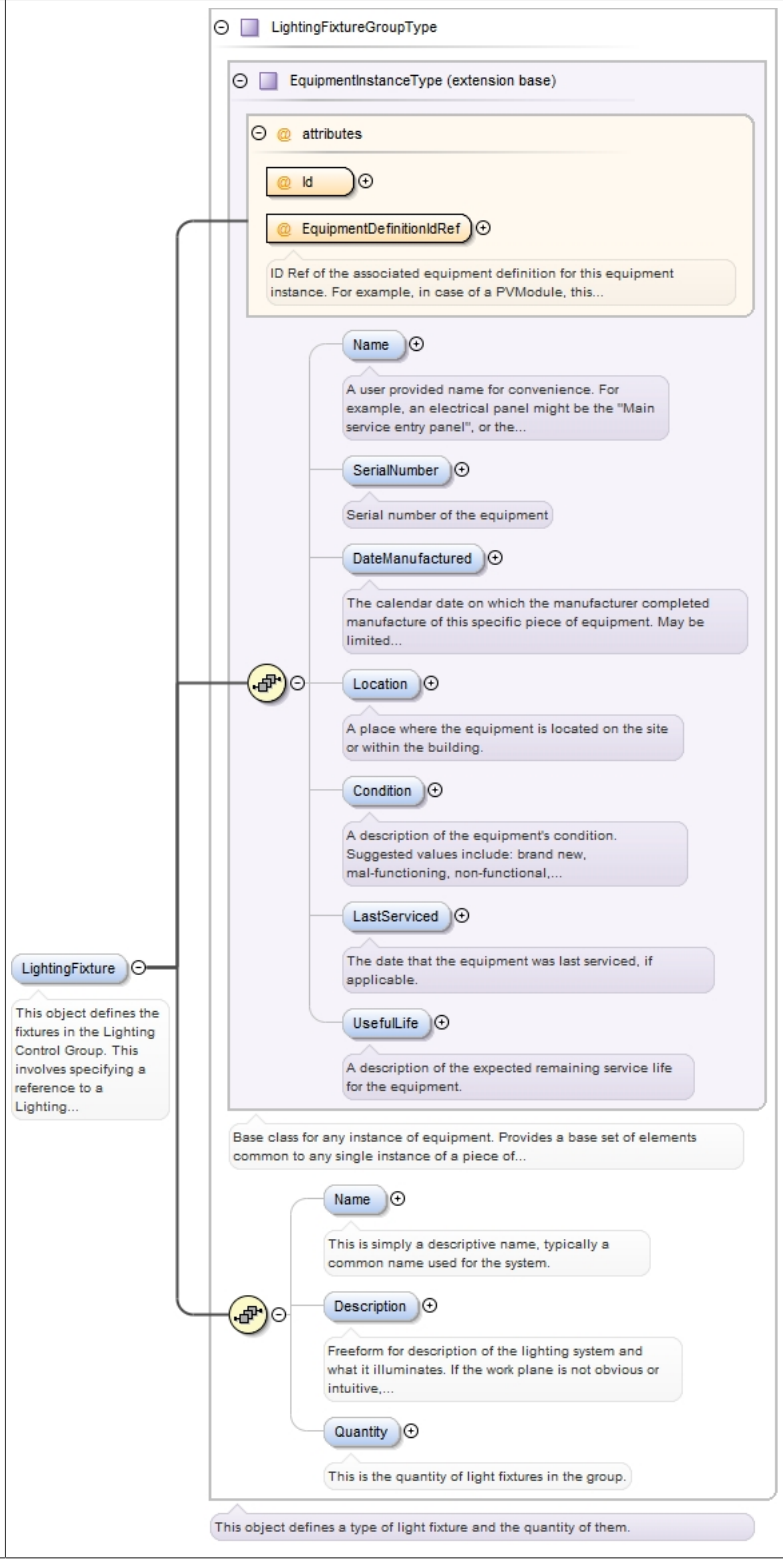

Type	LightingFixtureGroupType
Type hierarchy	• EquipmentInstanceType • LightingFixtureGroupType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Name{0,1} , SerialNumber{0,1} , DateManufactured{0,1} , Location{0,1} , Condition{0,1} , LastServiced{0,1} , UsefulLife{0,1} , Name{0,1} , Description{0,1} , Quantity{0,1}
Children	Condition, DateManufactured, Description, LastServiced, Location, Name, Quantity, SerialNumber, UsefulLife

Instance

```
<LightingFixture EquipmentDefinitionIdRef="" Id="" xmlns="http://www.iepmodel.net">
  <Name>{0,1}</Name>
  <SerialNumber>{0,1}</SerialNumber>
  <DateManufactured>{0,1}</DateManufactured>
  <Location>{0,1}</Location>
  <Condition>{0,1}</Condition>
  <LastServiced>{0,1}</LastServiced>
  <UsefulLife>{0,1}</UsefulLife>
  <Name>{0,1}</Name>
  <Description>{0,1}</Description>
  <Quantity>{0,1}</Quantity>
</LightingFixture>
```

Attributes

QName	Type	Fixed	Default	Use
EquipmentDefinitionIdRef	IDREF			required
	ID Ref of the associated equipment definition for this equipment instance. For example, in case of a PVModule, this would be the ID of the PvModuleDefinition element that describes this particular PV module instance.			
Id	xs:ID			required

Source

```
<xs:element maxOccurs="unbounded" minOccurs="0" name="LightingFixture"
 type="LightingFixtureGroupType">
  <xs:annotation>
    <xs:documentation>This object defines the fixtures in the Lighting Control Group. This
 involves specifying a reference to a Lighting Fixture Type defined in the Lighting System
 and a quantity of the Fixture Type.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element LightingFixtureGroupType / Name

Namespace	No namespace
Annotations	This is simply a descriptive name, typically a common name used for the system.
Diagram	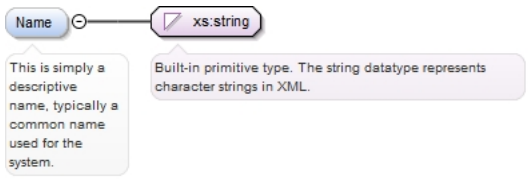
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source

```
<xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>This is simply a descriptive name, typically a common name used for
 the system.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element LightingFixtureGroupType / Description

Namespace	No namespace

Annotations	Freeform for description of the lighting system and what it illuminates. If the work plane is not obvious or intuitive, it should be defined here.
Diagram	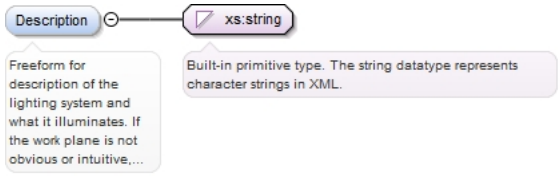
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Freeform for description of the lighting system and what it illuminates. If the work plane is not obvious or intuitive, it should be defined here.</xs:documentation> </xs:annotation> </xs:element>

Element LightingFixtureGroupType / Quantity

Namespace	No namespace
Annotations	This is the quantity of light fixtures in the group.
Diagram	
Type	restriction of xs:int
Properties	content: simple minOccurs: 0
Facets	minInclusive 0
Source	<xs:element minOccurs="0" name="Quantity"> <xs:annotation> <xs:documentation>This is the quantity of light fixtures in the group.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:int"> <xs:minInclusive value="0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element LightingControlGroupType / ControlProperties

Namespace	No namespace
Annotations	This object defines how the fixtures in the Control Group are controled. This includes a schedule object, the impact on the operating hours if an automatic control type is defined, the way in which the fixtures are controled (auto, manual, etc.), and the switching method (the way that the light output is modulated - dimming, on/off, bi-level...).

Diagram	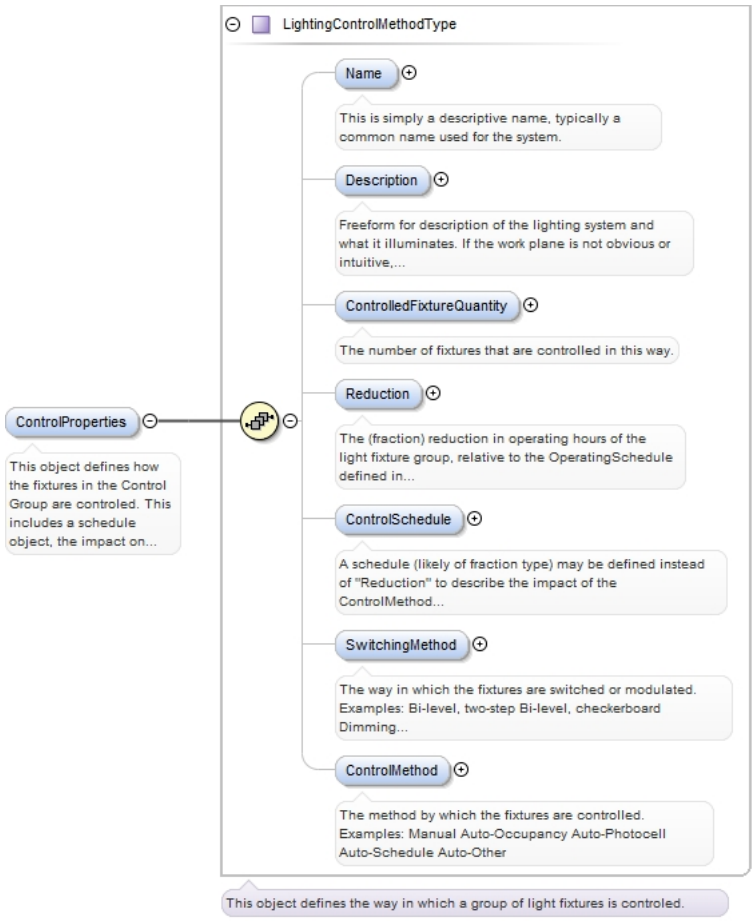
Type	LightingControlMethodType
Properties	content: complex minOccurs: 0
Model	Name{0,1} , Description{0,1} , ControlledFixtureQuantity{0,1} , Reduction{0,1} , ControlSchedule{0,1} , SwitchingMethod{0,1} , ControlMethod{0,1}
Children	ControlMethod, ControlSchedule, ControlledFixtureQuantity, Description, Name, Reduction, SwitchingMethod

Instance	`<ControlProperties>`
	`  <Name>{0,1}</Name>`
	`  <Description>{0,1}</Description>`
	`  <ControlledFixtureQuantity>{0,1}</ControlledFixtureQuantity>`
	`  <Reduction>{0,1}</Reduction>`
	`  <ControlSchedule>{0,1}</ControlSchedule>`
	`  <SwitchingMethod>{0,1}</SwitchingMethod>`
	`  <ControlMethod>{0,1}</ControlMethod>`
	`</ControlProperties>`

Source	`<xs:element name="ControlProperties" type="LightingControlMethodType" minOccurs="0">` `  <xs:annotation>` ` <xs:documentation>This object defines how the fixtures in the Control Group are controled. This includes a schedule object, the impact on the operating hours if an automatic control type is defined, the way in which the fixtures are controled (auto, manual, etc.), and the switching method (the way that the light output is modulated - dimming, on/off, bi-level...).</xs:documentation>` ` </xs:annotation>` `</xs:element>`

Element `LightingControlMethodType / Name`

Namespace	No namespace
Annotations	`This is simply a descriptive name, typically a common name used for the system.`

Diagram	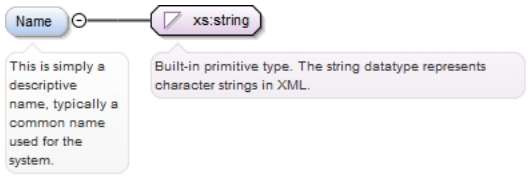
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This is simply a descriptive name, typically a common name used for the system.</xs:documentation> </xs:annotation> </xs:element>

Element LightingControlMethodType / Description

Namespace	No namespace
Annotations	Freeform for description of the lighting system and what it illuminates. If the work plane is not obvious or intuitive, it should be defined here.
Diagram	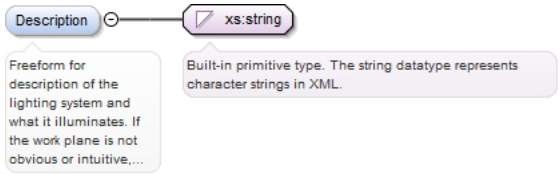
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Freeform for description of the lighting system and what it illuminates. If the work plane is not obvious or intuitive, it should be defined here.</xs:documentation> </xs:annotation> </xs:element>

Element LightingControlMethodType / ControlledFixtureQuantity

Namespace	No namespace
Annotations	The number of fixtures that are controlled in this way.
Diagram	
Type	restriction of xs:int
Properties	content: simple minOccurs: 0
Facets	minInclusive 0
Source	<xs:element minOccurs="0" name="ControlledFixtureQuantity"> <xs:annotation> <xs:documentation>The number of fixtures that are controlled in this way.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:int"> <xs:minInclusive value="0"/>

```
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element LightingControlMethodType / Reduction

Namespace	No namespace
Annotations	The (fraction) reduction in operating hours of the light fixture group, relative to the OperatingSchedule defined in SystemProperties, that results from the ControlMethod and SwitchingMethod.
Diagram	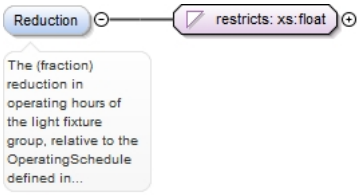
Type	restriction of xs:float
Properties	content: simple minOccurs: 0
Facets	maxInclusive 1 minInclusive 0
Source	

```
<xs:element minOccurs="0" name="Reduction">
  <xs:annotation>
    <xs:documentation>The (fraction) reduction in operating hours of the light fixture
 group, relative to the OperatingSchedule defined in SystemProperties, that results from
 the ControlMethod and SwitchingMethod.</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:float">
      <xs:minInclusive value="0"/>
      <xs:maxInclusive value="1"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element LightingControlMethodType / ControlSchedule

Namespace	No namespace
Annotations	A schedule (likely of fraction type) may be defined instead of "Reduction" to describe the impact of the ControlMethod and SwitchingMethod on the operation/operating-hours of the Fixtures.
Diagram	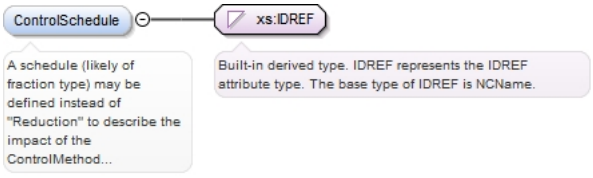
Type	xs:IDREF
Properties	content: simple minOccurs: 0
Source	

```
<xs:element minOccurs="0" name="ControlSchedule" type="xs:IDREF">
  <xs:annotation>
    <xs:documentation>A schedule (likely of fraction type) may be defined instead of
 "Reduction" to describe the impact of the ControlMethod and SwitchingMethod on the
 operation/operating-hours of the Fixtures.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element LightingControlMethodType / SwitchingMethod

Namespace	No namespace

Annotations	The way in which the fixtures are switched or modulated. Examples: Bi-level, two-step Bi-level, checkerboard Dimming Three Position Switch On/Off Other
Diagram	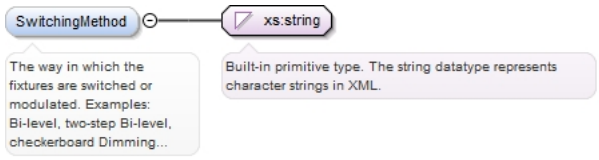
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="SwitchingMethod" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>The way in which the fixtures are switched or modulated. Examples: Bi-level, two-step Bi-level, checkerboard Dimming Three Position Switch On/Off Other</ xs:documentation> </xs:annotation> </xs:element>

Element LightingControlMethodType / ControlMethod

Namespace	No namespace
Annotations	The method by which the fixtures are controlled. Examples: Manual Auto-Occupancy Auto-Photocell Auto-Schedule Auto-Other
Diagram	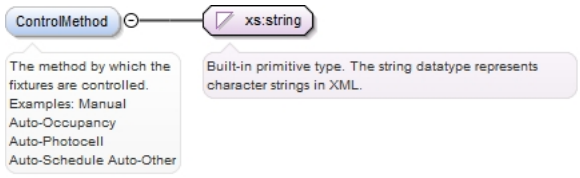
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="ControlMethod" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>The method by which the fixtures are controlled. Examples: Manual Auto-Occupancy Auto-Photocell Auto-Schedule Auto-Other</xs:documentation> </xs:annotation> </xs:element>

Element LightingControlGroupType / LightingControlGroup

Namespace	No namespace
Annotations	This element allows for layered control of lighting. For example, a building may have all of its lighting on a timeclock that turns off power to all of the lighting system at night. In addition, the light fixtures in an open office area may be manually switched. The light fixtures in another exterior office are may be on an occupancy and/or daylight sensor. In this example, some light fixtures have multiple layers of control.

Diagram	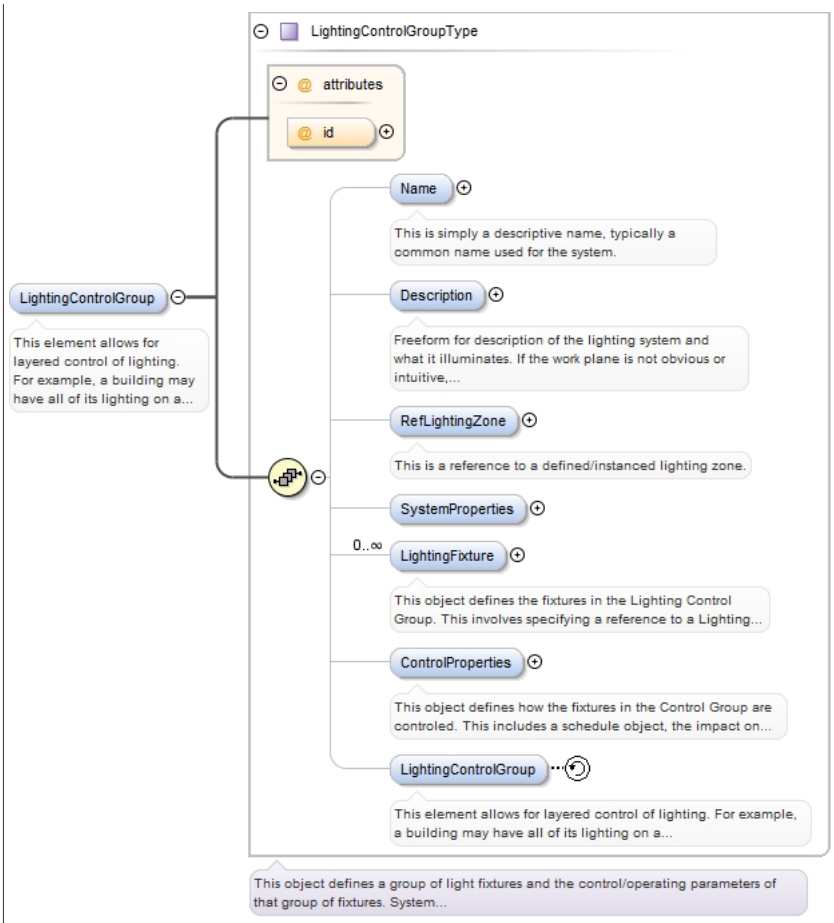
Type	LightingControlGroupType
Properties	content: complex minOccurs: 0
Model	Name{0,1} , Description{0,1} , RefLightingZone{0,1} , SystemProperties{0,1} , LightingFixture* , ControlProperties{0,1} , LightingControlGroup{0,1}
Children	ControlProperties, Description, LightingControlGroup, LightingFixture, Name, RefLightingZone, SystemProperties

Instance	`<LightingControlGroup id="">`
	`  <Name>{0,1}</Name>`
	`  <Description>{0,1}</Description>`
	`  <RefLightingZone>{0,1}</RefLightingZone>`
	`  <SystemProperties>{0,1}</SystemProperties>`
	`  <LightingFixture EquipmentDefinitionIdRef="" Id="">{0,unbounded}</LightingFixture>`
	`  <ControlProperties>{0,1}</ControlProperties>`
	`  <LightingControlGroup id="">{0,1}</LightingControlGroup>`
	`</LightingControlGroup>`

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			optional

Source

```
<xs:element minOccurs="0" name="LightingControlGroup" type="LightingControlGroupType">
  <xs:annotation>
    <xs:documentation>This element allows for layered control of lighting. For example,
 a building may have all of its lighting on a timeclock that turns off power to all of
 the lighting system at night. In addition, the light fixtures in an open office area
 may be manually switched. The light fixtures in another exterior office are may be on
 an occupancy and/or daylight sensor. In this example, some light fixtures have multiple
 layers of control.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element SystemChoiceType / PV

Namespace	No namespace
Annotations	A photovoltaic (PV) system. Generates electrical energy from sunlight.

Diagram	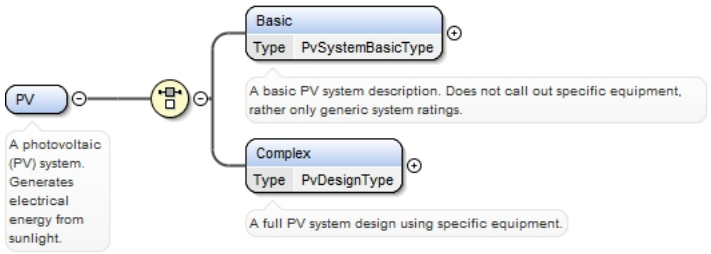
Properties	content: complex minOccurs: 1
Model	Basic | Complex
Children	Basic, Complex

Instance	`<PV>`
	`  <Basic>{1,1}</Basic>`
	`  <Complex>{1,1}</Complex>`
	`</PV>`

Source	`<xs:element name="PV" minOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>A photovoltaic (PV) system. Generates electrical energy from sunlight.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:complexType>`
	`  <xs:choice>`
	`  <xs:element name="Basic" type="PvSystemBasicType">`
	`  <xs:annotation>`
	`  <xs:documentation>A basic PV system description. Does not call out specific equipment, rather only generic system ratings.</xs:documentation>`
	`  </xs:annotation>`
	`  </xs:element>`
	`  <xs:element name="Complex" type="PvDesignType">`
	`  <xs:annotation>`
	`  <xs:documentation>A full PV system design using specific equipment.</xs:documentation>`
	`  </xs:annotation>`
	`  </xs:element>`
	`  </xs:choice>`
	`  </xs:complexType>`
	`</xs:element>`

Element SystemChoiceType / PV / Basic

Namespace	No namespace
Annotations	A basic PV system description. Does not call out specific equipment, rather only generic system ratings.
Diagram	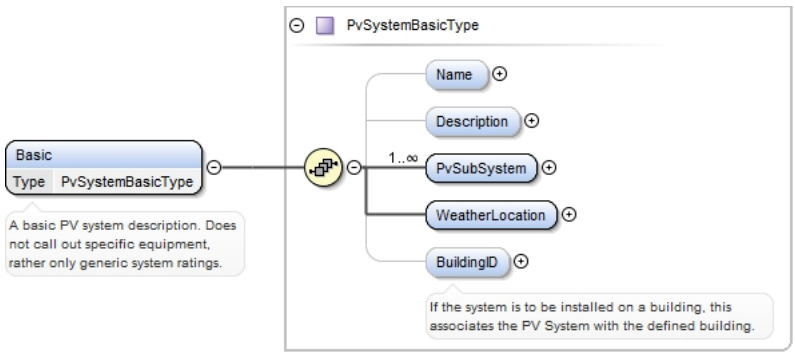
Type	PvSystemBasicType
Properties	content: complex
Model	Name{0,1} , Description{0,1} , PvSubSystem+ , WeatherLocation , BuildingID{0,1}
Children	BuildingID, Description, Name, PvSubSystem, WeatherLocation

Instance	`<Basic>`
	`  <Name>{0,1}</Name>`
	`  <Description>{0,1}</Description>`
	`  <PvSubSystem>{1,unbounded}</PvSubSystem>`
	`  <WeatherLocation>{1,1}</WeatherLocation>`

```
  <BuildingID>{0,1}</BuildingID>
</Basic>
```

Source

```
<xs:element name="Basic" type="PvSystemBasicType">
  <xs:annotation>
    <xs:documentation>A basic PV system description. Does not call out specific equipment,
 rather only generic system ratings.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element PvSystemBasicType / Name

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element minOccurs="0" name="Name" type="xs:string" maxOccurs="1"/>`

Element PvSystemBasicType / Description

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element minOccurs="0" name="Description" type="xs:string" maxOccurs="1"/>`

Element PvSystemBasicType / PvSubSystem

Namespace	No namespace
Diagram	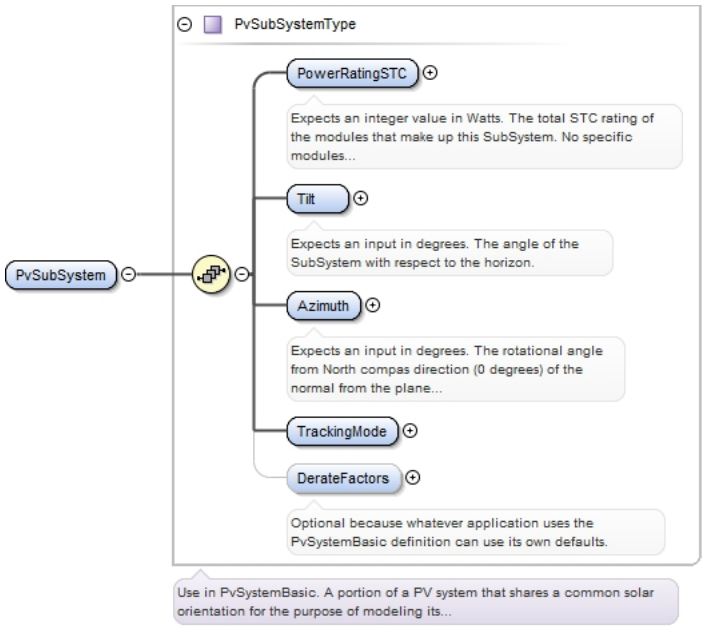
Type	PvSubSystemType

Properties	content: complex minOccurs: 1 maxOccurs: unbounded
Model	PowerRatingSTC , Tilt , Azimuth , TrackingMode , DerateFactors{0,1}
Children	Azimuth, DerateFactors, PowerRatingSTC, Tilt, TrackingMode
Instance	<PvSubSystem> <PowerRatingSTC>{1,1}</PowerRatingSTC> <Tilt>{1,1}</Tilt> <Azimuth>{1,1}</Azimuth> <TrackingMode>{1,1}</TrackingMode> <DerateFactors>{0,1}</DerateFactors> </PvSubSystem>
Source	<xs:element maxOccurs="unbounded" name="PvSubSystem" type="PvSubSystemType" minOccurs="1"/ >

Element PvSubSystemType / PowerRatingSTC

Namespace	No namespace
Annotations	Expects an integer value in Watts. The total STC rating of the modules that make up this SubSystem. No specific modules or quantities need be defined.
Diagram	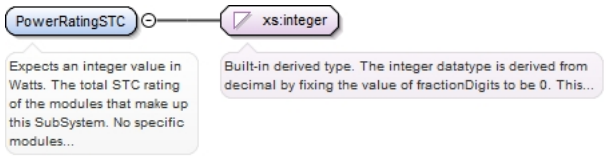
Type	xs:integer
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="PowerRatingSTC" type="xs:integer" maxOccurs="1" minOccurs="1"> <xs:annotation> <xs:documentation>Expects an integer value in Watts. The total STC rating of the modules that make up this SubSystem. No specific modules or quantities need be defined.</ xs:documentation> </xs:annotation> </xs:element>

Element PvSubSystemType / Tilt

Namespace	No namespace
Annotations	Expects an input in degrees. The angle of the SubSystem with respect to the horizon.
Diagram	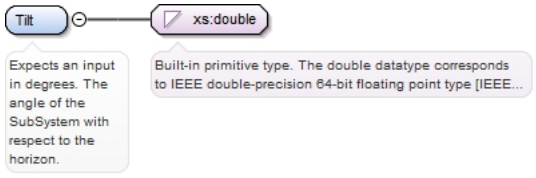
Type	xs:double
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="Tilt" type="xs:double" maxOccurs="1" minOccurs="1"> <xs:annotation> <xs:documentation>Expects an input in degrees. The angle of the SubSystem with respect to the horizon.</xs:documentation> </xs:annotation> </xs:element>

Element PvSubSystemType / Azimuth

Namespace	No namespace

Annotations	Expects an input in degrees. The rotational angle from North compas direction (0 degrees) of the normal from the plane defining the SubSystem.
Diagram	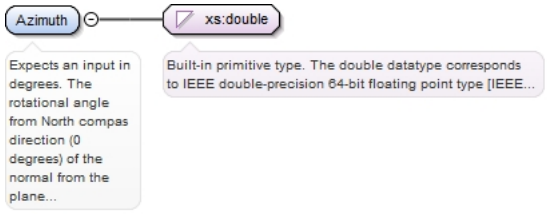
Type	xs:double
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="Azimuth" type="xs:double" maxOccurs="1" minOccurs="1"> <xs:annotation> <xs:documentation>Expects an input in degrees. The rotational angle from North compas direction (0 degrees) of the normal from the plane defining the SubSystem.</xs:documentation> </xs:annotation> </xs:element>

Element PvSubSystemType / TrackingMode

Namespace	No namespace
Diagram	
Type	TrackingModeEnumType
Properties	content: simple minOccurs: 1 maxOccurs: 1
Facets	enumeration Fixed enumeration Single-Axis enumeration Dual-Axis
Source	<xs:element name="TrackingMode" type="TrackingModeEnumType" maxOccurs="1" minOccurs="1"/>

Element PvSubSystemType / DerateFactors

Namespace	No namespace
Annotations	Optional because whatever application uses the PvSystemBasic definition can use its own defaults.

Diagram	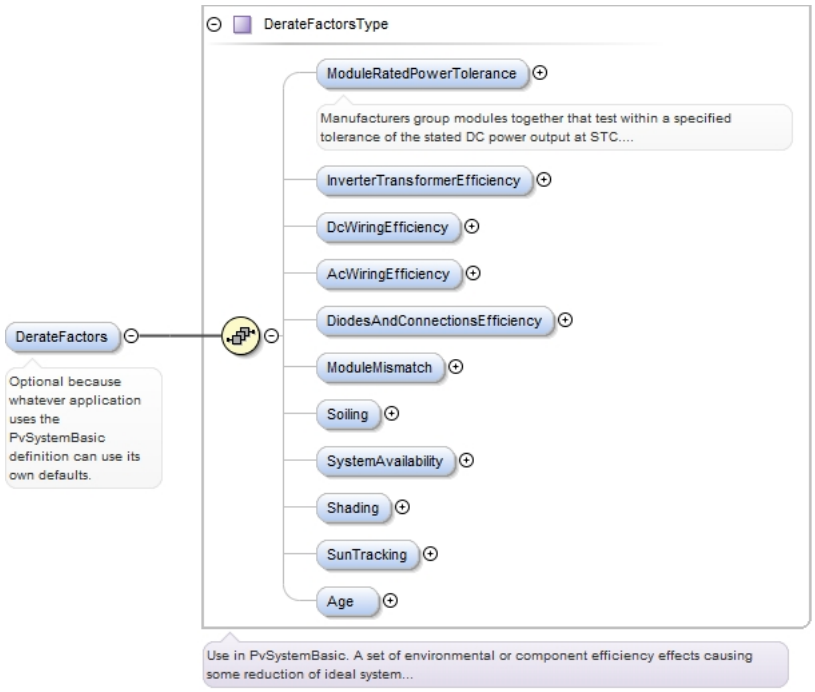
Type	DerateFactorsType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	ModuleRatedPowerTolerance{0,1} , InverterTransformerEfficiency{0,1} , DcWiringEfficiency{0,1} , AcWiringEfficiency{0,1} , DiodesAndConnectionsEfficiency{0,1} , ModuleMismatch{0,1} , Soiling{0,1} , SystemAvailability{0,1} , Shading{0,1} , SunTracking{0,1} , Age{0,1}
Children	AcWiringEfficiency, Age, DcWiringEfficiency, DiodesAndConnectionsEfficiency, InverterTransformerEfficiency, ModuleMismatch, ModuleRatedPowerTolerance, Shading, Soiling, SunTracking, SystemAvailability

Instance	`<DerateFactors xmlns="http://www.iepmodel.net">`
	`  <ModuleRatedPowerTolerance>{0,1}</ModuleRatedPowerTolerance>`
	`  <InverterTransformerEfficiency>{0,1}</InverterTransformerEfficiency>`
	`  <DcWiringEfficiency>{0,1}</DcWiringEfficiency>`
	`  <AcWiringEfficiency>{0,1}</AcWiringEfficiency>`
	`  <DiodesAndConnectionsEfficiency>{0,1}</DiodesAndConnectionsEfficiency>`
	`  <ModuleMismatch>{0,1}</ModuleMismatch>`
	`  <Soiling>{0,1}</Soiling>`
	`  <SystemAvailability>{0,1}</SystemAvailability>`
	`  <Shading>{0,1}</Shading>`
	`  <SunTracking>{0,1}</SunTracking>`
	`  <Age>{0,1}</Age>`
	`</DerateFactors>`

Source	`<xs:element name="DerateFactors" type="DerateFactorsType" minOccurs="0" maxOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>Optional because whatever application uses the PvSystemBasic definition can use its own defaults.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element DerateFactorsType / ModuleRatedPowerTolerance

Namespace	No namespace
Annotations	Manufacturers group modules together that test within a specified tolerance of the stated DC power output at STC. Depending on how they define the group, the actual expected power of the modules may be lower than the STC ratings. For example, if the module is rated at 200Wstc, but it has a lower power tolerance of -5%, then the assumption should be made that the modules will only output 190Wstc, and have a derate of 0.95. If the module's lower tolerance is 0%, then the derate would be 1.0.
Diagram	

Type	xs:double
Properties	content: simple minOccurs: 0 default: 0.95
Source	<xs:element default="0.95" minOccurs="0" name="ModuleRatedPowerTolerance" type="xs:double"> <xs:annotation> <xs:documentation>Manufacturers group modules together that test within a specified tolerance of the stated DC power output at STC. Depending on how they define the group, the actual expected power of the modules may be lower than the STC ratings. For example, if the module is rated at 200Wstc, but it has a lower power tolerance of -5%, then the assumption should be made that the modules will only output 190Wstc, and have a derate of 0.95. If the module's lower tolerance is 0%, then the derate would be 1.0.</xs:documentation> </xs:annotation> </xs:element>

Element DerateFactorsType / InverterTransformerEfficiency

Namespace	No namespace
Diagram	
Type	xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1 default: 0.92
Source	<xs:element default="0.92" name="InverterTransformerEfficiency" type="xs:double" maxOccurs="1" minOccurs="0"/>

Element DerateFactorsType / DcWiringEfficiency

Namespace	No namespace
Diagram	
Type	xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1 default: 0.98
Source	<xs:element default="0.98" name="DcWiringEfficiency" type="xs:double" maxOccurs="1" minOccurs="0"/>

Element DerateFactorsType / AcWiringEfficiency

Namespace	No namespace
Diagram	
Type	xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1 default: 0.99

Source	<xs:element default="0.99" name="AcWiringEfficiency" type="xs:double" maxOccurs="1" minOccurs="0"/>

Element DerateFactorsType / DiodesAndConnectionsEfficiency

Namespace	No namespace
Diagram	
Type	xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1 default: 0.995
Source	<xs:element default="0.995" name="DiodesAndConnectionsEfficiency" type="xs:double" maxOccurs="1" minOccurs="0"/>

Element DerateFactorsType / ModuleMismatch

Namespace	No namespace
Diagram	
Type	xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1 default: 0.98
Source	<xs:element name="ModuleMismatch" default="0.98" type="xs:double" maxOccurs="1" minOccurs="0"/>

Element DerateFactorsType / Soiling

Namespace	No namespace
Diagram	
Type	xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1 default: 0.95
Source	<xs:element default="0.95" name="Soiling" type="xs:double" maxOccurs="1" minOccurs="0"/>

Element DerateFactorsType / SystemAvailability

Namespace	No namespace
Diagram	
Type	xs:double
Properties	content: simple

	minOccurs:	0
	maxOccurs:	1
	default:	0.98
Source	<xs:element default="0.98" name="SystemAvailability" type="xs:double" maxOccurs="1" minOccurs="0"/>	

Element DerateFactorsType / Shading

Namespace	No namespace
Diagram	
Type	xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1 default: 1.0
Source	<xs:element name="Shading" default="1.0" type="xs:double" maxOccurs="1" minOccurs="0"/>

Element DerateFactorsType / Age

Namespace	No namespace
Diagram	
Type	xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1 default: 1.0
Source	<xs:element default="1.0" name="Age" type="xs:double" maxOccurs="1" minOccurs="0"/>

Element PvSystemBasicType / WeatherLocation

Namespace	No namespace
Diagram	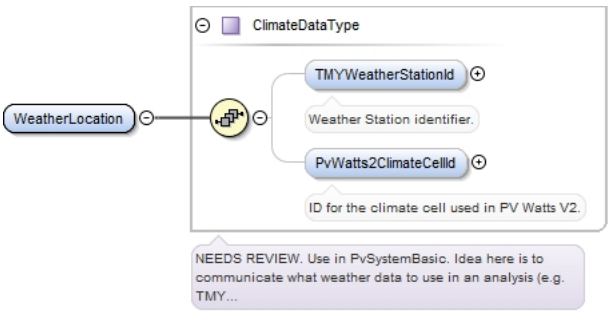
Type	ClimateDataType
Properties	content: complex minOccurs: 1 maxOccurs: 1
Model	TMYWeatherStationId{0,1} , PvWatts2ClimateCellId{0,1}
Children	PvWatts2ClimateCellId, TMYWeatherStationId
Instance	<WeatherLocation>

	<TMYWeatherStationId>{0,1}</TMYWeatherStationId> <PvWatts2ClimateCellId>{0,1}</PvWatts2ClimateCellId> </WeatherLocation>
Source	<xs:element name="WeatherLocation" type="ClimateDataType" maxOccurs="1" minOccurs="1"/>

Element ClimateDataType / TMYWeatherStationId

Namespace	No namespace
Annotations	Weather Station identifier.
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0
Source	<xs:element name="TMYWeatherStationId" type="xs:string" minOccurs="0"> <xs:annotation> <xs:documentation>Weather Station identifier.</xs:documentation> </xs:annotation> </xs:element>

Element ClimateDataType / PvWatts2ClimateCellId

Namespace	No namespace
Annotations	ID for the climate cell used in PV Watts V2.
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0
Source	<xs:element minOccurs="0" name="PvWatts2ClimateCellId" type="xs:string"> <xs:annotation> <xs:documentation>ID for the climate cell used in PV Watts V2.</xs:documentation> </xs:annotation> </xs:element>

Element PvSystemBasicType / BuildingID

Namespace	No namespace
Annotations	If the system is to be installed on a building, this associates the PV System with the defined building.
Diagram	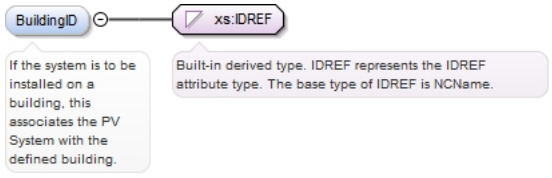
Type	xs:IDREF
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element minOccurs="0" name="BuildingID" type="xs:IDREF" maxOccurs="1"> <xs:annotation> <xs:documentation>If the system is to be installed on a building, this associates the PV System with the defined building.</xs:documentation> </xs:annotation> </xs:element>

Element SystemChoiceType / PV / Complex

Namespace	No namespace
Annotations	A full PV system design using specific equipment.
Diagram	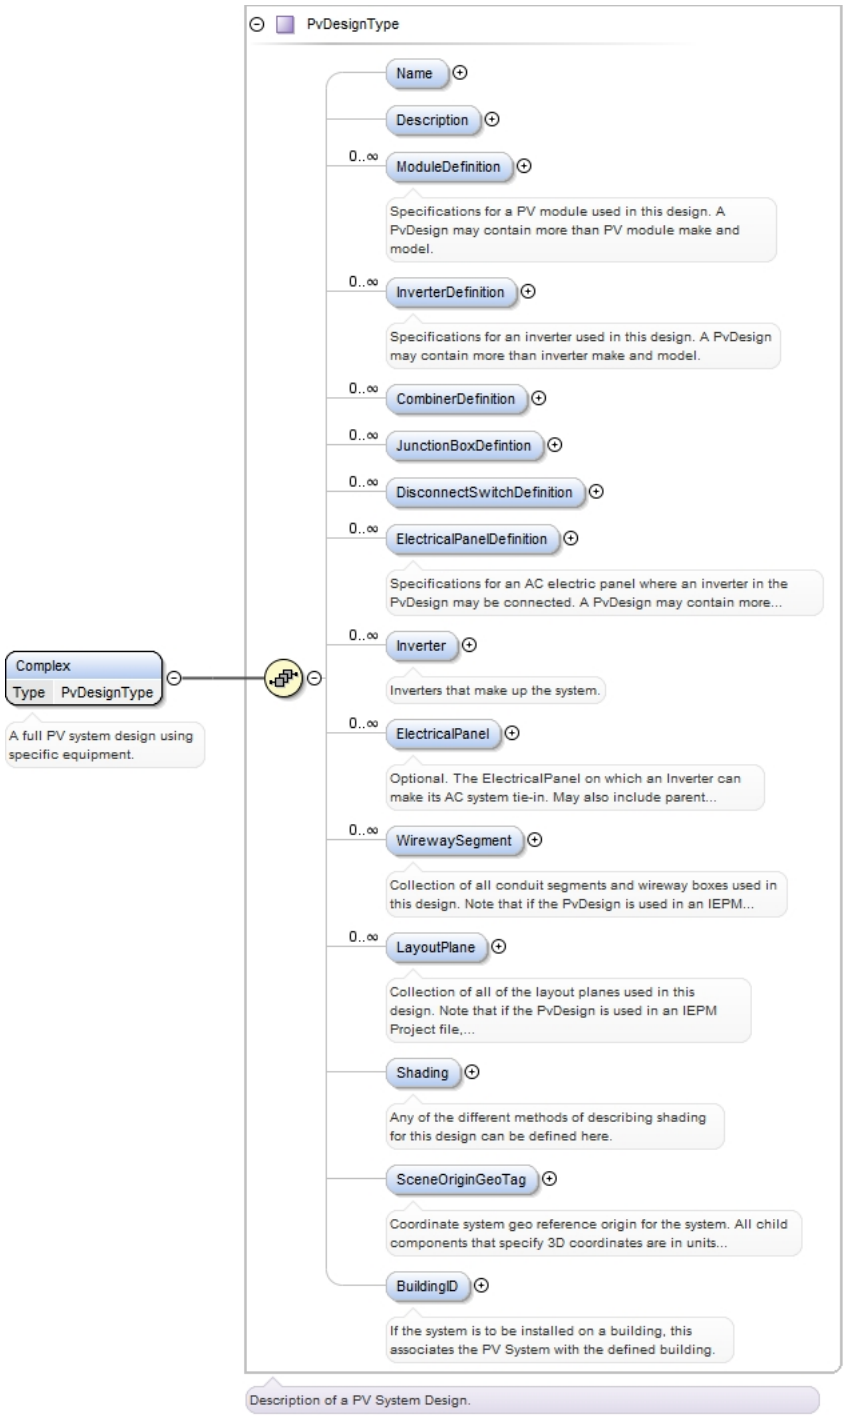
Type	PvDesignType
Properties	content: complex
Model	Name{0,1} , Description{0,1} , ModuleDefinition* , InverterDefinition* , CombinerDefinition* , JunctionBoxDefintion* , DisconnectSwitchDefinition* , ElectricalPanelDefinition* , Inverter* , ElectricalPanel* , WirewaySegment* , LayoutPlane* , Shading{0,1} , SceneOriginGeoTag{0,1} , BuildingID{0,1}
Children	BuildingID, CombinerDefinition, Description, DisconnectSwitchDefinition, ElectricalPanel, ElectricalPanelDefinition, Inverter, InverterDefinition, JunctionBoxDefintion, LayoutPlane, ModuleDefinition, Name, SceneOriginGeoTag, Shading, WirewaySegment
Instance	<Complex>

	<Name>{0,1}</Name> <Description>{0,1}</Description> <ModuleDefinition Id="">{0,unbounded}</ModuleDefinition> <InverterDefinition Id="">{0,unbounded}</InverterDefinition> <CombinerDefinition Id="">{0,unbounded}</CombinerDefinition> <JunctionBoxDefintion Id="">{0,unbounded}</JunctionBoxDefintion> <DisconnectSwitchDefinition Id="">{0,unbounded}</DisconnectSwitchDefinition> <ElectricalPanelDefinition Id="">{0,unbounded}</ElectricalPanelDefinition> <Inverter EquipmentDefinitionIdRef="" Id="">{0,unbounded}</Inverter> <ElectricalPanel EquipmentDefinitionIdRef="" Id="">{0,unbounded}</ElectricalPanel> <WirewaySegment EquipmentDefinitionIdRef="" Id="">{0,unbounded}</WirewaySegment> <LayoutPlane id="">{0,unbounded}</LayoutPlane> <Shading>{0,1}</Shading> <SceneOriginGeoTag>{0,1}</SceneOriginGeoTag> <BuildingID>{0,1}</BuildingID> </Complex>
Source	<xs:element name="Complex" type="PvDesignType"> <xs:annotation> <xs:documentation>A full PV system design using specific equipment.</xs:documentation> </xs:annotation> </xs:element>

Element PvDesignType / Name

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element minOccurs="0" name="Name" type="xs:string" maxOccurs="1"/>

Element PvDesignType / Description

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element minOccurs="0" name="Description" type="xs:string" maxOccurs="1"/>

Element PvDesignType / ModuleDefinition

Namespace	No namespace
Annotations	Specifications for a PV module used in this design. A PvDesign may contain more than PV module make and model.

Diagram

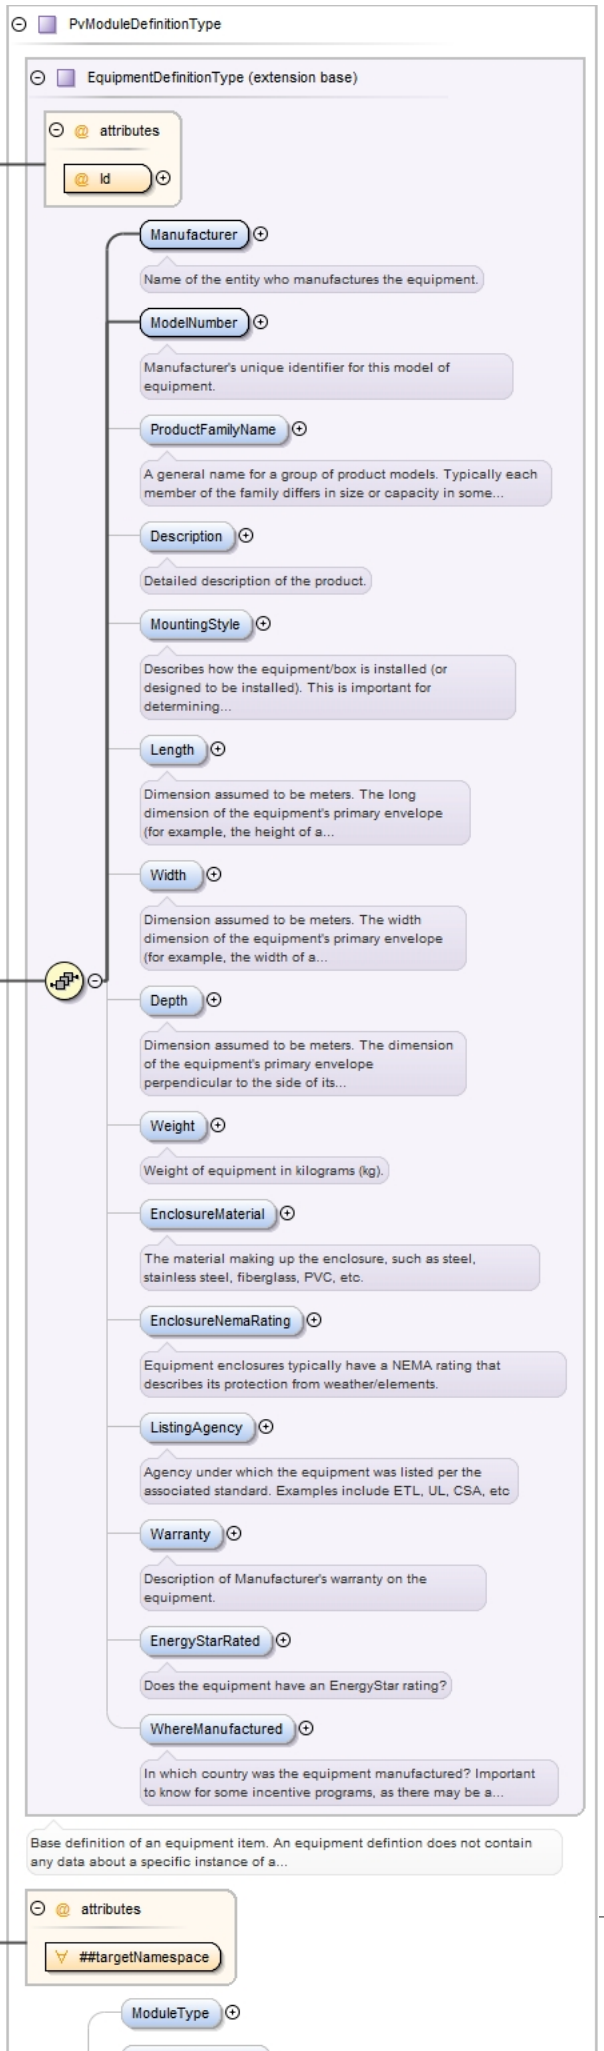
PvModuleDefinitionType
EquipmentDefinitionType (extension base)
attributes
Id
Manufacturer
Name of the entity who manufactures the equipment.
ModelNumber
Manufacturer's unique identifier for this model of equipment.
ProductFamilyName
A general name for a group of product models. Typically each member of the family differs in size or capacity in some...
Description
Detailed description of the product.
MountingStyle
Describes how the equipment/box is installed (or designed to be installed). This is important for determining...
Length
Dimension assumed to be meters. The long dimension of the equipment's primary envelope (for example, the height of a...
Width
Dimension assumed to be meters. The width dimension of the equipment's primary envelope (for example, the width of a...
Depth
Dimension assumed to be meters. The dimension of the equipment's primary envelope perpendicular to the side of its...
Weight
Weight of equipment in kilograms (kg).
EnclosureMaterial
The material making up the enclosure, such as steel, stainless steel, fiberglass, PVC, etc.
EnclosureNemaRating
Equipment enclosures typically have a NEMA rating that describes its protection from weather/elements.
ListingAgency
Agency under which the equipment was listed per the associated standard. Examples include ETL, UL, CSA, etc
Warranty
Description of Manufacturer's warranty on the equipment.
EnergyStarRated
Does the equipment have an EnergyStar rating?
WhereManufactured
In which country was the equipment manufactured? Important to know for some incentive programs, as there may be a...
Base definition of an equipment item. An equipment defintion does not contain any data about a specific instance of a...
attributes
##targetNamespace
ModuleType

Type	PvModuleDefinitionType
Type hierarchy	• EquipmentDefinitionType • PvModuleDefinitionType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Manufacturer , ModelNumber , ProductFamilyName{0,1} , Description{0,1} , MountingStyle{0,1} , Length{0,1} , Width{0,1} , Depth{0,1} , Weight{0,1} , EnclosureMaterial{0,1} , EnclosureNemaRating{0,1} , ListingAgency{0,1} , Warranty{0,1} , EnergyStarRated{0,1} , WhereManufactured{0,1} , ModuleType{0,1} , ModuleConstruction{0,1} , FrameMaterial{0,1} , BIPV{0,1} , DepthWithConnectionBox{0,1} , ConnectorType{0,1} , CableDiameter{0,1} , FuseRating{0,1} , ParallelSubstrings{0,1} , BypassDiodeCount{0,1} , Pstc{0,1} , PstcToleranceHighPercent{0,1} , PstcToleranceLowPercent{0,1} , Pptc{0,1} , Vmpp{0,1} , Impp{0,1} , Voc{0,1} , Isc{0,1} , Noct{0,1} , MaxSystemVoltage{0,1} , MaxSystemCurrent{0,1} , PowerSqFt{0,1} , Efficiency{0,1} , PowerWarrantyYears{0,1} , CellTechnology{0,1} , CellDimensions{0,1} , CellCount{0,1} , CecVmppLowLight{0,1} , CecImppLowLight{0,1} , CecVmppNoct{0,1} , CecImppNoct{0,1} , CecGeometricMultipl{0,1} , MeasurementDate{0,1} , FiveParamAref{0,1} , FiveParamILref{0,1} , FiveParamIoref{0,1} , FiveParamRs{0,1} , FiveParamRshref{0,1} , FiveParamAdjust{0,1} , SandiaIxo{0,1} , SandiaIxxo{0,1} , SandiaDiodeFactor{0,1} , SandiaThermalVoltage{0,1} , SandiaMbVoc{0,1} , SandiaMbVmpp{0,1} , GammaPmppPercent{0,1} , BetaVocPercent{0,1} , BetaMppPercent{0,1} , AlphaIscPercent{0,1} , AlphaImppPercent{0,1} , SandiaTempFactorA{0,1} , SandiaTempFactorB{0,1} , SandiaCoefA0{0,1} , SandiaCoefA1{0,1} , SandiaCoefA2{0,1} , SandiaCoefA3{0,1} , SandiaCoefA4{0,1} , SandiaCoefB0{0,1} , SandiaCoefB1{0,1} , SandiaCoefB2{0,1} , SandiaCoefB3{0,1} , SandiaCoefB4{0,1} , SandiaCoefB5{0,1} , SandiaCoefC0{0,1} , SandiaCoefC1{0,1} , SandiaCoefC2{0,1} , SandiaCoefC3{0,1} , SandiaCoefC4{0,1} , SandiaCoefC5{0,1} , SandiaCoefC6{0,1} , SandiaCoefC7{0,1} , SandiaDiffuseAcceptanceFactor{0,1} , Notes{0,1}
Children	AlphaImppPercent, AlphaIscPercent, BIPV, BetaMppPercent, BetaVocPercent, BypassDiodeCount, CableDiameter, CecGeometricMultipl, CecImppLowLight, CecImppNoct, CecVmppLowLight, CecVmppNoct, CellCount, CellDimensions, CellTechnology, ConnectorType, Depth, DepthWithConnectionBox, Description, Efficiency, EnclosureMaterial, EnclosureNemaRating, EnergyStarRated, FiveParamAdjust, FiveParamAref, FiveParamILref, FiveParamIoref, FiveParamRs, FiveParamRshref, FrameMaterial, FuseRating, GammaPmppPercent, Impp, Isc, Length, ListingAgency, Manufacturer, MaxSystemCurrent, MaxSystemVoltage, MeasurementDate, ModelNumber, ModuleConstruction, ModuleType, MountingStyle, Noct, Notes, ParallelSubstrings, PowerSqFt, PowerWarrantyYears, Pptc, ProductFamilyName, Pstc, PstcToleranceHighPercent, PstcToleranceLowPercent, SandiaCoefA0, SandiaCoefA1, SandiaCoefA2, SandiaCoefA3, SandiaCoefA4, SandiaCoefB0, SandiaCoefB1, SandiaCoefB2, SandiaCoefB3, SandiaCoefB4, SandiaCoefB5, SandiaCoefC0, SandiaCoefC1, SandiaCoefC2, SandiaCoefC3, SandiaCoefC4, SandiaCoefC5, SandiaCoefC6, SandiaCoefC7, SandiaDiffuseAcceptanceFactor, SandiaDiodeFactor, SandiaIxo, SandiaIxxo, SandiaMbVmpp, SandiaMbVoc, SandiaTempFactorA, SandiaTempFactorB, SandiaThermalVoltage, Vmpp, Voc, Warranty, Weight, WhereManufactured, Width
Instance	<ModuleDefinition Id="" xmlns="http://www.iepmodel.net"> <Manufacturer>{1,1}</Manufacturer> <ModelNumber>{1,1}</ModelNumber> <ProductFamilyName>{0,1}</ProductFamilyName> <Description>{0,1}</Description> <MountingStyle>{0,1}</MountingStyle> <Length>{0,1}</Length> <Width>{0,1}</Width> <Depth>{0,1}</Depth> <Weight>{0,1}</Weight> <EnclosureMaterial>{0,1}</EnclosureMaterial> <EnclosureNemaRating>{0,1}</EnclosureNemaRating> <ListingAgency>{0,1}</ListingAgency> <Warranty>{0,1}</Warranty> <EnergyStarRated>{0,1}</EnergyStarRated> <WhereManufactured>{0,1}</WhereManufactured> <ModuleType>{0,1}</ModuleType> <ModuleConstruction>{0,1}</ModuleConstruction> <FrameMaterial>{0,1}</FrameMaterial> <BIPV>{0,1}</BIPV> <DepthWithConnectionBox>{0,1}</DepthWithConnectionBox> <ConnectorType>{0,1}</ConnectorType> <CableDiameter>{0,1}</CableDiameter> <FuseRating>{0,1}</FuseRating> <ParallelSubstrings>{0,1}</ParallelSubstrings> <BypassDiodeCount>{0,1}</BypassDiodeCount> <Pstc>{0,1}</Pstc> <PstcToleranceHighPercent>{0,1}</PstcToleranceHighPercent> <PstcToleranceLowPercent>{0,1}</PstcToleranceLowPercent> <Pptc>{0,1}</Pptc> <Vmpp>{0,1}</Vmpp> <Impp>{0,1}</Impp> <Voc>{0,1}</Voc> <Isc>{0,1}</Isc> <Noct>{0,1}</Noct>

```
  <MaxSystemVoltage>{0,1}</MaxSystemVoltage>
  <MaxSystemCurrent>{0,1}</MaxSystemCurrent>
  <PowerSqFt>{0,1}</PowerSqFt>
  <Efficiency>{0,1}</Efficiency>
  <PowerWarrantyYears>{0,1}</PowerWarrantyYears>
  <CellTechnology>{0,1}</CellTechnology>
  <CellDimensions>{0,1}</CellDimensions>
  <CellCount>{0,1}</CellCount>
  <CecVmppLowLight>{0,1}</CecVmppLowLight>
  <CecImppLowLight>{0,1}</CecImppLowLight>
  <CecVmppNoct>{0,1}</CecVmppNoct>
  <CecImppNoct>{0,1}</CecImppNoct>
  <CecGeometricMultipl>{0,1}</CecGeometricMultipl>
  <MeasurementDate>{0,1}</MeasurementDate>
  <FiveParamAref>{0,1}</FiveParamAref>
  <FiveParamILref>{0,1}</FiveParamILref>
  <FiveParamIoref>{0,1}</FiveParamIoref>
  <FiveParamRs>{0,1}</FiveParamRs>
  <FiveParamRshref>{0,1}</FiveParamRshref>
  <FiveParamAdjust>{0,1}</FiveParamAdjust>
  <SandiaIxo>{0,1}</SandiaIxo>
  <SandiaIxxo>{0,1}</SandiaIxxo>
  <SandiaDiodeFactor>{0,1}</SandiaDiodeFactor>
  <SandiaThermalVoltage>{0,1}</SandiaThermalVoltage>
  <SandiaMbVoc>{0,1}</SandiaMbVoc>
  <SandiaMbVmpp>{0,1}</SandiaMbVmpp>
  <GammaPmppPercent>{0,1}</GammaPmppPercent>
  <BetaVocPercent>{0,1}</BetaVocPercent>
  <BetaMppPercent>{0,1}</BetaMppPercent>
  <AlphaIscPercent>{0,1}</AlphaIscPercent>
  <AlphaImppPercent>{0,1}</AlphaImppPercent>
  <SandiaTempFactorA>{0,1}</SandiaTempFactorA>
  <SandiaTempFactorB>{0,1}</SandiaTempFactorB>
  <SandiaCoefA0>{0,1}</SandiaCoefA0>
  <SandiaCoefA1>{0,1}</SandiaCoefA1>
  <SandiaCoefA2>{0,1}</SandiaCoefA2>
  <SandiaCoefA3>{0,1}</SandiaCoefA3>
  <SandiaCoefA4>{0,1}</SandiaCoefA4>
  <SandiaCoefB0>{0,1}</SandiaCoefB0>
  <SandiaCoefB1>{0,1}</SandiaCoefB1>
  <SandiaCoefB2>{0,1}</SandiaCoefB2>
  <SandiaCoefB3>{0,1}</SandiaCoefB3>
  <SandiaCoefB4>{0,1}</SandiaCoefB4>
  <SandiaCoefB5>{0,1}</SandiaCoefB5>
  <SandiaCoefC0>{0,1}</SandiaCoefC0>
  <SandiaCoefC1>{0,1}</SandiaCoefC1>
  <SandiaCoefC2>{0,1}</SandiaCoefC2>
  <SandiaCoefC3>{0,1}</SandiaCoefC3>
  <SandiaCoefC4>{0,1}</SandiaCoefC4>
  <SandiaCoefC5>{0,1}</SandiaCoefC5>
  <SandiaCoefC6>{0,1}</SandiaCoefC6>
  <SandiaCoefC7>{0,1}</SandiaCoefC7>
  <SandiaDiffuseAcceptanceFactor>{0,1}</SandiaDiffuseAcceptanceFactor>
  <Notes>{0,1}</Notes>
</ModuleDefinition>
```

Attributes

QName	Type	Fixed	Default	Use
ANY attribute from TARGET namespace 'http://www.iepmodel.net'				
Id	xs:ID			required

Source

```
<xs:element name="ModuleDefinition" type="PvModuleDefinitionType" minOccurs="0"
 maxOccurs="unbounded">
  <xs:annotation>
    <xs:documentation>Specifications for a PV module used in this design. A PvDesign may
 contain more than PV module make and model.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element PvModuleDefinitionType / ModuleType

Namespace	No namespace
Diagram	
Type	restriction of xs:string
Properties	content: simple

	minOccurs:	0
	maxOccurs:	1
Facets	maxLength	255
Source	<xs:element name="ModuleType" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="255"/> </xs:restriction> </xs:simpleType> </xs:element>	

Element PvModuleDefinitionType / ModuleConstruction

Namespace	No namespace	
Diagram		
Type	restriction of xs:string	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	maxLength	255
Source	<xs:element name="ModuleConstruction" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="255"/> </xs:restriction> </xs:simpleType> </xs:element>	

Element PvModuleDefinitionType / FrameMaterial

Namespace	No namespace	
Diagram		
Type	restriction of xs:string	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	maxLength	255
Source	<xs:element name="FrameMaterial" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="255"/> </xs:restriction> </xs:simpleType> </xs:element>	

Element PvModuleDefinitionType / BIPV

Namespace	No namespace	
Diagram		
Type	restriction of xs:string	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	maxLength	255
Source	<xs:element name="BIPV" minOccurs="0" maxOccurs="1">	

```
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:maxLength value="255"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element PvModuleDefinitionType / DepthWithConnectionBox

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 500.0 minInclusive 0.0
Source	<xs:element name="DepthWithConnectionBox" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="0.0"/> <xs:maxInclusive value="500.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / ConnectorType

Namespace	No namespace
Diagram	
Type	restriction of xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxLength 255
Source	<xs:element name="ConnectorType" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="255"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / CableDiameter

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 10.0 minInclusive 1.0
Source	<xs:element name="CableDiameter" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double">

```
      <xs:minInclusive value="1.0"/>
      <xs:maxInclusive value="10.0"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element PvModuleDefinitionType / FuseRating

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 100.0 minInclusive 1.0
Source	<xs:element name="FuseRating" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="1.0"/> <xs:maxInclusive value="100.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / ParallelSubstrings

Namespace	No namespace
Diagram	
Type	restriction of xs:integer
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 100 minInclusive 1
Source	<xs:element name="ParallelSubstrings" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:integer"> <xs:minInclusive value="1"/> <xs:maxInclusive value="100"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / BypassDiodeCount

Namespace	No namespace
Diagram	
Type	restriction of xs:integer
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 100 minInclusive 0
Source	<xs:element name="BypassDiodeCount" minOccurs="0" maxOccurs="1">

```
  <xs:simpleType>
    <xs:restriction base="xs:integer">
      <xs:minInclusive value="0"/>
      <xs:maxInclusive value="100"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element PvModuleDefinitionType / Pstc

Namespace	No namespace
Annotations	Rated power output at Standard Test Conditions (stc).
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 800.0 minInclusive 1.0
Source	

```
<xs:element name="Pstc" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>Rated power output at Standard Test Conditions (stc).</
xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:double">
      <xs:minInclusive value="1.0"/>
      <xs:maxInclusive value="800.0"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element PvModuleDefinitionType / PstcToleranceHighPercent

Namespace	No namespace
Annotations	Upper range of variation from rated power at STC. A module with this specification may output up to x % more than rated Pstc.
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 20.0 minInclusive 0.0
Source	

```
<xs:element name="PstcToleranceHighPercent" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>Upper range of variation from rated power at STC. A module with this
 specification may output up to x % more than rated Pstc.</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:double">
      <xs:minInclusive value="0.0"/>
      <xs:maxInclusive value="20.0"/>
    </xs:restriction>
  </xs:simpleType>
```

```
</xs:element>
```

Element PvModuleDefinitionType / PstcToleranceLowPercent

Namespace	No namespace
Annotations	Lower range of variation from rated power at STC. A module with this specification may output up to x % less than rated Pstc.
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 0.0 minInclusive -20.0
Source	

```
<xs:element name="PstcToleranceLowPercent" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>Lower range of variation from rated power at STC. A module with this
 specification may output up to x % less than rated Pstc.</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:double">
      <xs:minInclusive value="-20.0"/>
      <xs:maxInclusive value="0.0"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element PvModuleDefinitionType / Pptc

Namespace	No namespace
Annotations	Rated power at PVUSA test conditions (PTC).
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 800.0 minInclusive 1.0
Source	

```
<xs:element name="Pptc" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>Rated power at PVUSA test conditions (PTC).</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:double">
      <xs:minInclusive value="1.0"/>
      <xs:maxInclusive value="800.0"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element PvModuleDefinitionType / Vmpp

Namespace	No namespace

Annotations	Voltage at MPP (V)
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 800.0 minInclusive 1.0
Source	<xs:element name="Vmpp" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Voltage at MPP (V)</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="1.0"/> <xs:maxInclusive value="800.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / Impp

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 50.0 minInclusive .1
Source	<xs:element name="Impp" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value=".1"/> <xs:maxInclusive value="50.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / Voc

Namespace	No namespace
Annotations	Open Circuit Voltage (V)
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 500.0 minInclusive 1.0
Source	<xs:element name="Voc" minOccurs="0" maxOccurs="1">

```
  <xs:annotation>
    <xs:documentation>Open Circuit Voltage (V)</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:double">
      <xs:minInclusive value="1.0"/>
      <xs:maxInclusive value="500.0"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element PvModuleDefinitionType / Isc

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 50 minInclusive .1
Source	<xs:element name="Isc" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value=".1"/> <xs:maxInclusive value="50"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / Noct

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 60.0 minInclusive 30.0
Source	<xs:element name="Noct" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="30.0"/> <xs:maxInclusive value="60.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / MaxSystemVoltage

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1

Facets	maxInclusive	1000.0
	minInclusive	1.0
Source	<xs:element name="MaxSystemVoltage" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="1.0"/> <xs:maxInclusive value="1000.0"/> </xs:restriction> </xs:simpleType> </xs:element>	

Element PvModuleDefinitionType / MaxSystemCurrent

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 50.0 minInclusive .1
Source	<xs:element name="MaxSystemCurrent" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value=".1"/> <xs:maxInclusive value="50.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / PowerSqFt

Namespace	No namespace
Diagram	
Type	xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="PowerSqFt" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"/> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / Efficiency

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 30.0 minInclusive 1.0
Source	<xs:element name="Efficiency" minOccurs="0" maxOccurs="1">

```
  <xs:simpleType>
    <xs:restriction base="xs:double">
      <xs:minInclusive value="1.0"/>
      <xs:maxInclusive value="30.0"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element PvModuleDefinitionType / PowerWarrantyYears

Namespace	No namespace
Diagram	
Type	restriction of xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxLength 255
Source	<xs:element name="PowerWarrantyYears" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="255"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / CellTechnology

Namespace	No namespace
Diagram	
Type	restriction of xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxLength 255
Source	<xs:element name="CellTechnology" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="255"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / CellDimensions

Namespace	No namespace
Diagram	
Type	restriction of xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxLength 255
Source	<xs:element name="CellDimensions" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="255"/> </xs:restriction> </xs:simpleType>

```
</xs:element>
```

Element PvModuleDefinitionType / CellCount

Namespace	No namespace
Diagram	
Type	restriction of xs:integer
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 1000 minInclusive 1
Source	<xs:element name="CellCount" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:integer"> <xs:minInclusive value="1"/> <xs:maxInclusive value="1000"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / CecVmppLowLight

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 500.0 minInclusive .1
Source	<xs:element name="CecVmppLowLight" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value=".1"/> <xs:maxInclusive value="500.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / CecImppLowLight

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 50.0 minInclusive .1
Source	<xs:element name="CecImppLowLight" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value=".1"/> <xs:maxInclusive value="50.0"/>

```
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element PvModuleDefinitionType / CecVmppNoct

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 500.0 minInclusive 1.0
Source	<xs:element name="CecVmppNoct" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="1.0"/> <xs:maxInclusive value="500.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / CecImppNoct

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 50.0 minInclusive .1
Source	<xs:element name="CecImppNoct" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value=".1"/> <xs:maxInclusive value="50.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / CecGeometricMultipl

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 1.0 minInclusive .10
Source	<xs:element name="CecGeometricMultipl" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value=".10"/>

```
      <xs:maxInclusive value="1.0"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element PvModuleDefinitionType / MeasurementDate

Namespace	No namespace
Diagram	
Type	restriction of xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxLength 255
Source	<xs:element name="MeasurementDate" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="255"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / FiveParamAref

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 10.0 minInclusive .1
Source	<xs:element name="FiveParamAref" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value=".1"/> <xs:maxInclusive value="10.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / FiveParamILref

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 20.0 minInclusive .1
Source	<xs:element name="FiveParamILref" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value=".1"/> <xs:maxInclusive value="20.0"/>

```
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element PvModuleDefinitionType / FiveParamIoref

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 1.0e-6 minInclusive 1.0e-13
Source	

```
<xs:element name="FiveParamIoref" minOccurs="0" maxOccurs="1">
  <xs:simpleType>
    <xs:restriction base="xs:double">
      <xs:minInclusive value="1.0e-13"/>
      <xs:maxInclusive value="1.0e-6"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element PvModuleDefinitionType / FiveParamRs

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 100.0 minInclusive 1.0e-3
Source	

```
<xs:element name="FiveParamRs" minOccurs="0" maxOccurs="1">
  <xs:simpleType>
    <xs:restriction base="xs:double">
      <xs:minInclusive value="1.0e-3"/>
      <xs:maxInclusive value="100.0"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element PvModuleDefinitionType / FiveParamRshref

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 1000000.00 minInclusive 10.0
Source	

```
<xs:element name="FiveParamRshref" minOccurs="0" maxOccurs="1">
  <xs:simpleType>
    <xs:restriction base="xs:double">
      <xs:minInclusive value="10.0"/>
```

```
      <xs:maxInclusive value="1000000.00"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element PvModuleDefinitionType / FiveParamAdjust

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 100.0 minInclusive -100.0
Source	<xs:element name="FiveParamAdjust" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="-100.0"/> <xs:maxInclusive value="100.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / SandiaIxo

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 50.0 minInclusive .1
Source	<xs:element name="SandiaIxo" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value=".1"/> <xs:maxInclusive value="50.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / SandiaIxxo

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 50.0 minInclusive .1
Source	<xs:element name="SandiaIxxo" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double">

```
      <xs:minInclusive value=".1"/>
      <xs:maxInclusive value="50.0"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element PvModuleDefinitionType / SandiaDiodeFactor

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 10.0 minInclusive .1

Source	`<xs:element name="SandiaDiodeFactor" minOccurs="0" maxOccurs="1">`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:double">`
	`  <xs:minInclusive value=".1"/>`
	`  <xs:maxInclusive value="10.0"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

Element PvModuleDefinitionType / SandiaThermalVoltage

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 10.0 minInclusive .1

Source	`<xs:element name="SandiaThermalVoltage" minOccurs="0" maxOccurs="1">`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:double">`
	`  <xs:minInclusive value=".1"/>`
	`  <xs:maxInclusive value="10.0"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

Element PvModuleDefinitionType / SandiaMbVoc

Namespace	No namespace
Diagram	
Type	xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source	`<xs:element name="SandiaMbVoc" minOccurs="0" maxOccurs="1">`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:double"/>`
	`  </xs:simpleType>`
	`</xs:element>`

Element PvModuleDefinitionType / SandiaMbVmpp

Namespace	No namespace
Diagram	
Type	xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="SandiaMbVmpp" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"/> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / GammaPmppPercent

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 10.0 minInclusive -10.0
Source	<xs:element name="GammaPmppPercent" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="-10.0"/> <xs:maxInclusive value="10.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / BetaVocPercent

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 2.0 minInclusive -2.0
Source	<xs:element name="BetaVocPercent" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="-2.0"/> <xs:maxInclusive value="2.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / BetaMppPercent

Namespace	No namespace

Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 2.0 minInclusive -2.0
Source	<xs:element name="BetaMppPercent" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="-2.0"/> <xs:maxInclusive value="2.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / AlphaIscPercent

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 2.0 minInclusive -2.0
Source	<xs:element name="AlphaIscPercent" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="-2.0"/> <xs:maxInclusive value="2.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / AlphaImppPercent

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 2.0 minInclusive -2.0
Source	<xs:element name="AlphaImppPercent" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="-2.0"/> <xs:maxInclusive value="2.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / SandiaTempFactorA

Namespace	No namespace

Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive -1.0 minInclusive -5.0
Source	<xs:element name="SandiaTempFactorA" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="-5.0"/> <xs:maxInclusive value="-1.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / SandiaTempFactorB

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive -0.01 minInclusive -1.0
Source	<xs:element name="SandiaTempFactorB" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="-1.0"/> <xs:maxInclusive value="-0.01"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / SandiaCoefA0

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 100.0 minInclusive -100.0
Source	<xs:element name="SandiaCoefA0" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="-100.0"/> <xs:maxInclusive value="100.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / SandiaCoefA1

Namespace	No namespace

Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 100.0 minInclusive -100.0
Source	<xs:element name="SandiaCoefA1" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="-100.0"/> <xs:maxInclusive value="100.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / SandiaCoefA2

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 100.0 minInclusive -100.0
Source	<xs:element name="SandiaCoefA2" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="-100.0"/> <xs:maxInclusive value="100.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / SandiaCoefA3

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 100.0 minInclusive -100.0
Source	<xs:element name="SandiaCoefA3" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="-100.0"/> <xs:maxInclusive value="100.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / SandiaCoefA4

Namespace	No namespace

Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 100.0 minInclusive -100.0
Source	<xs:element name="SandiaCoefA4" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="-100.0"/> <xs:maxInclusive value="100.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / SandiaCoefB0

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 100.0 minInclusive -100.0
Source	<xs:element name="SandiaCoefB0" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="-100.0"/> <xs:maxInclusive value="100.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / SandiaCoefB1

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 100.0 minInclusive -100.0
Source	<xs:element name="SandiaCoefB1" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="-100.0"/> <xs:maxInclusive value="100.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / SandiaCoefB2

Namespace	No namespace

Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 100.0 minInclusive -100.0
Source	<xs:element name="SandiaCoefB2" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="-100.0"/> <xs:maxInclusive value="100.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / SandiaCoefB3

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 100.0 minInclusive -100.0
Source	<xs:element name="SandiaCoefB3" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="-100.0"/> <xs:maxInclusive value="100.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / SandiaCoefB4

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 100.0 minInclusive -100.0
Source	<xs:element name="SandiaCoefB4" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="-100.0"/> <xs:maxInclusive value="100.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / SandiaCoefB5

Namespace	No namespace

Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 100.0 minInclusive -100.0
Source	<xs:element name="SandiaCoefB5" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="-100.0"/> <xs:maxInclusive value="100.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / SandiaCoefC0

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 100.0 minInclusive -100.0
Source	<xs:element name="SandiaCoefC0" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="-100.0"/> <xs:maxInclusive value="100.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / SandiaCoefC1

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 100.0 minInclusive -100.0
Source	<xs:element name="SandiaCoefC1" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="-100.0"/> <xs:maxInclusive value="100.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / SandiaCoefC2

Namespace	No namespace

Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 100.0 minInclusive -100.0
Source	<xs:element name="SandiaCoefC2" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="-100.0"/> <xs:maxInclusive value="100.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / SandiaCoefC3

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 100.0 minInclusive -100.0
Source	<xs:element name="SandiaCoefC3" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="-100.0"/> <xs:maxInclusive value="100.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / SandiaCoefC4

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 100.0 minInclusive -100.0
Source	<xs:element name="SandiaCoefC4" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="-100.0"/> <xs:maxInclusive value="100.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / SandiaCoefC5

Namespace	No namespace

Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 100.0 minInclusive -100.0
Source	<xs:element name="SandiaCoefC5" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="-100.0"/> <xs:maxInclusive value="100.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / SandiaCoefC6

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 100.0 minInclusive -100.0
Source	<xs:element name="SandiaCoefC6" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="-100.0"/> <xs:maxInclusive value="100.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / SandiaCoefC7

Namespace	No namespace
Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 100.0 minInclusive -100.0
Source	<xs:element name="SandiaCoefC7" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value="-100.0"/> <xs:maxInclusive value="100.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / SandiaDiffuseAcceptanceFactor

Namespace	No namespace

Diagram	
Type	restriction of xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxInclusive 1.0 minInclusive .1
Source	<xs:element name="SandiaDiffuseAcceptanceFactor" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:double"> <xs:minInclusive value=".1"/> <xs:maxInclusive value="1.0"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvModuleDefinitionType / Notes

Namespace	No namespace
Diagram	
Type	restriction of xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxLength 255
Source	<xs:element name="Notes" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="255"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvDesignType / InverterDefinition

Namespace	No namespace
Annotations	Specifications for an inverter used in this design. A PvDesign may contain more than inverter make and model.

Diagram

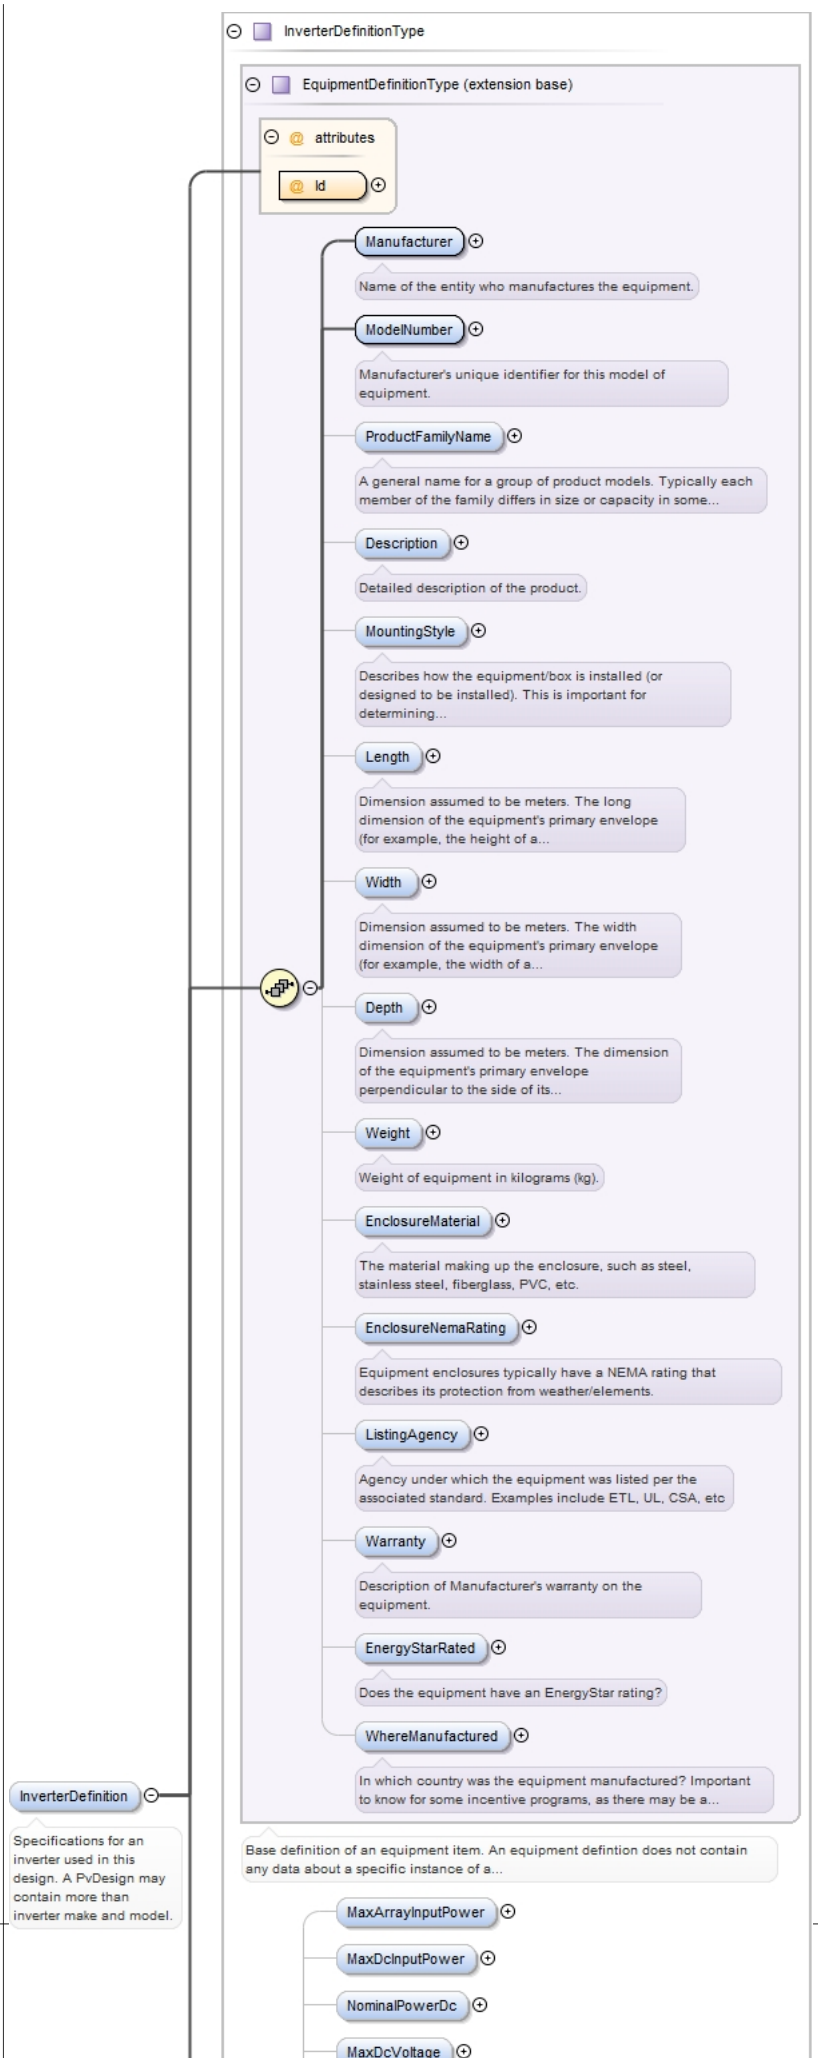
InverterDefinitionType
EquipmentDefinitionType (extension base)
attributes
Id
Manufacturer
Name of the entity who manufactures the equipment.
ModelNumber
Manufacturer's unique identifier for this model of equipment.
ProductFamilyName
A general name for a group of product models. Typically each member of the family differs in size or capacity in some...
Description
Detailed description of the product.
MountingStyle
Describes how the equipment/box is installed (or designed to be installed). This is important for determining...
Length
Dimension assumed to be meters. The long dimension of the equipment's primary envelope (for example, the height of a...
Width
Dimension assumed to be meters. The width dimension of the equipment's primary envelope (for example, the width of a...
Depth
Dimension assumed to be meters. The dimension of the equipment's primary envelope perpendicular to the side of its...
Weight
Weight of equipment in kilograms (kg).
EnclosureMaterial
The material making up the enclosure, such as steel, stainless steel, fiberglass, PVC, etc.
EnclosureNemaRating
Equipment enclosures typically have a NEMA rating that describes its protection from weather/elements.
ListingAgency
Agency under which the equipment was listed per the associated standard. Examples include ETL, UL, CSA, etc
Warranty
Description of Manufacturer's warranty on the equipment.
EnergyStarRated
Does the equipment have an EnergyStar rating?
WhereManufactured
In which country was the equipment manufactured? Important to know for some incentive programs, as there may be a...
InverterDefinition
Specifications for an inverter used in this design. A PvDesign may contain more than inverter make and model.
Base definition of an equipment item. An equipment defintion does not contain any data about a specific instance of a...
MaxArrayInputPower
MaxDcInputPower
NominalPowerDc
MaxDcVoltage

Type	InverterDefinitionType
Type hierarchy	• EquipmentDefinitionType • InverterDefinitionType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Manufacturer , ModelNumber , ProductFamilyName{0,1} , Description{0,1} , MountingStyle{0,1} , Length{0,1} , Width{0,1} , Depth{0,1} , Weight{0,1} , EnclosureMaterial{0,1} , EnclosureNemaRating{0,1} , ListingAgency{0,1} , Warranty{0,1} , EnergyStarRated{0,1} , WhereManufactured{0,1} , MaxArrayInputPower{0,1} , MaxDcInputPower{0,1} , NominalPowerDc{0,1} , MaxDcVoltage{0,1} , MinOperatingVoltage{0,1} , MaxOperatingVoltage{0,1} , MaxCurrentDc{0,1} , MaxPowerAc{0,1} , NominalPowerAc{0,1} , GridVoltageRange{0,1} , GridFrequency{0,1} , MaxEffeciency{0,1} , CecWeightedEffeciency{0,1} , EuroEtaEffeciency{0,1} , NumberMppTrackers{0,1} , UsProtectionClass{0,1} , EuProtectionClass{0,1} , DcConnection{0,1} , NumberInputsDc{0,1} , MaxCableDiameterDc{0,1} , AcConnection{0,1} , MaxCableDiameterAc{0,1} , GridFeed{0,1} , Fan{0,1} , Transformer{0,1} , Msd{0,1} , ResidualCurrentProtection{0,1} , IntegratedDcCircuitBreaker{0,1} , OvervoltageProtection{0,1} , Display{0,1} , Notes{0,1}
Children	AcConnection, CecWeightedEffeciency, DcConnection, Depth, Description, Display, EnclosureMaterial, EnclosureNemaRating, EnergyStarRated, EuProtectionClass, EuroEtaEffeciency, Fan, GridFeed, GridFrequency, GridVoltageRange, IntegratedDcCircuitBreaker, Length, ListingAgency, Manufacturer, MaxArrayInputPower, MaxCableDiameterAc, MaxCableDiameterDc, MaxCurrentDc, MaxDcInputPower, MaxDcVoltage, MaxEffeciency, MaxOperatingVoltage, MaxPowerAc, MinOperatingVoltage, ModelNumber, MountingStyle, Msd, NominalPowerAc, NominalPowerDc, Notes, NumberInputsDc, NumberMppTrackers, OvervoltageProtection, ProductFamilyName, ResidualCurrentProtection, Transformer, UsProtectionClass, Warranty, Weight, WhereManufactured, Width
Instance	<InverterDefinition Id="" xmlns="http://www.iepmodel.net"> <Manufacturer>{1,1}</Manufacturer> <ModelNumber>{1,1}</ModelNumber> <ProductFamilyName>{0,1}</ProductFamilyName> <Description>{0,1}</Description> <MountingStyle>{0,1}</MountingStyle> <Length>{0,1}</Length> <Width>{0,1}</Width> <Depth>{0,1}</Depth> <Weight>{0,1}</Weight> <EnclosureMaterial>{0,1}</EnclosureMaterial> <EnclosureNemaRating>{0,1}</EnclosureNemaRating> <ListingAgency>{0,1}</ListingAgency> <Warranty>{0,1}</Warranty> <EnergyStarRated>{0,1}</EnergyStarRated> <WhereManufactured>{0,1}</WhereManufactured> <MaxArrayInputPower>{0,1}</MaxArrayInputPower> <MaxDcInputPower>{0,1}</MaxDcInputPower> <NominalPowerDc>{0,1}</NominalPowerDc> <MaxDcVoltage>{0,1}</MaxDcVoltage> <MinOperatingVoltage>{0,1}</MinOperatingVoltage> <MaxOperatingVoltage>{0,1}</MaxOperatingVoltage> <MaxCurrentDc>{0,1}</MaxCurrentDc> <MaxPowerAc>{0,1}</MaxPowerAc> <NominalPowerAc>{0,1}</NominalPowerAc> <GridVoltageRange>{0,1}</GridVoltageRange> <GridFrequency>{0,1}</GridFrequency> <MaxEffeciency>{0,1}</MaxEffeciency> <CecWeightedEffeciency>{0,1}</CecWeightedEffeciency> <EuroEtaEffeciency>{0,1}</EuroEtaEffeciency> <NumberMppTrackers>{0,1}</NumberMppTrackers> <UsProtectionClass>{0,1}</UsProtectionClass> <EuProtectionClass>{0,1}</EuProtectionClass> <DcConnection>{0,1}</DcConnection> <NumberInputsDc>{0,1}</NumberInputsDc> <MaxCableDiameterDc>{0,1}</MaxCableDiameterDc> <AcConnection>{0,1}</AcConnection> <MaxCableDiameterAc>{0,1}</MaxCableDiameterAc> <GridFeed>{0,1}</GridFeed> <Fan>{0,1}</Fan> <Transformer>{0,1}</Transformer> <Msd>{0,1}</Msd> <ResidualCurrentProtection>{0,1}</ResidualCurrentProtection> <IntegratedDcCircuitBreaker>{0,1}</IntegratedDcCircuitBreaker> <OvervoltageProtection>{0,1}</OvervoltageProtection> <Display>{0,1}</Display> <Notes>{0,1}</Notes> </InverterDefinition>

Attributes	QName	Type	Fixed	Default	Use
	Id	xs:ID			required

Source

```
<xs:element name="InverterDefinition" type="InverterDefinitionType" minOccurs="0"
 maxOccurs="unbounded">
  <xs:annotation>
    <xs:documentation>Specifications for an inverter used in this design. A PvDesign may
 contain more than inverter make and model.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element InverterDefinitionType / MaxArrayInputPower

Namespace	No namespace
Diagram	
Type	xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source

```
<xs:element name="MaxArrayInputPower" type="xs:double" minOccurs="0" maxOccurs="1"/>
```

Element InverterDefinitionType / MaxDcInputPower

Namespace	No namespace
Diagram	
Type	xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source

```
<xs:element name="MaxDcInputPower" type="xs:double" minOccurs="0" maxOccurs="1"/>
```

Element InverterDefinitionType / NominalPowerDc

Namespace	No namespace
Diagram	
Type	xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source

```
<xs:element name="NominalPowerDc" type="xs:double" minOccurs="0" maxOccurs="1"/>
```

Element InverterDefinitionType / MaxDcVoltage

Namespace	No namespace
Diagram	

Type	xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="MaxDcVoltage" type="xs:double" minOccurs="0" maxOccurs="1"/>`

Element InverterDefinitionType / MinOperatingVoltage

Namespace	No namespace
Diagram	
Type	xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="MinOperatingVoltage" type="xs:double" minOccurs="0" maxOccurs="1"/>`

Element InverterDefinitionType / MaxOperatingVoltage

Namespace	No namespace
Diagram	
Type	xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="MaxOperatingVoltage" type="xs:double" minOccurs="0" maxOccurs="1"/>`

Element InverterDefinitionType / MaxCurrentDc

Namespace	No namespace
Diagram	
Type	xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="MaxCurrentDc" type="xs:double" minOccurs="0" maxOccurs="1"/>`

Element InverterDefinitionType / MaxPowerAc

Namespace	No namespace
Diagram	
Type	xs:double
Properties	content: simple

	minOccurs:	0
	maxOccurs:	1
Source	<xs:element name="MaxPowerAc" type="xs:double" minOccurs="0" maxOccurs="1"/>	

Element InverterDefinitionType / NominalPowerAc

Namespace	No namespace
Diagram	
Type	xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="NominalPowerAc" type="xs:double" minOccurs="0" maxOccurs="1"/>

Element InverterDefinitionType / GridVoltageRange

Namespace	No namespace
Diagram	
Type	restriction of xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxLength 255
Source	<xs:element name="GridVoltageRange" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="255"/> </xs:restriction> </xs:simpleType> </xs:element>

Element InverterDefinitionType / GridFrequency

Namespace	No namespace
Diagram	
Type	xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="GridFrequency" type="xs:double" minOccurs="0" maxOccurs="1"/>

Element InverterDefinitionType / MaxEffeciency

Namespace	No namespace
Diagram	

Type	xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="MaxEffeciency" type="xs:double" minOccurs="0" maxOccurs="1"/>`

Element InverterDefinitionType / CecWeightedEffeciency

Namespace	No namespace
Diagram	
Type	xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="CecWeightedEffeciency" type="xs:double" minOccurs="0" maxOccurs="1"/>`

Element InverterDefinitionType / EuroEtaEffeciency

Namespace	No namespace
Diagram	
Type	xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="EuroEtaEffeciency" type="xs:double" minOccurs="0" maxOccurs="1"/>`

Element InverterDefinitionType / NumberMppTrackers

Namespace	No namespace
Diagram	
Type	xs:integer
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="NumberMppTrackers" type="xs:integer" minOccurs="0" maxOccurs="1"/>`

Element InverterDefinitionType / UsProtectionClass

Namespace	No namespace
Diagram	
Type	restriction of xs:string
Properties	content: simple minOccurs: 0

	maxOccurs:	1
Facets	maxLength	255
Source	<xs:element name="UsProtectionClass" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="255"/> </xs:restriction> </xs:simpleType> </xs:element>	

Element InverterDefinitionType / EuProtectionClass

Namespace	No namespace	
Diagram		
Type	restriction of xs:string	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	maxLength	255
Source	<xs:element name="EuProtectionClass" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="255"/> </xs:restriction> </xs:simpleType> </xs:element>	

Element InverterDefinitionType / DcConnection

Namespace	No namespace	
Diagram		
Type	restriction of xs:string	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	maxLength	255
Source	<xs:element name="DcConnection" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="255"/> </xs:restriction> </xs:simpleType> </xs:element>	

Element InverterDefinitionType / NumberInputsDc

Namespace	No namespace	
Diagram		
Type	xs:integer	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Source	<xs:element name="NumberInputsDc" type="xs:integer" minOccurs="0" maxOccurs="1"/>	

Element InverterDefinitionType / MaxCableDiameterDc

Namespace	No namespace
Diagram	
Type	xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="MaxCableDiameterDc" type="xs:double" minOccurs="0" maxOccurs="1"/>`

Element InverterDefinitionType / AcConnection

Namespace	No namespace
Diagram	
Type	restriction of xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxLength 255

Source	`<xs:element name="AcConnection" minOccurs="0" maxOccurs="1">`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:maxLength value="255"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

Element InverterDefinitionType / MaxCableDiameterAc

Namespace	No namespace
Diagram	
Type	xs:double
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="MaxCableDiameterAc" type="xs:double" minOccurs="0" maxOccurs="1"/>`

Element InverterDefinitionType / GridFeed

Namespace	No namespace
Diagram	
Type	restriction of xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxLength 255

Source	<xs:element name="GridFeed" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="255"/> </xs:restriction> </xs:simpleType> </xs:element>

Element InverterDefinitionType / Fan

Namespace	No namespace
Diagram	
Type	restriction of xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxLength 255
Source	<xs:element name="Fan" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="255"/> </xs:restriction> </xs:simpleType> </xs:element>

Element InverterDefinitionType / Transformer

Namespace	No namespace
Diagram	
Type	restriction of xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxLength 255
Source	<xs:element name="Transformer" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="255"/> </xs:restriction> </xs:simpleType> </xs:element>

Element InverterDefinitionType / Msd

Namespace	No namespace
Diagram	
Type	restriction of xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxLength 255
Source	<xs:element name="Msd" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="255"/> </xs:restriction> </xs:simpleType>

```
</xs:element>
```

Element InverterDefinitionType / ResidualCurrentProtection

Namespace	No namespace
Diagram	
Type	restriction of xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxLength 255
Source	

```
<xs:element name="ResidualCurrentProtection" minOccurs="0" maxOccurs="1">
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:maxLength value="255"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element InverterDefinitionType / IntegratedDcCircuitBreaker

Namespace	No namespace
Diagram	
Type	restriction of xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxLength 255
Source	

```
<xs:element name="IntegratedDcCircuitBreaker" minOccurs="0" maxOccurs="1">
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:maxLength value="255"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element InverterDefinitionType / OvervoltageProtection

Namespace	No namespace
Diagram	
Type	restriction of xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxLength 255
Source	

```
<xs:element name="OvervoltageProtection" minOccurs="0" maxOccurs="1">
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:maxLength value="255"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element InverterDefinitionType / Display

Namespace	No namespace

Diagram	
Type	restriction of xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxLength 255
Source	<xs:element name="Display" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="255"/> </xs:restriction> </xs:simpleType> </xs:element>

Element InverterDefinitionType / Notes

Namespace	No namespace
Diagram	
Type	restriction of xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	maxLength 255
Source	<xs:element name="Notes" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="255"/> </xs:restriction> </xs:simpleType> </xs:element>

Element PvDesignType / CombinerDefinition

Namespace	No namespace

Diagram

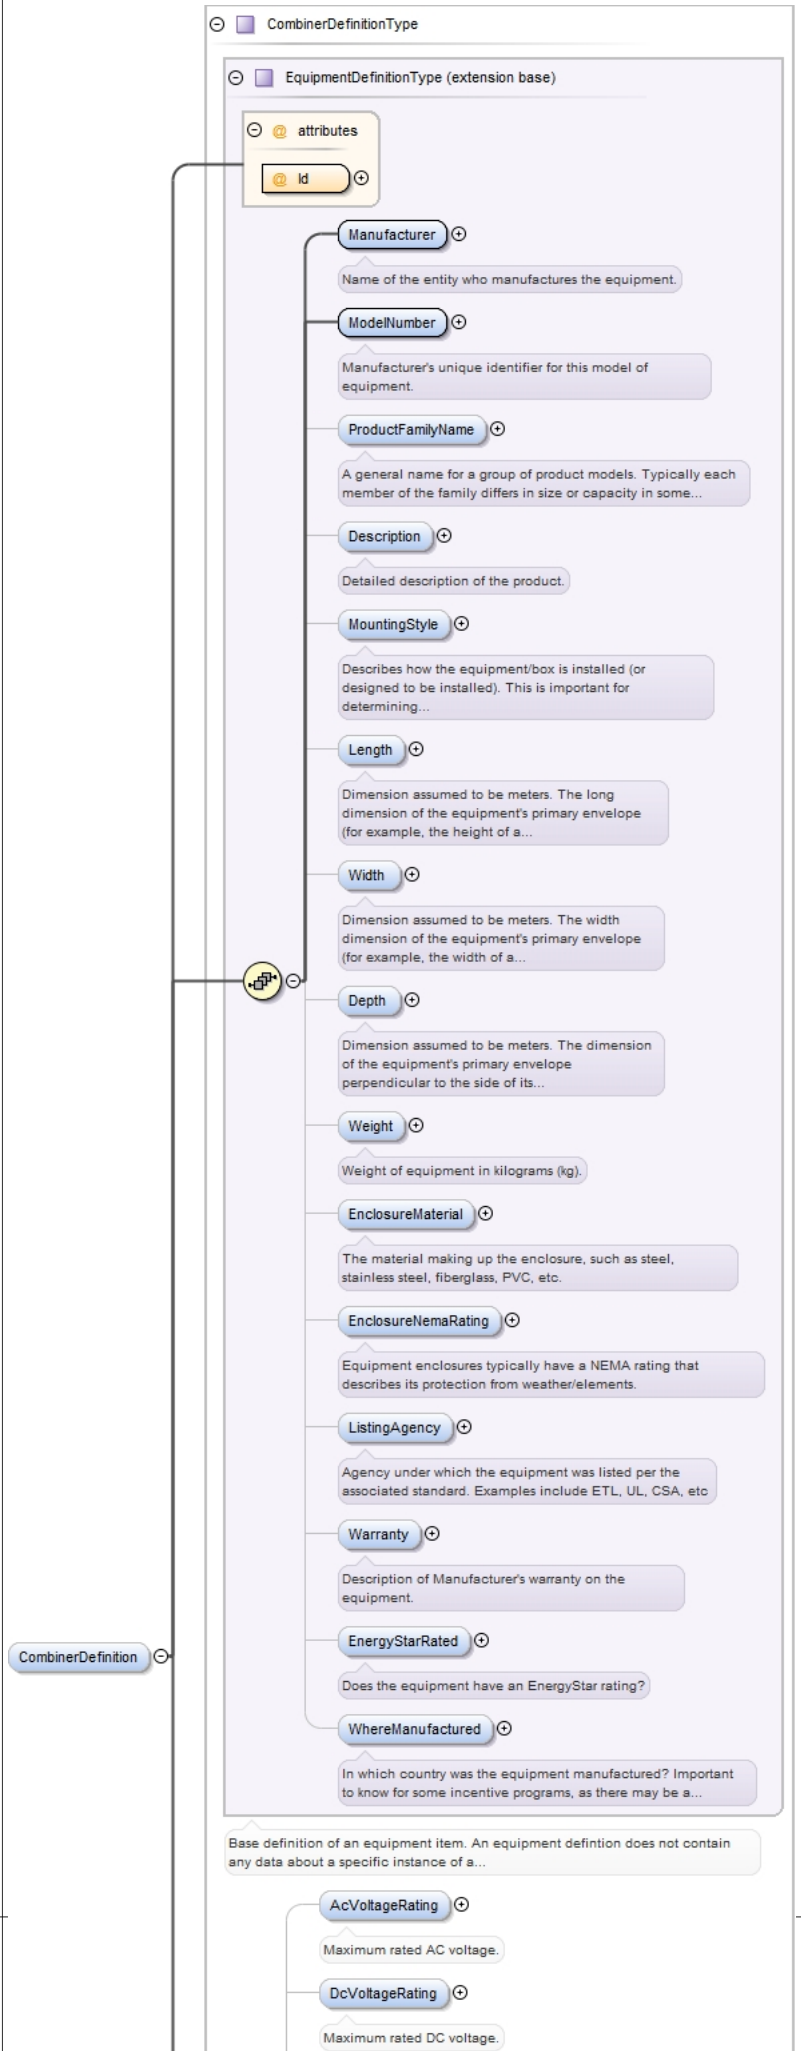
CombinerDefinitionType
EquipmentDefinitionType (extension base)
attributes
Id
Manufacturer
Name of the entity who manufactures the equipment.
ModelNumber
Manufacturer's unique identifier for this model of equipment.
ProductFamilyName
A general name for a group of product models. Typically each member of the family differs in size or capacity in some...
Description
Detailed description of the product.
MountingStyle
Describes how the equipment/box is installed (or designed to be installed). This is important for determining...
Length
Dimension assumed to be meters. The long dimension of the equipment's primary envelope (for example, the height of a...
Width
Dimension assumed to be meters. The width dimension of the equipment's primary envelope (for example, the width of a...
Depth
Dimension assumed to be meters. The dimension of the equipment's primary envelope perpendicular to the side of its...
Weight
Weight of equipment in kilograms (kg).
EnclosureMaterial
The material making up the enclosure, such as steel, stainless steel, fiberglass, PVC, etc.
EnclosureNemaRating
Equipment enclosures typically have a NEMA rating that describes its protection from weather/elements.
ListingAgency
Agency under which the equipment was listed per the associated standard. Examples include ETL, UL, CSA, etc
Warranty
Description of Manufacturer's warranty on the equipment.
EnergyStarRated
Does the equipment have an EnergyStar rating?
WhereManufactured
In which country was the equipment manufactured? Important to know for some incentive programs, as there may be a...
Base definition of an equipment item. An equipment defintion does not contain any data about a specific instance of a...
AcVoltageRating
Maximum rated AC voltage.
DcVoltageRating
Maximum rated DC voltage.
CombinerDefinition

Type	CombinerDefinitionType
Type hierarchy	• EquipmentDefinitionType • CombinerDefinitionType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Manufacturer , ModelNumber , ProductFamilyName{0,1} , Description{0,1} , MountingStyle{0,1} , Length{0,1} , Width{0,1} , Depth{0,1} , Weight{0,1} , EnclosureMaterial{0,1} , EnclosureNemaRating{0,1} , ListingAgency{0,1} , Warranty{0,1} , EnergyStarRated{0,1} , WhereManufactured{0,1} , AcVoltageRating{0,1} , DcVoltageRating{0,1} , MaxContinuousCurrent{0,1} , QtyInputCircuits{0,1} , MaxOCPDRating{0,1} , MinInputConductorSize{0,1} , MaxInputConductorSize{0,1} , QtyOutputConductors{0,1} , MinOutputConductorSize{0,1} , MaxOutputConductorSize{0,1} , IntegratedDisconnectIncluded{0,1} , IntegratedDisconnectRating{0,1} , MonitoringAvailable{0,1} , RevenueGradeMonitoring{0,1}
Children	AcVoltageRating, DcVoltageRating, Depth, Description, EnclosureMaterial, EnclosureNemaRating, EnergyStarRated, IntegratedDisconnectIncluded, IntegratedDisconnectRating, Length, ListingAgency, Manufacturer, MaxContinuousCurrent, MaxInputConductorSize, MaxOCPDRating, MaxOutputConductorSize, MinInputConductorSize, MinOutputConductorSize, ModelNumber, MonitoringAvailable, MountingStyle, ProductFamilyName, QtyInputCircuits, QtyOutputConductors, RevenueGradeMonitoring, Warranty, Weight, WhereManufactured, Width

Instance

```
<CombinerDefinition Id="" xmlns="http://www.iepmodel.net">
  <Manufacturer>{1,1}</Manufacturer>
  <ModelNumber>{1,1}</ModelNumber>
  <ProductFamilyName>{0,1}</ProductFamilyName>
  <Description>{0,1}</Description>
  <MountingStyle>{0,1}</MountingStyle>
  <Length>{0,1}</Length>
  <Width>{0,1}</Width>
  <Depth>{0,1}</Depth>
  <Weight>{0,1}</Weight>
  <EnclosureMaterial>{0,1}</EnclosureMaterial>
  <EnclosureNemaRating>{0,1}</EnclosureNemaRating>
  <ListingAgency>{0,1}</ListingAgency>
  <Warranty>{0,1}</Warranty>
  <EnergyStarRated>{0,1}</EnergyStarRated>
  <WhereManufactured>{0,1}</WhereManufactured>
  <AcVoltageRating>{0,1}</AcVoltageRating>
  <DcVoltageRating>{0,1}</DcVoltageRating>
  <MaxContinuousCurrent>{0,1}</MaxContinuousCurrent>
  <QtyInputCircuits>{0,1}</QtyInputCircuits>
  <MaxOCPDRating>{0,1}</MaxOCPDRating>
  <MinInputConductorSize>{0,1}</MinInputConductorSize>
  <MaxInputConductorSize>{0,1}</MaxInputConductorSize>
  <QtyOutputConductors>{0,1}</QtyOutputConductors>
  <MinOutputConductorSize>{0,1}</MinOutputConductorSize>
  <MaxOutputConductorSize>{0,1}</MaxOutputConductorSize>
  <IntegratedDisconnectIncluded>{0,1}</IntegratedDisconnectIncluded>
  <IntegratedDisconnectRating>{0,1}</IntegratedDisconnectRating>
  <MonitoringAvailable>{0,1}</MonitoringAvailable>
  <RevenueGradeMonitoring>{0,1}</RevenueGradeMonitoring>
</CombinerDefinition>
```

Attributes

QName	Type	Fixed	Default	Use
Id	xs:ID			required

Source

```
<xs:element maxOccurs="unbounded" minOccurs="0" name="CombinerDefinition"
 type="CombinerDefinitionType"/>
```

Element CombinerDefinitionType / AcVoltageRating

Namespace	No namespace
Annotations	Maximum rated AC voltage.
Diagram	
Type	xs:integer
Properties	content: simple minOccurs: 0

Source	<xs:element minOccurs="0" name="AcVoltageRating" type="xs:integer"> <xs:annotation> <xs:documentation>Maximum rated AC voltage.</xs:documentation> </xs:annotation> </xs:element>

Element CombinerDefinitionType / DcVoltageRating

Namespace	No namespace
Annotations	Maximum rated DC voltage.
Diagram	
Type	xs:integer
Properties	content: simple minOccurs: 0
Source	<xs:element minOccurs="0" name="DcVoltageRating" type="xs:integer"> <xs:annotation> <xs:documentation>Maximum rated DC voltage.</xs:documentation> </xs:annotation> </xs:element>

Element CombinerDefinitionType / MaxContinuousCurrent

Namespace	No namespace
Annotations	Rating in amps.
Diagram	
Type	xs:integer
Properties	content: simple minOccurs: 0
Source	<xs:element minOccurs="0" name="MaxContinuousCurrent" type="xs:integer"> <xs:annotation> <xs:documentation>Rating in amps.</xs:documentation> </xs:annotation> </xs:element>

Element CombinerDefinitionType / QtyInputCircuits

Namespace	No namespace
Annotations	Max number of circuits on the input side.
Diagram	
Type	xs:integer
Properties	content: simple minOccurs: 0
Source	<xs:element name="QtyInputCircuits" minOccurs="0" type="xs:integer"> <xs:annotation> <xs:documentation>Max number of circuits on the input side.</xs:documentation> </xs:annotation> </xs:element>

Element CombinerDefinitionType / MaxOCPDRating

Namespace	No namespace

Annotations	Maximum rated current (in Amps) of the over-current protection device (OCPD) per input circuit.
Diagram	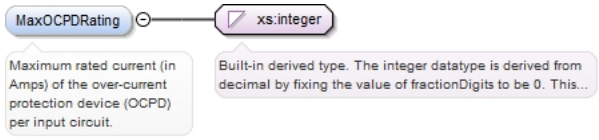
Type	xs:integer
Properties	content: simple minOccurs: 0
Source	<xs:element minOccurs="0" name="MaxOCPDRating" type="xs:integer"> <xs:annotation> <xs:documentation>Maximum rated current (in Amps) of the over-current protection device (OCPD) per input circuit.</xs:documentation> </xs:annotation> </xs:element>

Element CombinerDefinitionType / MinInputConductorSize

Namespace	No namespace
Diagram	
Type	ConductorSizeEnumType
Properties	content: simple minOccurs: 0
Facets	enumeration 12 enumeration 10 enumeration 8 enumeration 6 enumeration 4 enumeration 3 enumeration 2 enumeration 1/0 enumeration 2/0 enumeration 3/0 enumeration 4/0 enumeration 250 enumeration 350 enumeration 400 enumeration 500
Source	<xs:element minOccurs="0" name="MinInputConductorSize" type="ConductorSizeEnumType"/>

Element CombinerDefinitionType / MaxInputConductorSize

Namespace	No namespace
Diagram	
Type	ConductorSizeEnumType
Properties	content: simple minOccurs: 0
Facets	enumeration 12

	enumeration	10
	enumeration	8
	enumeration	6
	enumeration	4
	enumeration	3
	enumeration	2
	enumeration	1/0
	enumeration	2/0
	enumeration	3/0
	enumeration	4/0
	enumeration	250
	enumeration	350
	enumeration	400
	enumeration	500
Source	<xs:element minOccurs="0" name="MaxInputConductorSize" type="ConductorSizeEnumType"/>	

Element CombinerDefinitionType / QtyOutputConductors

Namespace	No namespace	
Annotations	Max number of output conductors.	
Diagram		
Type	xs:integer	
Properties	content:	simple
	minOccurs:	0
Source	<xs:element name="QtyOutputConductors" minOccurs="0" type="xs:integer"> <xs:annotation> <xs:documentation>Max number of output conductors.</xs:documentation> </xs:annotation> </xs:element>	

Element CombinerDefinitionType / MinOutputConductorSize

Namespace	No namespace	
Diagram		
Type	ConductorSizeEnumType	
Properties	content:	simple
	minOccurs:	0
Facets	enumeration	12
	enumeration	10
	enumeration	8
	enumeration	6
	enumeration	4
	enumeration	3
	enumeration	2
	enumeration	1/0
	enumeration	2/0
	enumeration	3/0
	enumeration	4/0

	enumeration	250
	enumeration	350
	enumeration	400
	enumeration	500
Source	<xs:element minOccurs="0" name="MinOutputConductorSize" type="ConductorSizeEnumType"/>	

Element CombinerDefinitionType / MaxOutputConductorSize

Namespace	No namespace	
Diagram		
Type	ConductorSizeEnumType	
Properties	content:	simple
	minOccurs:	0
Facets	enumeration	12
	enumeration	10
	enumeration	8
	enumeration	6
	enumeration	4
	enumeration	3
	enumeration	2
	enumeration	1/0
	enumeration	2/0
	enumeration	3/0
	enumeration	4/0
	enumeration	250
	enumeration	350
	enumeration	400
	enumeration	500
Source	<xs:element minOccurs="0" name="MaxOutputConductorSize" type="ConductorSizeEnumType"/>	

Element CombinerDefinitionType / IntegratedDisconnectIncluded

Namespace	No namespace	
Diagram		
Type	xs:boolean	
Properties	content:	simple
	minOccurs:	0
Source	<xs:element minOccurs="0" name="IntegratedDisconnectIncluded" type="xs:boolean"/>	

Element CombinerDefinitionType / IntegratedDisconnectRating

Namespace	No namespace	
Diagram		
Type	xs:integer	

Properties	content: simple minOccurs: 0
Source	`<xs:element minOccurs="0" name="IntegratedDisconnectRating" type="xs:integer"/>`

Element CombinerDefinitionType / MonitoringAvailable

Namespace	No namespace
Diagram	
Type	xs:boolean
Properties	content: simple minOccurs: 0
Source	`<xs:element minOccurs="0" name="MonitoringAvailable" type="xs:boolean"/>`

Element CombinerDefinitionType / RevenueGradeMonitoring

Namespace	No namespace
Diagram	
Type	xs:boolean
Properties	content: simple minOccurs: 0
Source	`<xs:element minOccurs="0" name="RevenueGradeMonitoring" type="xs:boolean"/>`

Element PvDesignType / JunctionBoxDefintion

Namespace	No namespace

Diagram

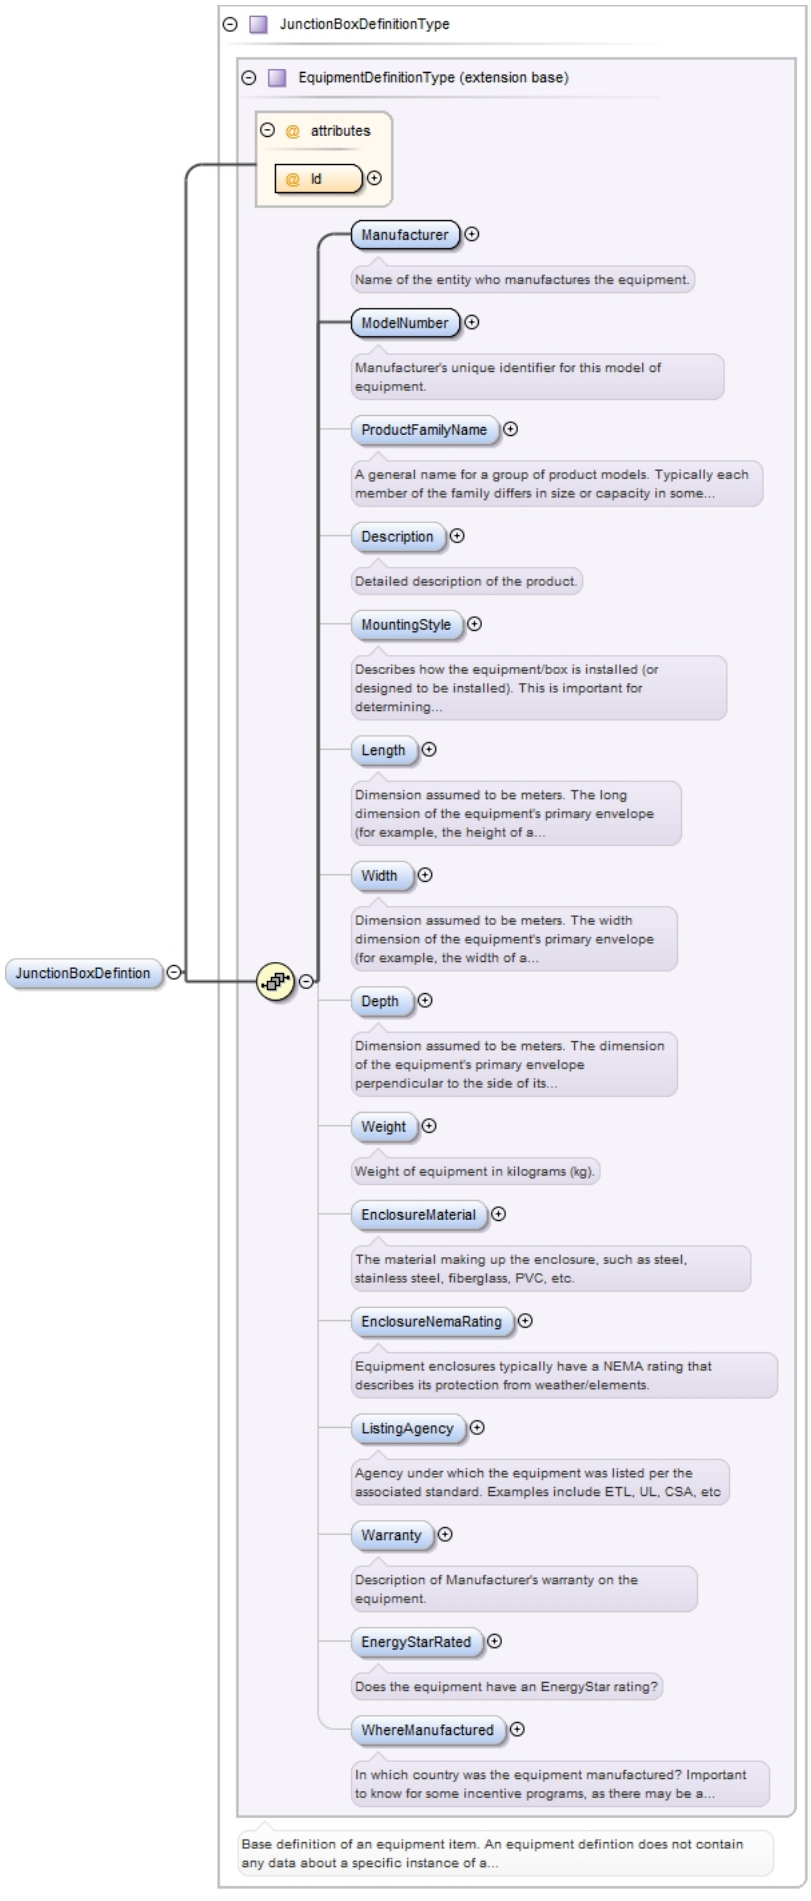
JunctionBoxDefinitionType
EquipmentDefinitionType (extension base)
attributes
Id
Manufacturer
Name of the entity who manufactures the equipment.
ModelNumber
Manufacturer's unique identifier for this model of equipment.
ProductFamilyName
A general name for a group of product models. Typically each member of the family differs in size or capacity in some...
Description
Detailed description of the product.
MountingStyle
Describes how the equipment/box is installed (or designed to be installed). This is important for determining...
Length
Dimension assumed to be meters. The long dimension of the equipment's primary envelope (for example, the height of a...
Width
Dimension assumed to be meters. The width dimension of the equipment's primary envelope (for example, the width of a...
JunctionBoxDefintion
Depth
Dimension assumed to be meters. The dimension of the equipment's primary envelope perpendicular to the side of its...
Weight
Weight of equipment in kilograms (kg).
EnclosureMaterial
The material making up the enclosure, such as steel, stainless steel, fiberglass, PVC, etc.
EnclosureNemaRating
Equipment enclosures typically have a NEMA rating that describes its protection from weather/elements.
ListingAgency
Agency under which the equipment was listed per the associated standard. Examples include ETL, UL, CSA, etc
Warranty
Description of Manufacturer's warranty on the equipment.
EnergyStarRated
Does the equipment have an EnergyStar rating?
WhereManufactured
In which country was the equipment manufactured? Important to know for some incentive programs, as there may be a...
Base definition of an equipment item. An equipment defintion does not contain any data about a specific instance of a...

Type	JunctionBoxDefinitionType
Type hierarchy	• EquipmentDefinitionType • JunctionBoxDefinitionType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Manufacturer , ModelNumber , ProductFamilyName{0,1} , Description{0,1} , MountingStyle{0,1} , Length{0,1} , Width{0,1} , Depth{0,1} , Weight{0,1} , EnclosureMaterial{0,1} , EnclosureNemaRating{0,1} , ListingAgency{0,1} , Warranty{0,1} , EnergyStarRated{0,1} , WhereManufactured{0,1}
Children	Depth, Description, EnclosureMaterial, EnclosureNemaRating, EnergyStarRated, Length, ListingAgency, Manufacturer, ModelNumber, MountingStyle, ProductFamilyName, Warranty, Weight, WhereManufactured, Width

Instance

```
<JunctionBoxDefintion Id="" xmlns="http://www.iepmodel.net">
  <Manufacturer>{1,1}</Manufacturer>
  <ModelNumber>{1,1}</ModelNumber>
  <ProductFamilyName>{0,1}</ProductFamilyName>
  <Description>{0,1}</Description>
  <MountingStyle>{0,1}</MountingStyle>
  <Length>{0,1}</Length>
  <Width>{0,1}</Width>
  <Depth>{0,1}</Depth>
  <Weight>{0,1}</Weight>
  <EnclosureMaterial>{0,1}</EnclosureMaterial>
  <EnclosureNemaRating>{0,1}</EnclosureNemaRating>
  <ListingAgency>{0,1}</ListingAgency>
  <Warranty>{0,1}</Warranty>
  <EnergyStarRated>{0,1}</EnergyStarRated>
  <WhereManufactured>{0,1}</WhereManufactured>
</JunctionBoxDefintion>
```

Attributes

QName	Type	Fixed	Default	Use
Id	xs:ID			required

Source

```
<xs:element maxOccurs="unbounded" minOccurs="0" name="JunctionBoxDefintion"
 type="JunctionBoxDefinitionType"/>
```

Element PvDesignType / DisconnectSwitchDefinition

Namespace	No namespace

Diagram

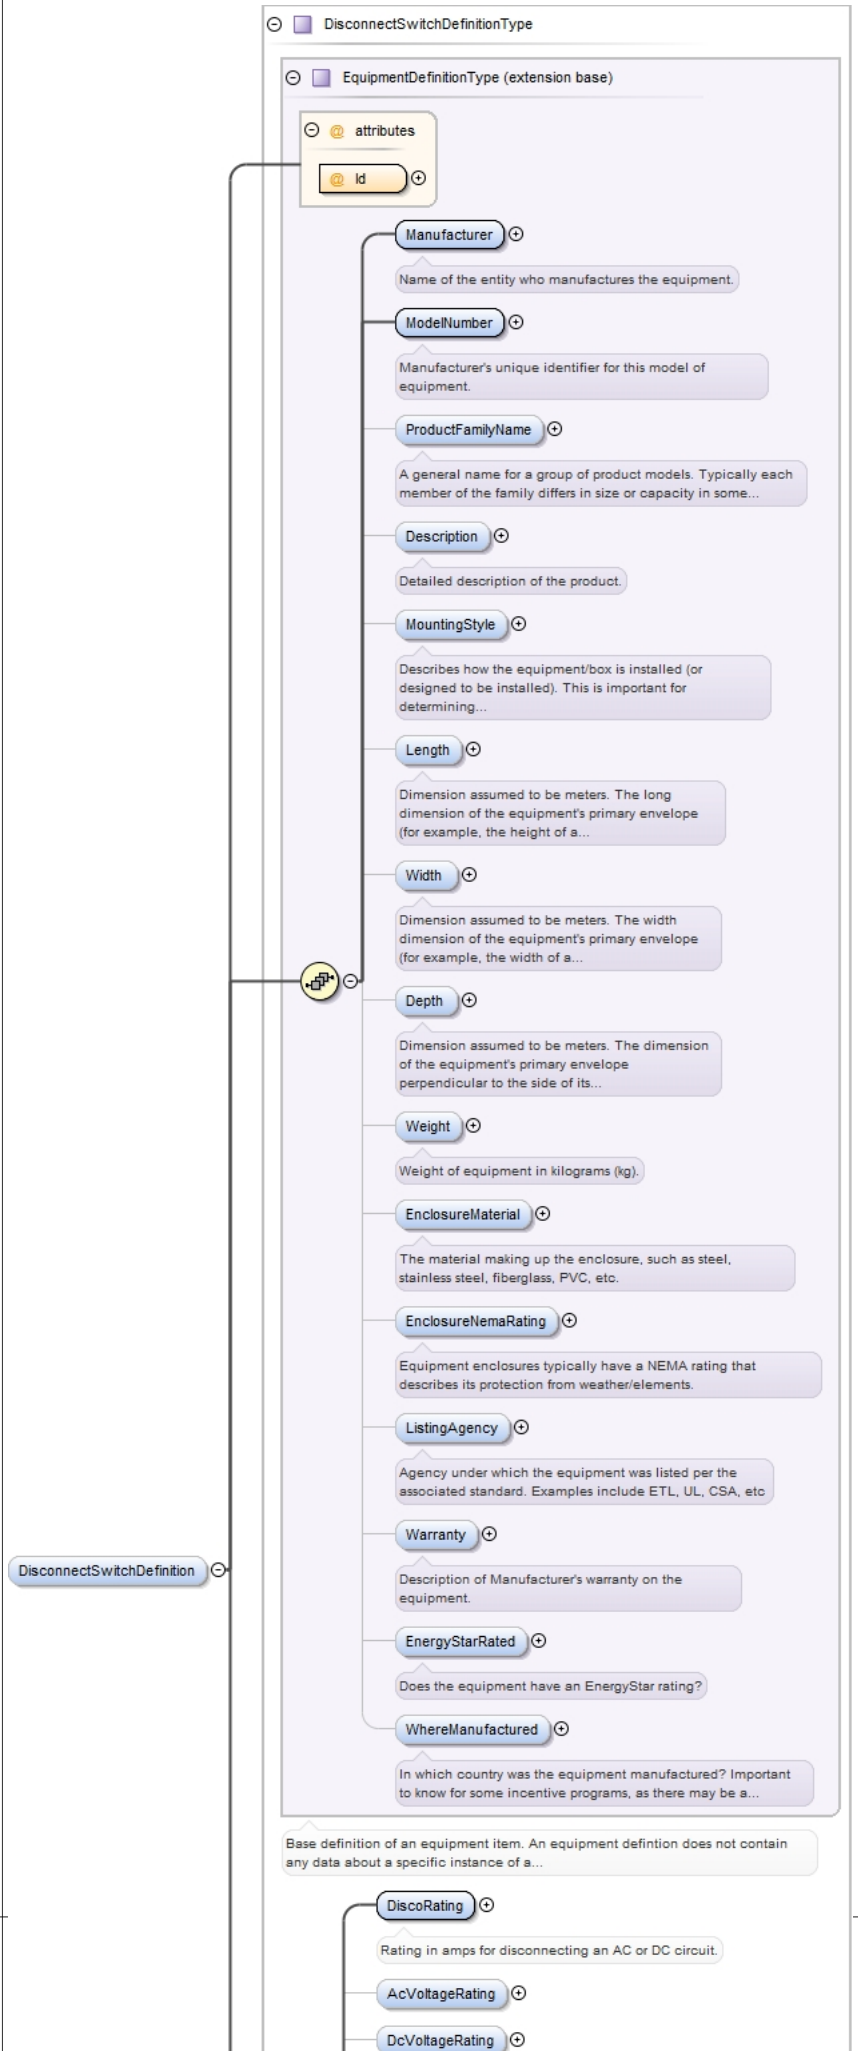
DisconnectSwitchDefinitionType
EquipmentDefinitionType (extension base)
attributes
Id
Manufacturer
Name of the entity who manufactures the equipment.
ModelNumber
Manufacturer's unique identifier for this model of equipment.
ProductFamilyName
A general name for a group of product models. Typically each member of the family differs in size or capacity in some...
Description
Detailed description of the product.
MountingStyle
Describes how the equipment/box is installed (or designed to be installed). This is important for determining...
Length
Dimension assumed to be meters. The long dimension of the equipment's primary envelope (for example, the height of a...
Width
Dimension assumed to be meters. The width dimension of the equipment's primary envelope (for example, the width of a...
Depth
Dimension assumed to be meters. The dimension of the equipment's primary envelope perpendicular to the side of its...
Weight
Weight of equipment in kilograms (kg).
EnclosureMaterial
The material making up the enclosure, such as steel, stainless steel, fiberglass, PVC, etc.
EnclosureNemaRating
Equipment enclosures typically have a NEMA rating that describes its protection from weather/elements.
ListingAgency
Agency under which the equipment was listed per the associated standard. Examples include ETL, UL, CSA, etc
Warranty
Description of Manufacturer's warranty on the equipment.
EnergyStarRated
Does the equipment have an EnergyStar rating?
WhereManufactured
In which country was the equipment manufactured? Important to know for some incentive programs, as there may be a...
Base definition of an equipment item. An equipment defintion does not contain any data about a specific instance of a...
DisconnectSwitchDefinition
DiscoRating
Rating in amps for disconnecting an AC or DC circuit.
AcVoltageRating
DcVoltageRating

Type	DisconnectSwitchDefinitionType
Type hierarchy	• EquipmentDefinitionType • DisconnectSwitchDefinitionType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Manufacturer , ModelNumber , ProductFamilyName{0,1} , Description{0,1} , MountingStyle{0,1} , Length{0,1} , Width{0,1} , Depth{0,1} , Weight{0,1} , EnclosureMaterial{0,1} , EnclosureNemaRating{0,1} , ListingAgency{0,1} , Warranty{0,1} , EnergyStarRated{0,1} , WhereManufactured{0,1} , DiscoRating , AcVoltageRating{0,1} , DcVoltageRating{0,1} , SwitchContact{0,1} , Duty{0,1} , VisibleLock{0,1} , Fusible{0,1} , Fuse{0,1}
Children	AcVoltageRating, DcVoltageRating, Depth, Description, DiscoRating, Duty, EnclosureMaterial, EnclosureNemaRating, EnergyStarRated, Fuse, Fusible, Length, ListingAgency, Manufacturer, ModelNumber, MountingStyle, ProductFamilyName, SwitchContact, VisibleLock, Warranty, Weight, WhereManufactured, Width

Instance

```
<DisconnectSwitchDefinition Id="" xmlns="http://www.iepmodel.net">
  <Manufacturer>{1,1}</Manufacturer>
  <ModelNumber>{1,1}</ModelNumber>
  <ProductFamilyName>{0,1}</ProductFamilyName>
  <Description>{0,1}</Description>
  <MountingStyle>{0,1}</MountingStyle>
  <Length>{0,1}</Length>
  <Width>{0,1}</Width>
  <Depth>{0,1}</Depth>
  <Weight>{0,1}</Weight>
  <EnclosureMaterial>{0,1}</EnclosureMaterial>
  <EnclosureNemaRating>{0,1}</EnclosureNemaRating>
  <ListingAgency>{0,1}</ListingAgency>
  <Warranty>{0,1}</Warranty>
  <EnergyStarRated>{0,1}</EnergyStarRated>
  <WhereManufactured>{0,1}</WhereManufactured>
  <DiscoRating>{1,1}</DiscoRating>
  <AcVoltageRating>{0,1}</AcVoltageRating>
  <DcVoltageRating>{0,1}</DcVoltageRating>
  <SwitchContact>{0,1}</SwitchContact>
  <Duty>{0,1}</Duty>
  <VisibleLock>{0,1}</VisibleLock>
  <Fusible>{0,1}</Fusible>
  <Fuse>{0,1}</Fuse>
</DisconnectSwitchDefinition>
```

Attributes

QName	Type	Fixed	Default	Use
Id	xs:ID			required

Source

```
<xs:element maxOccurs="unbounded" minOccurs="0" name="DisconnectSwitchDefinition"
 type="DisconnectSwitchDefinitionType"/>
```

Element PvDesignType / ElectricalPanelDefinition

Namespace	No namespace
Annotations	Specifications for an AC electric panel where an inverter in the PvDesign may be connected. A PvDesign may contain more than one AC electric panel make and model (each inverter can connect to different equipment).

Diagram

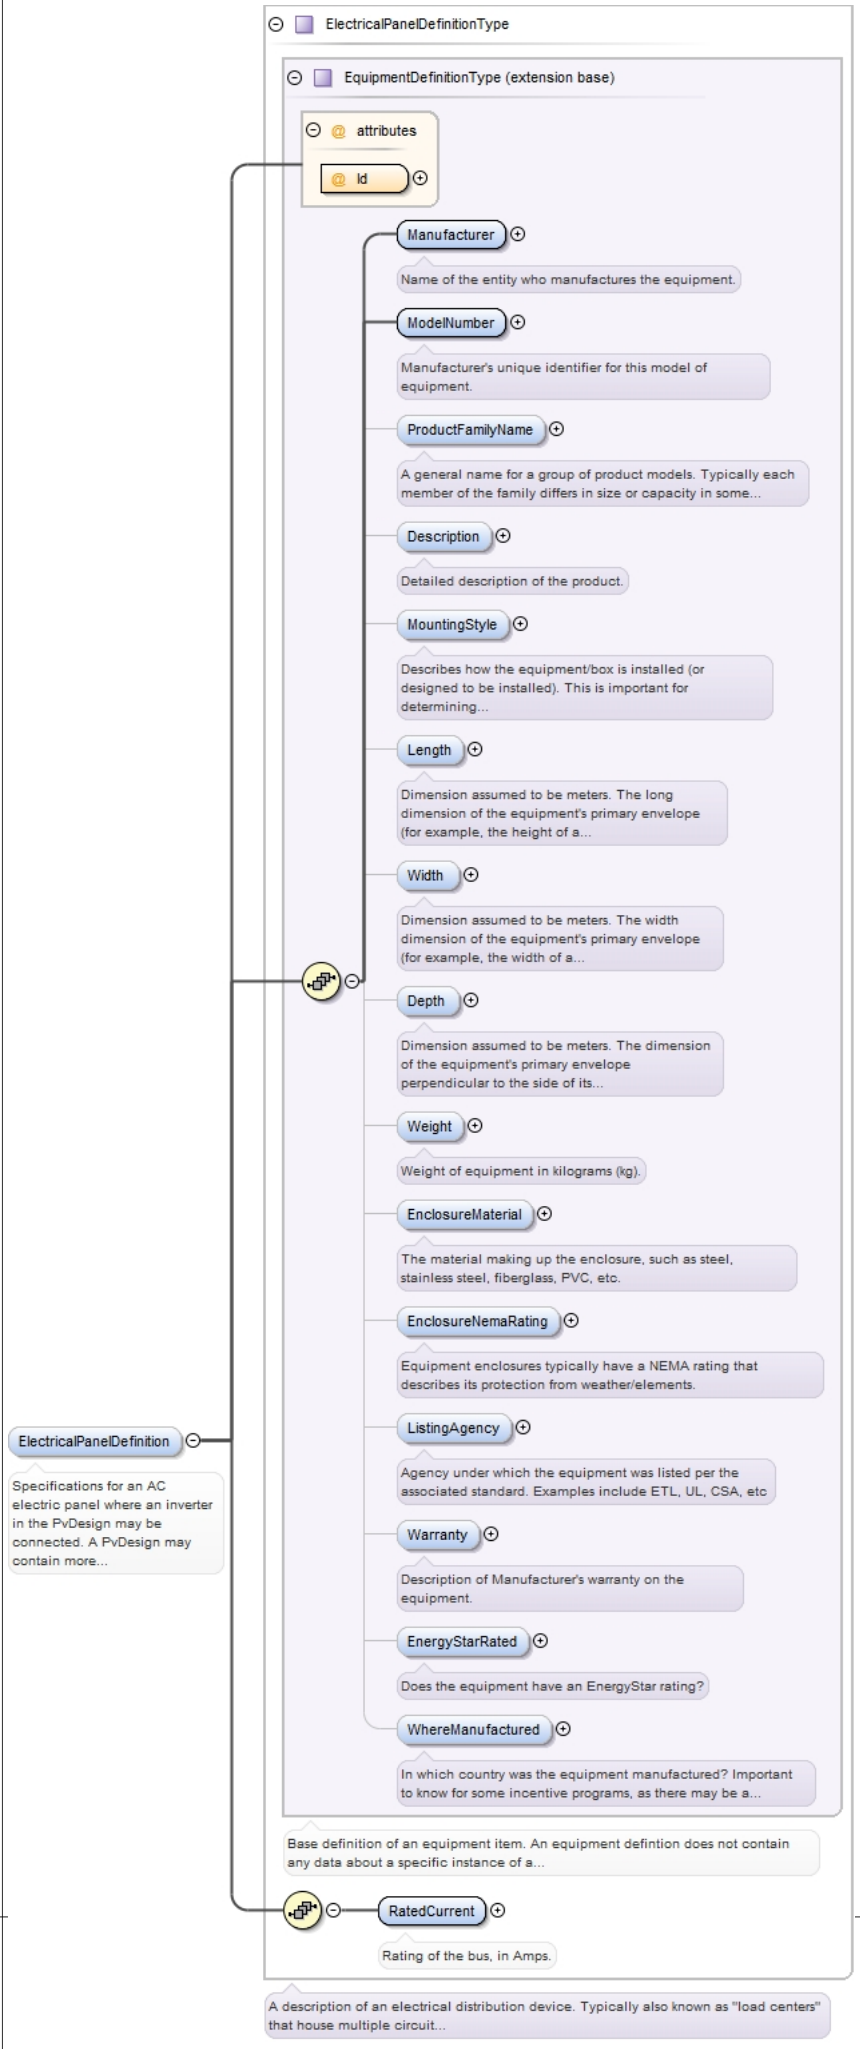
ElectricalPanelDefinitionType
EquipmentDefinitionType (extension base)
attributes
Id
Manufacturer
Name of the entity who manufactures the equipment.
ModelNumber
Manufacturer's unique identifier for this model of equipment.
ProductFamilyName
A general name for a group of product models. Typically each member of the family differs in size or capacity in some...
Description
Detailed description of the product.
MountingStyle
Describes how the equipment/box is installed (or designed to be installed). This is important for determining...
Length
Dimension assumed to be meters. The long dimension of the equipment's primary envelope (for example, the height of a...
Width
Dimension assumed to be meters. The width dimension of the equipment's primary envelope (for example, the width of a...
Depth
Dimension assumed to be meters. The dimension of the equipment's primary envelope perpendicular to the side of its...
Weight
Weight of equipment in kilograms (kg).
EnclosureMaterial
The material making up the enclosure, such as steel, stainless steel, fiberglass, PVC, etc.
EnclosureNemaRating
Equipment enclosures typically have a NEMA rating that describes its protection from weather/elements.
ListingAgency
Agency under which the equipment was listed per the associated standard. Examples include ETL, UL, CSA, etc
Warranty
Description of Manufacturer's warranty on the equipment.
EnergyStarRated
Does the equipment have an EnergyStar rating?
WhereManufactured
In which country was the equipment manufactured? Important to know for some incentive programs, as there may be a...
Base definition of an equipment item. An equipment defintion does not contain any data about a specific instance of a...
RatedCurrent
Rating of the bus, in Amps.
A description of an electrical distribution device. Typically also known as "load centers" that house multiple circuit...
ElectricalPanelDefinition
Specifications for an AC electric panel where an inverter in the PvDesign may be connected. A PvDesign may contain more...

Type	ElectricalPanelDefinitionType
Type hierarchy	• EquipmentDefinitionType • ElectricalPanelDefinitionType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Manufacturer , ModelNumber , ProductFamilyName{0,1} , Description{0,1} , MountingStyle{0,1} , Length{0,1} , Width{0,1} , Depth{0,1} , Weight{0,1} , EnclosureMaterial{0,1} , EnclosureNemaRating{0,1} , ListingAgency{0,1} , Warranty{0,1} , EnergyStarRated{0,1} , WhereManufactured{0,1} , RatedCurrent
Children	Depth, Description, EnclosureMaterial, EnclosureNemaRating, EnergyStarRated, Length, ListingAgency, Manufacturer, ModelNumber, MountingStyle, ProductFamilyName, RatedCurrent, Warranty, Weight, WhereManufactured, Width

Instance

```
<ElectricalPanelDefinition Id="" xmlns="http://www.iepmodel.net">
  <Manufacturer>{1,1}</Manufacturer>
  <ModelNumber>{1,1}</ModelNumber>
  <ProductFamilyName>{0,1}</ProductFamilyName>
  <Description>{0,1}</Description>
  <MountingStyle>{0,1}</MountingStyle>
  <Length>{0,1}</Length>
  <Width>{0,1}</Width>
  <Depth>{0,1}</Depth>
  <Weight>{0,1}</Weight>
  <EnclosureMaterial>{0,1}</EnclosureMaterial>
  <EnclosureNemaRating>{0,1}</EnclosureNemaRating>
  <ListingAgency>{0,1}</ListingAgency>
  <Warranty>{0,1}</Warranty>
  <EnergyStarRated>{0,1}</EnergyStarRated>
  <WhereManufactured>{0,1}</WhereManufactured>
  <RatedCurrent>{1,1}</RatedCurrent>
</ElectricalPanelDefinition>
```

Attributes

QName	Type	Fixed	Default	Use
Id	xs:ID			required

Source

```
<xs:element maxOccurs="unbounded" minOccurs="0" name="ElectricalPanelDefinition"
 type="ElectricalPanelDefinitionType">
  <xs:annotation>
    <xs:documentation>Specifications for an AC electric panel where an inverter in the
 PvDesign may be connected. A PvDesign may contain more than one AC electric panel make
 and model (each inverter can connect to different equipment).</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element PvDesignType / Inverter

Namespace	No namespace
Annotations	Inverters that make up the system.

Diagram	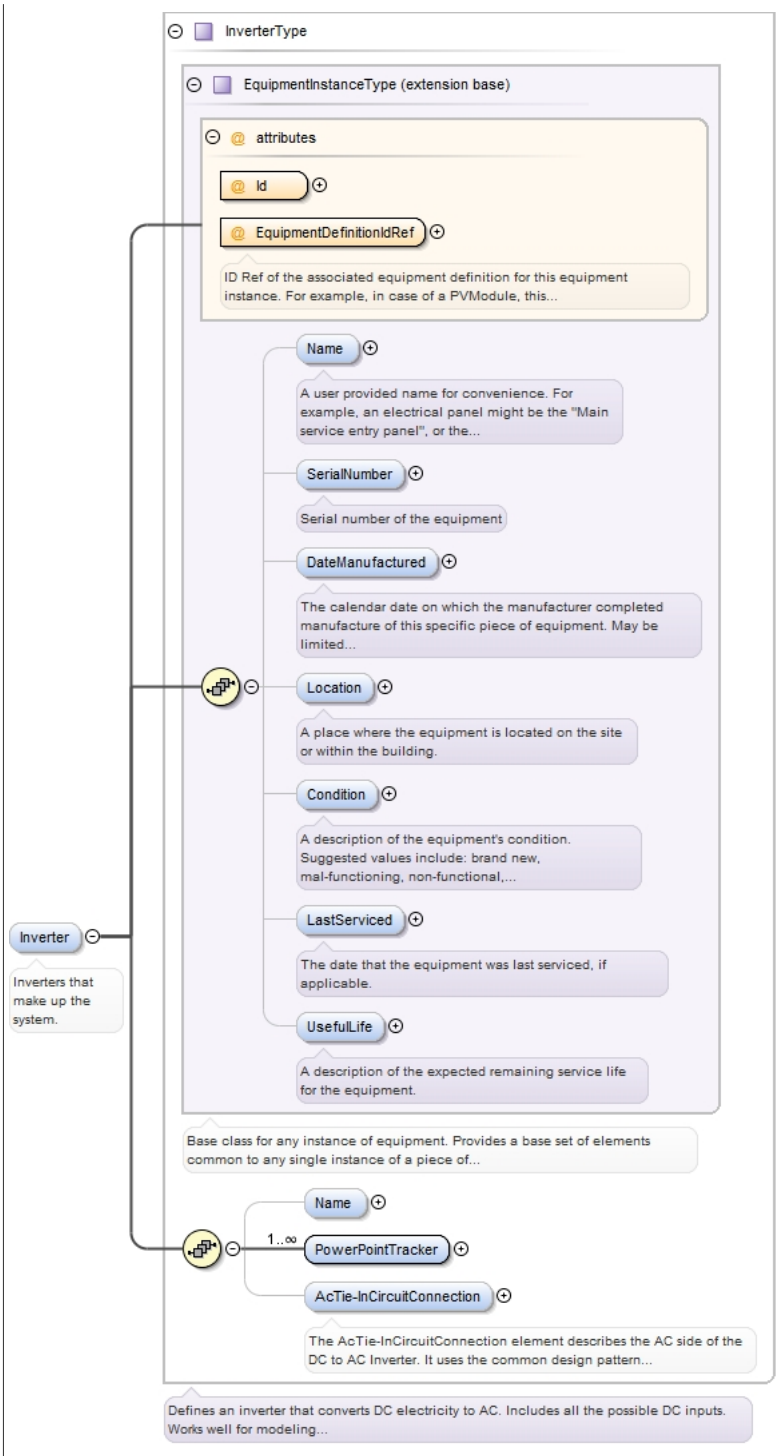
Type	InverterType
Type hierarchy	• EquipmentInstanceType • InverterType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Name{0,1} , SerialNumber{0,1} , DateManufactured{0,1} , Location{0,1} , Condition{0,1} , LastServiced{0,1} , UsefulLife{0,1} , Name{0,1} , PowerPointTracker+ , AcTie-InCircuitConnection{0,1}
Children	AcTie-InCircuitConnection, Condition, DateManufactured, LastServiced, Location, Name, PowerPointTracker, SerialNumber, UsefulLife
Instance	`<Inverter EquipmentDefinitionIdRef="" Id="" xmlns="http://www.iepmodel.net">`

```
  <Name>{0,1}</Name>
  <SerialNumber>{0,1}</SerialNumber>
  <DateManufactured>{0,1}</DateManufactured>
  <Location>{0,1}</Location>
  <Condition>{0,1}</Condition>
  <LastServiced>{0,1}</LastServiced>
  <UsefulLife>{0,1}</UsefulLife>
  <Name>{0,1}</Name>
  <PowerPointTracker>{1,unbounded}</PowerPointTracker>
  <AcTie-InCircuitConnection EquipmentWhereConnectedIdRef="">{0,1}</AcTie-
InCircuitConnection>
</Inverter>
```

Attributes

QName	Type	Fixed	Default	Use
EquipmentDefinitionIdRef	IDREF			required
	ID Ref of the associated equipment definition for this equipment instance. For example, in case of a PVModule, this would be the ID of the PvModuleDefinition element that describes this particular PV module instance.			
Id	xs:ID			required

Source

```
<xs:element name="Inverter" type="InverterType" minOccurs="0" maxOccurs="unbounded">
  <xs:annotation>
    <xs:documentation>Inverters that make up the system.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element InverterType / Name

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0
Source	`<xs:element name="Name" type="xs:string" minOccurs="0"/>`

Element InverterType / PowerPointTracker

Namespace	No namespace
Diagram	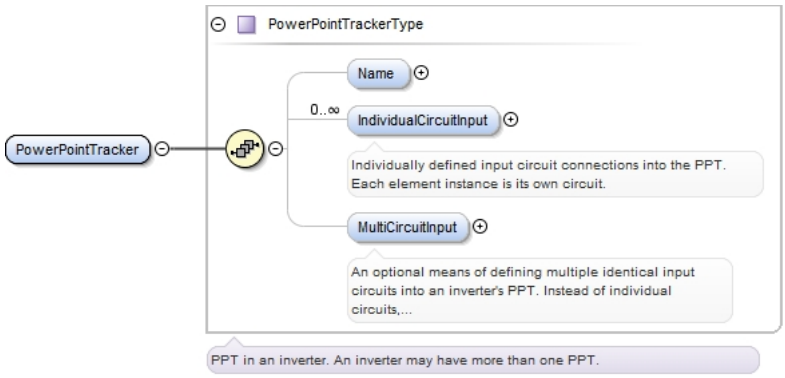
Type	PowerPointTrackerType
Properties	content: complex maxOccurs: unbounded
Model	Name{0,1} , IndividualCircuitInput* , MultiCircuitInput{0,1}
Children	IndividualCircuitInput, MultiCircuitInput, Name

Instance	`<PowerPointTracker>`
	`  <Name>{0,1}</Name>`
	`  <IndividualCircuitInput>{0,unbounded}</IndividualCircuitInput>`
	`  <MultiCircuitInput>{0,1}</MultiCircuitInput>`
	`</PowerPointTracker>`

Source	`<xs:element maxOccurs="unbounded" name="PowerPointTracker" type="PowerPointTrackerType"/>`

Element PowerPointTrackerType / Name

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0
Source	<xs:element name="Name" minOccurs="0" type="xs:string"/>

Element PowerPointTrackerType / IndividualCircuitInput

Namespace	No namespace
Annotations	Individually defined input circuit connections into the PPT. Each element instance is its own circuit.
Diagram	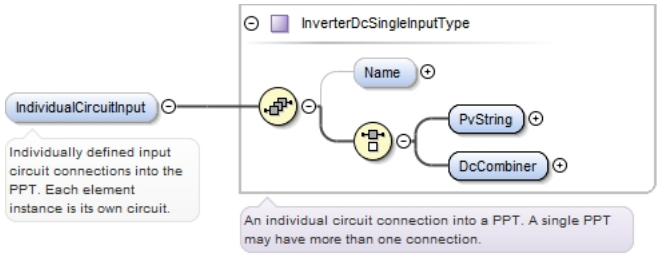
Type	InverterDcSingleInputType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Name{0,1} , (PvString | DcCombiner)
Children	DcCombiner, Name, PvString
Instance	<IndividualCircuitInput> <Name>{0,1}</Name> <PvString>{1,1}</PvString> <DcCombiner EquipmentDefinitionIdRef="" Id="">{1,1}</DcCombiner> </IndividualCircuitInput>
Source	<xs:element maxOccurs="unbounded" name="IndividualCircuitInput" type="InverterDcSingleInputType" minOccurs="0"> <xs:annotation> <xs:documentation>Individually defined input circuit connections into the PPT. Each element instance is its own circuit.</xs:documentation> </xs:annotation> </xs:element>

Element InverterDcSingleInputType / Name

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0
Source	<xs:element name="Name" type="xs:string" minOccurs="0"/>

Element InverterDcSingleInputType / PvString

Namespace	No namespace

Diagram	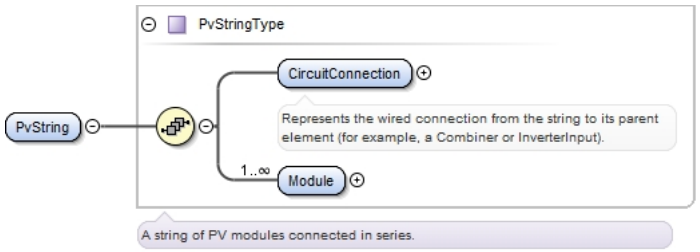
Type	PvStringType
Properties	content: complex minOccurs: 1 maxOccurs: 1
Model	CircuitConnection , Module+
Children	CircuitConnection, Module
Instance	<PvString> <CircuitConnection EquipmentWhereConnectedIdRef="">{1,1}</CircuitConnection> <Module EquipmentDefinitionIdRef="" Id="" LayoutPlaneIdRef="">{1,unbounded}</Module> </PvString>
Source	<xs:element maxOccurs="1" minOccurs="1" name="PvString" type="PvStringType"/>

Element PvStringType / CircuitConnection

Namespace	No namespace
Annotations	Represents the wired connection from the string to its parent element (for example, a Combiner or InverterInput).

Diagram	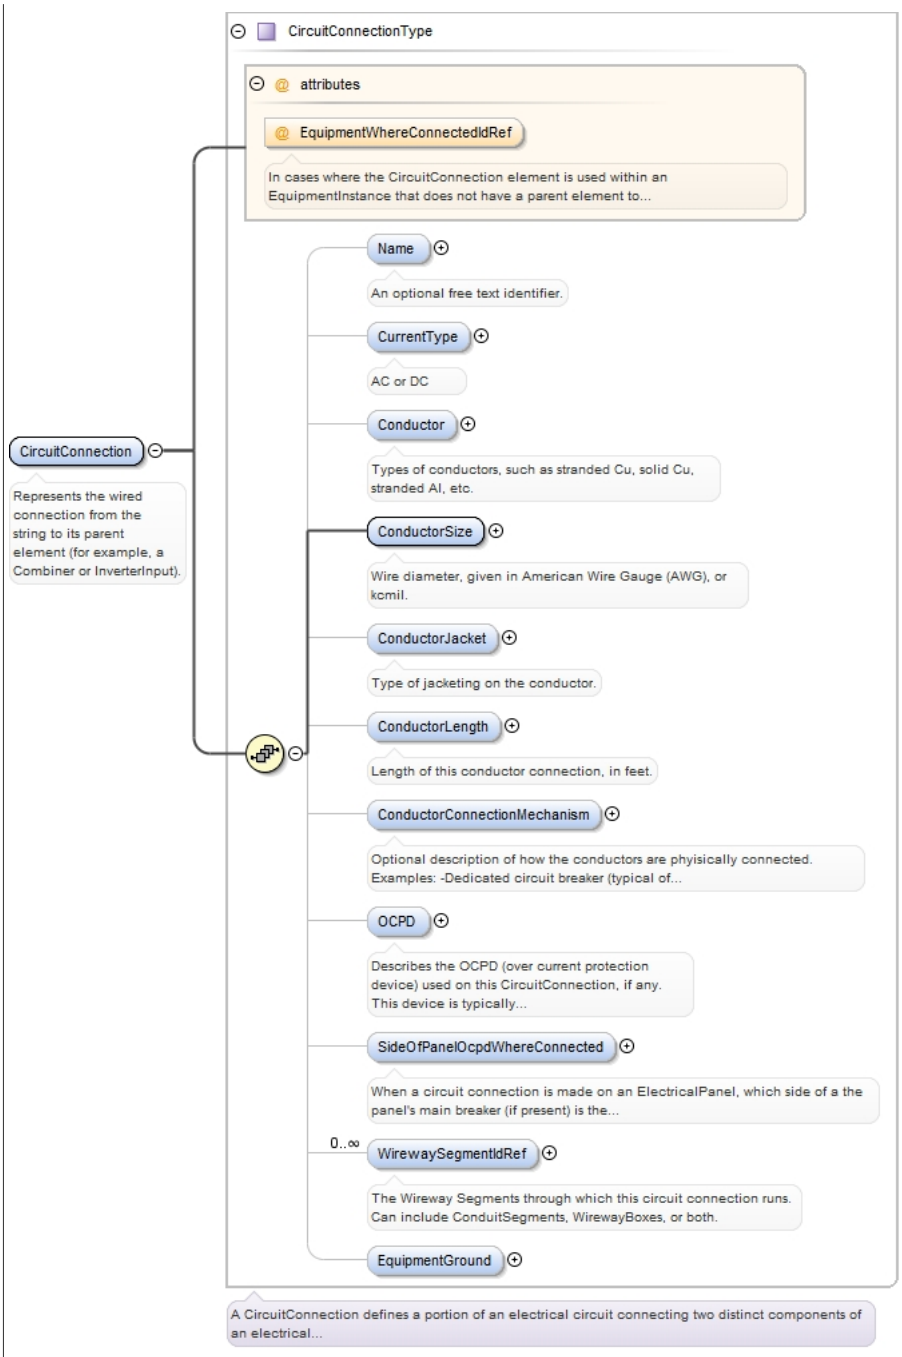
Type	CircuitConnectionType
Properties	content: complex
Model	Name{0,1} , CurrentType{0,1} , Conductor{0,1} , ConductorSize , ConductorJacket{0,1} , ConductorLength{0,1} , ConductorConnectionMechanism{0,1} , OCPD{0,1} , SideOfPanelOcpdWhereConnected{0,1} , WirewaySegmentIdRef* , EquipmentGround{0,1}
Children	Conductor, ConductorConnectionMechanism, ConductorJacket, ConductorLength, ConductorSize, CurrentType, EquipmentGround, Name, OCPD, SideOfPanelOcpdWhereConnected, WirewaySegmentIdRef

Instance	`<CircuitConnection EquipmentWhereConnectedIdRef="" xmlns="http://www.iepmodel.net">`
	`<Name>{0,1}</Name>`
	`<CurrentType>{0,1}</CurrentType>`
	`<Conductor>{0,1}</Conductor>`
	`<ConductorSize>{1,1}</ConductorSize>`
	`<ConductorJacket>{0,1}</ConductorJacket>`
	`<ConductorLength>{0,1}</ConductorLength>`
	`<ConductorConnectionMechanism>{0,1}</ConductorConnectionMechanism>`
	`<OCPD>{0,1}</OCPD>`
	`<SideOfPanelOcpdWhereConnected>{0,1}</SideOfPanelOcpdWhereConnected>`
	`<WirewaySegmentIdRef>{0,unbounded}</WirewaySegmentIdRef>`

<EquipmentGround>{0,1}</EquipmentGround>
</CircuitConnection>

Attributes

QName	Type	Fixed	Default	Use
EquipmentWhereConnectedIdRef				optional

In cases where the CircuitConnection element is used within an EquipmentInstance that does not have a parent element to which the CircuitConnection is assumed to connect, a reference ID can be used to associate this CircuitConnection to another EquipmentInstance elsewhere in a document instance. For example, a PvSystem may have an AcPointOfConnection that uses a new ElectricalPanel as an AC combiner for more than one Inverter. The new electrical panel can be described by an ElectricalPanel element in the PvDesign (which in turn refers to an ElectricalPanelDefinition element).

in the AcPointOfConnection's EquipmentWhereConnected element. That ElectricPanel's EnergizingCircuitConnection element may reference another ElectricPanel in an instance of the Project's ExistingElectricalHierarchy element.

Source

```
<xs:element name="CircuitConnection" type="CircuitConnectionType">
  <xs:annotation>
    <xs:documentation>Represents the wired connection from the string to its parent
 element (for example, a Combiner or InverterInput).</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element PvStringType / Module

Namespace	No namespace

Diagram

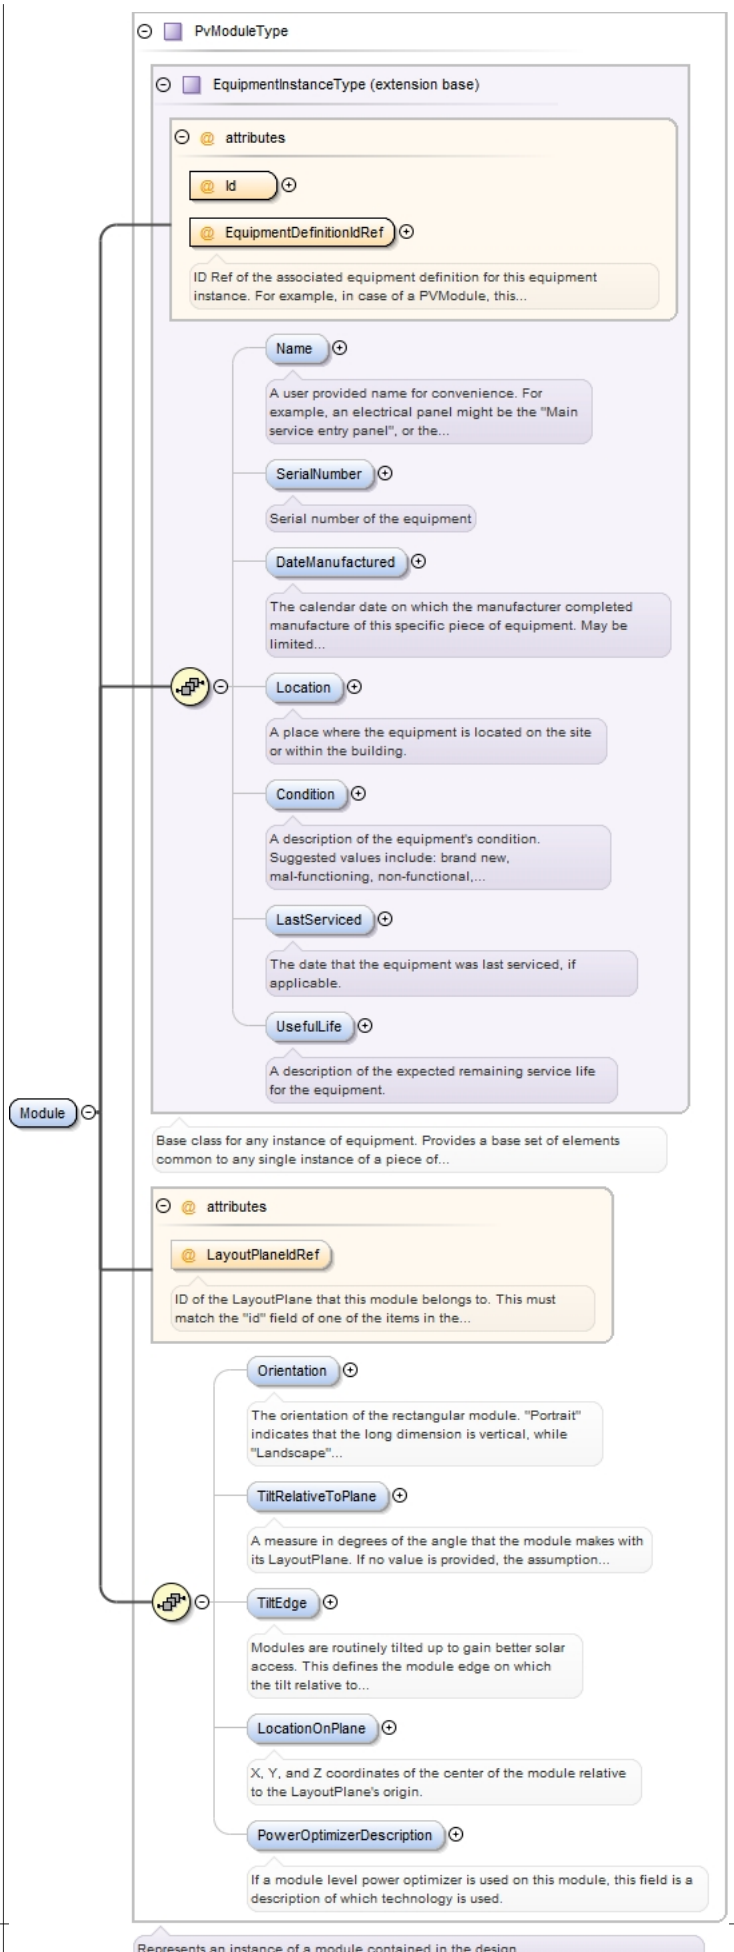
PvModuleType
EquipmentInstanceType (extension base)
attributes
Id
EquipmentDefinitionIdRef
ID Ref of the associated equipment definition for this equipment instance. For example, in case of a PVModule, this...
Name
A user provided name for convenience. For example, an electrical panel might be the "Main service entry panel", or the...
SerialNumber
Serial number of the equipment
DateManufactured
The calendar date on which the manufacturer completed manufacture of this specific piece of equipment. May be limited...
Location
A place where the equipment is located on the site or within the building.
Condition
A description of the equipment's condition. Suggested values include: brand new, mal-functioning, non-functional,...
LastServiced
The date that the equipment was last serviced, if applicable.
UsefulLife
A description of the expected remaining service life for the equipment.
Module
Base class for any instance of equipment. Provides a base set of elements common to any single instance of a piece of...
attributes
LayoutPlaneIdRef
ID of the LayoutPlane that this module belongs to. This must match the "id" field of one of the items in the...
Orientation
The orientation of the rectangular module. "Portrait" indicates that the long dimension is vertical, while "Landscape"...
TiltRelativeToPlane
A measure in degrees of the angle that the module makes with its LayoutPlane. If no value is provided, the assumption...
TiltEdge
Modules are routinely tilted up to gain better solar access. This defines the module edge on which the tilt relative to...
LocationOnPlane
X, Y, and Z coordinates of the center of the module relative to the LayoutPlane's origin.
PowerOptimizerDescription
If a module level power optimizer is used on this module, this field is a description of which technology is used.
Represents an instance of a module contained in the design.

Type	PvModuleType
Type hierarchy	• EquipmentInstanceType • PvModuleType
Properties	content: complex minOccurs: 1 maxOccurs: unbounded
Model	Name{0,1} , SerialNumber{0,1} , DateManufactured{0,1} , Location{0,1} , Condition{0,1} , LastServiced{0,1} , UsefulLife{0,1} , Orientation{0,1} , TiltRelativeToPlane{0,1} , TiltEdge{0,1} , LocationOnPlane{0,1} , PowerOptimizerDescription{0,1}
Children	Condition, DateManufactured, LastServiced, Location, LocationOnPlane, Name, Orientation, PowerOptimizerDescription, SerialNumber, TiltEdge, TiltRelativeToPlane, UsefulLife

Instance	`<Module EquipmentDefinitionIdRef="" Id="" LayoutPlaneIdRef="" xmlns="http://www.iepmodel.net">`
	`  <Name>{0,1}</Name>`
	`  <SerialNumber>{0,1}</SerialNumber>`
	`  <DateManufactured>{0,1}</DateManufactured>`
	`  <Location>{0,1}</Location>`
	`  <Condition>{0,1}</Condition>`
	`  <LastServiced>{0,1}</LastServiced>`
	`  <UsefulLife>{0,1}</UsefulLife>`
	`  <Orientation>{0,1}</Orientation>`
	`  <TiltRelativeToPlane>{0,1}</TiltRelativeToPlane>`
	`  <TiltEdge>{0,1}</TiltEdge>`
	`  <LocationOnPlane>{0,1}</LocationOnPlane>`
	`  <PowerOptimizerDescription>{0,1}</PowerOptimizerDescription>`
	`</Module>`

Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **EquipmentDefinitionIdRef** / IDREF / / / required ID Ref of the associated equipment definition for this equipment instance. For example, in case of a PVModule, this would be the ID of the PvModuleDefinition element that describes this particular PV module instance. **Id** / xs:ID / / / required **LayoutPlaneIdRef** / / / / optional ID of the LayoutPlane that this module belongs to. This must match the "id" field of one of the items in the LayoutPlanes field of the PvDesignType instance this module belongs to.
Source	`<xs:element maxOccurs="unbounded" minOccurs="1" name="Module" type="PvModuleType"/>`

Element PvModuleType / Orientation

Namespace	No namespace
Annotations	The orientation of the rectangular module. "Portrait" indicates that the long dimension is vertical, while "Landscape" indicates that the long dimension is horizontal.
Diagram	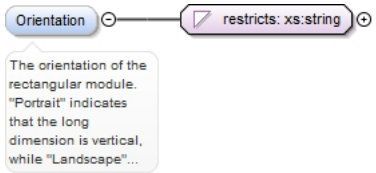
Type	restriction of xs:string
Properties	content: simple minOccurs: 0 default: Portrait
Facets	enumeration: Portrait enumeration: Landscape

Source	`<xs:element minOccurs="0" name="Orientation" default="Portrait">`
	`  <xs:annotation>`
	`  <xs:documentation>The orientation of the rectangular module. "Portrait" indicates that the long dimension is vertical, while "Landscape" indicates that the long dimension is horizontal.</xs:documentation>`

```
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:enumeration value="Portrait"/>
      <xs:enumeration value="Landscape"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element PvModuleType / TiltRelativeToPlane

Namespace	No namespace
Annotations	A measure in degrees of the angle that the module makes with its LayoutPlane. If no value is provided, the assumption is that the module will be placed parallel to its LayoutPlane.
Diagram	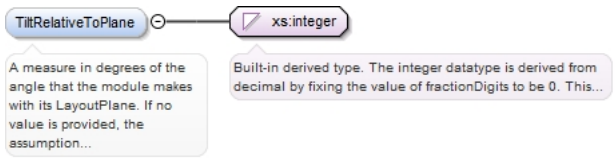
Type	xs:integer
Properties	content: simple minOccurs: 0 default: 0
Source	<xs:element name="TiltRelativeToPlane" minOccurs="0" type="xs:integer" default="0"> <xs:annotation> <xs:documentation>A measure in degrees of the angle that the module makes with its LayoutPlane. If no value is provided, the assumption is that the module will be placed parallel to its LayoutPlane.</xs:documentation> </xs:annotation> </xs:element>

Element PvModuleType / TiltEdge

Namespace	No namespace
Annotations	Modules are routinely tilted up to gain better solar access. This defines the module edge on which the tilt relative to the LayoutPlane's azimuth occurs. For example, a "top" edge tilt is routinely used on a north roof to tilt the module to face south (aka "reverse tilt"). "Bottom edge" is the edge toward the azimuth direction of the LayoutPlane.
Diagram	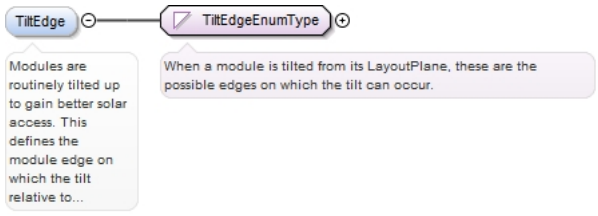
Type	TiltEdgeEnumType
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	enumeration: bottom enumeration: top enumeration: left enumeration: right
Source	<xs:element name="TiltEdge" maxOccurs="1" minOccurs="0" type="TiltEdgeEnumType"> <xs:annotation> <xs:documentation>Modules are routinely tilted up to gain better solar access. This defines the module edge on which the tilt relative to the LayoutPlane's azimuth occurs. For example, a "top" edge tilt is routinely used on a north roof to tilt the module to face south (aka "reverse tilt"). "Bottom edge" is the edge toward the azimuth direction of the LayoutPlane.</xs:documentation>

```
  </xs:annotation>
</xs:element>
```

Element PvModuleType / LocationOnPlane

Namespace	No namespace
Annotations	X, Y, and Z coordinates of the center of the module relative to the LayoutPlane's origin.
Diagram	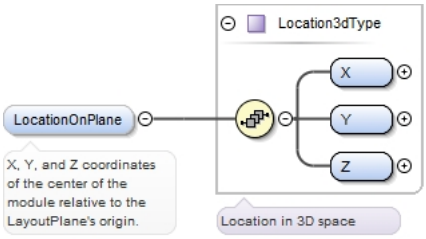
Type	Location3dType
Properties	content: complex minOccurs: 0
Model	X , Y , Z
Children	X, Y, Z
Instance	<LocationOnPlane xmlns="http://www.iepmodel.net"> <X>{1,1}</X> <Y>{1,1}</Y> <Z>{1,1}</Z> </LocationOnPlane>
Source	<xs:element minOccurs="0" name="LocationOnPlane" type="Location3dType"> <xs:annotation> <xs:documentation>X, Y, and Z coordinates of the center of the module relative to the LayoutPlane's origin.</xs:documentation> </xs:annotation> </xs:element>

Element PvModuleType / PowerOptimizerDescription

Namespace	No namespace
Annotations	If a module level power optimizer is used on this module, this field is a description of which technology is used.
Diagram	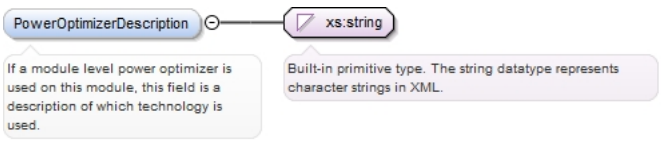
Type	xs:string
Properties	content: simple minOccurs: 0
Source	<xs:element minOccurs="0" name="PowerOptimizerDescription" type="xs:string"> <xs:annotation> <xs:documentation>If a module level power optimizer is used on this module, this field is a description of which technology is used.</xs:documentation> </xs:annotation> </xs:element>

Element InverterDcSingleInputType / DcCombiner

Namespace	No namespace

Diagram	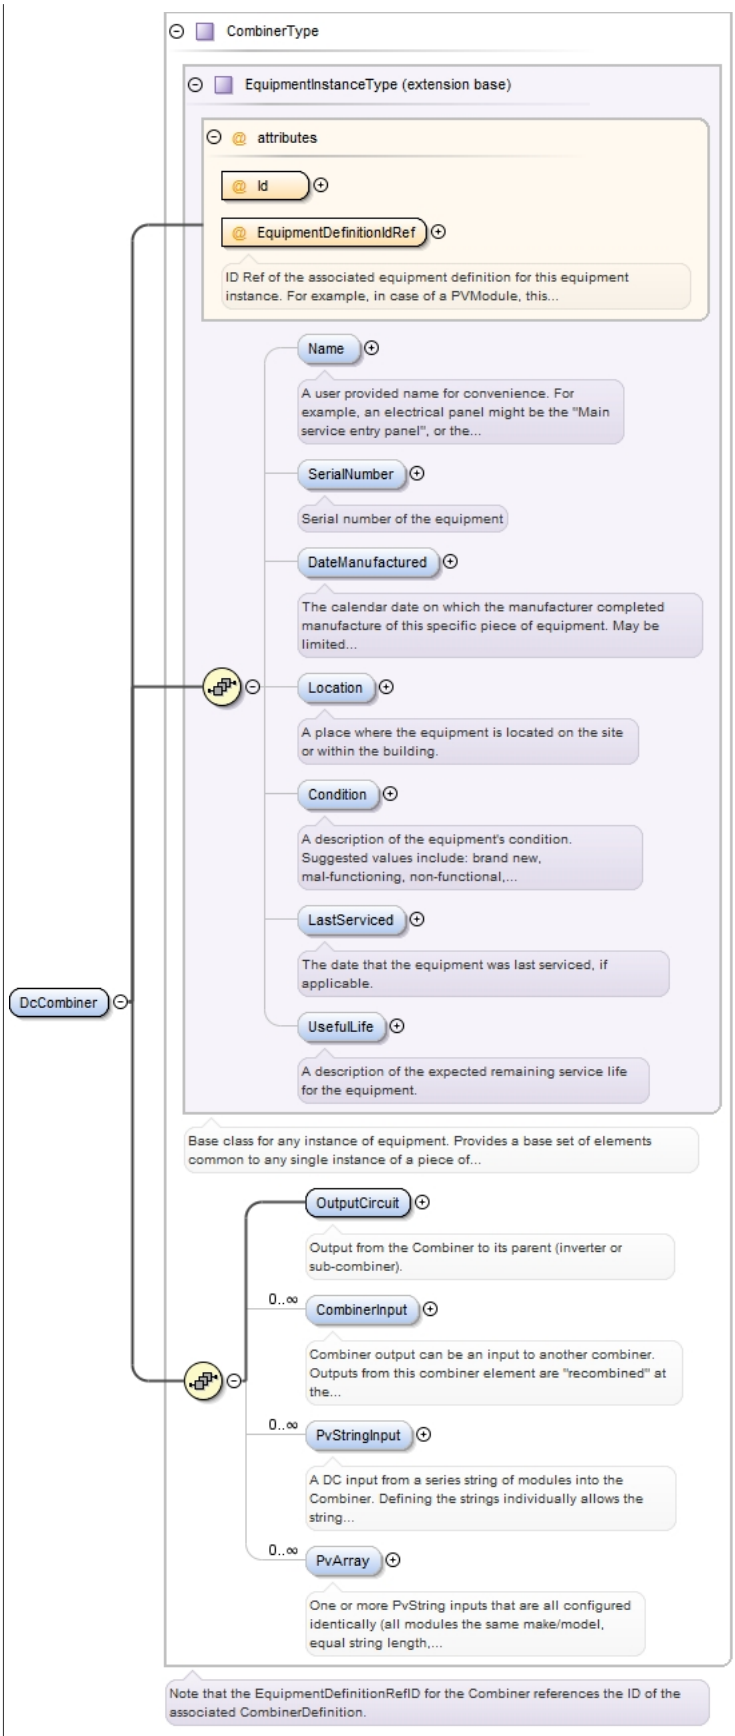
Type	CombinerType
Type hierarchy	• EquipmentInstanceType

	• CombinerType
Properties	content: complex minOccurs: 1 maxOccurs: 1
Model	Name{0,1} , SerialNumber{0,1} , DateManufactured{0,1} , Location{0,1} , Condition{0,1} , LastServiced{0,1} , UsefulLife{0,1} , OutputCircuit , CombinerInput* , PvStringInput* , PvArray*
Children	CombinerInput, Condition, DateManufactured, LastServiced, Location, Name, OutputCircuit, PvArray, PvStringInput, SerialNumber, UsefulLife

Instance

```
<DcCombiner EquipmentDefinitionIdRef="" Id="" xmlns="http://www.iepmodel.net">
  <Name>{0,1}</Name>
  <SerialNumber>{0,1}</SerialNumber>
  <DateManufactured>{0,1}</DateManufactured>
  <Location>{0,1}</Location>
  <Condition>{0,1}</Condition>
  <LastServiced>{0,1}</LastServiced>
  <UsefulLife>{0,1}</UsefulLife>
  <OutputCircuit EquipmentWhereConnectedIdRef="">{1,1}</OutputCircuit>
  <CombinerInput EquipmentDefinitionIdRef="" Id="">{0,unbounded}</CombinerInput>
  <PvStringInput>{0,unbounded}</PvStringInput>
  <PvArray Id="" LayoutPlaneIdRef="" ModuleDefinitionIdRef="">{0,unbounded}</PvArray>
</DcCombiner>
```

Attributes

QName	Type	Fixed	Default	Use
EquipmentDefinitionIdRef	IDREF			required
	ID Ref of the associated equipment definition for this equipment instance. For example, in case of a PVModule, this would be the ID of the PvModuleDefinition element that describes this particular PV module instance.			
Id	xs:ID			required

Source

```
<xs:element maxOccurs="1" minOccurs="1" name="DcCombiner" type="CombinerType"/>
```

Element CombinerType / OutputCircuit

Namespace	No namespace
Annotations	Output from the Combiner to its parent (inverter or sub-combiner).

Diagram	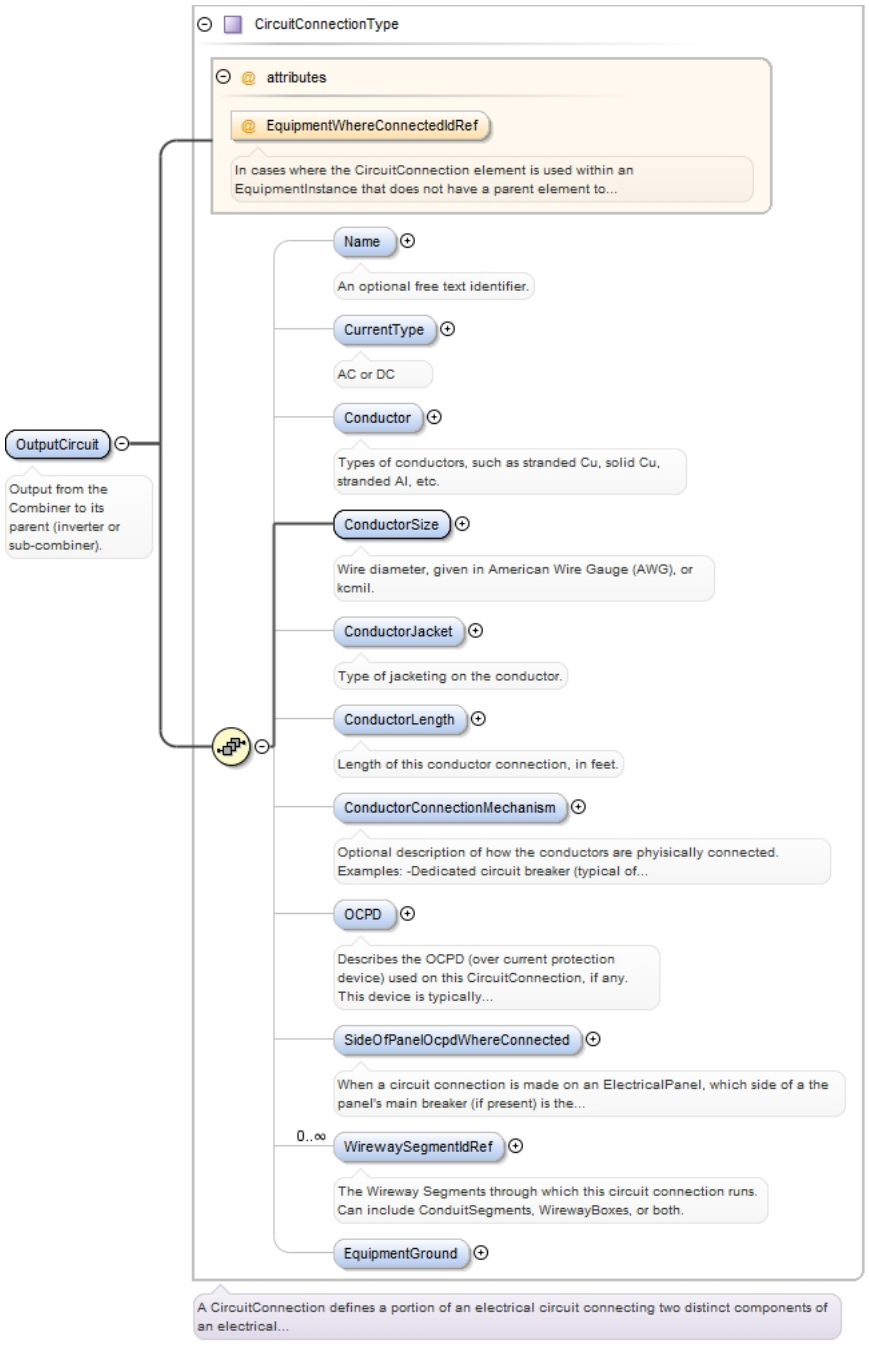
Type	CircuitConnectionType
Properties	content: complex
Model	Name{0,1} , CurrentType{0,1} , Conductor{0,1} , ConductorSize , ConductorJacket{0,1} , ConductorLength{0,1} , ConductorConnectionMechanism{0,1} , OCPD{0,1} , SideOfPanelOcpdWhereConnected{0,1} , WirewaySegmentIdRef* , EquipmentGround{0,1}
Children	Conductor, ConductorConnectionMechanism, ConductorJacket, ConductorLength, ConductorSize, CurrentType, EquipmentGround, Name, OCPD, SideOfPanelOcpdWhereConnected, WirewaySegmentIdRef
Instance	<OutputCircuit EquipmentWhereConnectedIdRef="" xmlns="http://www.iepmodel.net"> <Name>{0,1}</Name> <CurrentType>{0,1}</CurrentType> <Conductor>{0,1}</Conductor> <ConductorSize>{1,1}</ConductorSize> <ConductorJacket>{0,1}</ConductorJacket> <ConductorLength>{0,1}</ConductorLength> <ConductorConnectionMechanism>{0,1}</ConductorConnectionMechanism> <OCPD>{0,1}</OCPD> <SideOfPanelOcpdWhereConnected>{0,1}</SideOfPanelOcpdWhereConnected> <WirewaySegmentIdRef>{0,unbounded}</WirewaySegmentIdRef>

<table>
<tr><td></td><td><pre> <EquipmentGround>{0,1}</EquipmentGround>
</OutputCircuit></pre></td></tr>
<tr><td>Attributes</td><td>
<table>
<tr><th>QName</th><th>Type</th><th>Fixed</th><th>Default</th><th>Use</th></tr>
<tr><td>EquipmentWhereConnectedIdRef</td><td></td><td></td><td></td><td>optional</td></tr>
<tr><td></td><td colspan="4">In cases where the CircuitConnection element is used within an EquipmentInstance that does not have a parent element to which the CircuitConnection is assumed to connect, a reference ID can be used to associate this CircuitConnection to another EquipmentInstance elsewhere in a document instance. For example, a PvSystem may have an AcPointOfConnection that uses a new ElectricalPanel as an AC combiner for more than one Inverter. The new electrical panel can be described by an ElectricalPanel element in the PvDesign (which in turn refers to an ElectricalPanelDefinition element).

in the AcPointOfConnection's EquipmentWhereConnected element. That ElectricPanel's EnergizingCircuitConnection element may reference another ElectricPanel in an instance of the Project's ExistingElectricalHierarchy element.</td></tr>
</table>
</td></tr>
<tr><td>Source</td><td><pre><xs:element name="OutputCircuit" type="CircuitConnectionType">
  <xs:annotation>
    <xs:documentation>Output from the Combiner to its parent (inverter or sub-combiner).</
xs:documentation>
  </xs:annotation>
</xs:element></pre></td></tr>
</table>

Element CombinerType / CombinerInput

Namespace	No namespace
Annotations	Combiner output can be an input to another combiner. Outputs from this combiner element are "recombined" at the combiner in which this element is found.

Diagram	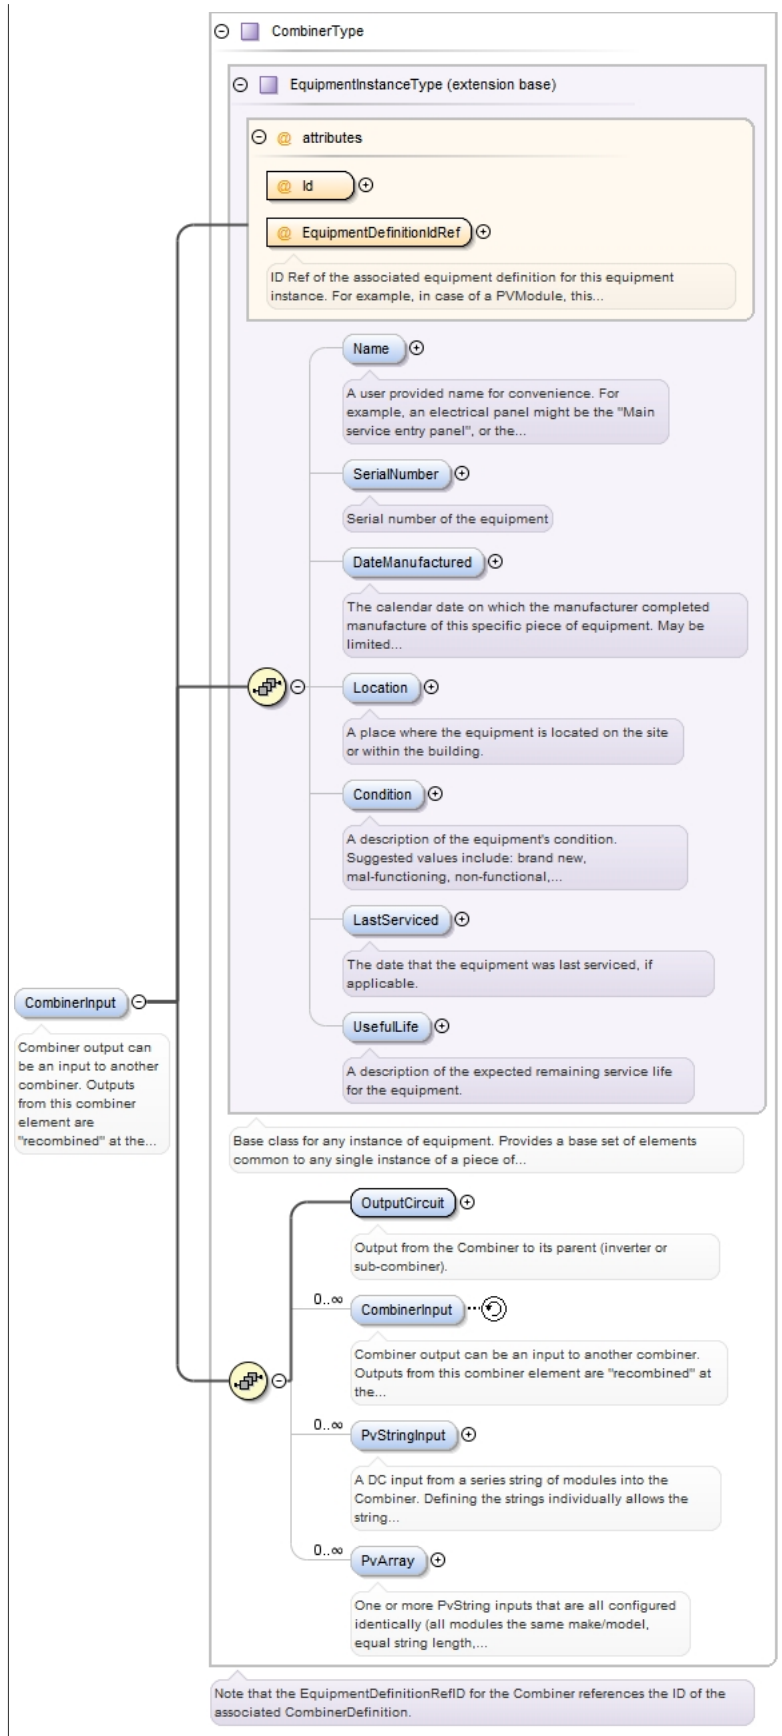
Type	CombinerType
Type hierarchy	• EquipmentInstanceType

	• CombinerType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Name{0,1} , SerialNumber{0,1} , DateManufactured{0,1} , Location{0,1} , Condition{0,1} , LastServiced{0,1} , UsefulLife{0,1} , OutputCircuit , CombinerInput* , PvStringInput* , PvArray*
Children	CombinerInput, Condition, DateManufactured, LastServiced, Location, Name, OutputCircuit, PvArray, PvStringInput, SerialNumber, UsefulLife

Instance

```
<CombinerInput EquipmentDefinitionIdRef="" Id="" xmlns="http://www.iepmodel.net">
  <Name>{0,1}</Name>
  <SerialNumber>{0,1}</SerialNumber>
  <DateManufactured>{0,1}</DateManufactured>
  <Location>{0,1}</Location>
  <Condition>{0,1}</Condition>
  <LastServiced>{0,1}</LastServiced>
  <UsefulLife>{0,1}</UsefulLife>
  <OutputCircuit EquipmentWhereConnectedIdRef="">{1,1}</OutputCircuit>
  <CombinerInput EquipmentDefinitionIdRef="" Id="">{0,unbounded}</CombinerInput>
  <PvStringInput>{0,unbounded}</PvStringInput>
  <PvArray Id="" LayoutPlaneIdRef="" ModuleDefinitionIdRef="">{0,unbounded}</PvArray>
</CombinerInput>
```

Attributes

QName	Type	Fixed	Default	Use
EquipmentDefinitionIdRef	IDREF			required
	ID Ref of the associated equipment definition for this equipment instance. For example, in case of a PVModule, this would be the ID of the PvModuleDefinition element that describes this particular PV module instance.			
Id	xs:ID			required

Source

```
<xs:element maxOccurs="unbounded" minOccurs="0" name="CombinerInput" type="CombinerType">
  <xs:annotation>
    <xs:documentation>Combiner output can be an input to another combiner. Outputs from this combiner element are "recombined" at the combiner in which this element is found.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element CombinerType / PvStringInput

Namespace	No namespace
Annotations	A DC input from a series string of modules into the Combiner. Defining the strings individually allows the string definitions to vary.
Diagram	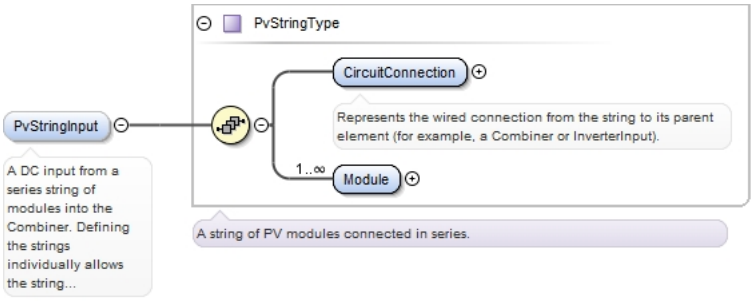
Type	PvStringType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	CircuitConnection , Module+
Children	CircuitConnection, Module

Instance

```
<PvStringInput>
  <CircuitConnection EquipmentWhereConnectedIdRef="">{1,1}</CircuitConnection>
  <Module EquipmentDefinitionIdRef="" Id="" LayoutPlaneIdRef="">{1,unbounded}</Module>
</PvStringInput>
```

Source

```
<xs:element maxOccurs="unbounded" minOccurs="0" name="PvStringInput" type="PvStringType">
```

```
  <xs:annotation>
    <xs:documentation>A DC input from a series string of modules into the Combiner.
 Defining the strings individually allows the string definitions to vary.</
xs:documentation>
  </xs:annotation>
</xs:element>
```

Element CombinerType / PvArray

Namespace	No namespace
Annotations	One or more PvString inputs that are all configured identically (all modules the same make/model, equal string length, and share the same LayoutPlane). The PvArray element provides an alternate, and simpler means of defining a set of identical strings than using the PvString element which lists every module individually, making it quite verbose. The PvArray defines a single string and how many of them there are. NOTE: Must consider total number of strings to be separate inputs into the combiner.
Diagram	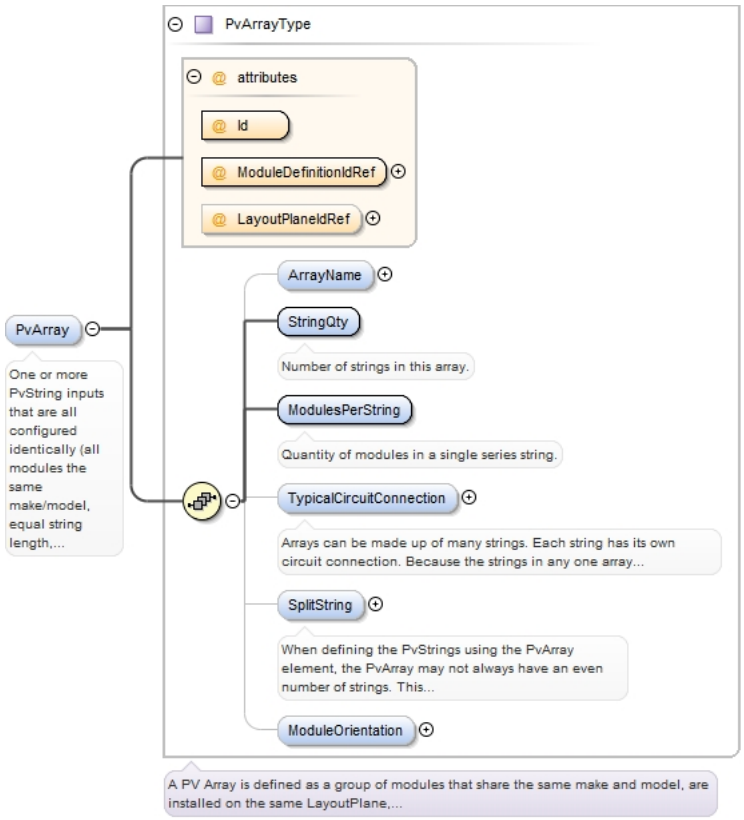
Type	PvArrayType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	ArrayName{0,1} , StringQty , ModulesPerString , TypicalCircuitConnection{0,1} , SplitString{0,1} , ModuleOrientation{0,1}
Children	ArrayName, ModuleOrientation, ModulesPerString, SplitString, StringQty, TypicalCircuitConnection

Instance	`<PvArray Id="" LayoutPlaneIdRef="" ModuleDefinitionIdRef="">`
	`  <ArrayName>{0,1}</ArrayName>`
	`  <StringQty>{1,1}</StringQty>`
	`  <ModulesPerString>{1,1}</ModulesPerString>`
	`  <TypicalCircuitConnection EquipmentWhereConnectedIdRef="">{0,1}</TypicalCircuitConnection>`
	`  <SplitString>{0,1}</SplitString>`
	`  <ModuleOrientation>{0,1}</ModuleOrientation>`
	`</PvArray>`

Attributes

QName	Type	Fixed	Default	Use
Id				required
LayoutPlaneIdRef	xs:IDREF			optional

	QName	Type	Fixed	Default	Use
	ModuleDefinitionIdRefs	xs:IDREF			required

Source

```
<xs:element name="PvArray" type="PvArrayType" maxOccurs="unbounded" minOccurs="0">
  <xs:annotation>
    <xs:documentation>One or more PvString inputs that are all configured identically (all
 modules the same make/model, equal string length, and share the same LayoutPlane). The
 PvArray element provides an alternate, and simpler means of defining a set of identical
 strings than using the PvString element which lists every module individually, making
 it quite verbose. The PvArray defines a single string and how many of them there are.
 NOTE: Must consider total number of strings to be separate inputs into the combiner.</
xs:documentation>
  </xs:annotation>
</xs:element>
```

Element PvArrayType / ArrayName

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0
Source	`<xs:element minOccurs="0" name="ArrayName" type="xs:string"/>`

Element PvArrayType / StringQty

Namespace	No namespace
Annotations	Number of strings in this array.
Diagram	

Source	`<xs:element name="StringQty">`
	`  <xs:annotation>`
	`  <xs:documentation>Number of strings in this array.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element PvArrayType / ModulesPerString

Namespace	No namespace
Annotations	Quantity of modules in a single series string.
Diagram	

Source	`<xs:element name="ModulesPerString">`
	`  <xs:annotation>`
	`  <xs:documentation>Quantity of modules in a single series string.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element PvArrayType / TypicalCircuitConnection

Namespace	No namespace
Annotations	Arrays can be made up of many strings. Each string has its own circuit connection. Because the strings in any one array are almost always connected to their parent element in a common way, this TypicalCircuitConnection element defines the commonly used connection approach from any one of the strings to the parent element (a combiner, or inverter).

Diagram	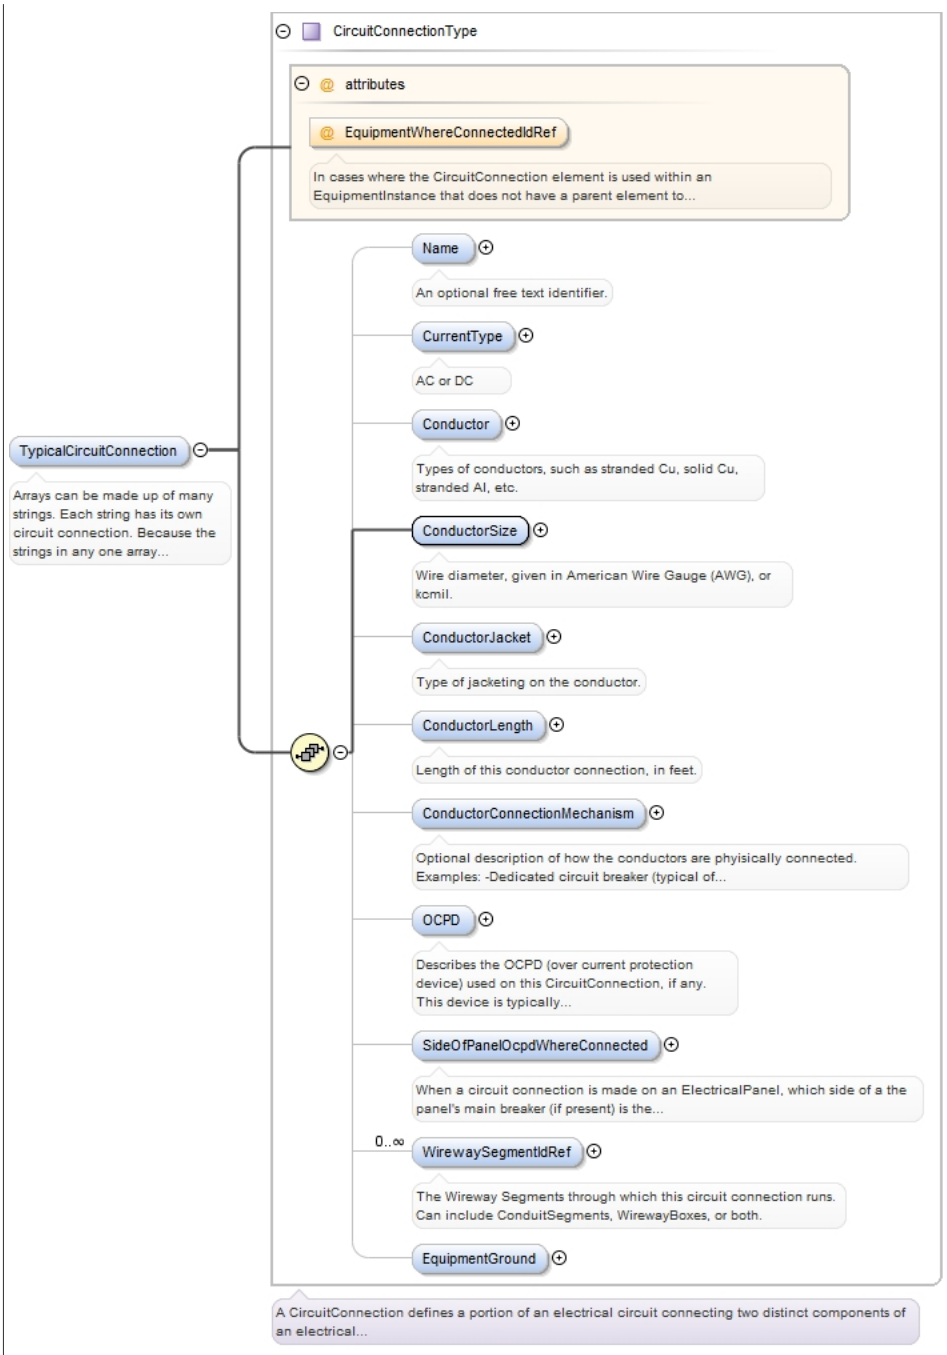
Type	CircuitConnectionType
Properties	content: complex minOccurs: 0
Model	Name{0,1} , CurrentType{0,1} , Conductor{0,1} , ConductorSize , ConductorJacket{0,1} , ConductorLength{0,1} , ConductorConnectionMechanism{0,1} , OCPD{0,1} , SideOfPanelOcpdWhereConnected{0,1} , WirewaySegmentIdRef* , EquipmentGround{0,1}
Children	Conductor, ConductorConnectionMechanism, ConductorJacket, ConductorLength, ConductorSize, CurrentType, EquipmentGround, Name, OCPD, SideOfPanelOcpdWhereConnected, WirewaySegmentIdRef
Instance	<TypicalCircuitConnection EquipmentWhereConnectedIdRef="" xmlns="http://www.iepmodel.net"> <Name>{0,1}</Name> <CurrentType>{0,1}</CurrentType> <Conductor>{0,1}</Conductor> <ConductorSize>{1,1}</ConductorSize> <ConductorJacket>{0,1}</ConductorJacket> <ConductorLength>{0,1}</ConductorLength> <ConductorConnectionMechanism>{0,1}</ConductorConnectionMechanism> <OCPD>{0,1}</OCPD>

```
  <SideOfPanelOcpdWhereConnected>{0,1}</SideOfPanelOcpdWhereConnected>
  <WirewaySegmentIdRef>{0,unbounded}</WirewaySegmentIdRef>
  <EquipmentGround>{0,1}</EquipmentGround>
</TypicalCircuitConnection>
```

Attributes

QName	Type	Fixed	Default	Use
EquipmentWhereConnectedIdRef				optional

In cases where the CircuitConnection element is used within an EquipmentInstance that does not have a parent element to which the CircuitConnection is assumed to connect, a reference ID can be used to associate this CircuitConnection to another EquipmentInstance elsewhere in a document instance. For example, a PvSystem may have an AcPointOfConnection that uses a new ElectricalPanel as an AC combiner for more than one Inverter. The new electrical panel can be described by an ElectricalPanel element in the PvDesign (which in turn refers to an ElectricalPanelDefinition element).

in the AcPointOfConnection's EquipmentWhereConnected element. That ElectricPanel's EnergizingCircuitConnection element may reference another ElectricPanel in an instance of the Project's ExistingElectricalHierarchy element.

Source

```
<xs:element name="TypicalCircuitConnection" minOccurs="0" type="CircuitConnectionType">
  <xs:annotation>
    <xs:documentation>Arrays can be made up of many strings. Each string has its own
 circuit connection. Because the strings in any one array are almost always connected to
 their parent element in a common way, this TypicalCircuitConnection element defines the
 commonly used connection approach from any one of the strings to the parent element (a
 combiner, or inverter).</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element PvArrayType / SplitString

Namespace	No namespace
Annotations	When defining the PvStrings using the PvArray element, the PvArray may not always have an even number of strings. This type allows a partial string to be included in an array, noting how many modules of the total string length are in this array, and setting a reference to another array where the remainder of the string is included.
Diagram	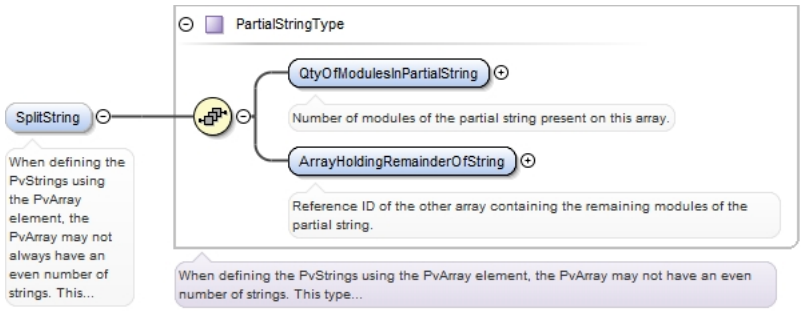
Type	PartialStringType
Properties	content: complex minOccurs: 0
Model	QtyOfModulesInPartialString , ArrayHoldingRemainderOfString
Children	ArrayHoldingRemainderOfString, QtyOfModulesInPartialString
Instance	<SplitString> <QtyOfModulesInPartialString>{1,1}</QtyOfModulesInPartialString> <ArrayHoldingRemainderOfString>{1,1}</ArrayHoldingRemainderOfString> </SplitString>
Source	<xs:element minOccurs="0" name="SplitString" type="PartialStringType"> <xs:annotation> <xs:documentation>When defining the PvStrings using the PvArray element, the PvArray may not always have an even number of strings. This type allows a partial string to be included in an array, noting how many modules of the total string length are in this array, and setting a reference to another array where the remainder of the string is included.</xs:documentation> </xs:annotation> </xs:element>

Element PartialStringType / QtyOfModulesInPartialString

Namespace	No namespace
Annotations	Number of modules of the partial string present on this array.
Diagram	
Type	xs:integer
Properties	content: simple
Source	<xs:element name="QtyOfModulesInPartialString" type="xs:integer"> <xs:annotation> <xs:documentation>Number of modules of the partial string present on this array.</xs:documentation> </xs:annotation> </xs:element>

Element PartialStringType / ArrayHoldingRemainderOfString

Namespace	No namespace
Annotations	Reference ID of the other array containing the remaining modules of the partial string.
Diagram	
Type	xs:IDREF
Properties	content: simple
Source	<xs:element name="ArrayHoldingRemainderOfString" type="xs:IDREF"> <xs:annotation> <xs:documentation>Reference ID of the other array containing the remaining modules of the partial string.</xs:documentation> </xs:annotation> </xs:element>

Element PvArrayType / ModuleOrientation

Namespace	No namespace
Diagram	
Type	PvModuleOrientationEnumType
Properties	content: simple minOccurs: 0
Facets	enumeration Portrait enumeration Landscape
Source	<xs:element minOccurs="0" name="ModuleOrientation" type="PvModuleOrientationEnumType"/>

Element PowerPointTrackerType / MultiCircuitInput

Namespace	No namespace
Annotations	An optional means of defining multiple identical input circuits into an inverter's PPT. Instead of individual circuits, it contains a single definition of a PvArray's set of identical strings. The MultiCircuitInput can include more than one set of PvArray inputs, provided the inverter can support them. In most cases an inverter will only support the inputs from a single PvArray element. Since a PvArray is defined as a set of modules that share the same LayoutPlane, there may be occasions where one string might define a PvArray, and a second string defines another PvArray, making two separate PvArray elements that each feed only a single string into the PPT. NOTE: not relevant in use of micro-inverter architectures where the inverter always has a single circuit input.

Diagram	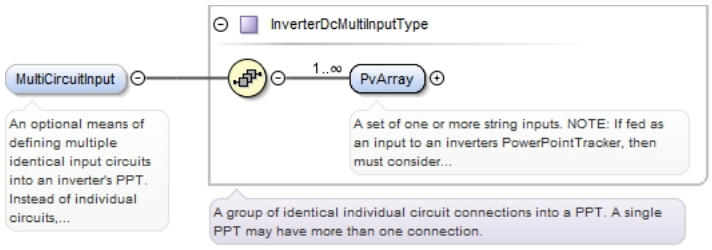
Type	InverterDcMultiInputType
Properties	content: complex minOccurs: 0
Model	PvArray+
Children	PvArray

Instance	`<MultiCircuitInput>`
	`  <PvArray Id="" LayoutPlaneIdRef="" ModuleDefinitionIdRef="">{1,unbounded}</PvArray>`
	`</MultiCircuitInput>`

Source	`<xs:element minOccurs="0" name="MultiCircuitInput" type="InverterDcMultiInputType">` `  <xs:annotation>` ` <xs:documentation>An optional means of defining multiple identical input circuits into an inverter's PPT. Instead of individual circuits, it contains a single definition of a PvArray's set of identical strings. The MultiCircuitInput can include more than one set of PvArray inputs, provided the inverter can support them. In most cases an inverter will only support the inputs from a single PvArray element. Since a PvArray is defined as a set of modules that share the same LayoutPlane, there may be occasions where one string might define a PvArray, and a second string defines another PvArray, making two separate PvArray elements that each feed only a single string into the PPT. NOTE: not relevant in use of micro-inverter architectures where the inverter always has a single circuit input.</xs:documentation>` ` </xs:annotation>` `</xs:element>`

Element `InverterDcMultiInputType / PvArray`

Namespace	No namespace
Annotations	A set of one or more string inputs. NOTE: If fed as an input to an inverters PowerPointTracker, then must consider total number of strings to be separate inputs into the PPT. Make sure PPT has combiner capable of handling these separate string circuits.

Diagram	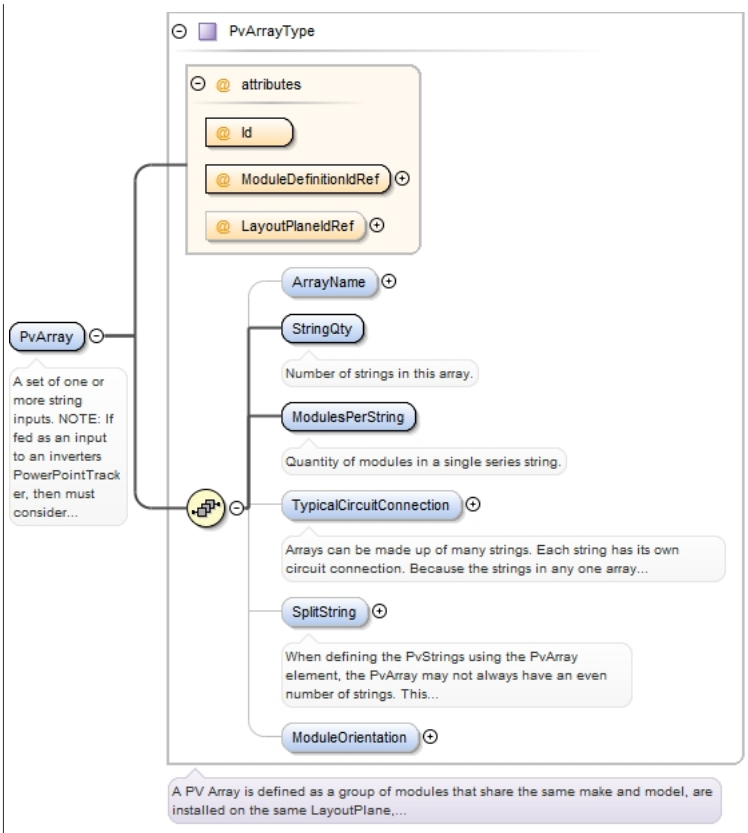
Type	PvArrayType
Properties	content: complex maxOccurs: unbounded
Model	ArrayName{0,1} , StringQty , ModulesPerString , TypicalCircuitConnection{0,1} , SplitString{0,1} , ModuleOrientation{0,1}
Children	ArrayName, ModuleOrientation, ModulesPerString, SplitString, StringQty, TypicalCircuitConnection

Instance

```
<PvArray Id="" LayoutPlaneIdRef="" ModuleDefinitionIdRef="">
  <ArrayName>{0,1}</ArrayName>
  <StringQty>{1,1}</StringQty>
  <ModulesPerString>{1,1}</ModulesPerString>
  <TypicalCircuitConnection EquipmentWhereConnectedIdRef="">{0,1}</
TypicalCircuitConnection>
  <SplitString>{0,1}</SplitString>
  <ModuleOrientation>{0,1}</ModuleOrientation>
</PvArray>
```

Attributes

QName	Type	Fixed	Default	Use
Id				required
LayoutPlaneIdRef	xs:IDREF			optional
ModuleDefinitionIdRef	xs:IDREF			required

Source

```
<xs:element name="PvArray" type="PvArrayType" maxOccurs="unbounded">
  <xs:annotation>
    <xs:documentation>A set of one or more string inputs. NOTE: If fed as an input to an
 inverters PowerPointTracker, then must consider total number of strings to be separate
 inputs into the PPT. Make sure PPT has combiner capable of handling these separate string
 circuits.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element InverterType / AcTie-InCircuitConnection

Namespace	No namespace
Annotations	The AcTie-InCircuitConnection element describes the AC side of the DC to AC Inverter. It uses the common design pattern of each electrical equipment instance having a single CircuitConnection element that describes its electrical connection to upstream electrical equipment (for example, Combiners, ElectricalPanels, etc).

	However, Inverters do not have a parent element to which the CircuitConnection refers. Instead, it relies on its optional EquipmentWhereConnectedIdRef attribute to describe the EquipmentInstance to which it is connected. For string inverters, the EquipmentWhereConnectedIdRef attribute should reference the ElectricalPanel element that represents the electrical panel where the Inverter will be (or already is) connected. In micro-inverter case, the EquipmentWhereConnectedIdRef attribute should reference the ID of the next micro-inverter in the circuit. The last inverter in the circuit will reference the electrical panel where interconnected. If the PvDesign is used independently (a PvDesign document) then the EquipmentWhereConnectedIdRef attribute should reference an ElectricalPanel element within the PvDesign element. The referenced ElectricalPanel can represent an existing electrical panel on the site, or a new panel (perhaps serving as an AC Combiner). If the PvDesign is used within a Project.xml document, and the PvDesign calls for the connection of the Inverter to an existing ElectricalPanel, the EquipmentWhereConnectedIdRef attribute should reference an ElectricalPanel element within the ExistingElectricalDistributionHierarchy element of the Site. If the PvDesign calls for the inverter to connect to a new ElectricPanel, then the EquipmentWhereConnectedIdRef attribute should reference an ElectricalPanel instance within the PvDesign itself. NOTE: If an external AC Disconnect Switch is required, it is a part of this CircuitConnection's WirewaySegments. One segment can be a disconnect type.

Diagram	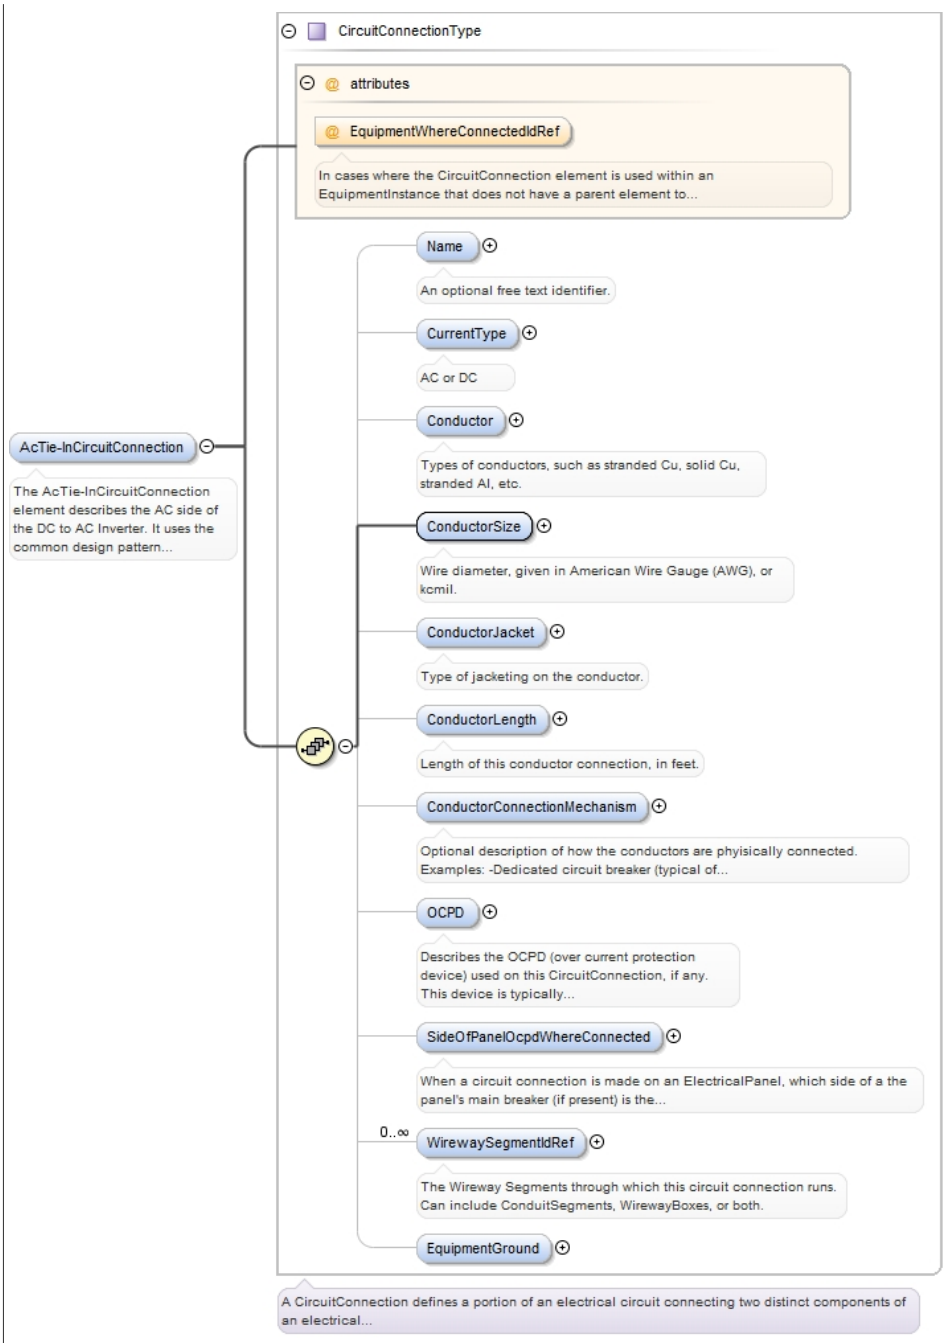
Type	CircuitConnectionType
Properties	content: complex minOccurs: 0
Model	Name{0,1} , CurrentType{0,1} , Conductor{0,1} , ConductorSize , ConductorJacket{0,1} , ConductorLength{0,1} , ConductorConnectionMechanism{0,1} , OCPD{0,1} , SideOfPanelOcpdWhereConnected{0,1} , WirewaySegmentIdRef* , EquipmentGround{0,1}
Children	Conductor, ConductorConnectionMechanism, ConductorJacket, ConductorLength, ConductorSize, CurrentType, EquipmentGround, Name, OCPD, SideOfPanelOcpdWhereConnected, WirewaySegmentIdRef
Instance	<AcTie-InCircuitConnection EquipmentWhereConnectedIdRef="" xmlns="http://www.iepmodel.net"> <Name>{0,1}</Name> <CurrentType>{0,1}</CurrentType> <Conductor>{0,1}</Conductor> <ConductorSize>{1,1}</ConductorSize> <ConductorJacket>{0,1}</ConductorJacket> <ConductorLength>{0,1}</ConductorLength> <ConductorConnectionMechanism>{0,1}</ConductorConnectionMechanism> <OCPD>{0,1}</OCPD>

<table>
<tr><td></td><td>

```
  <SideOfPanelOcpdWhereConnected>{0,1}</SideOfPanelOcpdWhereConnected>
  <WirewaySegmentIdRef>{0,unbounded}</WirewaySegmentIdRef>
  <EquipmentGround>{0,1}</EquipmentGround>
</AcTie-InCircuitConnection>
```

</td></tr>
<tr><td>Attributes</td><td>
<table>
<tr><th>QName</th><th>Type</th><th>Fixed</th><th>Default</th><th>Use</th></tr>
<tr><td>EquipmentWhereConnectedIdRef</td><td></td><td></td><td></td><td>optional</td></tr>
<tr><td></td><td colspan="4">In cases where the CircuitConnection element is used within an EquipmentInstance that does not have a parent element to which the CircuitConnection is assumed to connect, a reference ID can be used to associate this CircuitConnection to another EquipmentInstance elsewhere in a document instance. For example, a PvSystem may have an AcPointOfConnection that uses a new ElectricalPanel as an AC combiner for more than one Inverter. The new electrical panel can be described by an ElectricalPanel element in the PvDesign (which in turn refers to an ElectricalPanelDefinition element).

in the AcPointOfConnection's EquipmentWhereConnected element. That ElectricPanel's EnergizingCircuitConnection element may reference another ElectricPanel in an instance of the Project's ExistingElectricalHierarchy element.</td></tr>
</table>
</td></tr>
<tr><td>Source</td><td>

```
<xs:element name="AcTie-InCircuitConnection" type="CircuitConnectionType" minOccurs="0">
  <xs:annotation>
    <xs:documentation>The AcTie-InCircuitConnection element describes the AC side of
 the DC to AC Inverter. It uses the common design pattern of each electrical equipment
 instance having a single CircuitConnection element that describes its electrical
 connection to upstream electrical equipment (for example, Combiners, ElectricalPanels,
 etc). However, Inverters do not have a parent element to which the CircuitConnection
 refers. Instead, it relies on its optional EquipmentWhereConnectedIdRef attribute to
 describe the EquipmentInstance to which it is connected. For string inverters, the
 EquipmentWhereConnectedIdRef attribute should reference the ElectricalPanel element
 that represents the electrical panel where the Inverter will be (or already is)
 connected. In micro-inverter case, the EquipmentWhereConnectedIdRef attribute should
 reference the ID of the next micro-inverter in the circuit. The last inverter in the
 circuit will reference the electrical panel where interconnected. If the PvDesign
 is used independently (a PvDesign document) then the EquipmentWhereConnectedIdRef
 attribute should reference an ElectricalPanel element within the PvDesign element.
 The referenced ElectricalPanel can represent an existing electrical panel on the site,
 or a new panel (perhaps serving as an AC Combiner). If the PvDesign is used within a
 Project.xml document, and the PvDesign calls for the connection of the Inverter to an
 existing ElectricalPanel, the EquipmentWhereConnectedIdRef attribute should reference
 an ElectricalPanel element within the ExistingElectricalDistributionHierarchy element of
 the Site. If the PvDesign calls for the inverter to connect to a new ElectricPanel, then
 the EquipmentWhereConnectedIdRef attribute should reference an ElectricalPanel instance
 within the PvDesign itself. NOTE: If an external AC Disconnect Switch is required, it
 is a part of this CircuitConnection's WirewaySegments. One segment can be a disconnect
 type.</xs:documentation>
  </xs:annotation>
</xs:element>
```

</td></tr>
</table>

Element PvDesignType / ElectricalPanel

<table>
<tr><td>Namespace</td><td>No namespace</td></tr>
<tr><td>Annotations</td><td>

```
Optional. The ElectricalPanel on which an Inverter can make its AC system tie-in. May also
 include parent ElectricalPanels.

Use of this element is somewhat dependent on what XSDs are used. This element is always
 used to describe a new electrical panel which will be added to a site to accommodate the
 addition of a PV system (perhaps serving as an AC Combiner). If PvDesign xml document
 is used independently from a broader Project XML document, then this element can also be
 used to define existing ElectricalPanel(s) where the PV system may be interconnected.

This element is not required when the PvDesign is used within a broader Project XML
 instance that contains an ExistingElectricalDitributionHierarchy and the PvDesign's
 Inverter(s) are to be connected to the ElectricalPanel(s) defined there.

NOTE: The EquipmentWhereConnectedIdRef within the Inverter's AcCircuitConnection
 should reference either this element, or a similar ElectricalPanel instance within an
 ExistingElectricalDistributionHierarchy element of a Project.xml.

NOTE: A PvDesign cannot be used within an ElectricalDistributionHierarchy
 element. It can only be associated with an ElectricalDistributionHierarchy via
 EquipmentWhereConnectedIdRef attribute of the Inverter's AcTie-InCircuitConnection
 element.
```

</td></tr>
</table>

Diagram

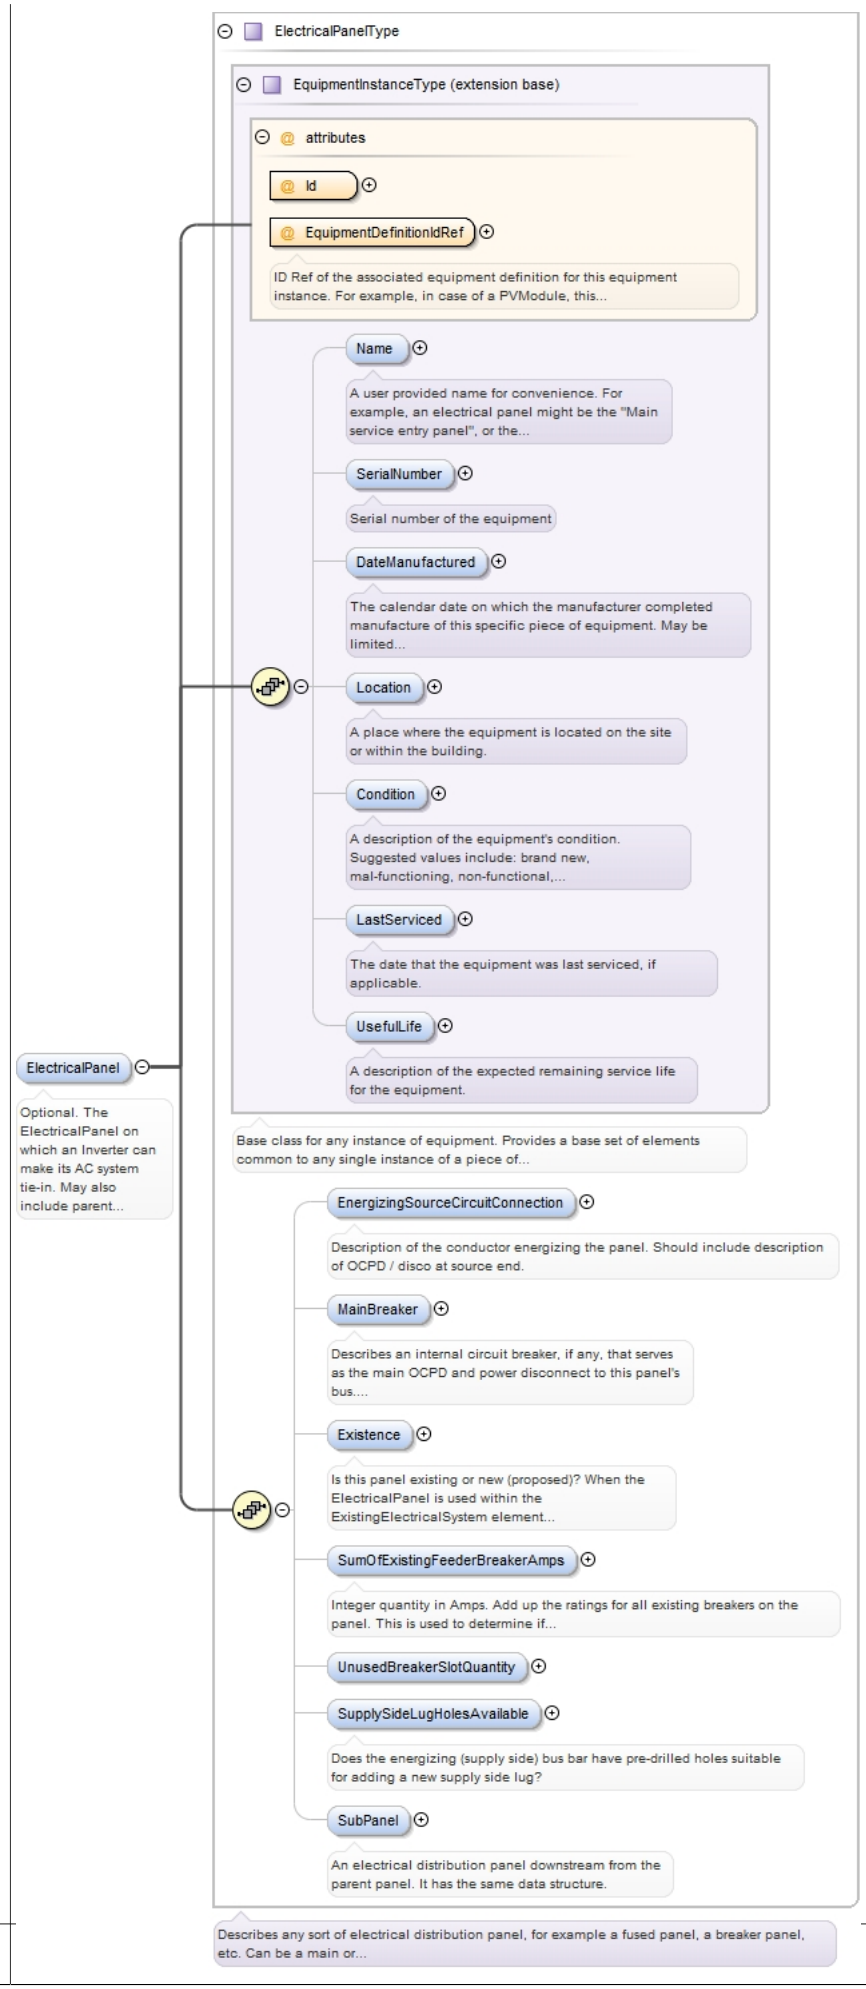
ElectricalPanelType
EquipmentInstanceType (extension base)
attributes
Id
EquipmentDefinitionIdRef
ID Ref of the associated equipment definition for this equipment instance. For example, in case of a PVModule, this...
Name
A user provided name for convenience. For example, an electrical panel might be the "Main service entry panel", or the...
SerialNumber
Serial number of the equipment
DateManufactured
The calendar date on which the manufacturer completed manufacture of this specific piece of equipment. May be limited...
Location
A place where the equipment is located on the site or within the building.
Condition
A description of the equipment's condition. Suggested values include: brand new, mal-functioning, non-functional,...
LastServiced
The date that the equipment was last serviced, if applicable.
UsefulLife
A description of the expected remaining service life for the equipment.
Base class for any instance of equipment. Provides a base set of elements common to any single instance of a piece of...
ElectricalPanel
Optional. The ElectricalPanel on which an Inverter can make its AC system tie-in. May also include parent...
EnergizingSourceCircuitConnection
Description of the conductor energizing the panel. Should include description of OCPD / disco at source end.
MainBreaker
Describes an internal circuit breaker, if any, that serves as the main OCPD and power disconnect to this panel's bus....
Existence
Is this panel existing or new (proposed)? When the ElectricalPanel is used within the ExistingElectricalSystem element...
SumOfExistingFeederBreakerAmps
Integer quantity in Amps. Add up the ratings for all existing breakers on the panel. This is used to determine if...
UnusedBreakerSlotQuantity
SupplySideLugHolesAvailable
Does the energizing (supply side) bus bar have pre-drilled holes suitable for adding a new supply side lug?
SubPanel
An electrical distribution panel downstream from the parent panel. It has the same data structure.
Describes any sort of electrical distribution panel, for example a fused panel, a breaker panel, etc. Can be a main or...

Type	ElectricalPanelType
Type hierarchy	• EquipmentInstanceType • ElectricalPanelType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Name{0,1} , SerialNumber{0,1} , DateManufactured{0,1} , Location{0,1} , Condition{0,1} , LastServiced{0,1} , UsefulLife{0,1} , EnergizingSourceCircuitConnection{0,1} , MainBreaker{0,1} , Existence{0,1} , SumOfExistingFeederBreakerAmps{0,1} , UnusedBreakerSlotQuantity{0,1} , SupplySideLugHolesAvailable{0,1} , SubPanel{0,1}
Children	Condition, DateManufactured, EnergizingSourceCircuitConnection, Existence, LastServiced, Location, MainBreaker, Name, SerialNumber, SubPanel, SumOfExistingFeederBreakerAmps, SupplySideLugHolesAvailable, UnusedBreakerSlotQuantity, UsefulLife

Instance

```
<ElectricalPanel EquipmentDefinitionIdRef="" Id="" xmlns="http://www.iepmodel.net">
  <Name>{0,1}</Name>
  <SerialNumber>{0,1}</SerialNumber>
  <DateManufactured>{0,1}</DateManufactured>
  <Location>{0,1}</Location>
  <Condition>{0,1}</Condition>
  <LastServiced>{0,1}</LastServiced>
  <UsefulLife>{0,1}</UsefulLife>
  <EnergizingSourceCircuitConnection EquipmentWhereConnectedIdRef="">{0,1}</
EnergizingSourceCircuitConnection>
  <MainBreaker>{0,1}</MainBreaker>
  <Existence>{0,1}</Existence>
  <SumOfExistingFeederBreakerAmps>{0,1}</SumOfExistingFeederBreakerAmps>
  <UnusedBreakerSlotQuantity>{0,1}</UnusedBreakerSlotQuantity>
  <SupplySideLugHolesAvailable>{0,1}</SupplySideLugHolesAvailable>
  <SubPanel EquipmentDefinitionIdRef="" Id="">{0,1}</SubPanel>
</ElectricalPanel>
```

Attributes

QName	Type	Fixed	Default	Use
EquipmentDefinitionIdRef	IDREF			required
	ID Ref of the associated equipment definition for this equipment instance. For example, in case of a PVModule, this would be the ID of the PvModuleDefinition element that describes this particular PV module instance.			
Id	xs:ID			required

Source

```
<xs:element maxOccurs="unbounded" minOccurs="0" name="ElectricalPanel"
 type="ElectricalPanelType">
  <xs:annotation>
    <xs:documentation>Optional. The ElectricalPanel on which an Inverter can make its
 AC system tie-in. May also include parent ElectricalPanels. Use of this element is
 somewhat dependent on what XSDs are used. This element is always used to describe a new
 electrical panel which will be added to a site to accommodate the addition of a PV system
 (perhaps serving as an AC Combiner). If PvDesign xml document is used independently from
 a broader Project XML document, then this element can also be used to define existing
 ElectricalPanel(s) where the PV system may be interconnected. This element is not
 required when the PvDesign is used within a broader Project XML instance that contains an
 ExistingElectricalDitributionHierarchy and the PvDesign's Inverter(s) are to be connected
 to the ElectricalPanel(s) defined there. NOTE: The EquipmentWhereConnectedIdRef within
 the Inverter's AcCircuitConnection should reference either this element, or a similar
 ElectricalPanel instance within an ExistingElectricalDistributionHierarchy element of a
 Project.xml. NOTE: A PvDesign cannot be used within an ElectricalDistributionHierarchy
 element. It can only be associated with an ElectricalDistributionHierarchy via
 EquipmentWhereConnectedIdRef attribute of the Inverter's AcTie-InCircuitConnection
 element.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element PvDesignType / WirewaySegment

Namespace	No namespace
Annotations	Collection of all conduit segments and wireway boxes used in this design. Note that if the PvDesign is used in an IEPM Project file, this collection of Wireway Segments does not reference any ExistingWirewaySegments or ProposedWirewaySegments defined in the Site element. Those elements are used for site survey data collection, not system definition.

Diagram	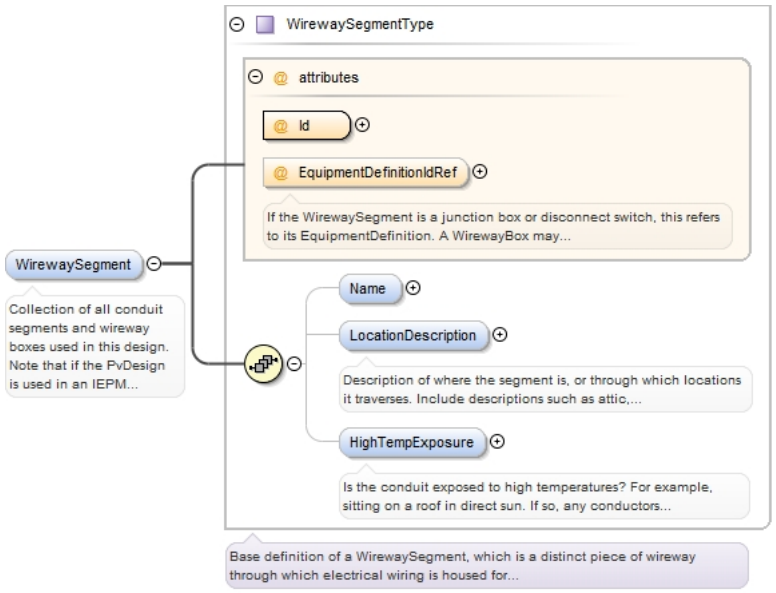
Type	WirewaySegmentType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Name{0,1} , LocationDescription{0,1} , HighTempExposure{0,1}
Children	HighTempExposure, LocationDescription, Name

Instance	`<WirewaySegment EquipmentDefinitionIdRef="" Id="" xmlns="http://www.iepmodel.net">`
	`  <Name>{0,1}</Name>`
	`  <LocationDescription>{0,1}</LocationDescription>`
	`  <HighTempExposure>{0,1}</HighTempExposure>`
	`</WirewaySegment>`

Attributes

QName	Type	Fixed	Default	Use
EquipmentDefinitionIdRef	IDREF			optional
	If the WirewaySegment is a junction box or disconnect switch, this refers to its EquipmentDefinition. A WirewayBox may be a pass through where multiple ConduitSegments are combined into a single ConduitSegment for example. A disconnect switch box may also be modeled as a WirewayBox, provided that the circuit(s) involved are simply disoconnected and not combined in any way. DO NOT use WirewayBox to represent a combiner, or distribution panel.			
Id	xs:ID			required

Source

```
<xs:element name="WirewaySegment" type="WirewaySegmentType" minOccurs="0"
 maxOccurs="unbounded">
  <xs:annotation>
    <xs:documentation>Collection of all conduit segments and wireway boxes used
 in this design. Note that if the PvDesign is used in an IEPM Project file, this
 collection of Wireway Segments does not reference any ExistingWirewaySegments or
 ProposedWirewaySegments defined in the Site element. Those elements are used for site
 survey data collection, not system definition.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element PvDesignType / LayoutPlane

Namespace	No namespace
Annotations	Collection of all of the layout planes used in this design. Note that if the PvDesign is used in an IEPM Project file, this collection of LayoutPlanes does not reference any LayoutPlane defined in the Site-Building-Envelope-Roof element. LayoutPlane element(s) defined for a Roof element can be used in a PvDesign as the plane on which modules are installed. The PvDesign would include those LayoutPlane elements here, rather than referencing them as a part of the Building's Roof inside the Project's Site element. The LayoutPlane elements in the Roof are primarily used for site survey data collection, not system definition.

Diagram	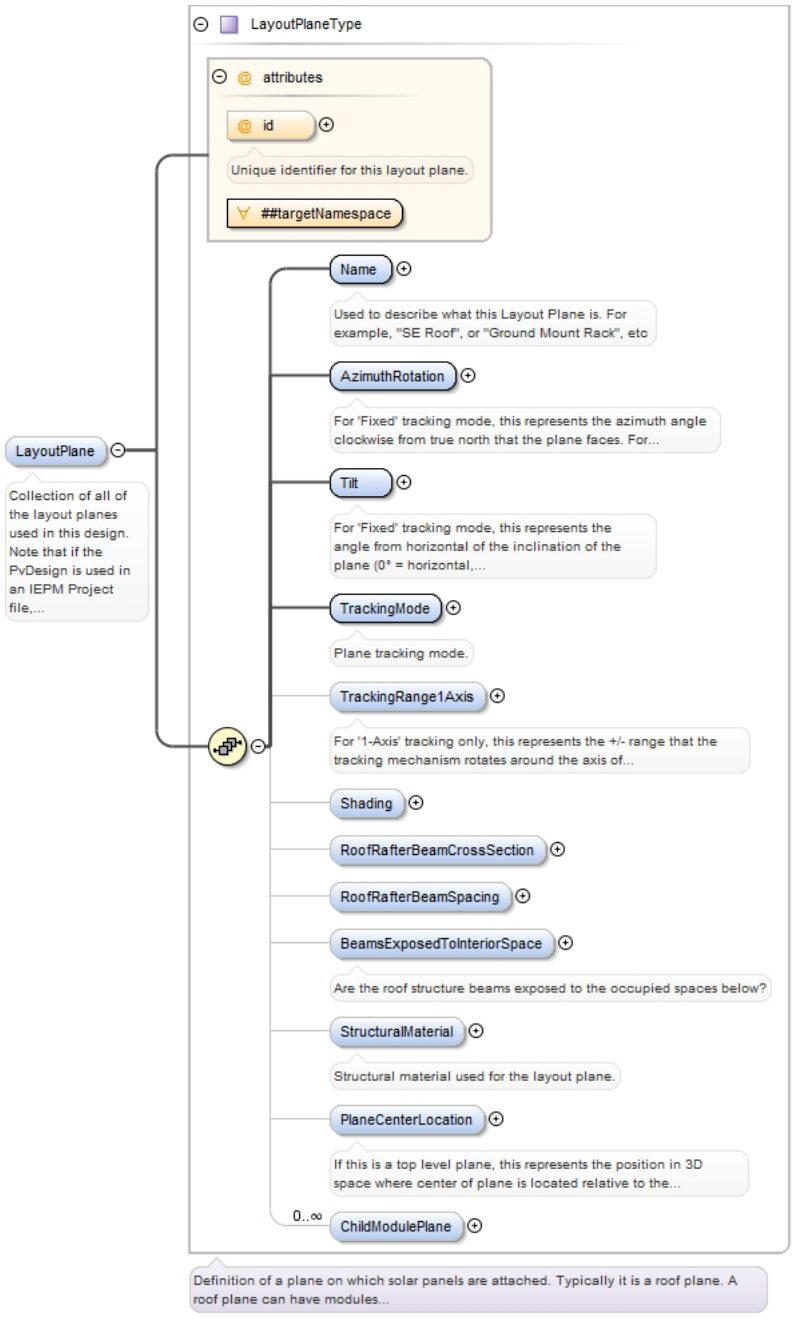
Type	LayoutPlaneType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Name , AzimuthRotation , Tilt , TrackingMode , TrackingRange1Axis{0,1} , Shading{0,1} , RoofRafterBeamCrossSection{0,1} , RoofRafterBeamSpacing{0,1} , BeamsExposedToInteriorSpace{0,1} , StructuralMaterial{0,1} , PlaneCenterLocation{0,1} , ChildModulePlane*
Children	AzimuthRotation, BeamsExposedToInteriorSpace, ChildModulePlane, Name, PlaneCenterLocation, RoofRafterBeamCrossSection, RoofRafterBeamSpacing, Shading, StructuralMaterial, Tilt, TrackingMode, TrackingRange1Axis
Instance	<LayoutPlane id="" xmlns="http://www.iepmodel.net"> <Name>{1,1}</Name> <AzimuthRotation>{1,1}</AzimuthRotation> <Tilt>{1,1}</Tilt> <TrackingMode>{1,1}</TrackingMode> <TrackingRange1Axis>{0,1}</TrackingRange1Axis> <Shading>{0,1}</Shading> <RoofRafterBeamCrossSection>{0,1}</RoofRafterBeamCrossSection>

```
  <RoofRafterBeamSpacing>{0,1}</RoofRafterBeamSpacing>
  <BeamsExposedToInteriorSpace>{0,1}</BeamsExposedToInteriorSpace>
  <StructuralMaterial>{0,1}</StructuralMaterial>
  <PlaneCenterLocation>{0,1}</PlaneCenterLocation>
  <ChildModulePlane id="">{0,unbounded}</ChildModulePlane>
</LayoutPlane>
```

Attributes

QName	Type	Fixed	Default	Use
ANY attribute from TARGET namespace 'http://www.iepmodel.net'				
id	xs:ID			optional
	Unique identifier for this layout plane.			

Source

```
<xs:element name="LayoutPlane" type="LayoutPlaneType" minOccurs="0" maxOccurs="unbounded">
  <xs:annotation>
    <xs:documentation>Collection of all of the layout planes used in this design. Note
 that if the PvDesign is used in an IEPM Project file, this collection of LayoutPlanes
 does not reference any LayoutPlane defined in the Site-Building-Envelope-Roof element.
 LayoutPlane element(s) defined for a Roof element can be used in a PvDesign as the plane
 on which modules are installed. The PvDesign would include those LayoutPlane elements
 here, rather than referencing them as a part of the Building's Roof inside the Project's
 Site element. The LayoutPlane elements in the Roof are primarily used for site survey
 data collection, not system definition.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element PvDesignType / Shading

Namespace	No namespace
Annotations	Any of the different methods of describing shading for this design can be defined here.
Diagram	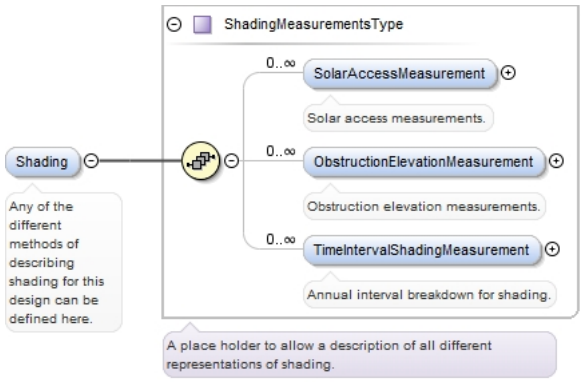
Type	ShadingMeasurementsType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	SolarAccessMeasurement* , ObstructionElevationMeasurement* , TimeIntervalShadingMeasurement*
Children	ObstructionElevationMeasurement, SolarAccessMeasurement, TimeIntervalShadingMeasurement

Instance

```
<Shading xmlns="http://www.iepmodel.net">
  <SolarAccessMeasurement>{0,unbounded}</SolarAccessMeasurement>
  <ObstructionElevationMeasurement>{0,unbounded}</ObstructionElevationMeasurement>
  <TimeIntervalShadingMeasurement>{0,unbounded}</TimeIntervalShadingMeasurement>
</Shading>
```

Source

```
<xs:element name="Shading" type="ShadingMeasurementsType" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>Any of the different methods of describing shading for this design
 can be defined here.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element PvDesignType / SceneOriginGeoTag

Namespace	No namespace

Annotations	Coordinate system geo reference origin for the system. All child components that specify 3D coordinates are in units meters relative to this location. The 3D coordinate of this origin is (0,0,0).
Diagram	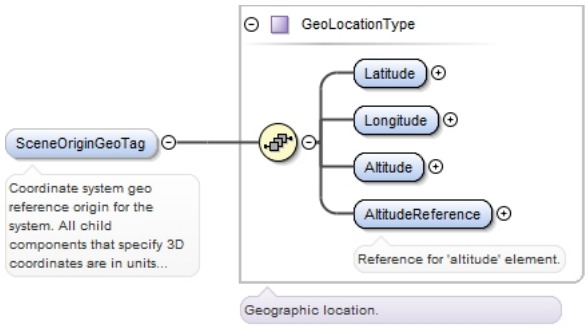
Type	GeoLocationType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	Latitude , Longitude , Altitude , AltitudeReference
Children	Altitude, AltitudeReference, Latitude, Longitude
Instance	<SceneOriginGeoTag xmlns="http://www.iepmodel.net"> <Latitude>{1,1}</Latitude> <Longitude>{1,1}</Longitude> <Altitude>{1,1}</Altitude> <AltitudeReference>{1,1}</AltitudeReference> </SceneOriginGeoTag>
Source	<xs:element name="SceneOriginGeoTag" type="GeoLocationType" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Coordinate system geo reference origin for the system. All child components that specify 3D coordinates are in units meters relative to this location. The 3D coordinate of this origin is (0,0,0).</xs:documentation> </xs:annotation> </xs:element>

Element PvDesignType / BuildingID

Namespace	No namespace
Annotations	If the system is to be installed on a building, this associates the PV System with the defined building.
Diagram	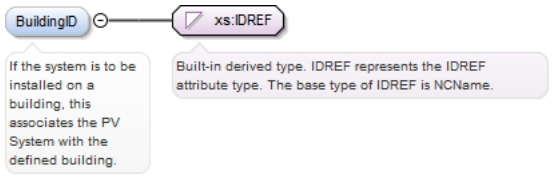
Type	xs:IDREF
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element minOccurs="0" name="BuildingID" type="xs:IDREF" maxOccurs="1"> <xs:annotation> <xs:documentation>If the system is to be installed on a building, this associates the PV System with the defined building.</xs:documentation> </xs:annotation> </xs:element>

Element SystemChoiceType / WaterHeating

Namespace	No namespace

Diagram	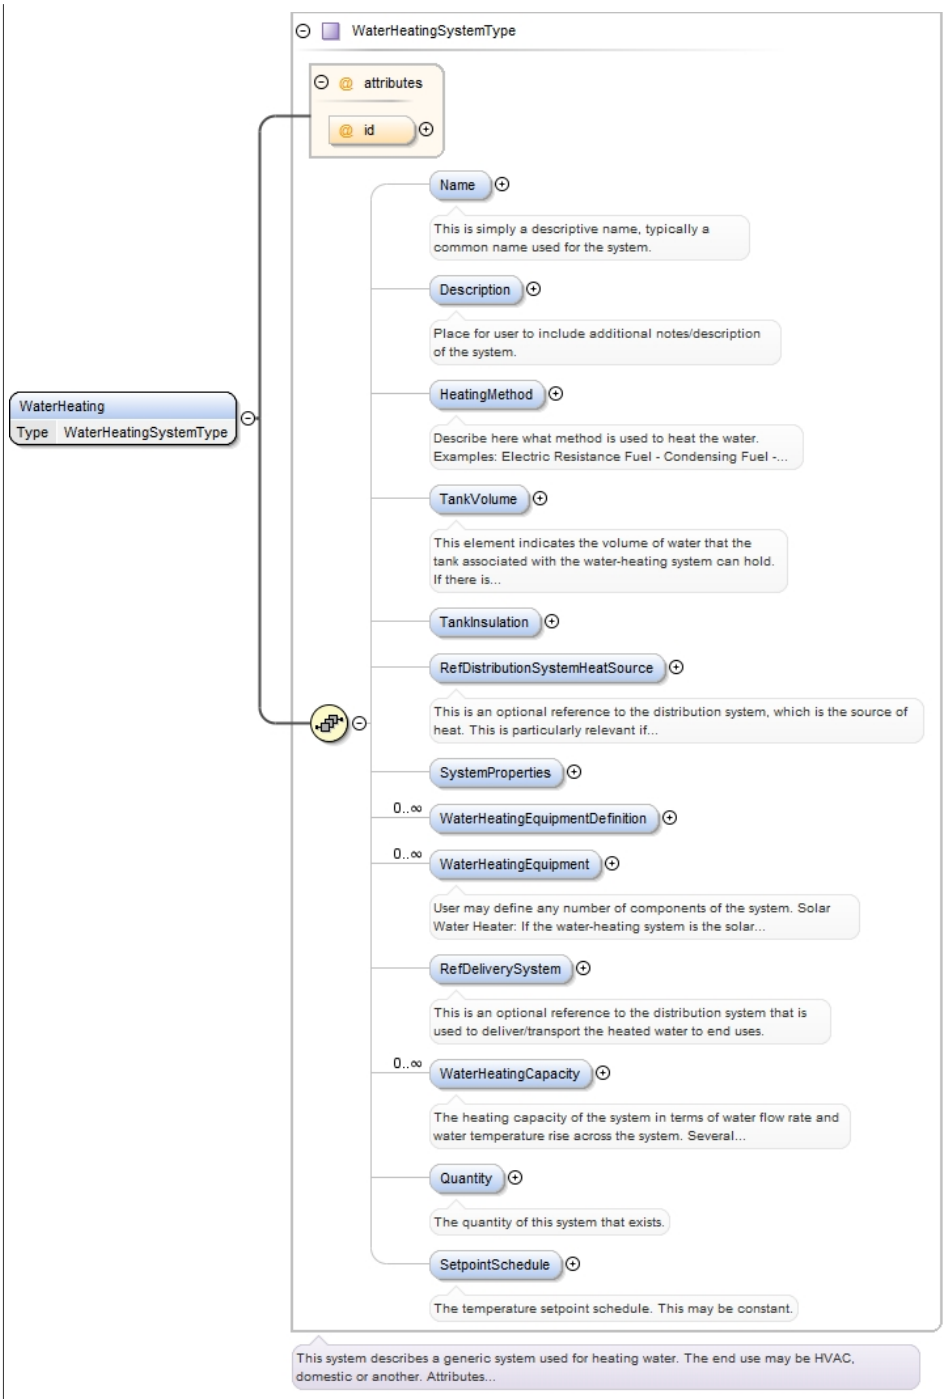
Type	WaterHeatingSystemType
Properties	content: complex
Model	Name{0,1} , Description{0,1} , HeatingMethod{0,1} , TankVolume{0,1} , TankInsulation{0,1} , RefDistributionSystemHeatSource{0,1} , SystemProperties{0,1} , WaterHeatingEquipmentDefinition* , WaterHeatingEquipment* , RefDeliverySystem{0,1} , WaterHeatingCapacity* , Quantity{0,1} , SetpointSchedule{0,1}
Children	Description, HeatingMethod, Name, Quantity, RefDeliverySystem, RefDistributionSystemHeatSource, SetpointSchedule, SystemProperties, TankInsulation, TankVolume, WaterHeatingCapacity, WaterHeatingEquipment, WaterHeatingEquipmentDefinition
Instance	<WaterHeating id=""> <Name>{0,1}</Name> <Description>{0,1}</Description> <HeatingMethod>{0,1}</HeatingMethod> <TankVolume Unit="" UnitDesc="">{0,1}</TankVolume> <TankInsulation>{0,1}</TankInsulation> <RefDistributionSystemHeatSource>{0,1}</RefDistributionSystemHeatSource>

```
  <SystemProperties>{0,1}</SystemProperties>
  <WaterHeatingEquipmentDefinition Id="">{0,unbounded}</WaterHeatingEquipmentDefinition>
  <WaterHeatingEquipment EquipmentDefinitionIdRef="" Id="">{0,unbounded}</
WaterHeatingEquipment>
  <RefDeliverySystem>{0,1}</RefDeliverySystem>
  <WaterHeatingCapacity>{0,unbounded}</WaterHeatingCapacity>
  <Quantity>{0,1}</Quantity>
  <SetpointSchedule>{0,1}</SetpointSchedule>
</WaterHeating>
```

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			optional

Source

```
<xs:element name="WaterHeating" type="WaterHeatingSystemType"/>
```

Element WaterHeatingSystemType / Name

Namespace	No namespace
Annotations	This is simply a descriptive name, typically a common name used for the system.
Diagram	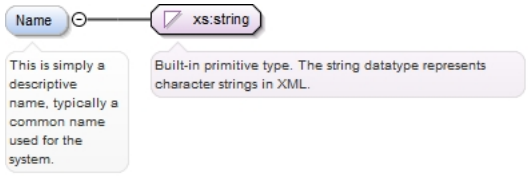
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source	`<xs:element name="Name" type="xs:string" minOccurs="0" maxOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>This is simply a descriptive name, typically a common name used for the system.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element WaterHeatingSystemType / Description

Namespace	No namespace
Annotations	Place for user to include additional notes/description of the system.
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source	`<xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>Place for user to include additional notes/description of the system.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element WaterHeatingSystemType / HeatingMethod

Namespace	No namespace
Annotations	Describe here what method is used to heat the water. Examples: Electric Resistance Fuel - Condensing Fuel - Non-Condensing

	Heat Pump – Air Source Heat Pump – Water Source Hybrid Heat Exchanger Solar Note, that some of the examples above require additional objects to be defined. For example: - If the heating type is Heat Exchanger, a reference to a distribution system that is the heat source is needed. - If solar, then additional details regarding the solar heating system are needed. This may simply be a reference to the distribution system that transfers heat from the solar panels to the water heating system. It may be an instance of Equipment Properties.
Diagram	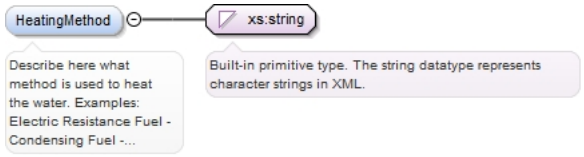
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="HeatingMethod" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Describe here what method is used to heat the water. Examples: Electric Resistance Fuel - Condensing Fuel - Non-Condensing Heat Pump – Air Source Heat Pump – Water Source Hybrid Heat Exchanger Solar Note, that some of the examples above require additional objects to be defined. For example: - If the heating type is Heat Exchanger, a reference to a distribution system that is the heat source is needed. - If solar, then additional details regarding the solar heating system are needed. This may simply be a reference to the distribution system that transfers heat from the solar panels to the water heating system. It may be an instance of Equipment Properties.</xs:documentation> </xs:annotation> </xs:element>

Element WaterHeatingSystemType / TankVolume

Namespace	No namespace
Annotations	This element indicates the volume of water that the tank associated with the water-heating system can hold. If there is no tank, then this should have the value zero. Water heating systems wtih zero volume (no) tanks are commonly referred to as: - tankless - direct - instantaneous - boiler (typical in a large facility; used for space heating) Note that a hot water tank is not necessarily and does not have to be integrated with the water heating equipment. The water heater and the storage tank may be separate entities.
Diagram	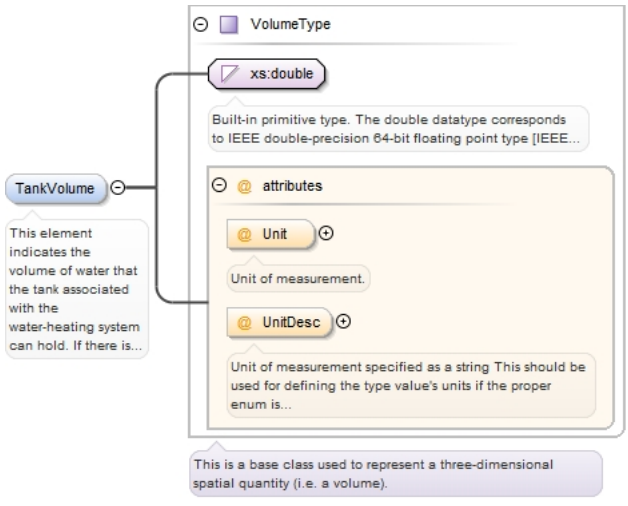

Type	VolumeType
Properties	content: complex minOccurs: 0 maxOccurs: 1

Attributes

QName	Type	Fixed	Default	Use
Unit	VolumeUnitEnumType			optional
	Unit of measurement.			
UnitDesc	xs:string			optional
	Unit of measurement specified as a string This should be used for defining the type value's units if the proper enum is not listed in Unit. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.			

Source

```
<xs:element name="TankVolume" type="VolumeType" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>This element indicates the volume of water that the tank associated
 with the water-heating system can hold. If there is no tank, then this should have the
 value zero. Water heating systems wtih zero volume (no) tanks are commonly referred to
 as: - tankless - direct - instantaneous - boiler (typical in a large facility; used for
 space heating) Note that a hot water tank is not necessarily and does not have to be
 integrated with the water heating equipment. The water heater and the storage tank may be
 separate entities.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element WaterHeatingSystemType / TankInsulation

Namespace	No namespace
Diagram	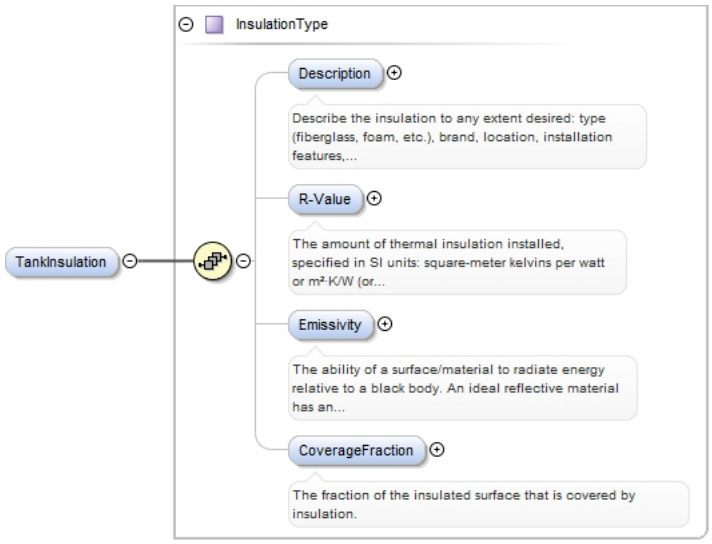
Type	InsulationType
Properties	content: complex minOccurs: 0
Model	Description{0,1} , R-Value{0,1} , Emissivity{0,1} , CoverageFraction{0,1}
Children	CoverageFraction, Description, Emissivity, R-Value
Instance	<TankInsulation> <Description>{0,1}</Description> <R-Value>{0,1}</R-Value> <Emissivity>{0,1}</Emissivity> <CoverageFraction>{0,1}</CoverageFraction> </TankInsulation>
Source	<xs:element minOccurs="0" name="TankInsulation" type="InsulationType"/>

Element WaterHeatingSystemType / RefDistributionSystemHeatSource

Namespace	No namespace

Annotations	This is an optional reference to the distribution system, which is the source of heat. This is particularly relevant if the heating method is a heat exchanger. For example, a facility may use hot water at multiple temperatures. One boiler may heat water to 180 degF to use for space heating. A heat exchanger may be used to extract heat from the 180degF water loop and heat another water loop to only 120 degF to be used as domestic hot water. Another use case is when multiple water heaters are used in series. The first heaters may heat water to 130 degF for one purpose, such as domestic hot water. Another heater may boost the water to a higher temperature for another use such as laundry or dish washing. Multiple hot water loops are often advantageous when the end uses are very far apart. The less distance that the hotter water has to travel, the less heat that will lost through the piping into the environment. It is then advantageous to boost the water temperature nearby the end use.
Diagram	
Type	xs:IDREF
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element maxOccurs="1" minOccurs="0" name="RefDistributionSystemHeatSource" type="xs:IDREF"> <xs:annotation> <xs:documentation>This is an optional reference to the distribution system, which is the source of heat. This is particularly relevant if the heating method is a heat exchanger. For example, a facility may use hot water at multiple temperatures. One boiler may heat water to 180 degF to use for space heating. A heat exchanger may be used to extract heat from the 180degF water loop and heat another water loop to only 120 degF to be used as domestic hot water. Another use case is when multiple water heaters are used in series. The first heaters may heat water to 130 degF for one purpose, such as domestic hot water. Another heater may boost the water to a higher temperature for another use such as laundry or dish washing. Multiple hot water loops are often advantageous when the end uses are very far apart. The less distance that the hotter water has to travel, the less heat that will lost through the piping into the environment. It is then advantageous to boost the water temperature nearby the end use.</xs:documentation> </xs:annotation> </xs:element>

Element WaterHeatingSystemType / SystemProperties

Namespace	No namespace

Diagram	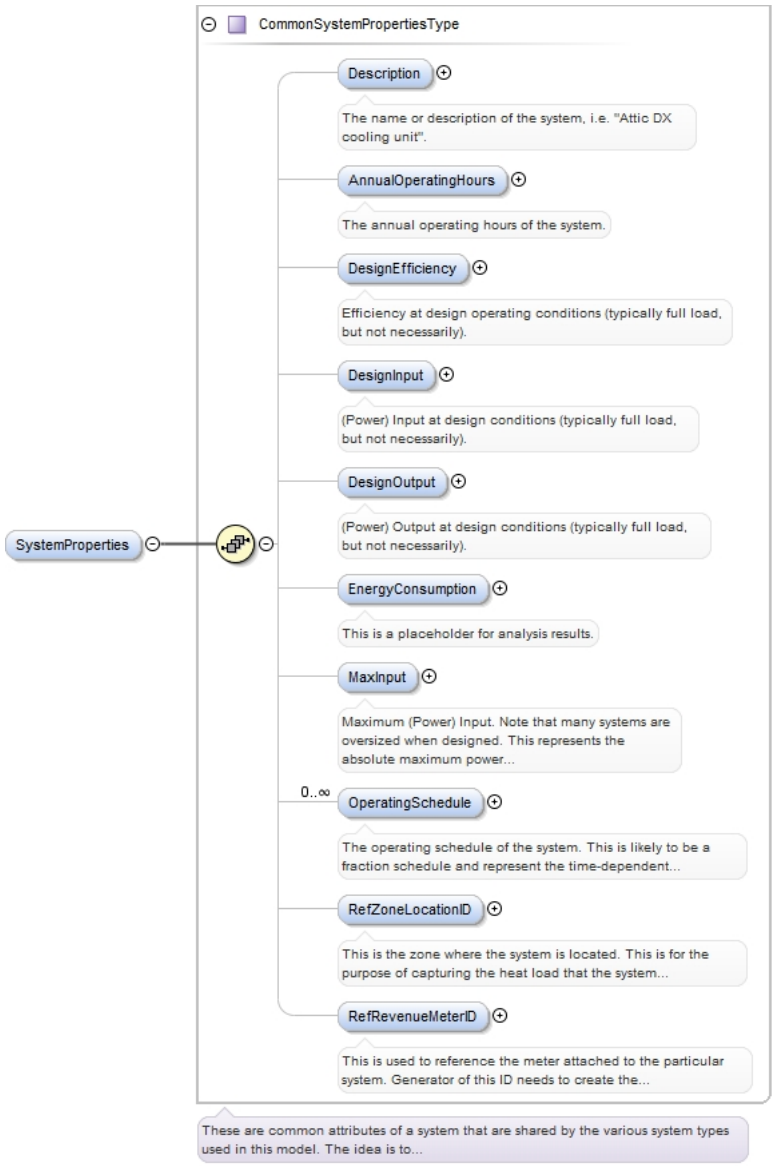
Type	CommonSystemPropertiesType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	Description{0,1} , AnnualOperatingHours{0,1} , DesignEfficiency{0,1} , DesignInput{0,1} , DesignOutput{0,1} , EnergyConsumption{0,1} , MaxInput{0,1} , OperatingSchedule* , RefZoneLocationID{0,1} , RefRevenueMeterID{0,1}
Children	AnnualOperatingHours, Description, DesignEfficiency, DesignInput, DesignOutput, EnergyConsumption, MaxInput, OperatingSchedule, RefRevenueMeterID, RefZoneLocationID
Instance	<SystemProperties> <Description>{0,1}</Description> <AnnualOperatingHours>{0,1}</AnnualOperatingHours> <DesignEfficiency TestCondition="" Unit="" UnitDesc="">{0,1}</DesignEfficiency> <DesignInput Fuel="Electricity" FuelDesc="Electricity" TestCondition="" Unit="" UnitDesc="kwh">{0,1}</DesignInput> <DesignOutput Fuel="Electricity" FuelDesc="Electricity" TestCondition="" Unit="" UnitDesc="kwh">{0,1}</DesignOutput> <EnergyConsumption>{0,1}</EnergyConsumption> <MaxInput Fuel="Electricity" FuelDesc="Electricity" TestCondition="" Unit="" UnitDesc="kwh">{0,1}</MaxInput> <OperatingSchedule>{0,unbounded}</OperatingSchedule> <RefZoneLocationID>{0,1}</RefZoneLocationID> <RefRevenueMeterID>{0,1}</RefRevenueMeterID> </SystemProperties>

Source	<xs:element name="SystemProperties" type="CommonSystemPropertiesType" minOccurs="0" maxOccurs="1"/>

Element WaterHeatingSystemType / WaterHeatingEquipmentDefinition

Namespace	No namespace

Diagram

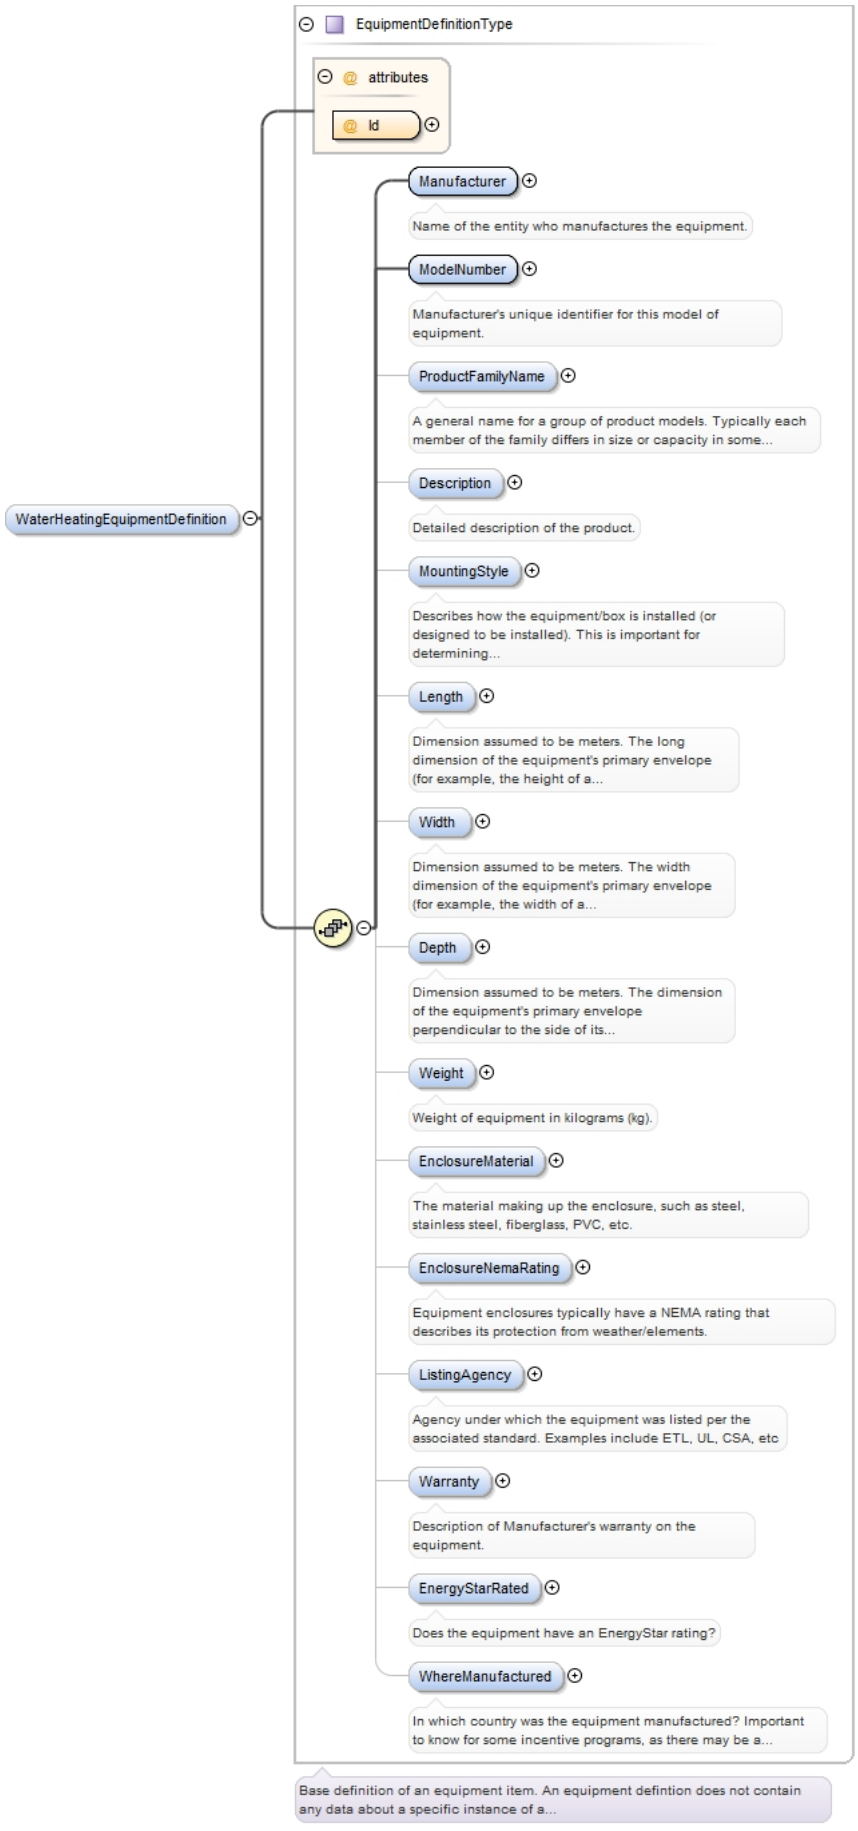
EquipmentDefinitionType
attributes
Id
Manufacturer
Name of the entity who manufactures the equipment.
ModelNumber
Manufacturer's unique identifier for this model of equipment.
ProductFamilyName
A general name for a group of product models. Typically each member of the family differs in size or capacity in some...
Description
Detailed description of the product.
MountingStyle
Describes how the equipment/box is installed (or designed to be installed). This is important for determining...
Length
Dimension assumed to be meters. The long dimension of the equipment's primary envelope (for example, the height of a...
Width
Dimension assumed to be meters. The width dimension of the equipment's primary envelope (for example, the width of a...
Depth
Dimension assumed to be meters. The dimension of the equipment's primary envelope perpendicular to the side of its...
Weight
Weight of equipment in kilograms (kg).
EnclosureMaterial
The material making up the enclosure, such as steel, stainless steel, fiberglass, PVC, etc.
EnclosureNemaRating
Equipment enclosures typically have a NEMA rating that describes its protection from weather/elements.
ListingAgency
Agency under which the equipment was listed per the associated standard. Examples include ETL, UL, CSA, etc
Warranty
Description of Manufacturer's warranty on the equipment.
EnergyStarRated
Does the equipment have an EnergyStar rating?
WhereManufactured
In which country was the equipment manufactured? Important to know for some incentive programs, as there may be a...
Base definition of an equipment item. An equipment defintion does not contain any data about a specific instance of a...
WaterHeatingEquipmentDefinition

Type	EquipmentDefinitionType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Manufacturer , ModelNumber , ProductFamilyName{0,1} , Description{0,1} , MountingStyle{0,1} , Length{0,1} , Width{0,1} , Depth{0,1} , Weight{0,1} , EnclosureMaterial{0,1} , EnclosureNemaRating{0,1} , ListingAgency{0,1} , Warranty{0,1} , EnergyStarRated{0,1} , WhereManufactured{0,1}
Children	Depth, Description, EnclosureMaterial, EnclosureNemaRating, EnergyStarRated, Length, ListingAgency, Manufacturer, ModelNumber, MountingStyle, ProductFamilyName, Warranty, Weight, WhereManufactured, Width
Instance	<WaterHeatingEquipmentDefinition Id="" xmlns="http://www.iepmodel.net"> <Manufacturer>{1,1}</Manufacturer> <ModelNumber>{1,1}</ModelNumber> <ProductFamilyName>{0,1}</ProductFamilyName> <Description>{0,1}</Description> <MountingStyle>{0,1}</MountingStyle> <Length>{0,1}</Length> <Width>{0,1}</Width> <Depth>{0,1}</Depth> <Weight>{0,1}</Weight> <EnclosureMaterial>{0,1}</EnclosureMaterial> <EnclosureNemaRating>{0,1}</EnclosureNemaRating> <ListingAgency>{0,1}</ListingAgency> <Warranty>{0,1}</Warranty> <EnergyStarRated>{0,1}</EnergyStarRated> <WhereManufactured>{0,1}</WhereManufactured> </WaterHeatingEquipmentDefinition>

Attributes

QName	Type	Fixed	Default	Use
Id	xs:ID			required

Source

```
<xs:element maxOccurs="unbounded" minOccurs="0" name="WaterHeatingEquipmentDefinition"
 type="EquipmentDefinitionType"/>
```

Element WaterHeatingSystemType / WaterHeatingEquipment

Namespace	No namespace
Annotations	User may define any number of components of the system. Solar Water Heater: If the water-heating system is the solar type, it may be useful to describe the properties of the solar system with an instance of this object.

Diagram	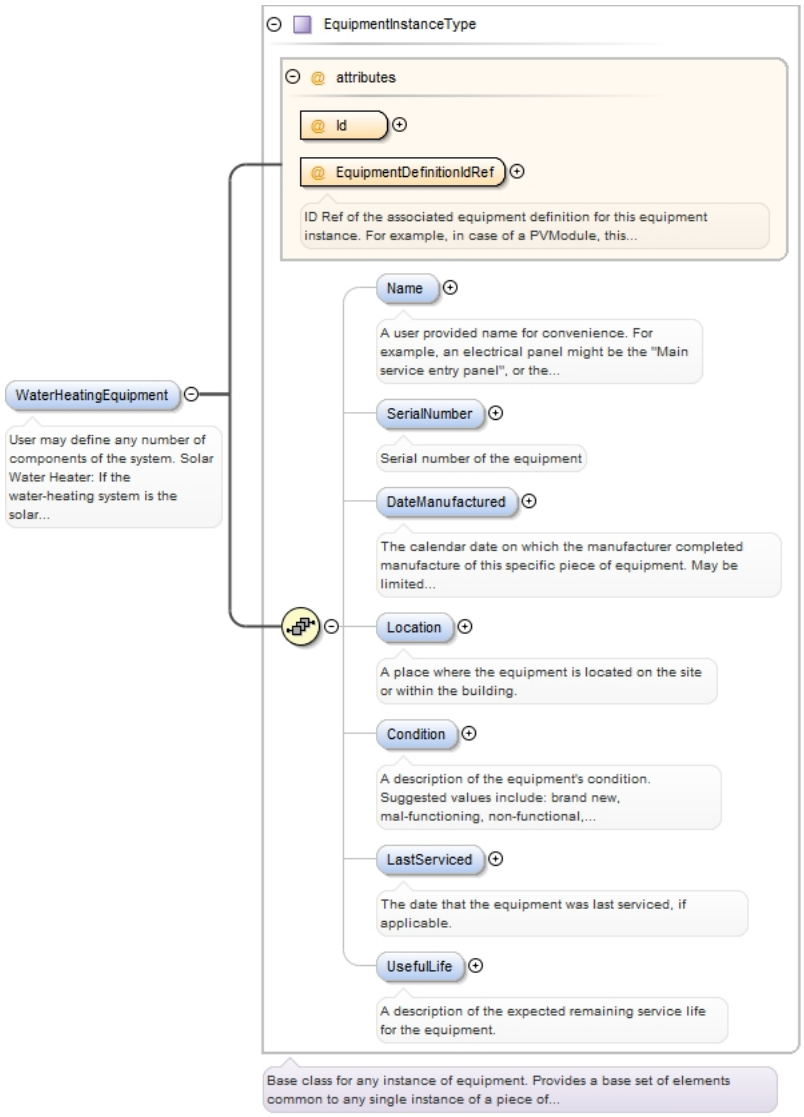
Type	EquipmentInstanceType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded nillable: false
Model	Name{0,1} , SerialNumber{0,1} , DateManufactured{0,1} , Location{0,1} , Condition{0,1} , LastServiced{0,1} , UsefulLife{0,1}
Children	Condition, DateManufactured, LastServiced, Location, Name, SerialNumber, UsefulLife

Instance	`<WaterHeatingEquipment EquipmentDefinitionIdRef="" Id="" xmlns="http://www.iepmodel.net">`
	`  <Name>{0,1}</Name>`
	`  <SerialNumber>{0,1}</SerialNumber>`
	`  <DateManufactured>{0,1}</DateManufactured>`
	`  <Location>{0,1}</Location>`
	`  <Condition>{0,1}</Condition>`
	`  <LastServiced>{0,1}</LastServiced>`
	`  <UsefulLife>{0,1}</UsefulLife>`
	`</WaterHeatingEquipment>`

Attributes

QName	Type	Fixed	Default	Use
EquipmentDefinitionIdRef	IDREF			required
	ID Ref of the associated equipment definition for this equipment instance. For example, in case of a PVModule, this would be the ID of the PvModuleDefinition element that describes this particular PV module instance.			

	QName	Type	Fixed	Default	Use
	Id	xs:ID			required

Source

```
<xs:element maxOccurs="unbounded" minOccurs="0" name="WaterHeatingEquipment"
 nillable="false" type="EquipmentInstanceType">
  <xs:annotation>
    <xs:documentation>User may define any number of components of the system. Solar Water
 Heater: If the water-heating system is the solar type, it may be useful to describe the
 properties of the solar system with an instance of this object.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element WaterHeatingSystemType / RefDeliverySystem

Namespace	No namespace
Annotations	This is an optional reference to the distribution system that is used to deliver/transport the heated water to end uses.
Diagram	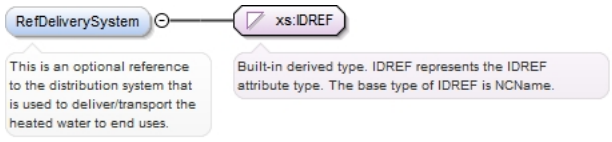
Type	xs:IDREF
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source

```
<xs:element maxOccurs="1" minOccurs="0" name="RefDeliverySystem" type="xs:IDREF">
  <xs:annotation>
    <xs:documentation>This is an optional reference to the distribution system that is
 used to deliver/transport the heated water to end uses.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element WaterHeatingSystemType / WaterHeatingCapacity

Namespace	No namespace
Annotations	The heating capacity of the system in terms of water flow rate and water temperature rise across the system. Several are allowed because it is not uncommon for manufacturers to specify the temperature rise at various flow rates.
Diagram	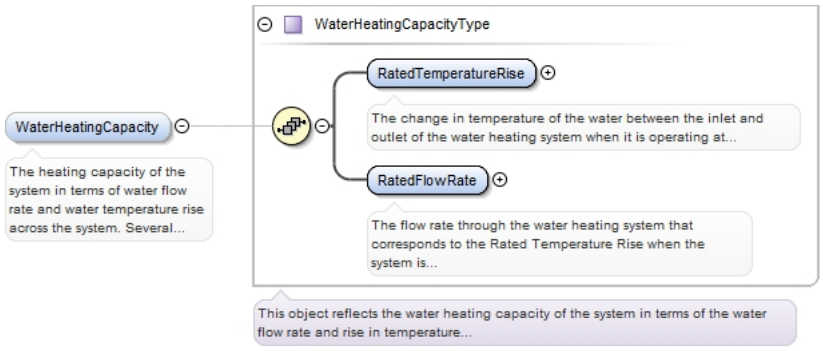
Type	WaterHeatingCapacityType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	RatedTemperatureRise , RatedFlowRate
Children	RatedFlowRate, RatedTemperatureRise

Instance

```
<WaterHeatingCapacity>
  <RatedTemperatureRise Unit="">{1,1}</RatedTemperatureRise>
  <RatedFlowRate Unit="">{1,1}</RatedFlowRate>
</WaterHeatingCapacity>
```

Source

```
<xs:element name="WaterHeatingCapacity" type="WaterHeatingCapacityType" minOccurs="0"
 maxOccurs="unbounded">
```

```
  <xs:annotation>
    <xs:documentation>The heating capacity of the system in terms of water flow rate
 and water temperature rise across the system. Several are allowed because it is not
 uncommon for manufacturers to specify the temperature rise at various flow rates.</
xs:documentation>
  </xs:annotation>
</xs:element>
```

Element WaterHeatingCapacityType / RatedTemperatureRise

Namespace	No namespace
Annotations	The change in temperature of the water between the inlet and outlet of the water heating system when it is operating at full load (maximum heat output or firing rate). This Rated Temperature Rise corresponds to the Rated Flow Rate.
Diagram	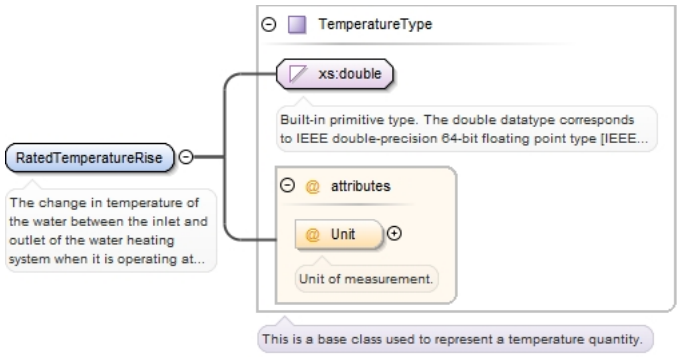
Type	TemperatureType
Properties	content: complex minOccurs: 1 maxOccurs: 1
Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **Unit** / TemperatureUnitEnumType / / / optional Unit of measurement.

Source	`<xs:element name="RatedTemperatureRise" type="TemperatureType" minOccurs="1" maxOccurs="1">`
	`  <xs:annotation>`
	`    <xs:documentation>The change in temperature of the water between the inlet and outlet of the water heating system when it is operating at full load (maximum heat output or firing rate). This Rated Temperature Rise corresponds to the Rated Flow Rate.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element WaterHeatingCapacityType / RatedFlowRate

Namespace	No namespace
Annotations	The flow rate through the water heating system that corresponds to the Rated Temperature Rise when the system is operating at full load (maximum heat output or firing rate).
Diagram	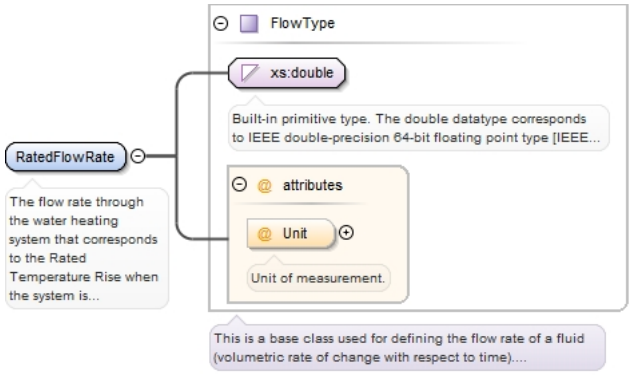
Type	FlowType

Properties	content:	complex			
	minOccurs:	1			
	maxOccurs:	1			
Attributes	**QName**	**Type**	**Fixed**	**Default**	**Use**
	Unit	FlowUnitEnumType			optional
		Unit of measurement.			

Source

```
<xs:element name="RatedFlowRate" type="FlowType" minOccurs="1" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>The flow rate through the water heating system that corresponds to
 the Rated Temperature Rise when the system is operating at full load (maximum heat output
 or firing rate).</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element WaterHeatingSystemType / Quantity

Namespace	No namespace
Annotations	The quantity of this system that exists.
Diagram	
Type	restriction of xs:int
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minInclusive 0

Source

```
<xs:element name="Quantity" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>The quantity of this system that exists.</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:int">
      <xs:minInclusive value="0"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

Element WaterHeatingSystemType / SetpointSchedule

Namespace	No namespace
Annotations	The temperature setpoint schedule. This may be constant.
Diagram	
Type	xs:IDREF
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source

```
<xs:element name="SetpointSchedule" type="xs:IDREF" minOccurs="0" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>The temperature setpoint schedule. This may be constant.</
xs:documentation>
  </xs:annotation>
</xs:element>
```

Element MeasureActionType / Modification

Namespace	No namespace

Diagram	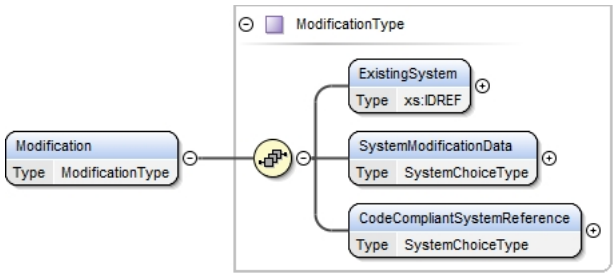
Type	ModificationType
Properties	content: complex minOccurs: 1 maxOccurs: 1 nillable: false
Model	ExistingSystem , SystemModificationData , CodeCompliantSystemReference
Children	CodeCompliantSystemReference, ExistingSystem, SystemModificationData
Instance	<Modification> <ExistingSystem>{1,1}</ExistingSystem> <SystemModificationData>{1,1}</SystemModificationData> <CodeCompliantSystemReference>{1,1}</CodeCompliantSystemReference> </Modification>
Source	<xs:element name="Modification" type="ModificationType" maxOccurs="1" minOccurs="1" nillable="false"/>

Element ModificationType / ExistingSystem

Namespace	No namespace
Diagram	
Type	xs:IDREF
Properties	content: simple
Source	<xs:element name="ExistingSystem" type="xs:IDREF"/>

Element ModificationType / SystemModificationData

Namespace	No namespace

Diagram	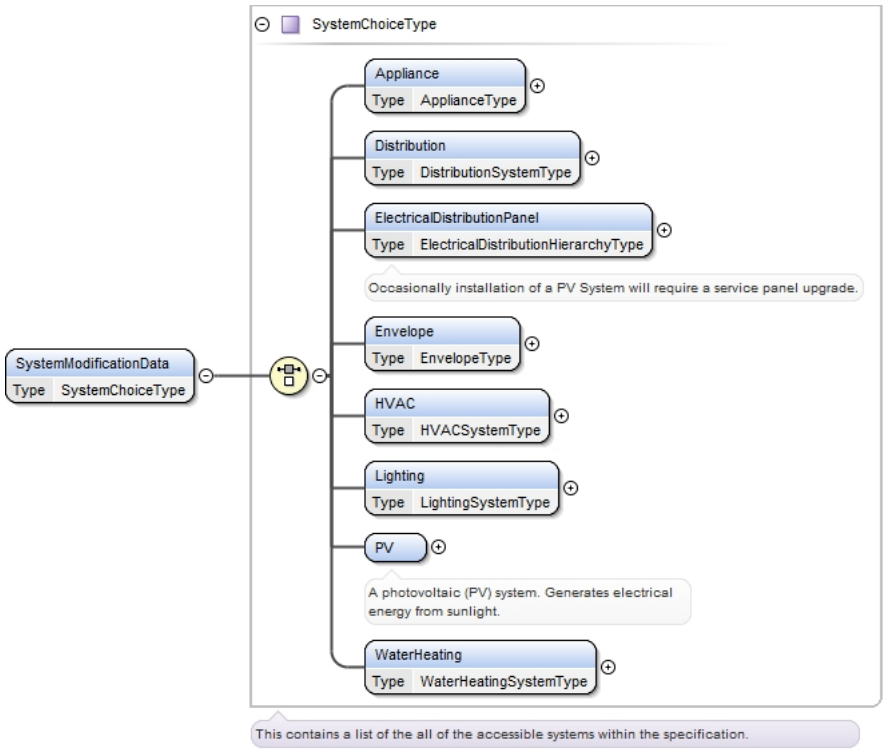
Type	SystemChoiceType
Properties	content: complex
Model	Appliance | Distribution | ElectricalDistributionPanel | Envelope | HVAC | Lighting | PV | WaterHeating
Children	Appliance, Distribution, ElectricalDistributionPanel, Envelope, HVAC, Lighting, PV, WaterHeating

Instance	`<SystemModificationData>`
	`  <Appliance>{1,1}</Appliance>`
	`  <Distribution id="">{1,1}</Distribution>`
	`  <ElectricalDistributionPanel>{1,1}</ElectricalDistributionPanel>`
	`  <Envelope id="">{1,1}</Envelope>`
	`  <HVAC id="">{1,1}</HVAC>`
	`  <Lighting>{1,1}</Lighting>`
	`  <PV>{1,1}</PV>`
	`  <WaterHeating id="">{1,1}</WaterHeating>`
	`</SystemModificationData>`

Source	`<xs:element name="SystemModificationData" type="SystemChoiceType"/>`

Element ModificationType / CodeCompliantSystemReference

Namespace	No namespace

Diagram	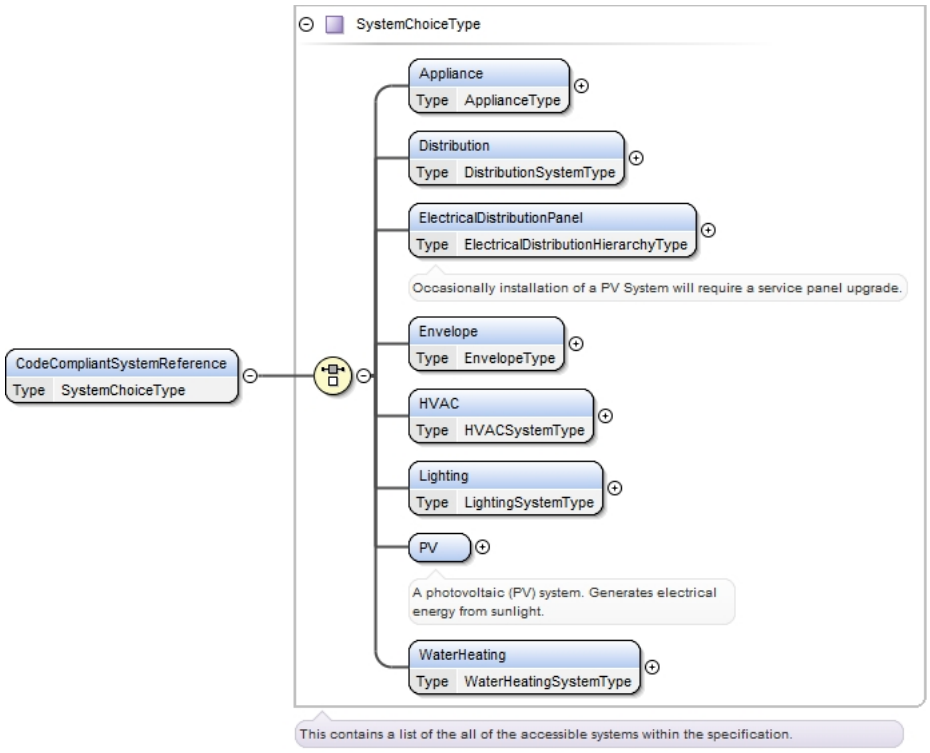
Type	SystemChoiceType
Properties	content: complex
Model	Appliance | Distribution | ElectricalDistributionPanel | Envelope | HVAC | Lighting | PV | WaterHeating
Children	Appliance, Distribution, ElectricalDistributionPanel, Envelope, HVAC, Lighting, PV, WaterHeating

Instance	`<CodeCompliantSystemReference>`
	`  <Appliance>{1,1}</Appliance>`
	`  <Distribution id="">{1,1}</Distribution>`
	`  <ElectricalDistributionPanel>{1,1}</ElectricalDistributionPanel>`
	`  <Envelope id="">{1,1}</Envelope>`
	`  <HVAC id="">{1,1}</HVAC>`
	`  <Lighting>{1,1}</Lighting>`
	`  <PV>{1,1}</PV>`
	`  <WaterHeating id="">{1,1}</WaterHeating>`
	`</CodeCompliantSystemReference>`

Source	`<xs:element name="CodeCompliantSystemReference" type="SystemChoiceType"/>`

Element MeasureActionType / Removal

Namespace	No namespace
Diagram	
Type	xs:IDREF
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	`<xs:element name="Removal" type="xs:IDREF" maxOccurs="1" minOccurs="1"/>`

Element MeasureActionType / Replacement

Namespace	No namespace

Diagram	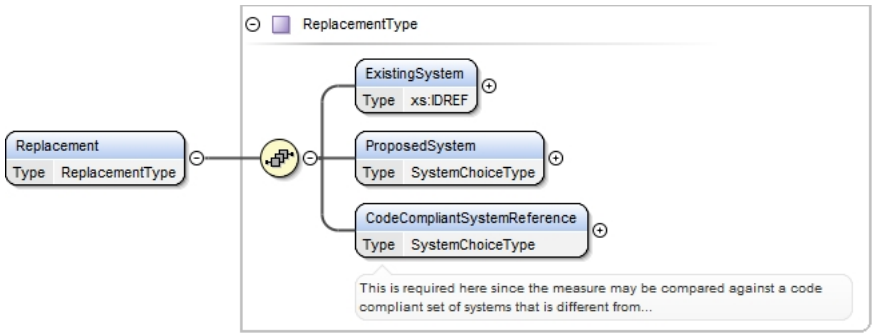
Type	ReplacementType
Properties	content: complex minOccurs: 1 maxOccurs: 1
Model	ExistingSystem , ProposedSystem , CodeCompliantSystemReference
Children	CodeCompliantSystemReference, ExistingSystem, ProposedSystem
Instance	<Replacement> <ExistingSystem>{1,1}</ExistingSystem> <ProposedSystem>{1,1}</ProposedSystem> <CodeCompliantSystemReference>{1,1}</CodeCompliantSystemReference> </Replacement>
Source	<xs:element name="Replacement" type="ReplacementType" maxOccurs="1" minOccurs="1"/>

Element ReplacementType / ExistingSystem

Namespace	No namespace
Diagram	
Type	xs:IDREF
Properties	content: simple
Source	<xs:element name="ExistingSystem" type="xs:IDREF"/>

Element ReplacementType / ProposedSystem

Namespace	No namespace

Diagram	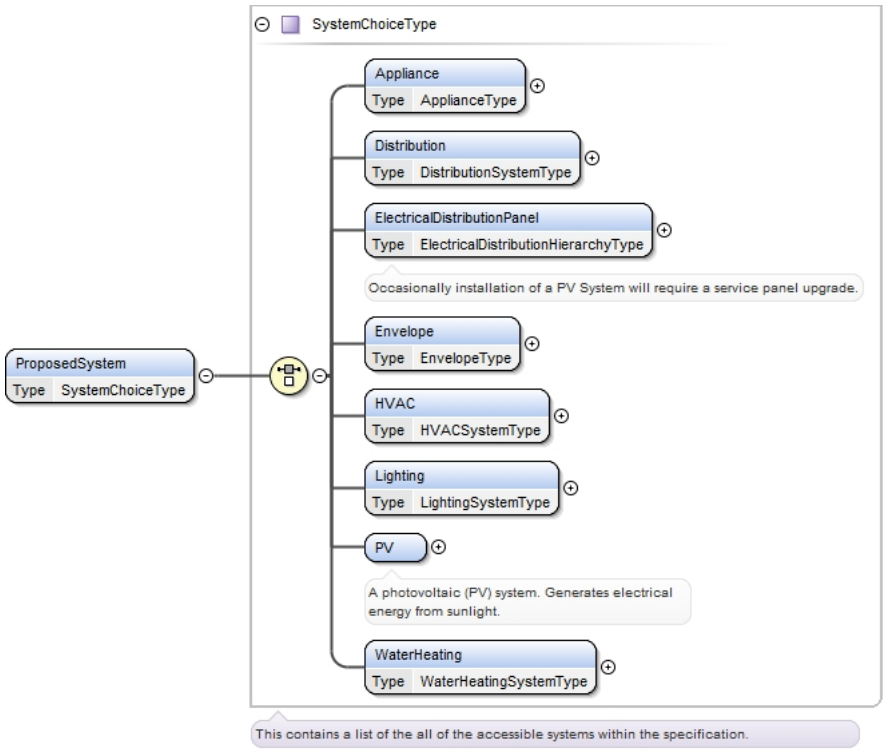
Type	SystemChoiceType
Properties	content: complex nillable: false
Model	Appliance | Distribution | ElectricalDistributionPanel | Envelope | HVAC | Lighting | PV | WaterHeating
Children	Appliance, Distribution, ElectricalDistributionPanel, Envelope, HVAC, Lighting, PV, WaterHeating
Instance	<ProposedSystem> <Appliance>{1,1}</Appliance> <Distribution id="">{1,1}</Distribution> <ElectricalDistributionPanel>{1,1}</ElectricalDistributionPanel> <Envelope id="">{1,1}</Envelope> <HVAC id="">{1,1}</HVAC> <Lighting>{1,1}</Lighting> <PV>{1,1}</PV> <WaterHeating id="">{1,1}</WaterHeating> </ProposedSystem>
Source	<xs:element name="ProposedSystem" nillable="false" type="SystemChoiceType"/>

Element ReplacementType / CodeCompliantSystemReference

Namespace	No namespace
Annotations	This is required here since the measure may be compared against a code compliant set of systems that is different from the existing baseline equipment. Specifically used for incentive calculations where incentives are only paid for incremental savings above code. For example: Building Energy code

Diagram	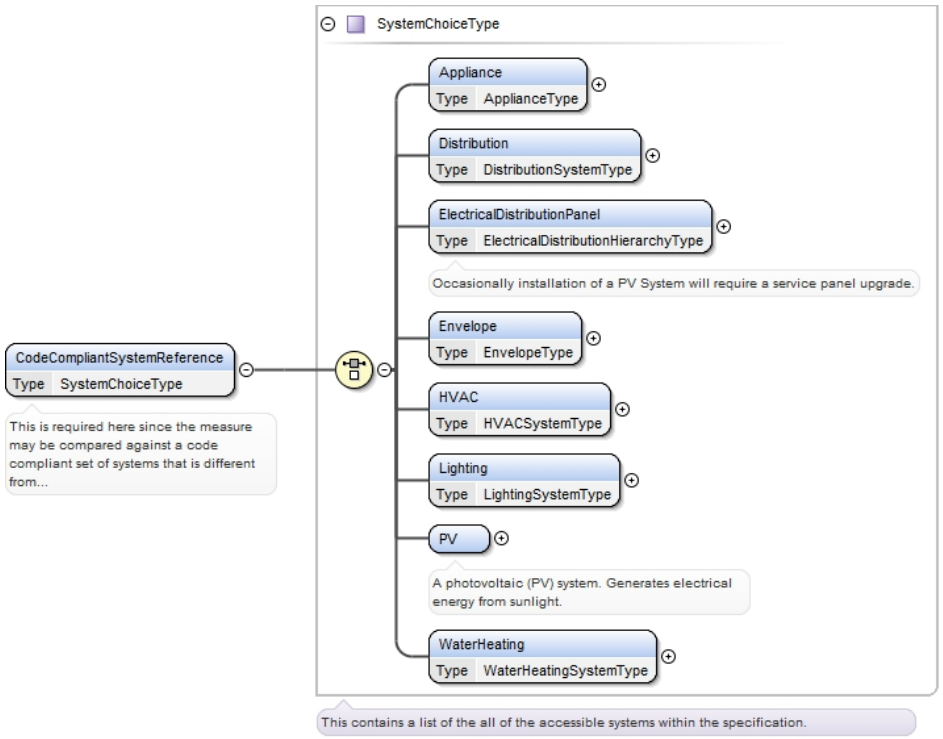
Type	SystemChoiceType
Properties	content: complex
Model	Appliance | Distribution | ElectricalDistributionPanel | Envelope | HVAC | Lighting | PV | WaterHeating
Children	Appliance, Distribution, ElectricalDistributionPanel, Envelope, HVAC, Lighting, PV, WaterHeating
Instance	<CodeCompliantSystemReference> <Appliance>{1,1}</Appliance> <Distribution id="">{1,1}</Distribution> <ElectricalDistributionPanel>{1,1}</ElectricalDistributionPanel> <Envelope id="">{1,1}</Envelope> <HVAC id="">{1,1}</HVAC> <Lighting>{1,1}</Lighting> <PV>{1,1}</PV> <WaterHeating id="">{1,1}</WaterHeating> </CodeCompliantSystemReference>
Source	<xs:element name="CodeCompliantSystemReference" type="SystemChoiceType"> <xs:annotation> <xs:documentation>This is required here since the measure may be compared against a code compliant set of systems that is different from the existing baseline equipment. Specifically used for incentive calculations where incentives are only paid for incremental savings above code. For example: Building Energy code</xs:documentation> </xs:annotation> </xs:element>

Element MeasureType / IncentiveProgramCategory

Namespace	No namespace
Annotations	Used for filtering measures based on what incentive program category.
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="IncentiveProgramCategory" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation>

```
    <xs:documentation>Used for filtering measures based on what incentive program
 category.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element MeasureType / ProgramMeasureCode

Namespace	No namespace
Annotations	Describes an incentive provider's codes corresponding to the defined measure. For example, the PG&E measure codes.
Diagram	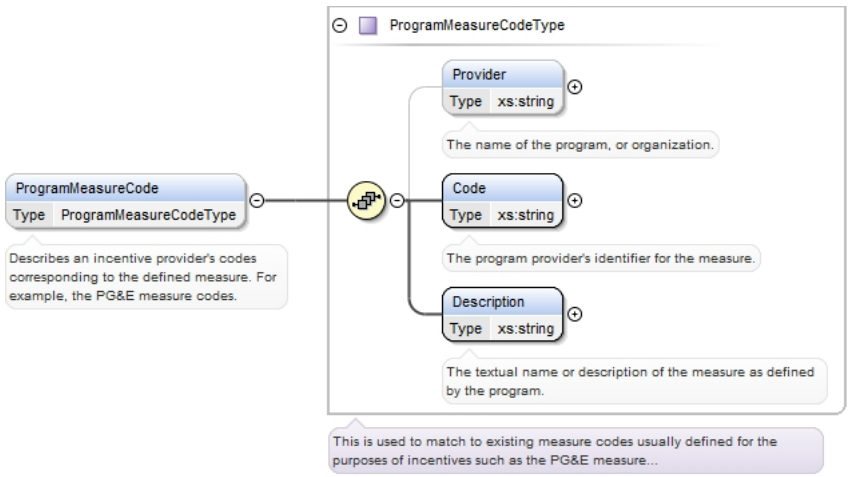
Type	ProgramMeasureCodeType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Provider{0,1} , Code , Description
Children	Code, Description, Provider
Instance	<ProgramMeasureCode> <Provider>{0,1}</Provider> <Code>{1,1}</Code> <Description>{1,1}</Description> </ProgramMeasureCode>
Source	<xs:element name="ProgramMeasureCode" type="ProgramMeasureCodeType" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>Describes an incentive provider's codes corresponding to the defined measure. For example, the PG&E measure codes.</xs:documentation> </xs:annotation> </xs:element>

Element ProgramMeasureCodeType / Provider

Namespace	No namespace
Annotations	The name of the program, or organization.
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Provider" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>The name of the program, or organization.</xs:documentation>

```
  </xs:annotation>
</xs:element>
```

Element ProgramMeasureCodeType / Code

Namespace	No namespace
Annotations	The program provider's identifier for the measure.
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="Code" type="xs:string" minOccurs="1" maxOccurs="1"> <xs:annotation> <xs:documentation>The program provider's identifier for the measure.</xs:documentation> </xs:annotation> </xs:element>

Element ProgramMeasureCodeType / Description

Namespace	No namespace
Annotations	The textual name or description of the measure as defined by the program.
Diagram	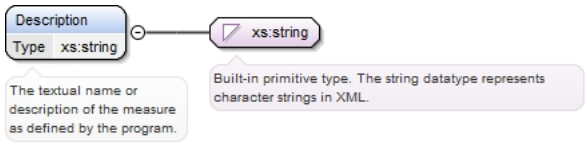
Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="Description" type="xs:string" minOccurs="1" maxOccurs="1"> <xs:annotation> <xs:documentation>The textual name or description of the measure as defined by the program.</xs:documentation> </xs:annotation> </xs:element>

Element MeasureType / Cost

Namespace	No namespace
Annotations	This defines the Costs for this particular measure. This is optional as costs may be rolled up at the Scope of Work level
Diagram	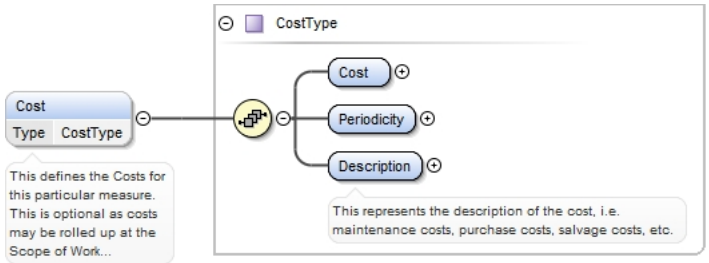
Type	CostType
Properties	content: complex

	minOccurs: 0 maxOccurs: unbounded
Model	Cost , Periodicity , Description
Children	Cost, Description, Periodicity
Instance	<Cost xmlns="http://www.iepmodel.net"> <Cost>{1,1}</Cost> <Periodicity>{1,1}</Periodicity> <Description>{1,1}</Description> </Cost>
Source	<xs:element name="Cost" type="CostType" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>This defines the Costs for this particular measure. This is optional as costs may be rolled up at the Scope of Work level</xs:documentation> </xs:annotation> </xs:element>

Element MeasureType / Benefit

Namespace	No namespace
Annotations	We also include Benefits here because Incentive applications require the benefits breakdown for each individual measure. This is optional as costs may be rolled up at the Scope of Work level. If BenefitsAnalysisOrder is defined then benefits are incremental relative to that order.
Diagram	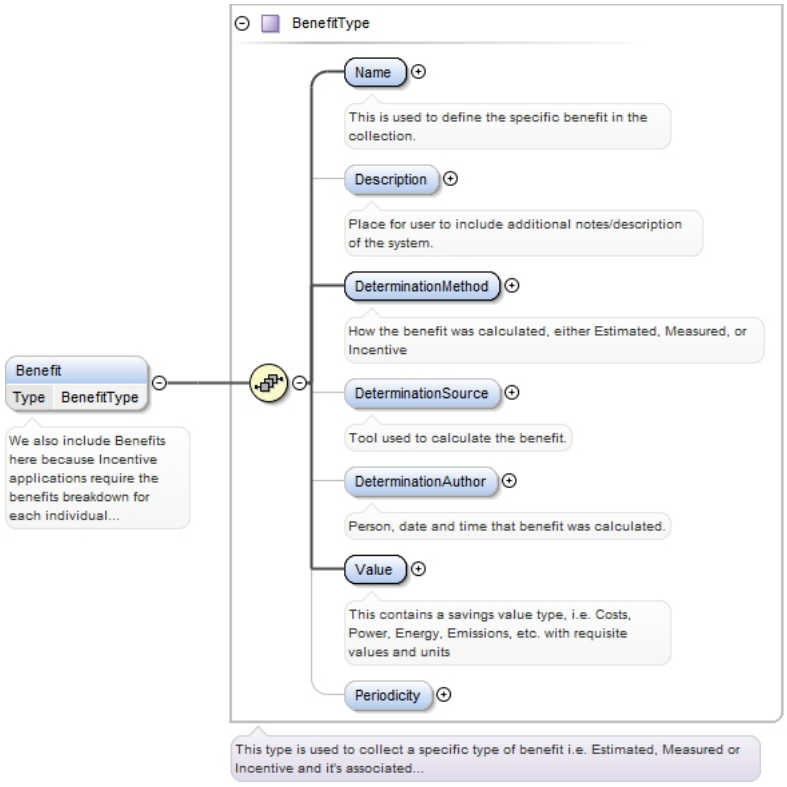
Type	BenefitType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Name , Description{0,1} , DeterminationMethod , DeterminationSource{0,1} , DeterminationAuthor{0,1} , Value , Periodicity{0,1}
Children	Description, DeterminationAuthor, DeterminationMethod, DeterminationSource, Name, Periodicity, Value
Instance	<Benefit xmlns="http://www.iepmodel.net"> <Name>{1,1}</Name> <Description>{0,1}</Description> <DeterminationMethod>{1,1}</DeterminationMethod> <DeterminationSource>{0,1}</DeterminationSource>

	<DeterminationAuthor>{0,1}</DeterminationAuthor> <Value>{1,1}</Value> <Periodicity>{0,1}</Periodicity> </Benefit>
Source	<xs:element name="Benefit" type="BenefitType" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>We also include Benefits here because Incentive applications require the benefits breakdown for each individual measure. This is optional as costs may be rolled up at the Scope of Work level. If BenefitsAnalysisOrder is defined then benefits are incremental relative to that order.</xs:documentation> </xs:annotation> </xs:element>

Element MeasureType / BenefitsAnalysisOrder

Namespace	No namespace
Annotations	This is used when analyzing the impact of the measure benefits. Specific measures need to be processed in an order based on the load priority of the system, i.e. efficiency change of a furnace and then apply the leakage of the ducts.
Diagram	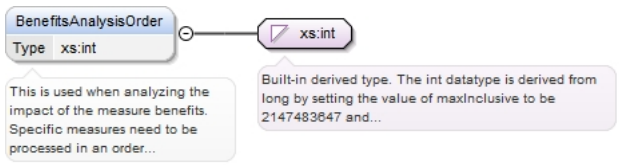
Type	xs:int
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="BenefitsAnalysisOrder" type="xs:int" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This is used when analyzing the impact of the measure benefits. Specific measures need to be processed in an order based on the load priority of the system, i.e. efficiency change of a furnace and then apply the leakage of the ducts.</xs:documentation> </xs:annotation> </xs:element>

Element ProjectType / ScopeOfWork

Namespace	No namespace
Annotations	This may be used to capture multiple scopes of work as a General Contractor may be obtaining independent Scopes of Work from multiple contractors. Each of those scopes of work would be captured in an independent Project.

Diagram	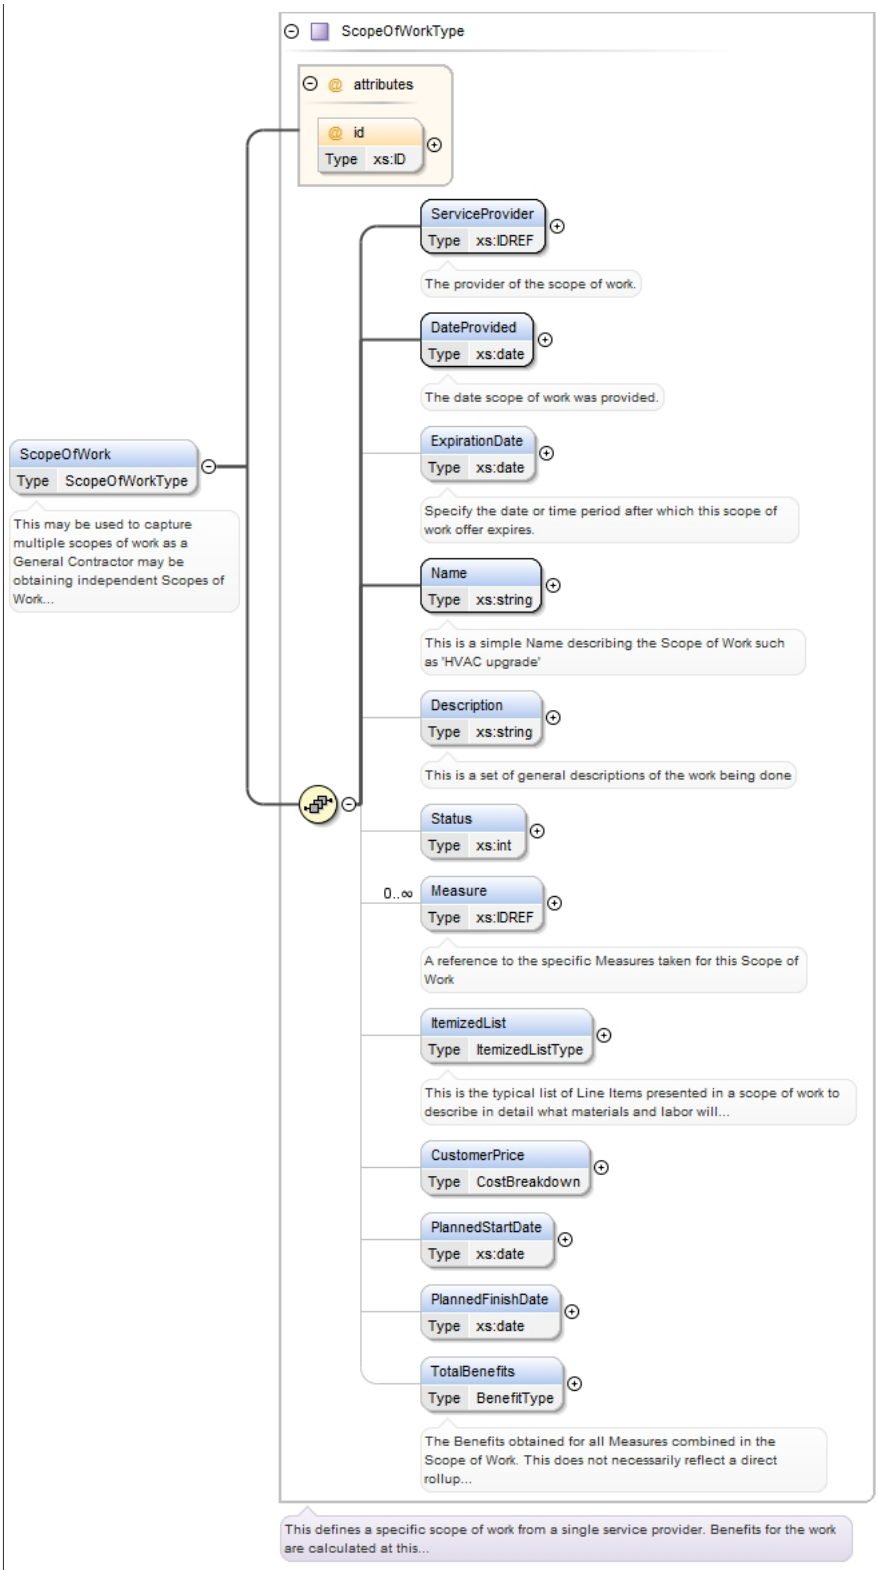
Type	ScopeOfWorkType
Properties	content: `complex` minOccurs: `0` maxOccurs: `1`
Model	ServiceProvider , DateProvided , ExpirationDate{0,1} , Name , Description{0,1} , Status{0,1} , Measure* , ItemizedList{0,1} , CustomerPrice{0,1} , PlannedStartDate{0,1} , PlannedFinishDate{0,1} , TotalBenefits{0,1}

Children	CustomerPrice, DateProvided, Description, ExpirationDate, ItemizedList, Measure, Name, PlannedFinishDate, PlannedStartDate, ServiceProvider, Status, TotalBenefits

Instance	<pre><ScopeOfWork id="">
	  <ServiceProvider>{1,1}</ServiceProvider>
	  <DateProvided>{1,1}</DateProvided>
	  <ExpirationDate>{0,1}</ExpirationDate>
	  <Name>{1,1}</Name>
	  <Description>{0,1}</Description>
	  <Status>{0,1}</Status>
	  <Measure>{0,unbounded}</Measure>
	  <ItemizedList>{0,1}</ItemizedList>
	  <CustomerPrice>{0,1}</CustomerPrice>
	  <PlannedStartDate>{0,1}</PlannedStartDate>
	  <PlannedFinishDate>{0,1}</PlannedFinishDate>
	  <TotalBenefits>{0,1}</TotalBenefits>
	</ScopeOfWork></pre>

Attributes	**QName** / **Type** / **Fixed** / **Default** / **Use** **id** / xs:ID / / / optional

Source	<pre><xs:element name="ScopeOfWork" type="ScopeOfWorkType" minOccurs="0" maxOccurs="1">
	  <xs:annotation>
	  <xs:documentation>This may be used to capture multiple scopes of work as a General Contractor may be obtaining independent Scopes of Work from multiple contractors. Each of those scopes of work would be captured in an independent Project.</xs:documentation>
	  </xs:annotation>
	</xs:element></pre>

Element ScopeOfWorkType / ServiceProvider

Namespace	No namespace
Annotations	The provider of the scope of work.
Diagram	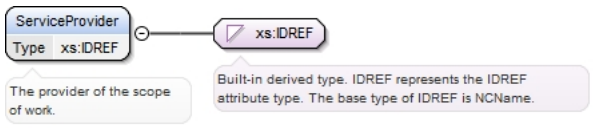
Type	xs:IDREF
Properties	content: simple minOccurs: 1 maxOccurs: 1

Source	<pre><xs:element name="ServiceProvider" type="xs:IDREF" minOccurs="1" maxOccurs="1">
	  <xs:annotation>
	  <xs:documentation>The provider of the scope of work.</xs:documentation>
	  </xs:annotation>
	</xs:element></pre>

Element ScopeOfWorkType / DateProvided

Namespace	No namespace
Annotations	The date scope of work was provided.
Diagram	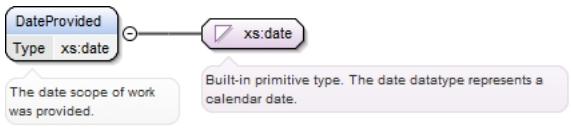
Type	xs:date
Properties	content: simple minOccurs: 1 maxOccurs: 1

Source	<pre><xs:element name="DateProvided" type="xs:date" minOccurs="1" maxOccurs="1">
	  <xs:annotation>
	  <xs:documentation>The date scope of work was provided.</xs:documentation>
	  </xs:annotation>
	</xs:element></pre>

Element ScopeOfWorkType / ExpirationDate

Namespace	No namespace
Annotations	Specify the date or time period after which this scope of work offer expires.
Diagram	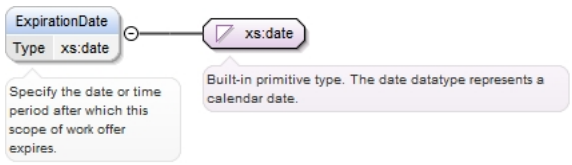
Type	xs:date
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="ExpirationDate" type="xs:date" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Specify the date or time period after which this scope of work offer expires.</xs:documentation> </xs:annotation> </xs:element>

Element ScopeOfWorkType / Name

Namespace	No namespace
Annotations	This is a simple Name describing the Scope of Work such as 'HVAC upgrade'
Diagram	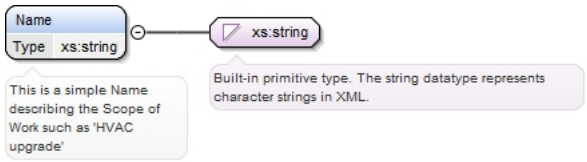
Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="Name" type="xs:string" minOccurs="1" maxOccurs="1"> <xs:annotation> <xs:documentation>This is a simple Name describing the Scope of Work such as 'HVAC upgrade'</xs:documentation> </xs:annotation> </xs:element>

Element ScopeOfWorkType / Description

Namespace	No namespace
Annotations	This is a set of general descriptions of the work being done
Diagram	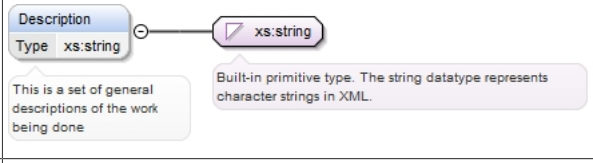
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>This is a set of general descriptions of the work being done</xs:documentation> </xs:annotation>

```
</xs:element>
```

Element ScopeOfWorkType / Status

Namespace	No namespace
Diagram	
Type	xs:int
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="Status" type="xs:int" minOccurs="0" maxOccurs="1"/>`

Element ScopeOfWorkType / Measure

Namespace	No namespace
Annotations	A reference to the specific Measures taken for this Scope of Work
Diagram	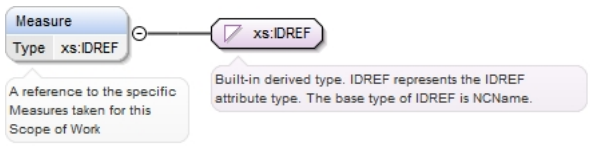
Type	xs:IDREF
Properties	content: simple minOccurs: 0 maxOccurs: unbounded

Source	`<xs:element name="Measure" type="xs:IDREF" minOccurs="0" maxOccurs="unbounded">`
	`  <xs:annotation>`
	`  <xs:documentation>A reference to the specific Measures taken for this Scope of Work</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element ScopeOfWorkType / ItemizedList

Namespace	No namespace
Annotations	This is the typical list of Line Items presented in a scope of work to describe in detail what materials and labor will be delivered for the contract price.
Diagram	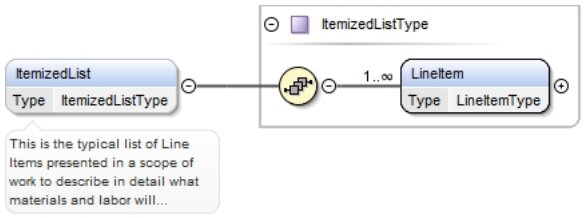
Type	ItemizedListType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	LineItem+
Children	LineItem

Instance	`<ItemizedList>`
	`  <LineItem id="">{1,unbounded}</LineItem>`
	`</ItemizedList>`

Source	`<xs:element maxOccurs="1" minOccurs="0" name="ItemizedList" type="ItemizedListType">`

```
  <xs:annotation>
    <xs:documentation>This is the typical list of Line Items presented in a scope of
 work to describe in detail what materials and labor will be delivered for the contract
 price.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element `ItemizedListType / LineItem`

Namespace	No namespace
Diagram	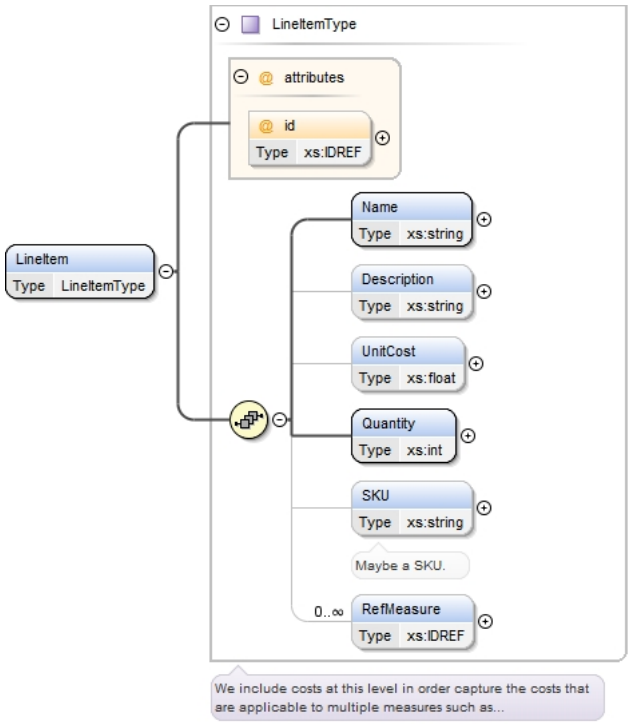
Type	LineItemType
Properties	content: `complex` minOccurs: `1` maxOccurs: `unbounded`
Model	Name , Description{0,1} , UnitCost{0,1} , Quantity , SKU{0,1} , RefMeasure*
Children	Description, Name, Quantity, RefMeasure, SKU, UnitCost

`Instance`	`<LineItem id="">`
	`  <Name>{1,1}</Name>`
	`  <Description>{0,1}</Description>`
	`  <UnitCost>{0,1}</UnitCost>`
	`  <Quantity>{1,1}</Quantity>`
	`  <SKU>{0,1}</SKU>`
	`  <RefMeasure>{0,unbounded}</RefMeasure>`
	`</LineItem>`

Attributes

QName	Type	Fixed	Default	Use
id	xs:IDREF			optional

`Source`

```
<xs:element maxOccurs="unbounded" minOccurs="1" name="LineItem" type="LineItemType"/>
```

Element `LineItemType / Name`

Namespace	No namespace
Diagram	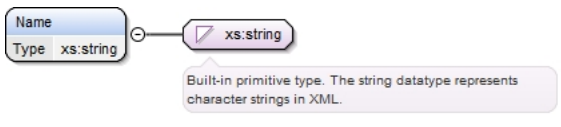
Type	xs:string
Properties	content: `simple`

	minOccurs: 1 maxOccurs: 1
Source	`<xs:element maxOccurs="1" minOccurs="1" name="Name" type="xs:string"/>`

Element LineItemType / Description

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="Description" type="xs:string" minOccurs="0" maxOccurs="1"/>`

Element LineItemType / UnitCost

Namespace	No namespace
Diagram	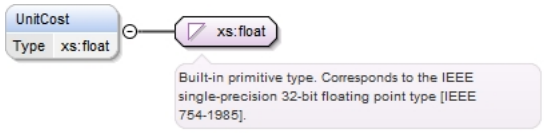
Type	xs:float
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="UnitCost" type="xs:float" minOccurs="0" maxOccurs="1"/>`

Element LineItemType / Quantity

Namespace	No namespace
Diagram	
Type	xs:int
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	`<xs:element name="Quantity" type="xs:int" maxOccurs="1" minOccurs="1"/>`

Element LineItemType / SKU

Namespace	No namespace
Annotations	Maybe a SKU.
Diagram	
Type	xs:string
Properties	content: simple

	minOccurs: 0
	maxOccurs: 1
Source	<xs:element name="SKU" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Maybe a SKU.</xs:documentation> </xs:annotation> </xs:element>

Element LineItemType / RefMeasure

Namespace	No namespace
Diagram	
Type	xs:IDREF
Properties	content: simple minOccurs: 0 maxOccurs: unbounded
Source	<xs:element name="RefMeasure" type="xs:IDREF" minOccurs="0" maxOccurs="unbounded"/>

Element ScopeOfWorkType / CustomerPrice

Namespace	No namespace
Diagram	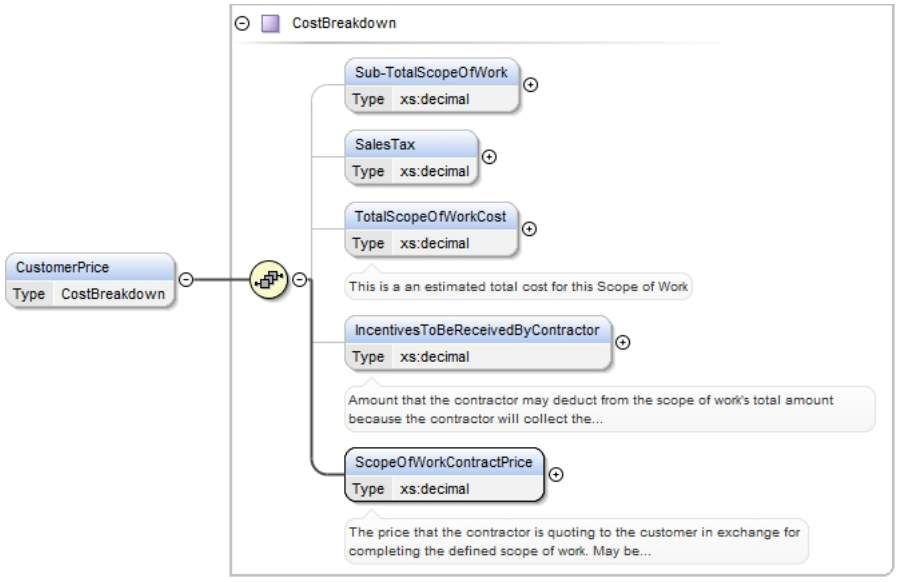
Type	CostBreakdown
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	Sub-TotalScopeOfWork{0,1} , SalesTax{0,1} , TotalScopeOfWorkCost{0,1} , IncentivesToBeReceivedByContractor{0,1} , ScopeOfWorkContractPrice
Children	IncentivesToBeReceivedByContractor, SalesTax, ScopeOfWorkContractPrice, Sub-TotalScopeOfWork, TotalScopeOfWorkCost
Instance	<CustomerPrice> <Sub-TotalScopeOfWork>{0,1}</Sub-TotalScopeOfWork> <SalesTax>{0,1}</SalesTax> <TotalScopeOfWorkCost>{0,1}</TotalScopeOfWorkCost> <IncentivesToBeReceivedByContractor>{0,1}</IncentivesToBeReceivedByContractor> <ScopeOfWorkContractPrice>{1,1}</ScopeOfWorkContractPrice> </CustomerPrice>
Source	<xs:element maxOccurs="1" minOccurs="0" name="CustomerPrice" type="CostBreakdown"/>

Element CostBreakdown / Sub-TotalScopeOfWork

Namespace	No namespace
Diagram	
Type	xs:decimal
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element maxOccurs="1" minOccurs="0" name="Sub-TotalScopeOfWork" type="xs:decimal"/>`

Element CostBreakdown / SalesTax

Namespace	No namespace
Diagram	
Type	xs:decimal
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element maxOccurs="1" minOccurs="0" name="SalesTax" type="xs:decimal"/>`

Element CostBreakdown / TotalScopeOfWorkCost

Namespace	No namespace
Annotations	This is a an estimated total cost for this Scope of Work
Diagram	
Type	xs:decimal
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source	`<xs:element name="TotalScopeOfWorkCost" type="xs:decimal" minOccurs="0" maxOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>This is a an estimated total cost for this Scope of Work</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element CostBreakdown / IncentivesToBeReceivedByContractor

Namespace	No namespace
Annotations	Amount that the contractor may deduct from the scope of work's total amount because the contractor will collect the incentive money rather than asking the customer to pay the contractor and acquire it themselves.
Diagram	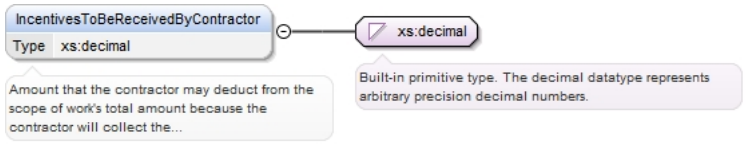
Type	xs:decimal

Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element maxOccurs="1" minOccurs="0" name="IncentivesToBeReceivedByContractor" type="xs:decimal"> <xs:annotation> <xs:documentation>Amount that the contractor may deduct from the scope of work's total amount because the contractor will collect the incentive money rather than asking the customer to pay the contractor and acquire it themselves.</xs:documentation> </xs:annotation> </xs:element>

Element CostBreakdown / ScopeOfWorkContractPrice

Namespace	No namespace
Annotations	The price that the contractor is quoting to the customer in exchange for completing the defined scope of work. May be the the TotalScopeOfWorkCost less any IncentivesToBeReceivedByContractor.
Diagram	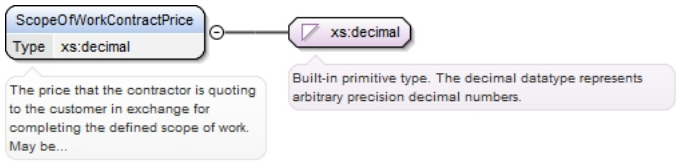
Type	xs:decimal
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element maxOccurs="1" minOccurs="1" name="ScopeOfWorkContractPrice" type="xs:decimal"> <xs:annotation> <xs:documentation>The price that the contractor is quoting to the customer in exchange for completing the defined scope of work. May be the the TotalScopeOfWorkCost less any IncentivesToBeReceivedByContractor.</xs:documentation> </xs:annotation> </xs:element>

Element ScopeOfWorkType / PlannedStartDate

Namespace	No namespace
Diagram	
Type	xs:date
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="PlannedStartDate" type="xs:date" minOccurs="0" maxOccurs="1"/>

Element ScopeOfWorkType / PlannedFinishDate

Namespace	No namespace
Diagram	
Type	xs:date
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source	<xs:element name="PlannedFinishDate" type="xs:date" minOccurs="0" maxOccurs="1"/>

Element ScopeOfWorkType / TotalBenefits

Namespace	No namespace
Annotations	The Benefits obtained for all Measures combined in the Scope of Work. This does not necessarily reflect a direct rollup of all of the individual measure benefits as some combination of measures may impact measure benefits. Individual measure benefits may be expressed independent of other measures. For example: The total benefit of a Lighting efficiency measure combined with a high efficiency HVAC measure would not equal the sum of the measures benefit if implemented independently.
Diagram	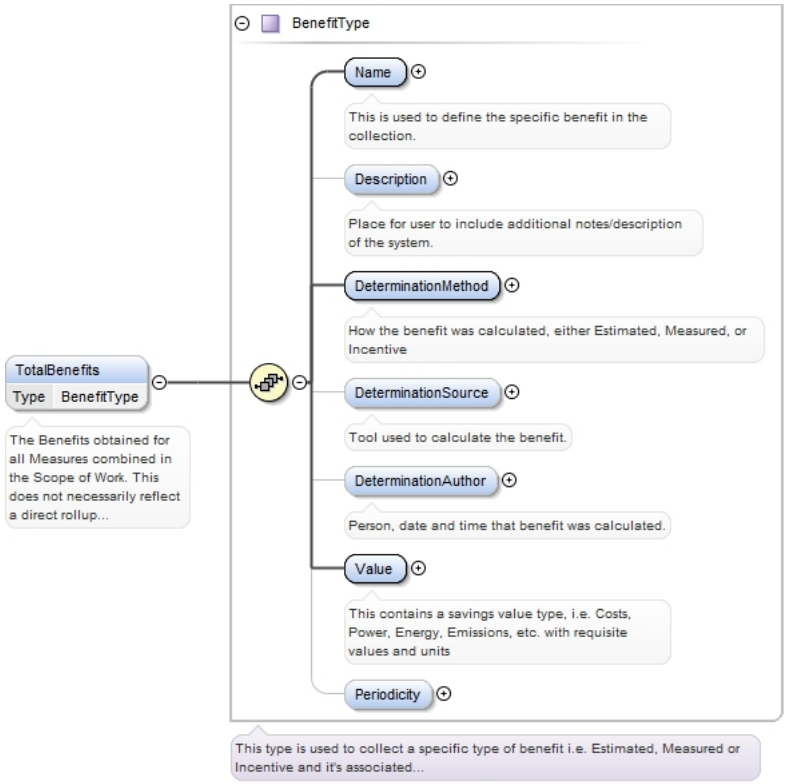
Type	BenefitType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	Name , Description{0,1} , DeterminationMethod , DeterminationSource{0,1} , DeterminationAuthor{0,1} , Value , Periodicity{0,1}
Children	Description, DeterminationAuthor, DeterminationMethod, DeterminationSource, Name, Periodicity, Value
Instance	<TotalBenefits xmlns="http://www.iepmodel.net"> <Name>{1,1}</Name> <Description>{0,1}</Description> <DeterminationMethod>{1,1}</DeterminationMethod> <DeterminationSource>{0,1}</DeterminationSource> <DeterminationAuthor>{0,1}</DeterminationAuthor> <Value>{1,1}</Value> <Periodicity>{0,1}</Periodicity> </TotalBenefits>
Source	<xs:element name="TotalBenefits" type="BenefitType" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>The Benefits obtained for all Measures combined in the Scope of Work. This does not necessarily reflect a direct rollup of all of the individual measure benefits as some combination of measures may impact measure benefits. Individual measure benefits may be expressed independent of other measures. For example: The total benefit of a Lighting efficiency measure combined with a high efficiency HVAC measure would not equal the sum of the measures benefit if implemented independently.</xs:documentation> </xs:annotation> </xs:element>

Element `ProjectType / ExistingAppliance`

Namespace	No namespace
Diagram	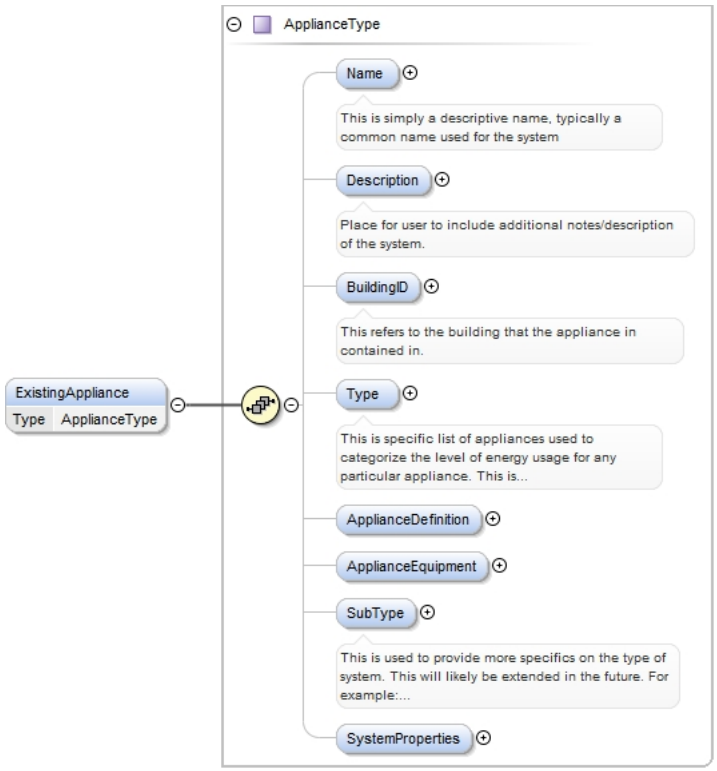
Type	ApplianceType
Properties	content: `complex` minOccurs: `0` maxOccurs: `unbounded`
Model	Name{0,1} , Description{0,1} , BuildingID{0,1} , Type{0,1} , ApplianceDefinition{0,1} , ApplianceEquipment{0,1} , SubType{0,1} , SystemProperties{0,1}
Children	ApplianceDefinition, ApplianceEquipment, BuildingID, Description, Name, SubType, SystemProperties, Type

`Instance`	`<ExistingAppliance>`
	`  <Name>{0,1}</Name>`
	`  <Description>{0,1}</Description>`
	`  <BuildingID>{0,1}</BuildingID>`
	`  <Type>{0,1}</Type>`
	`  <ApplianceDefinition Id="">{0,1}</ApplianceDefinition>`
	`  <ApplianceEquipment EquipmentDefinitionIdRef="" Id="">{0,1}</ApplianceEquipment>`
	`  <SubType>{0,1}</SubType>`
	`  <SystemProperties>{0,1}</SystemProperties>`
	`</ExistingAppliance>`

`Source`	`<xs:element maxOccurs="unbounded" minOccurs="0" name="ExistingAppliance" type="ApplianceType"/>`

Element `ProjectType / ExistingDistributionSystem`

Namespace	No namespace

Diagram	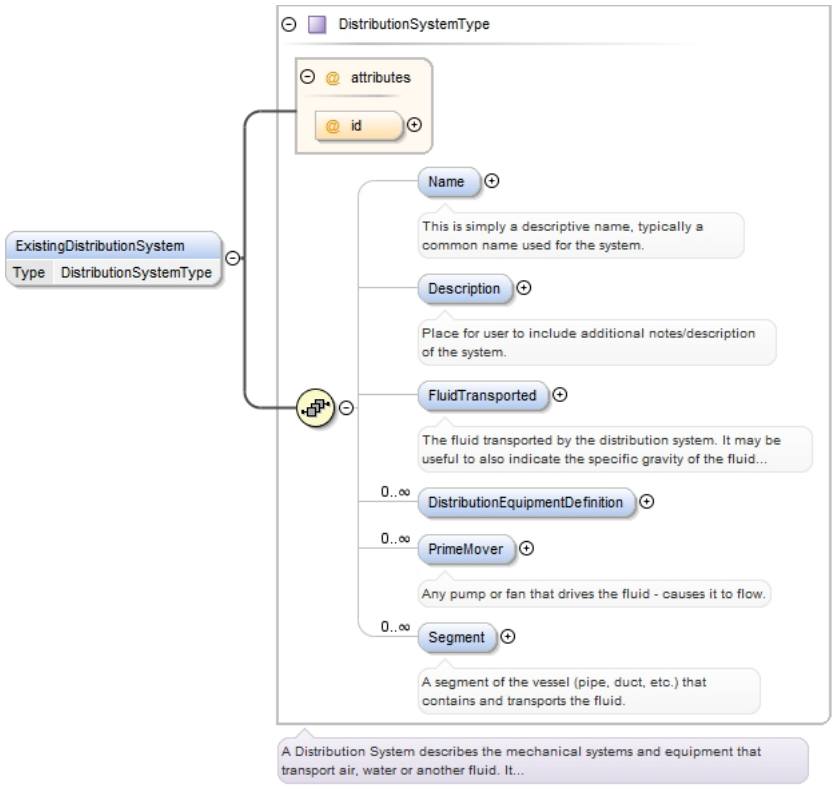
Type	DistributionSystemType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Name{0,1} , Description{0,1} , FluidTransported{0,1} , DistributionEquipmentDefinition* , PrimeMover* , Segment*
Children	Description, DistributionEquipmentDefinition, FluidTransported, Name, PrimeMover, Segment

Instance	`<ExistingDistributionSystem id="">`
	`  <Name>{0,1}</Name>`
	`  <Description>{0,1}</Description>`
	`  <FluidTransported>{0,1}</FluidTransported>`
	`  <DistributionEquipmentDefinition Id="">{0,unbounded}</DistributionEquipmentDefinition>`
	`  <PrimeMover id="">{0,unbounded}</PrimeMover>`
	`  <Segment id="">{0,unbounded}</Segment>`
	`</ExistingDistributionSystem>`

Attributes	**QName** | **Type** | **Fixed** | **Default** | **Use** **id** | xs:ID | | | optional
Source	`<xs:element name="ExistingDistributionSystem" type="DistributionSystemType" minOccurs="0" maxOccurs="unbounded"/>`

Element `ProjectType / ExistingElectricalDistributionSystem`

Namespace	No namespace
Annotations	This defines the hierarchy of existing panels and their subpanels

Diagram	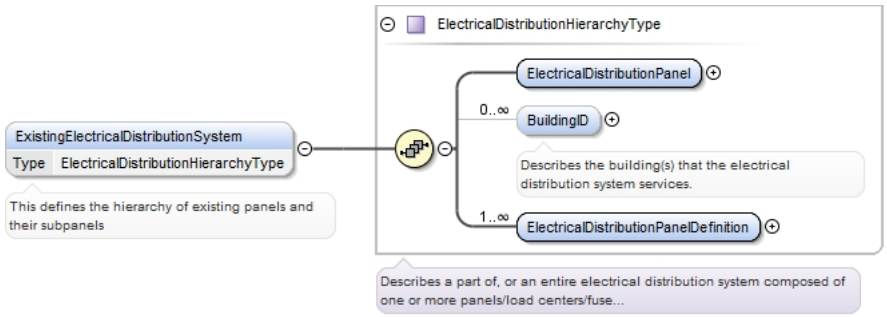
Type	ElectricalDistributionHierarchyType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	ElectricalDistributionPanel , BuildingID* , ElectricalDistributionPanelDefinition+
Children	BuildingID, ElectricalDistributionPanel, ElectricalDistributionPanelDefinition

Instance	`<ExistingElectricalDistributionSystem xmlns="http://www.iepmodel.net">`
	`  <ElectricalDistributionPanel EquipmentDefinitionIdRef="" Id="">{1,1}</ElectricalDistributionPanel>`
	`  <BuildingID>{0,unbounded}</BuildingID>`
	`  <ElectricalDistributionPanelDefinition Id="">{1,unbounded}</ElectricalDistributionPanelDefinition>`
	`</ExistingElectricalDistributionSystem>`

Source	`<xs:element minOccurs="0" name="ExistingElectricalDistributionSystem" type="ElectricalDistributionHierarchyType" maxOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>This defines the hierarchy of existing panels and their subpanels</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element ProjectType / ExistingHVAC

Namespace	No namespace

Diagram	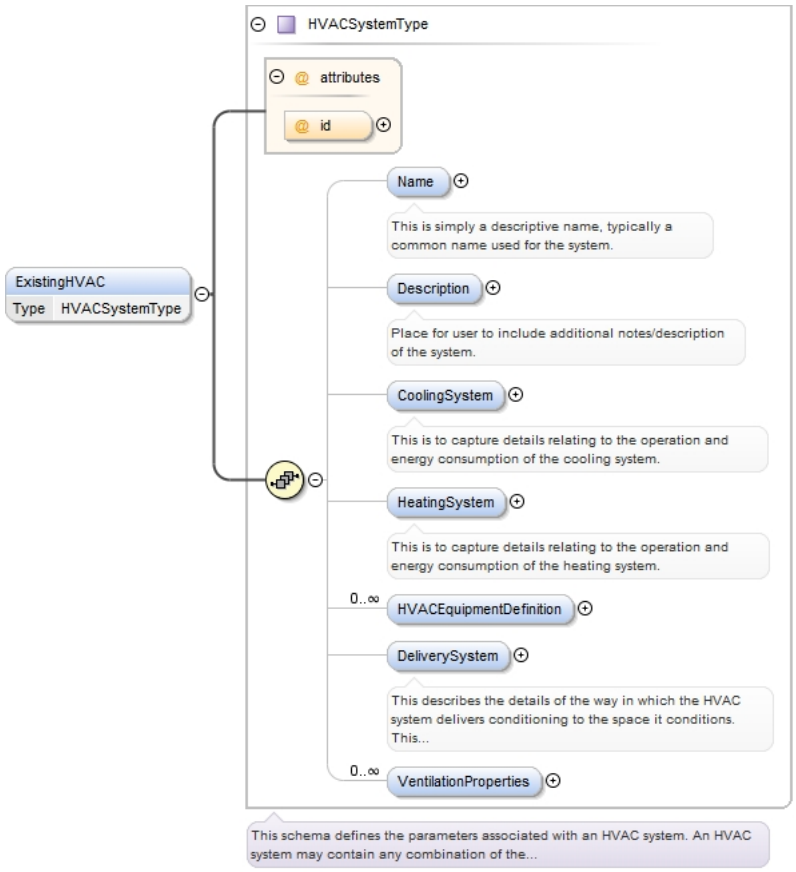
Type	HVACSystemType
Properties	content: `complex` minOccurs: `0` maxOccurs: `unbounded`
Model	Name{0,1} , Description{0,1} , CoolingSystem{0,1} , HeatingSystem{0,1} , HVACEquipmentDefinition* , DeliverySystem{0,1} , VentilationProperties*
Children	CoolingSystem, DeliverySystem, Description, HVACEquipmentDefinition, HeatingSystem, Name, VentilationProperties

`Instance`	`<ExistingHVAC id="">`
	`  <Name>{0,1}</Name>`
	`  <Description>{0,1}</Description>`
	`  <CoolingSystem>{0,1}</CoolingSystem>`
	`  <HeatingSystem>{0,1}</HeatingSystem>`
	`  <HVACEquipmentDefinition Id="">{0,unbounded}</HVACEquipmentDefinition>`
	`  <DeliverySystem>{0,1}</DeliverySystem>`
	`  <VentilationProperties>{0,unbounded}</VentilationProperties>`
	`</ExistingHVAC>`

Attributes	**QName** | **Type** | **Fixed** | **Default** | **Use** **id** | xs:ID | | | optional
`Source`	`<xs:element name="ExistingHVAC" type="HVACSystemType" minOccurs="0" maxOccurs="unbounded"/>`

Element `ProjectType / ExistingLighting`

Namespace	No namespace

Diagram	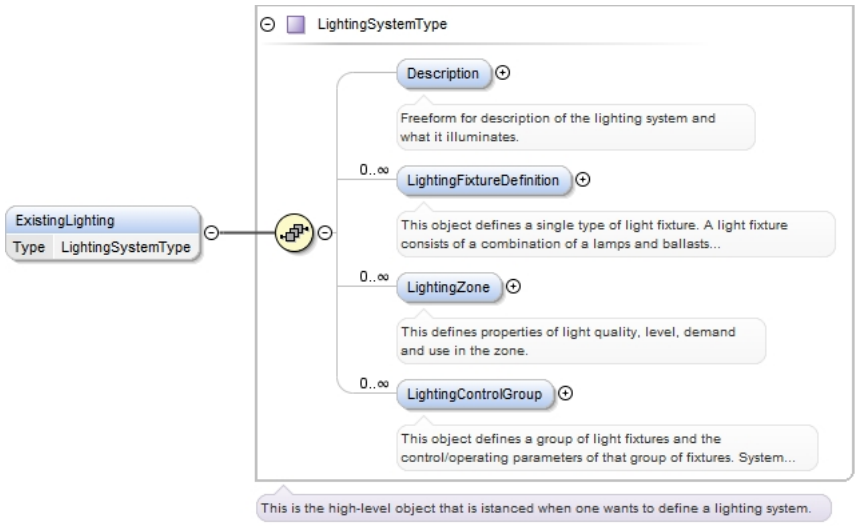
Type	LightingSystemType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Description{0,1} , LightingFixtureDefinition* , LightingZone* , LightingControlGroup*
Children	Description, LightingControlGroup, LightingFixtureDefinition, LightingZone
Instance	<ExistingLighting> <Description>{0,1}</Description> <LightingFixtureDefinition Id="">{0,unbounded}</LightingFixtureDefinition> <LightingZone id="">{0,unbounded}</LightingZone> <LightingControlGroup id="">{0,unbounded}</LightingControlGroup> </ExistingLighting>
Source	<xs:element name="ExistingLighting" type="LightingSystemType" minOccurs="0" maxOccurs="unbounded"/>

Element ProjectType / ExistingPvSystem

Namespace	No namespace
Annotations	An existing photovoltaic (PV) system on the site. Generates electrical energy from sunlight.
Diagram	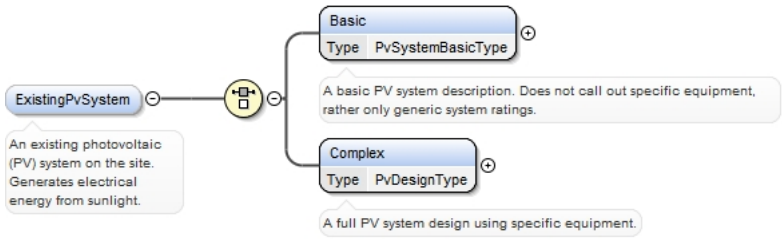
Properties	content: complex minOccurs: 0 maxOccurs: unbounded nillable: false
Model	Basic | Complex
Children	Basic, Complex
Instance	<ExistingPvSystem> <Basic>{1,1}</Basic> <Complex>{1,1}</Complex> </ExistingPvSystem>
Source	<xs:element name="ExistingPvSystem" nillable="false" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>An existing photovoltaic (PV) system on the site. Generates electrical energy from sunlight.</xs:documentation>

```
  </xs:annotation>
  <xs:complexType>
    <xs:choice>
      <xs:element name="Basic" type="PvSystemBasicType">
        <xs:annotation>
          <xs:documentation>A basic PV system description. Does not call out specific
 equipment, rather only generic system ratings.</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="Complex" type="PvDesignType">
        <xs:annotation>
          <xs:documentation>A full PV system design using specific equipment.</
xs:documentation>
        </xs:annotation>
      </xs:element>
    </xs:choice>
  </xs:complexType>
</xs:element>
```

Element ProjectType / ExistingPvSystem / Basic

Namespace	No namespace
Annotations	A basic PV system description. Does not call out specific equipment, rather only generic system ratings.
Diagram	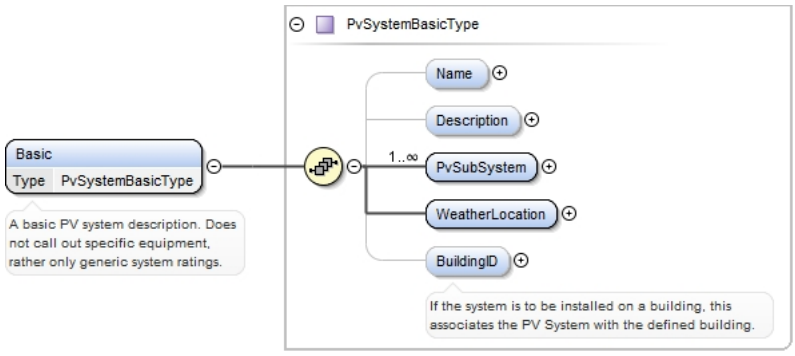
Type	PvSystemBasicType
Properties	content: complex
Model	Name{0,1} , Description{0,1} , PvSubSystem+ , WeatherLocation , BuildingID{0,1}
Children	BuildingID, Description, Name, PvSubSystem, WeatherLocation
Instance	<Basic> <Name>{0,1}</Name> <Description>{0,1}</Description> <PvSubSystem>{1,unbounded}</PvSubSystem> <WeatherLocation>{1,1}</WeatherLocation> <BuildingID>{0,1}</BuildingID> </Basic>
Source	<xs:element name="Basic" type="PvSystemBasicType"> <xs:annotation> <xs:documentation>A basic PV system description. Does not call out specific equipment, rather only generic system ratings.</xs:documentation> </xs:annotation> </xs:element>

Element ProjectType / ExistingPvSystem / Complex

Namespace	No namespace
Annotations	A full PV system design using specific equipment.

Diagram	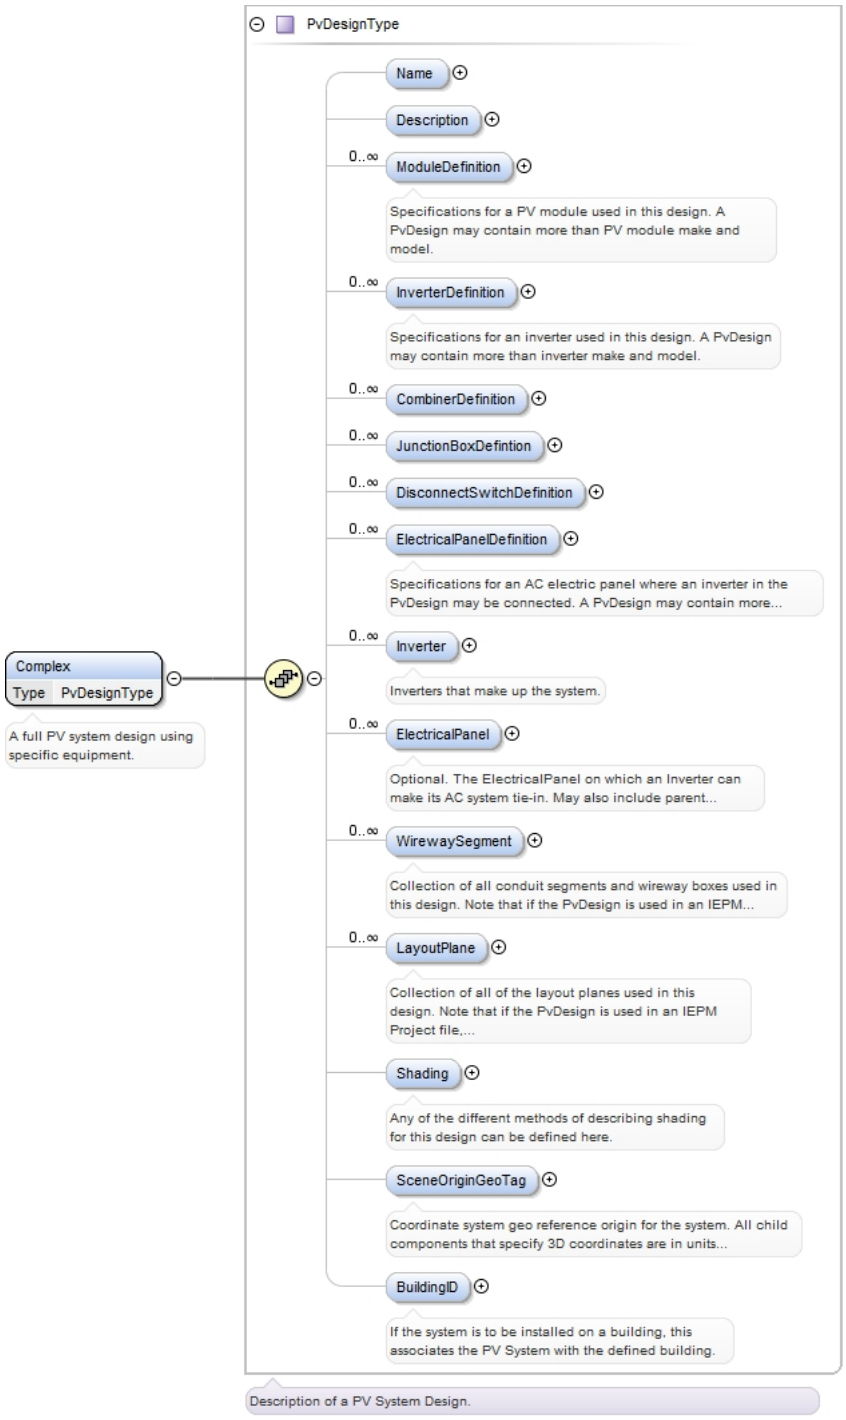
Type	PvDesignType
Properties	content: complex
Model	Name{0,1} , Description{0,1} , ModuleDefinition* , InverterDefinition* , CombinerDefinition* , JunctionBoxDefintion* , DisconnectSwitchDefinition* , ElectricalPanelDefinition* , Inverter* , ElectricalPanel* , WirewaySegment* , LayoutPlane* , Shading{0,1} , SceneOriginGeoTag{0,1} , BuildingID{0,1}
Children	BuildingID, CombinerDefinition, Description, DisconnectSwitchDefinition, ElectricalPanel, ElectricalPanelDefinition, Inverter, InverterDefinition, JunctionBoxDefintion, LayoutPlane, ModuleDefinition, Name, SceneOriginGeoTag, Shading, WirewaySegment
Instance	<Complex> <Name>{0,1}</Name> <Description>{0,1}</Description> <ModuleDefinition Id="">{0,unbounded}</ModuleDefinition> <InverterDefinition Id="">{0,unbounded}</InverterDefinition> <CombinerDefinition Id="">{0,unbounded}</CombinerDefinition>

```
  <JunctionBoxDefintion Id="">{0,unbounded}</JunctionBoxDefintion>
  <DisconnectSwitchDefinition Id="">{0,unbounded}</DisconnectSwitchDefinition>
  <ElectricalPanelDefinition Id="">{0,unbounded}</ElectricalPanelDefinition>
  <Inverter EquipmentDefinitionIdRef="" Id="">{0,unbounded}</Inverter>
  <ElectricalPanel EquipmentDefinitionIdRef="" Id="">{0,unbounded}</ElectricalPanel>
  <WirewaySegment EquipmentDefinitionIdRef="" Id="">{0,unbounded}</WirewaySegment>
  <LayoutPlane id="">{0,unbounded}</LayoutPlane>
  <Shading>{0,1}</Shading>
  <SceneOriginGeoTag>{0,1}</SceneOriginGeoTag>
  <BuildingID>{0,1}</BuildingID>
</Complex>
```

Source

```
<xs:element name="Complex" type="PvDesignType">
  <xs:annotation>
    <xs:documentation>A full PV system design using specific equipment.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element ProjectType / ExistingWaterHeatingSystem

Namespace	No namespace

Diagram	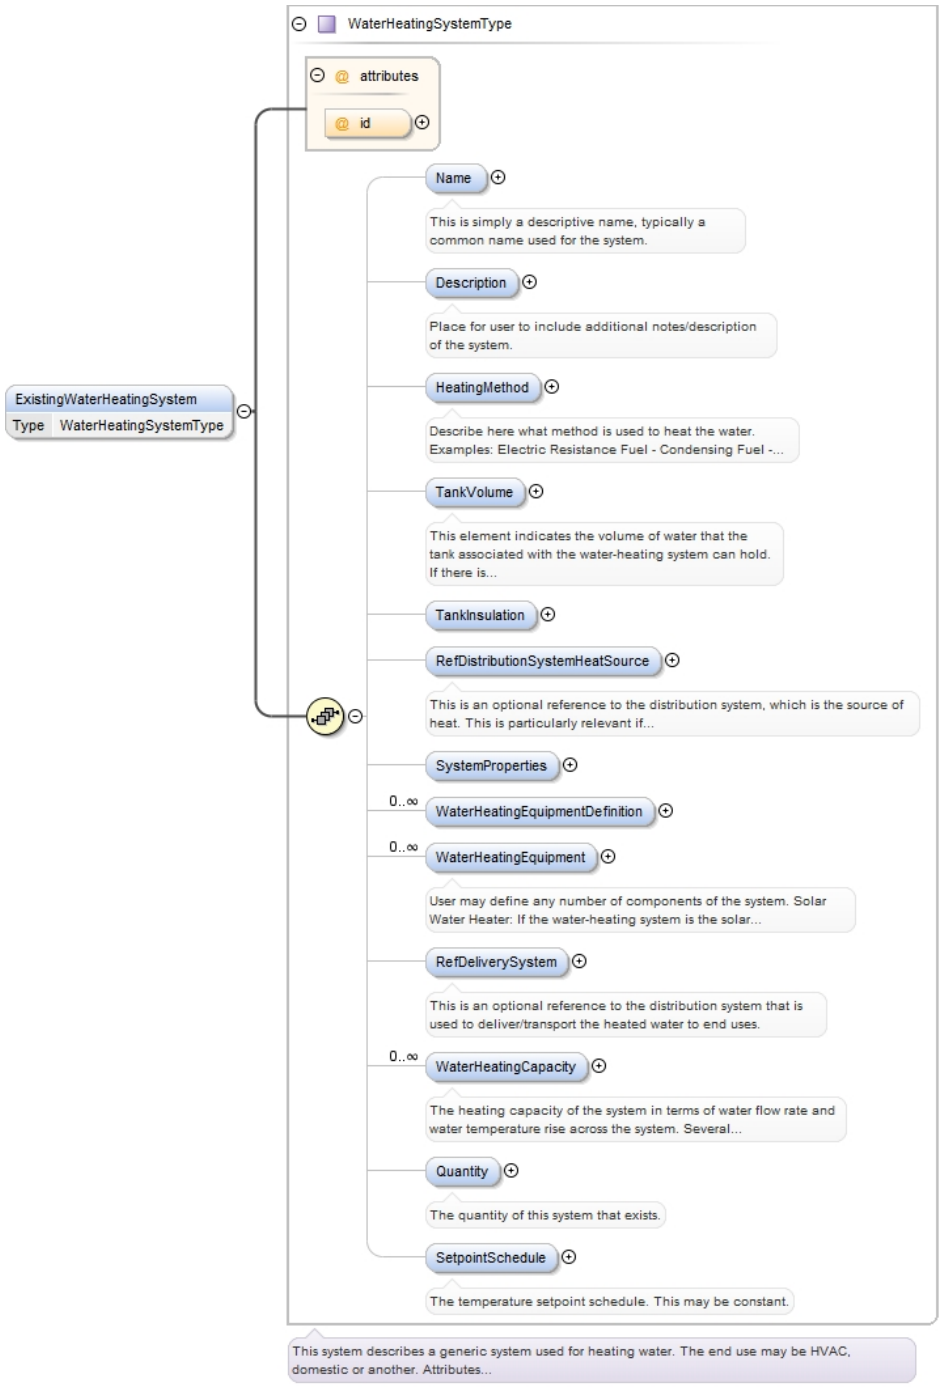
Type	WaterHeatingSystemType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Name{0,1} , Description{0,1} , HeatingMethod{0,1} , TankVolume{0,1} , TankInsulation{0,1} , RefDistributionSystemHeatSource{0,1} , SystemProperties{0,1} , WaterHeatingEquipmentDefinition* , WaterHeatingEquipment* , RefDeliverySystem{0,1} , WaterHeatingCapacity* , Quantity{0,1} , SetpointSchedule{0,1}
Children	Description, HeatingMethod, Name, Quantity, RefDeliverySystem, RefDistributionSystemHeatSource, SetpointSchedule, SystemProperties, TankInsulation, TankVolume, WaterHeatingCapacity, WaterHeatingEquipment, WaterHeatingEquipmentDefinition
Instance	<ExistingWaterHeatingSystem id=""> <Name>{0,1}</Name> <Description>{0,1}</Description>

```
  <HeatingMethod>{0,1}</HeatingMethod>
  <TankVolume Unit="" UnitDesc="">{0,1}</TankVolume>
  <TankInsulation>{0,1}</TankInsulation>
  <RefDistributionSystemHeatSource>{0,1}</RefDistributionSystemHeatSource>
  <SystemProperties>{0,1}</SystemProperties>
  <WaterHeatingEquipmentDefinition Id="">{0,unbounded}</WaterHeatingEquipmentDefinition>
  <WaterHeatingEquipment EquipmentDefinitionIdRef="" Id="">{0,unbounded}</
WaterHeatingEquipment>
  <RefDeliverySystem>{0,1}</RefDeliverySystem>
  <WaterHeatingCapacity>{0,unbounded}</WaterHeatingCapacity>
  <Quantity>{0,1}</Quantity>
  <SetpointSchedule>{0,1}</SetpointSchedule>
</ExistingWaterHeatingSystem>
```

Attributes

QName	Type	Fixed	Default	Use
id	xs:ID			optional

Source

```
<xs:element name="ExistingWaterHeatingSystem" type="WaterHeatingSystemType" minOccurs="0"
 maxOccurs="unbounded"/>
```

Element ProjectType / Schedules

Namespace	No namespace
Annotations	This is a container for all schedule definitions for the systems within the project.
Diagram	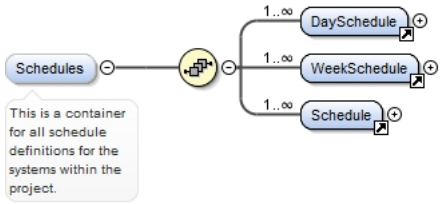
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	DaySchedule+ , WeekSchedule+ , Schedule+
Children	DaySchedule, Schedule, WeekSchedule
Instance	<Schedules xmlns="http://www.iepmodel.net"> <DaySchedule id="" type="">{1,unbounded}</DaySchedule> <WeekSchedule id="" type="">{1,unbounded}</WeekSchedule> <Schedule id="" type="">{1,unbounded}</Schedule> </Schedules>
Source	<xs:element maxOccurs="1" minOccurs="0" name="Schedules"> <xs:annotation> <xs:documentation>This is a container for all schedule definitions for the systems within the project.</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element maxOccurs="unbounded" minOccurs="1" ref="DaySchedule"/> <xs:element maxOccurs="unbounded" minOccurs="1" ref="WeekSchedule"/> <xs:element maxOccurs="unbounded" minOccurs="1" ref="Schedule"/> </xs:sequence> </xs:complexType> </xs:element>

Element ScheduleValueType / TimeBlock

Namespace	No namespace
Annotations	Value for one block of time. Divides a day evenly into number of ScheduleValue elements defined in DaySchedule. Example: If 12 ScheduleValue elements are defined, each will represent two hours
Diagram	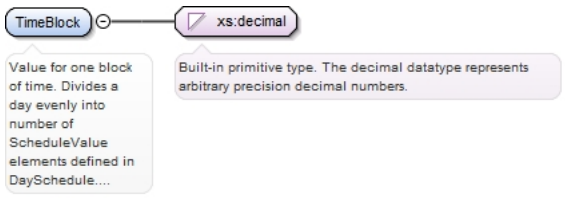

Type	xs:decimal
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="TimeBlock" type="xs:decimal" minOccurs="1" maxOccurs="1"> <xs:annotation> <xs:documentation>Value for one block of time. Divides a day evenly into number of ScheduleValue elements defined in DaySchedule. Example: If 12 ScheduleValue elements are defined, each will represent two hours</xs:documentation> </xs:annotation> </xs:element>

Element ScheduleValueType / HourSpecified

Namespace	No namespace
Annotations	This would used in the case of changes to a specific hour(s). These would match the ScheduleValue
Diagram	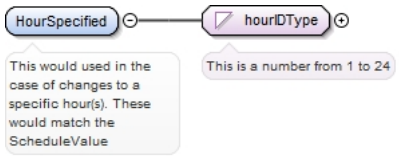
Type	hourIDType
Properties	content: simple minOccurs: 1 maxOccurs: 1
Facets	maxInclusive 24 minInclusive 1
Source	<xs:element name="HourSpecified" type="hourIDType" minOccurs="1" maxOccurs="1"> <xs:annotation> <xs:documentation>This would used in the case of changes to a specific hour(s). These would match the ScheduleValue</xs:documentation> </xs:annotation> </xs:element>

Element ScheduleValueType / BeginTime

Namespace	No namespace
Diagram	
Type	xs:time
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="BeginTime" type="xs:time" minOccurs="1" maxOccurs="1"/>

Element ScheduleValueType / EndTime

Namespace	No namespace
Diagram	
Type	xs:time
Properties	content: simple minOccurs: 1

	maxOccurs: 1
Source	<xs:element name="EndTime" type="xs:time" minOccurs="1" maxOccurs="1"/>

Element ProjectType / UtilityService

Namespace	No namespace
Annotations	This references the Utility company providing energy to the site. Included reference to Utility Service here instead of in Building since Project encapsulates building
Diagram	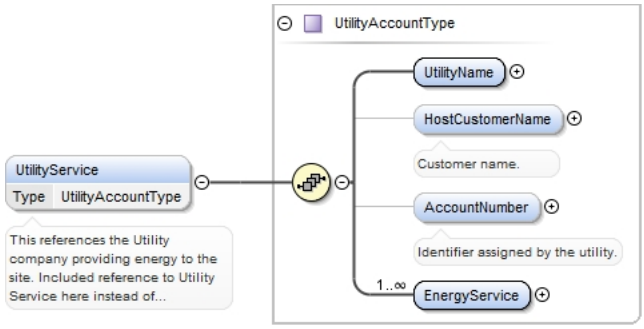
Type	UtilityAccountType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	UtilityName , HostCustomerName{0,1} , AccountNumber{0,1} , EnergyService+
Children	AccountNumber, EnergyService, HostCustomerName, UtilityName
Instance	<UtilityService> <UtilityName>{1,1}</UtilityName> <HostCustomerName>{0,1}</HostCustomerName> <AccountNumber>{0,1}</AccountNumber> <EnergyService>{1,unbounded}</EnergyService> </UtilityService>
Source	<xs:element name="UtilityService" type="UtilityAccountType" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>This references the Utility company providing energy to the site. Included reference to Utility Service here instead of in Building since Project encapsulates building</xs:documentation> </xs:annotation> </xs:element>

Element UtilityAccountType / UtilityName

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple
Source	<xs:element name="UtilityName" type="xs:string"/>

Element UtilityAccountType / HostCustomerName

Namespace	No namespace
Annotations	Customer name.
Diagram	

Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="HostCustomerName" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Customer name.</xs:documentation> </xs:annotation> </xs:element>

Element UtilityAccountType / AccountNumber

Namespace	No namespace
Annotations	Identifier assigned by the utility.
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="AccountNumber" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Identifier assigned by the utility.</xs:documentation> </xs:annotation> </xs:element>

Element UtilityAccountType / EnergyService

Namespace	No namespace

Diagram	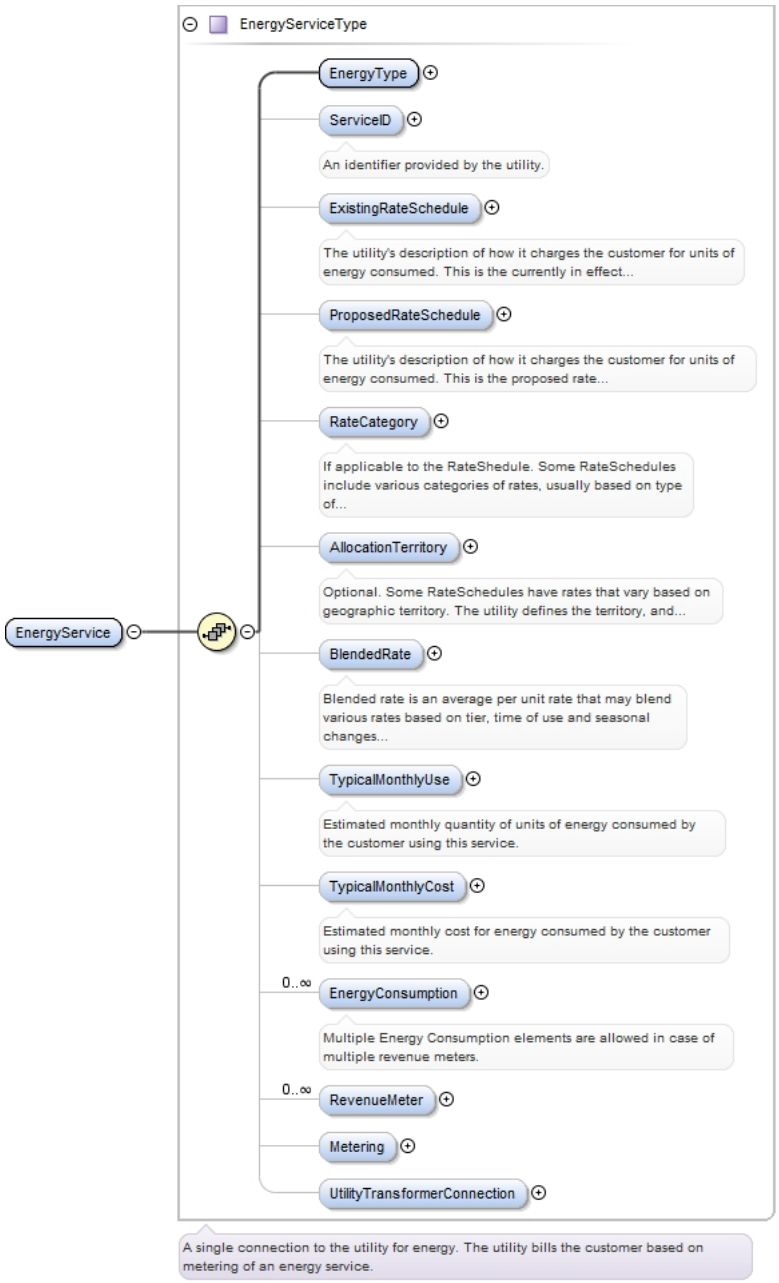
Type	EnergyServiceType
Properties	content: complex minOccurs: 1 maxOccurs: unbounded
Model	EnergyType , ServiceID{0,1} , ExistingRateSchedule{0,1} , ProposedRateSchedule{0,1} , RateCategory{0,1} , AllocationTerritory{0,1} , BlendedRate{0,1} , TypicalMonthlyUse{0,1} , TypicalMonthlyCost{0,1} , EnergyConsumption* , RevenueMeter* , Metering{0,1} , UtilityTransformerConnection{0,1}
Children	AllocationTerritory, BlendedRate, EnergyConsumption, EnergyType, ExistingRateSchedule, Metering, ProposedRateSchedule, RateCategory, RevenueMeter, ServiceID, TypicalMonthlyCost, TypicalMonthlyUse, UtilityTransformerConnection
Instance	<EnergyService> <EnergyType>{1,1}</EnergyType> <ServiceID>{0,1}</ServiceID> <ExistingRateSchedule>{0,1}</ExistingRateSchedule> <ProposedRateSchedule>{0,1}</ProposedRateSchedule> <RateCategory>{0,1}</RateCategory> <AllocationTerritory>{0,1}</AllocationTerritory> <BlendedRate Unit="">{0,1}</BlendedRate> <TypicalMonthlyUse>{0,1}</TypicalMonthlyUse>

```
  <TypicalMonthlyCost Unit="">{0,1}</TypicalMonthlyCost>
  <EnergyConsumption>{0,unbounded}</EnergyConsumption>
  <RevenueMeter Id="">{0,unbounded}</RevenueMeter>
  <Metering>{0,1}</Metering>
  <UtilityTransformerConnection>{0,1}</UtilityTransformerConnection>
</EnergyService>
```

Source

```
<xs:element name="EnergyService" type="EnergyServiceType" minOccurs="1"
 maxOccurs="unbounded"/>
```

Element EnergyServiceType / EnergyType

Namespace	No namespace
Diagram	
Type	EnergyUnitEnumType
Properties	content: simple
Facets	enumeration: BTU enumeration: Joules enumeration: KilowattHours enumeration: Therms
Source	`<xs:element name="EnergyType" type="EnergyUnitEnumType"/>`

Element EnergyServiceType / ServiceID

Namespace	No namespace
Annotations	An identifier provided by the utility.
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0

Source	`<xs:element name="ServiceID" type="xs:string" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>An identifier provided by the utility.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element EnergyServiceType / ExistingRateSchedule

Namespace	No namespace
Annotations	The utility's description of how it charges the customer for units of energy consumed. This is the currently in effect rate schedule.
Diagram	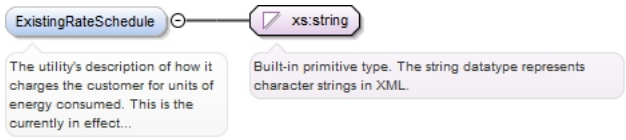
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source	`<xs:element name="ExistingRateSchedule" type="xs:string" maxOccurs="1" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>The utility's description of how it charges the customer for units`
	` of energy consumed. This is the currently in effect rate schedule.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element EnergyServiceType / ProposedRateSchedule

Namespace	No namespace
Annotations	The utility's description of how it charges the customer for units of energy consumed. This is the proposed rate schedule in cases where the project includes a change of rate schedule.
Diagram	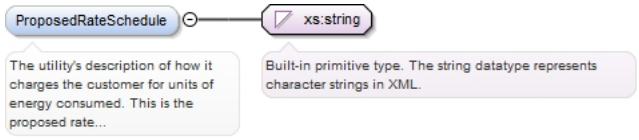
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="ProposedRateSchedule" maxOccurs="1" minOccurs="0" type="xs:string"> <xs:annotation> <xs:documentation>The utility's description of how it charges the customer for units of energy consumed. This is the proposed rate schedule in cases where the project includes a change of rate schedule.</xs:documentation> </xs:annotation> </xs:element>

Element EnergyServiceType / RateCategory

Namespace	No namespace
Annotations	If applicable to the RateShedule. Some RateSchedules include various categories of rates, usually based on type of customer (for example, "All Electric," "Low Income," etc).
Diagram	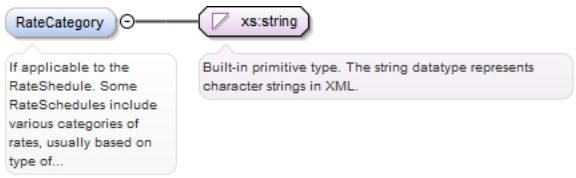
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="RateCategory" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>If applicable to the RateShedule. Some RateSchedules include various categories of rates, usually based on type of customer (for example, "All Electric," "Low Income," etc).</xs:documentation> </xs:annotation> </xs:element>

Element EnergyServiceType / AllocationTerritory

Namespace	No namespace
Annotations	Optional. Some RateSchedules have rates that vary based on geographic territory. The utility defines the territory, and this is their identifier. May be a name or a code.
Diagram	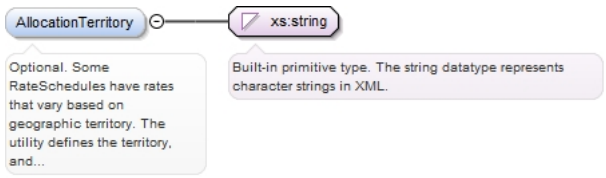
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source	<xs:element name="AllocationTerritory" type="xs:string" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Optional. Some RateSchedules have rates that vary based on geographic territory. The utility defines the territory, and this is their identifier. May be a name or a code.</xs:documentation> </xs:annotation> </xs:element>

Element EnergyServiceType / BlendedRate

Namespace	No namespace
Annotations	Blended rate is an average per unit rate that may blend various rates based on tier, time of use and seasonal changes into a single rate. This will be in cents/kwh or dollars/therm
Diagram	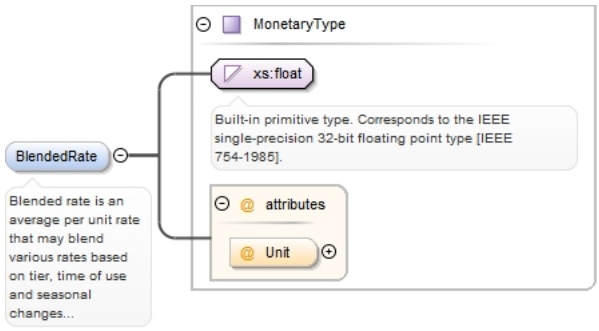
Type	MonetaryType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Attributes	QName: Unit; Type: MonetaryUnitEnumType; Fixed: ; Default: ; Use: optional
Source	<xs:element name="BlendedRate" type="MonetaryType" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Blended rate is an average per unit rate that may blend various rates based on tier, time of use and seasonal changes into a single rate. This will be in cents/kwh or dollars/therm</xs:documentation> </xs:annotation> </xs:element>

Element EnergyServiceType / TypicalMonthlyUse

Namespace	No namespace
Annotations	Estimated monthly quantity of units of energy consumed by the customer using this service.
Diagram	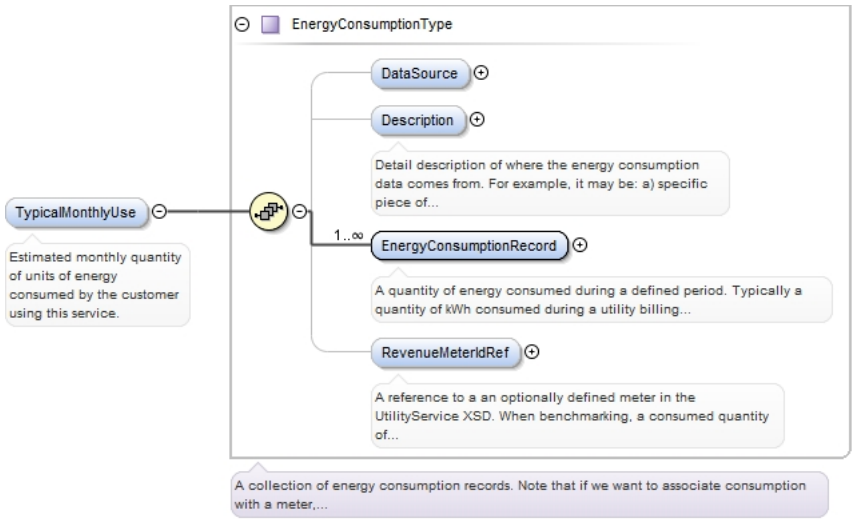
Type	EnergyConsumptionType

Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	DataSource{0,1} , Description{0,1} , EnergyConsumptionRecord+ , RevenueMeterIdRef{0,1}
Children	DataSource, Description, EnergyConsumptionRecord, RevenueMeterIdRef
Instance	<TypicalMonthlyUse> <DataSource>{0,1}</DataSource> <Description>{0,1}</Description> <EnergyConsumptionRecord>{1,unbounded}</EnergyConsumptionRecord> <RevenueMeterIdRef>{0,1}</RevenueMeterIdRef> </TypicalMonthlyUse>
Source	<xs:element name="TypicalMonthlyUse" type="EnergyConsumptionType" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Estimated monthly quantity of units of energy consumed by the customer using this service.</xs:documentation> </xs:annotation> </xs:element>

Element EnergyServiceType / TypicalMonthlyCost

Namespace	No namespace
Annotations	Estimated monthly cost for energy consumed by the customer using this service.
Diagram	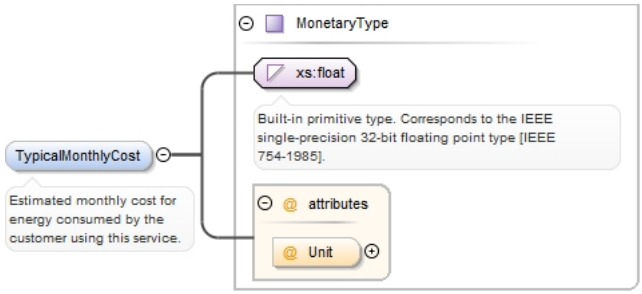
Type	MonetaryType
Properties	content: complex minOccurs: 0 maxOccurs: 1
Attributes	**QName** | **Type** | **Fixed** | **Default** | **Use** **Unit** | MonetaryUnitEnumType | | | optional
Source	<xs:element name="TypicalMonthlyCost" type="MonetaryType" minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Estimated monthly cost for energy consumed by the customer using this service.</xs:documentation> </xs:annotation> </xs:element>

Element EnergyServiceType / EnergyConsumption

Namespace	No namespace
Annotations	Multiple Energy Consumption elements are allowed in case of multiple revenue meters.

Diagram	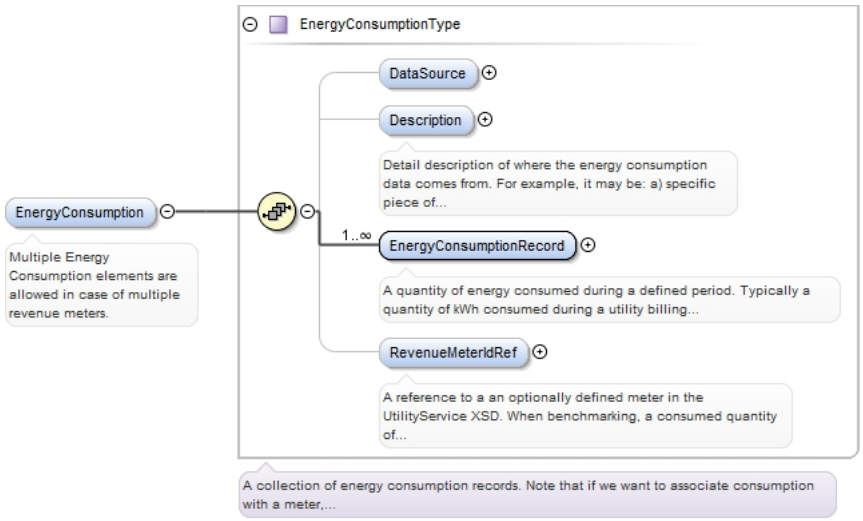
Type	EnergyConsumptionType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	DataSource{0,1} , Description{0,1} , EnergyConsumptionRecord+ , RevenueMeterIdRef{0,1}
Children	DataSource, Description, EnergyConsumptionRecord, RevenueMeterIdRef

Instance	`<EnergyConsumption>`
	`  <DataSource>{0,1}</DataSource>`
	`  <Description>{0,1}</Description>`
	`  <EnergyConsumptionRecord>{1,unbounded}</EnergyConsumptionRecord>`
	`  <RevenueMeterIdRef>{0,1}</RevenueMeterIdRef>`
	`</EnergyConsumption>`

Source	`<xs:element name="EnergyConsumption" type="EnergyConsumptionType" minOccurs="0" maxOccurs="unbounded">`
	`  <xs:annotation>`
	`  <xs:documentation>Multiple Energy Consumption elements are allowed in case of multiple revenue meters.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element EnergyServiceType / RevenueMeter

Namespace	No namespace

Diagram

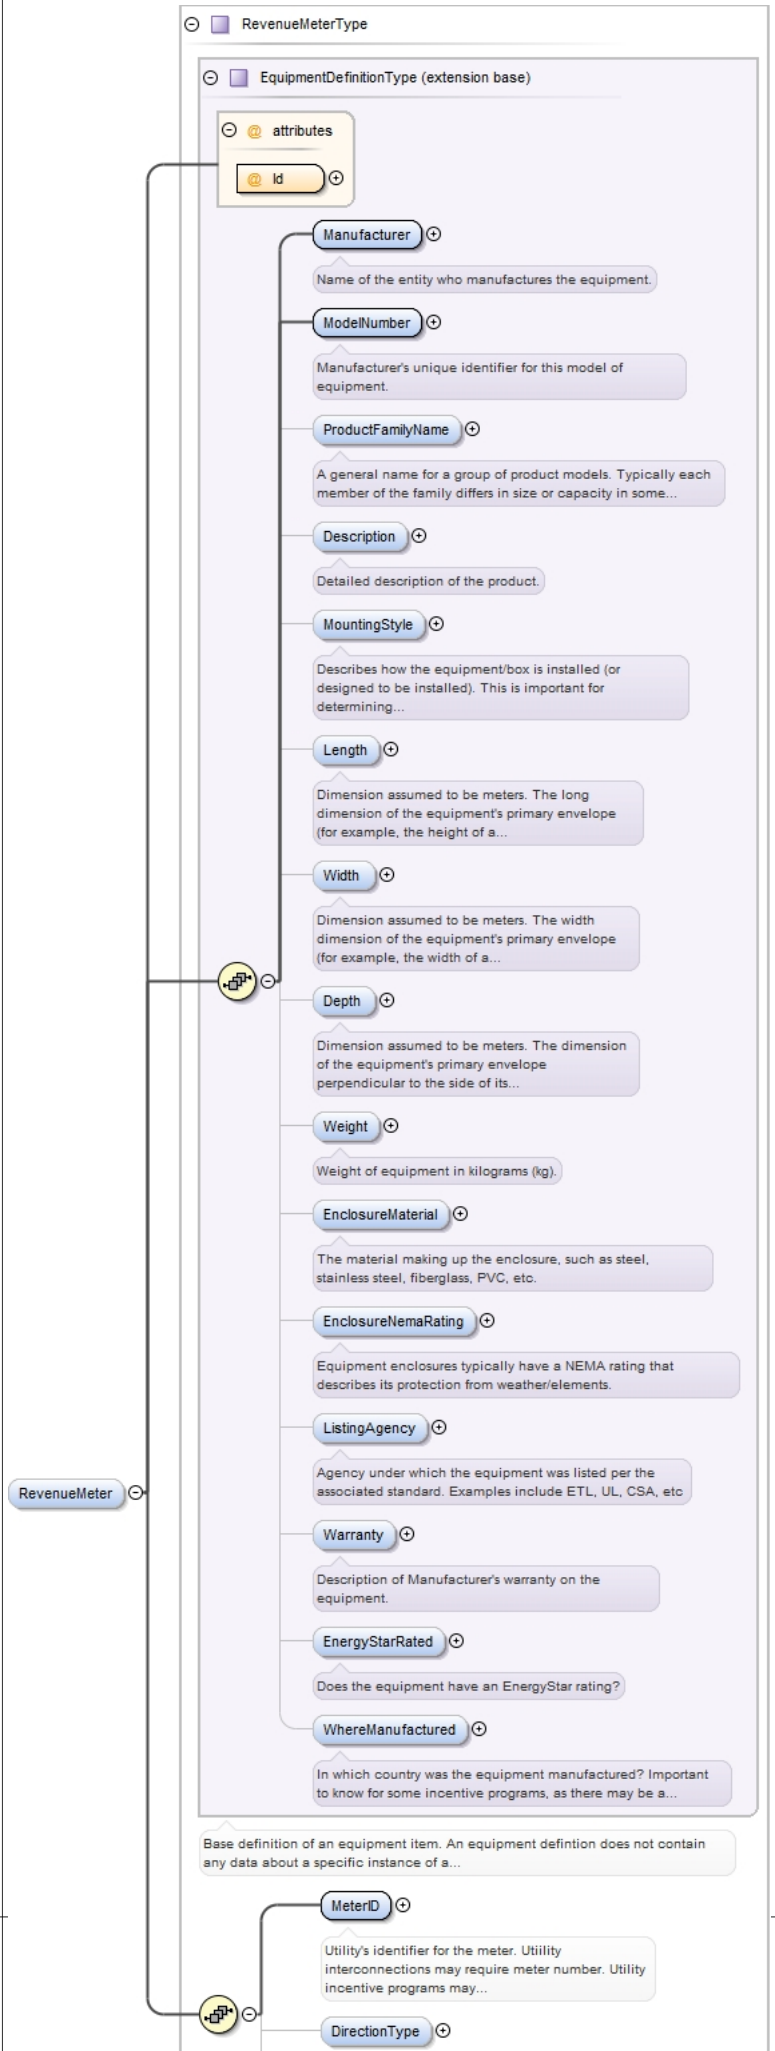
RevenueMeterType
EquipmentDefinitionType (extension base)
attributes
Id
Manufacturer
Name of the entity who manufactures the equipment.
ModelNumber
Manufacturer's unique identifier for this model of equipment.
ProductFamilyName
A general name for a group of product models. Typically each member of the family differs in size or capacity in some...
Description
Detailed description of the product.
MountingStyle
Describes how the equipment/box is installed (or designed to be installed). This is important for determining...
Length
Dimension assumed to be meters. The long dimension of the equipment's primary envelope (for example, the height of a...
Width
Dimension assumed to be meters. The width dimension of the equipment's primary envelope (for example, the width of a...
Depth
Dimension assumed to be meters. The dimension of the equipment's primary envelope perpendicular to the side of its...
Weight
Weight of equipment in kilograms (kg).
EnclosureMaterial
The material making up the enclosure, such as steel, stainless steel, fiberglass, PVC, etc.
EnclosureNemaRating
Equipment enclosures typically have a NEMA rating that describes its protection from weather/elements.
ListingAgency
Agency under which the equipment was listed per the associated standard. Examples include ETL, UL, CSA, etc
Warranty
Description of Manufacturer's warranty on the equipment.
EnergyStarRated
Does the equipment have an EnergyStar rating?
WhereManufactured
In which country was the equipment manufactured? Important to know for some incentive programs, as there may be a...
Base definition of an equipment item. An equipment defintion does not contain any data about a specific instance of a...
RevenueMeter
MeterID
Utility's identifier for the meter. Utiility interconnections may require meter number. Utility incentive programs may...
DirectionType

Type	RevenueMeterType
Type hierarchy	• EquipmentDefinitionType • RevenueMeterType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	Manufacturer , ModelNumber , ProductFamilyName{0,1} , Description{0,1} , MountingStyle{0,1} , Length{0,1} , Width{0,1} , Depth{0,1} , Weight{0,1} , EnclosureMaterial{0,1} , EnclosureNemaRating{0,1} , ListingAgency{0,1} , Warranty{0,1} , EnergyStarRated{0,1} , WhereManufactured{0,1} , MeterID , DirectionType{0,1} , MeasurementMechanism{0,1} , Space*
Children	Depth, Description, DirectionType, EnclosureMaterial, EnclosureNemaRating, EnergyStarRated, Length, ListingAgency, Manufacturer, MeasurementMechanism, MeterID, ModelNumber, MountingStyle, ProductFamilyName, Space, Warranty, Weight, WhereManufactured, Width

Instance

```
<RevenueMeter Id="" xmlns="http://www.iepmodel.net">
  <Manufacturer>{1,1}</Manufacturer>
  <ModelNumber>{1,1}</ModelNumber>
  <ProductFamilyName>{0,1}</ProductFamilyName>
  <Description>{0,1}</Description>
  <MountingStyle>{0,1}</MountingStyle>
  <Length>{0,1}</Length>
  <Width>{0,1}</Width>
  <Depth>{0,1}</Depth>
  <Weight>{0,1}</Weight>
  <EnclosureMaterial>{0,1}</EnclosureMaterial>
  <EnclosureNemaRating>{0,1}</EnclosureNemaRating>
  <ListingAgency>{0,1}</ListingAgency>
  <Warranty>{0,1}</Warranty>
  <EnergyStarRated>{0,1}</EnergyStarRated>
  <WhereManufactured>{0,1}</WhereManufactured>
  <MeterID>{1,1}</MeterID>
  <DirectionType>{0,1}</DirectionType>
  <MeasurementMechanism>{0,1}</MeasurementMechanism>
  <Space>{0,unbounded}</Space>
</RevenueMeter>
```

Attributes

QName	Type	Fixed	Default	Use
Id	xs:ID			required

Source

```
<xs:element name="RevenueMeter" type="RevenueMeterType" minOccurs="0"
 maxOccurs="unbounded"/>
```

Element RevenueMeterType / MeterID

Namespace	No namespace
Annotations	Utility's identifier for the meter. Utiility interconnections may require meter number. Utility incentive programs may require meter id as well.
Diagram	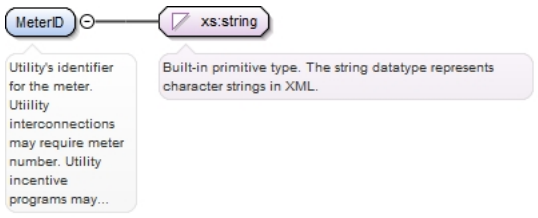
Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1

Source

```
<xs:element name="MeterID" type="xs:string" minOccurs="1" maxOccurs="1">
  <xs:annotation>
    <xs:documentation>Utility's identifier for the meter. Utiility interconnections
 may require meter number. Utility incentive programs may require meter id as well.</
xs:documentation>
  </xs:annotation>
</xs:element>
```

Element RevenueMeterType / DirectionType

Namespace	No namespace
Diagram	
Type	MeterDirectionEnumType
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	enumeration: bi-directional enumeration: mono-directional
Source	<xs:element name="DirectionType" type="MeterDirectionEnumType" minOccurs="0" maxOccurs="1"/>

Element RevenueMeterType / MeasurementMechanism

Namespace	No namespace
Diagram	
Type	MeterMeasurementMechanismEnumType
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	enumeration: current transducer enumeration: inline electro-mechanical
Source	<xs:element name="MeasurementMechanism" type="MeterMeasurementMechanismEnumType" minOccurs="0" maxOccurs="1"/>

Element RevenueMeterType / Space

Namespace	No namespace
Annotations	A building consists of one or many spaces. This object provides a high level specification of the building space profile intended for use with Projects and simulations such as SaveEnergy123 and Portfolio Manager. https://saveenergy123.com/ http://www.energystar.gov/index.cfm?c=evaluate_performance.bus_portfoliomanager
Diagram	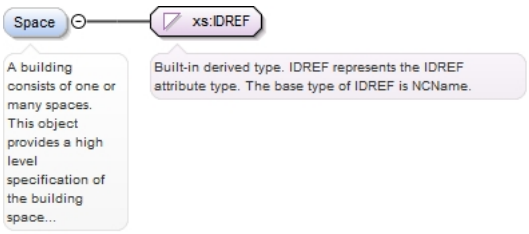
Type	xs:IDREF
Properties	content: simple minOccurs: 0 maxOccurs: unbounded
Source	<xs:element name="Space" type="xs:IDREF" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>A building consists of one or many spaces. This object provides a high level specification of the building space profile intended for use with Projects and simulations such as SaveEnergy123 and Portfolio Manager. https://saveenergy123.com/ http://www.energystar.gov/index.cfm?c=evaluate_performance.bus_portfoliomanager</xs:documentation> </xs:annotation>

	`</xs:element>`

Element EnergyServiceType / Metering

Namespace	No namespace
Diagram	
Type	MeteringTypesEnumType
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	enumeration: Individually Metered enumeration: Master Metered
Source	`<xs:element name="Metering" type="MeteringTypesEnumType" minOccurs="0" maxOccurs="1"/>`

Element EnergyServiceType / UtilityTransformerConnection

Namespace	No namespace
Diagram	
Type	UtilityTransformerConnectionTypesEnumType
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	enumeration: Secondary enumeration: Transmission enumeration: Primary
Source	`<xs:element name="UtilityTransformerConnection" type="UtilityTransformerConnectionTypesEnumType" minOccurs="0" maxOccurs="1"/>`

Element ProjectType / OccupantConstraints

Namespace	No namespace
Diagram	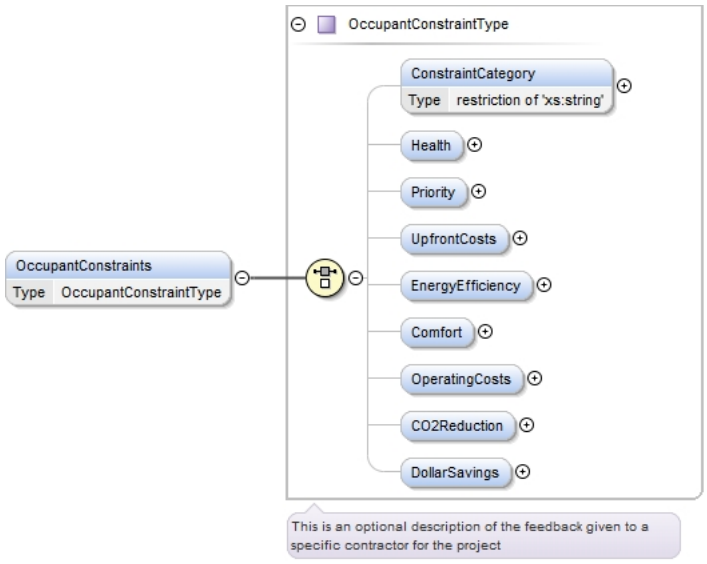
Type	OccupantConstraintType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded

Model	ConstraintCategory{0,1} | Health{0,1} | Priority{0,1} | UpfrontCosts{0,1} | EnergyEfficiency{0,1} | Comfort{0,1} | OperatingCosts{0,1} | CO2Reduction{0,1} | DollarSavings{0,1}
Children	CO2Reduction, Comfort, ConstraintCategory, DollarSavings, EnergyEfficiency, Health, OperatingCosts, Priority, UpfrontCosts
Instance	<OccupantConstraints> <ConstraintCategory>{0,1}</ConstraintCategory> <Health>{0,1}</Health> <Priority>{0,1}</Priority> <UpfrontCosts>{0,1}</UpfrontCosts> <EnergyEfficiency>{0,1}</EnergyEfficiency> <Comfort>{0,1}</Comfort> <OperatingCosts>{0,1}</OperatingCosts> <CO2Reduction>{0,1}</CO2Reduction> <DollarSavings>{0,1}</DollarSavings> </OccupantConstraints>
Source	<xs:element name="OccupantConstraints" type="OccupantConstraintType" minOccurs="0" maxOccurs="unbounded"/>

Element OccupantConstraintType / ConstraintCategory

Namespace	No namespace
Diagram	
Type	restriction of xs:string
Properties	content: simple minOccurs: 0
Facets	enumeration Health enumeration Comfort enumeration EnergyEfficiency enumeration UpfrontCosts enumeration OperatingCosts enumeration CO2Reduction enumeration DollarSavings
Source	<xs:element name="ConstraintCategory" minOccurs="0"> <xs:simpleType> <xs:restriction base="xs:string"> <xs:enumeration value="Health"/> <xs:enumeration value="Comfort"/> <xs:enumeration value="EnergyEfficiency"/> <xs:enumeration value="UpfrontCosts"/> <xs:enumeration value="OperatingCosts"/> <xs:enumeration value="CO2Reduction"/> <xs:enumeration value="DollarSavings"/> </xs:restriction> </xs:simpleType> </xs:element>

Element OccupantConstraintType / Health

Namespace	No namespace
Diagram	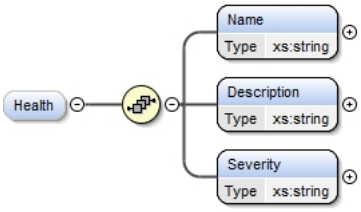
Properties	content: complex minOccurs: 0
Model	Name , Description , Severity
Children	Description, Name, Severity

Instance	<Health> <Name>{1,1}</Name> <Description>{1,1}</Description> <Severity>{1,1}</Severity> </Health>
Source	<xs:element name="Health" minOccurs="0"> <xs:complexType> <xs:annotation> <xs:documentation>This is used to describe health constraints such as specific allergies</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="Name" type="xs:string" minOccurs="1" maxOccurs="1"/> <xs:element name="Description" type="xs:string" minOccurs="1" maxOccurs="1"/> <xs:element name="Severity" type="xs:string" minOccurs="1" maxOccurs="1"/> </xs:sequence> </xs:complexType> </xs:element>

Element OccupantConstraintType / Health / Name

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="Name" type="xs:string" minOccurs="1" maxOccurs="1"/>

Element OccupantConstraintType / Health / Description

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="Description" type="xs:string" minOccurs="1" maxOccurs="1"/>

Element OccupantConstraintType / Health / Severity

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="Severity" type="xs:string" minOccurs="1" maxOccurs="1"/>

Element OccupantConstraintType / Priority

Namespace	No namespace

Diagram	
Properties	content: complex minOccurs: 0
Model	PriorityLevel , PriorityType
Children	PriorityLevel, PriorityType
Instance	<Priority> <PriorityLevel>{1,1}</PriorityLevel> <PriorityType>{1,1}</PriorityType> </Priority>
Source	<xs:element name="Priority" minOccurs="0"> <xs:complexType> <xs:annotation> <xs:documentation>Scale of 1 to 10.</xs:documentation> </xs:annotation> <xs:sequence minOccurs="0" maxOccurs="unbounded"> <xs:element name="PriorityLevel" type="xs:int" minOccurs="1" maxOccurs="1"/> <xs:element name="PriorityType" type="xs:string" minOccurs="1" maxOccurs="1"/> </xs:sequence> </xs:complexType> </xs:element>

Element OccupantConstraintType / Priority / PriorityLevel

Namespace	No namespace
Diagram	
Type	xs:int
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="PriorityLevel" type="xs:int" minOccurs="1" maxOccurs="1"/>

Element OccupantConstraintType / Priority / PriorityType

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="PriorityType" type="xs:string" minOccurs="1" maxOccurs="1"/>

Element OccupantConstraintType / UpfrontCosts

Namespace	No namespace
Diagram	
Properties	content: complex

	minOccurs: 0
Model	MaximumUpfrontCosts
Children	MaximumUpfrontCosts
Instance	<UpfrontCosts> <MaximumUpfrontCosts>{1,1}</MaximumUpfrontCosts> </UpfrontCosts>
Source	<xs:element name="UpfrontCosts" minOccurs="0"> <xs:complexType> <xs:sequence> <xs:element name="MaximumUpfrontCosts" type="xs:float" minOccurs="1" maxOccurs="1"/> </xs:sequence> </xs:complexType> </xs:element>

Element OccupantConstraintType / UpfrontCosts / MaximumUpfrontCosts

Namespace	No namespace
Diagram	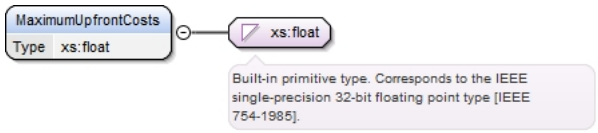
Type	xs:float
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="MaximumUpfrontCosts" type="xs:float" minOccurs="1" maxOccurs="1"/>

Element OccupantConstraintType / EnergyEfficiency

Namespace	No namespace
Diagram	
Properties	content: complex minOccurs: 0
Model	RequestedLevelOfEfficiency
Children	RequestedLevelOfEfficiency
Instance	<EnergyEfficiency> <RequestedLevelOfEfficiency>{1,1}</RequestedLevelOfEfficiency> </EnergyEfficiency>
Source	<xs:element name="EnergyEfficiency" minOccurs="0"> <xs:complexType> <xs:sequence> <xs:element name="RequestedLevelOfEfficiency" type="xs:string" minOccurs="1" maxOccurs="1"/> </xs:sequence> </xs:complexType> </xs:element>

Element OccupantConstraintType / EnergyEfficiency / RequestedLevelOfEfficiency

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1

Source	<xs:element name="RequestedLevelOfEfficiency" type="xs:string" minOccurs="1" maxOccurs="1"/>

Element OccupantConstraintType / Comfort

Namespace	No namespace
Diagram	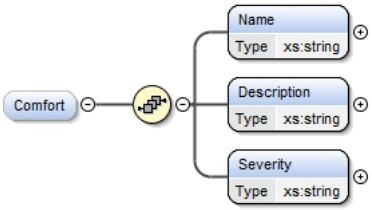
Properties	content: complex minOccurs: 0
Model	Name , Description , Severity
Children	Description, Name, Severity
Instance	<Comfort> <Name>{1,1}</Name> <Description>{1,1}</Description> <Severity>{1,1}</Severity> </Comfort>
Source	<xs:element name="Comfort" minOccurs="0"> <xs:complexType> <xs:annotation> <xs:documentation>This is used to describe specific comfort constraints in the building such as drafts, ventilation, hot and cold spots, etc.</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="Name" type="xs:string" minOccurs="1" maxOccurs="1"/> <xs:element name="Description" type="xs:string" minOccurs="1" maxOccurs="1"/> <xs:element name="Severity" type="xs:string" minOccurs="1" maxOccurs="1"/> </xs:sequence> </xs:complexType> </xs:element>

Element OccupantConstraintType / Comfort / Name

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="Name" type="xs:string" minOccurs="1" maxOccurs="1"/>

Element OccupantConstraintType / Comfort / Description

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="Description" type="xs:string" minOccurs="1" maxOccurs="1"/>

Element OccupantConstraintType / Comfort / Severity

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	`<xs:element name="Severity" type="xs:string" minOccurs="1" maxOccurs="1"/>`

Element OccupantConstraintType / OperatingCosts

Namespace	No namespace
Diagram	
Properties	content: complex minOccurs: 0
Model	MaximumOperatingCosts
Children	MaximumOperatingCosts

Instance	`<OperatingCosts>`
	`  <MaximumOperatingCosts>{1,1}</MaximumOperatingCosts>`
	`</OperatingCosts>`

Source	`<xs:element name="OperatingCosts" minOccurs="0">`
	`  <xs:complexType>`
	`  <xs:sequence>`
	`  <xs:element name="MaximumOperatingCosts" type="xs:float" minOccurs="1"`
	`  maxOccurs="1"/>`
	`  </xs:sequence>`
	`  </xs:complexType>`
	`</xs:element>`

Element OccupantConstraintType / OperatingCosts / MaximumOperatingCosts

Namespace	No namespace
Diagram	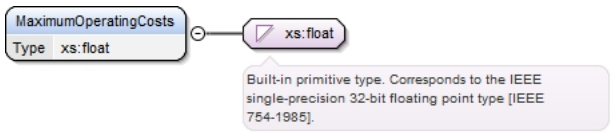
Type	xs:float
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	`<xs:element name="MaximumOperatingCosts" type="xs:float" minOccurs="1" maxOccurs="1"/>`

Element OccupantConstraintType / CO2Reduction

Namespace	No namespace
Diagram	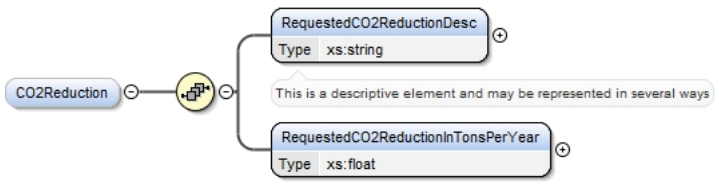

Properties	content: complex minOccurs: 0
Model	RequestedCO2ReductionDesc , RequestedCO2ReductionInTonsPerYear
Children	RequestedCO2ReductionDesc, RequestedCO2ReductionInTonsPerYear
Instance	<CO2Reduction> <RequestedCO2ReductionDesc>{1,1}</RequestedCO2ReductionDesc> <RequestedCO2ReductionInTonsPerYear>{1,1}</RequestedCO2ReductionInTonsPerYear> </CO2Reduction>
Source	<xs:element name="CO2Reduction" minOccurs="0"> <xs:complexType> <xs:sequence> <xs:element name="RequestedCO2ReductionDesc" type="xs:string" minOccurs="1" maxOccurs="1"> <xs:annotation> <xs:documentation>This is a descriptive element and may be represented in several ways</xs:documentation> </xs:annotation> </xs:element> <xs:element name="RequestedCO2ReductionInTonsPerYear" type="xs:float" minOccurs="1" maxOccurs="1"/> </xs:sequence> </xs:complexType> </xs:element>

Element OccupantConstraintType / CO2Reduction / RequestedCO2ReductionDesc

Namespace	No namespace
Annotations	This is a descriptive element and may be represented in several ways
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="RequestedCO2ReductionDesc" type="xs:string" minOccurs="1" maxOccurs="1"> <xs:annotation> <xs:documentation>This is a descriptive element and may be represented in several ways</xs:documentation> </xs:annotation> </xs:element>

Element OccupantConstraintType / CO2Reduction / RequestedCO2ReductionInTonsPerYear

Namespace	No namespace
Diagram	
Type	xs:float
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="RequestedCO2ReductionInTonsPerYear" type="xs:float" minOccurs="1" maxOccurs="1"/>

Element OccupantConstraintType / DollarSavings

Namespace	No namespace

Diagram	
Properties	content: complex minOccurs: 0
Model	ExpectedTotalDollarSavingsInOperatingCosts
Children	ExpectedTotalDollarSavingsInOperatingCosts
Instance	<DollarSavings> <ExpectedTotalDollarSavingsInOperatingCosts>{1,1}</ExpectedTotalDollarSavingsInOperatingCosts> </DollarSavings>
Source	<xs:element name="DollarSavings" minOccurs="0"> <xs:complexType> <xs:sequence> <xs:element name="ExpectedTotalDollarSavingsInOperatingCosts" type="xs:float" minOccurs="1" maxOccurs="1"/> </xs:sequence> </xs:complexType> </xs:element>

Element OccupantConstraintType / DollarSavings / ExpectedTotalDollarSavingsInOperatingCosts

Namespace	No namespace
Diagram	
Type	xs:float
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	<xs:element name="ExpectedTotalDollarSavingsInOperatingCosts" type="xs:float" minOccurs="1" maxOccurs="1"/>

Element ProjectType / ConsumerFeedback

Namespace	No namespace
Diagram	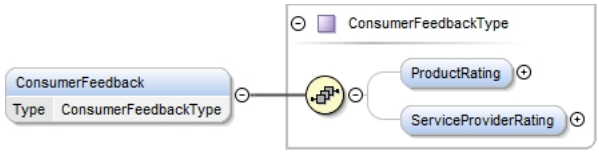
Type	ConsumerFeedbackType
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	ProductRating{0,1} , ServiceProviderRating{0,1}
Children	ProductRating, ServiceProviderRating
Instance	<ConsumerFeedback> <ProductRating>{0,1}</ProductRating> <ServiceProviderRating>{0,1}</ServiceProviderRating> </ConsumerFeedback>
Source	<xs:element name="ConsumerFeedback" type="ConsumerFeedbackType" minOccurs="0" maxOccurs="unbounded"/>

Element ConsumerFeedbackType / ProductRating

Namespace	No namespace

Diagram	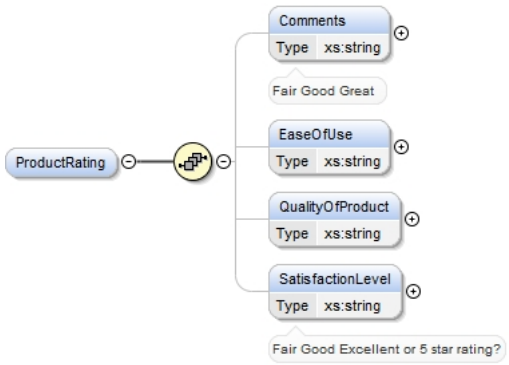
Properties	content: complex minOccurs: 0
Model	Comments{0,1} , EaseOfUse{0,1} , QualityOfProduct{0,1} , SatisfactionLevel{0,1}
Children	Comments, EaseOfUse, QualityOfProduct, SatisfactionLevel

Instance	<pre><ProductRating>
	  <Comments>{0,1}</Comments>
	  <EaseOfUse>{0,1}</EaseOfUse>
	  <QualityOfProduct>{0,1}</QualityOfProduct>
	  <SatisfactionLevel>{0,1}</SatisfactionLevel>
	</ProductRating></pre>

Source	<pre><xs:element name="ProductRating" minOccurs="0">
	  <xs:complexType>
	  <xs:sequence>
	  <xs:element name="Comments" type="xs:string" minOccurs="0" maxOccurs="1">
	  <xs:annotation>
	  <xs:documentation>Fair Good Great</xs:documentation>
	  </xs:annotation>
	  </xs:element>
	  <xs:element name="EaseOfUse" type="xs:string" minOccurs="0" maxOccurs="1"/>
	  <xs:element name="QualityOfProduct" type="xs:string" minOccurs="0" maxOccurs="1"/>
	  <xs:element name="SatisfactionLevel" type="xs:string" minOccurs="0" maxOccurs="1">
	  <xs:annotation>
	  <xs:documentation>Fair Good Excellent or 5 star rating?</xs:documentation>
	  </xs:annotation>
	  </xs:element>
	  </xs:sequence>
	  </xs:complexType>
	</xs:element></pre>

Element ConsumerFeedbackType / ProductRating / Comments

Namespace	No namespace
Annotations	Fair Good Great
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source	<pre><xs:element name="Comments" type="xs:string" minOccurs="0" maxOccurs="1">
	  <xs:annotation>
	  <xs:documentation>Fair Good Great</xs:documentation>
	  </xs:annotation>
	</xs:element></pre>

Element ConsumerFeedbackType / ProductRating / EaseOfUse

Namespace	No namespace

Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="EaseOfUse" type="xs:string" minOccurs="0" maxOccurs="1"/>`

Element ConsumerFeedbackType / ProductRating / QualityOfProduct

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="QualityOfProduct" type="xs:string" minOccurs="0" maxOccurs="1"/>`

Element ConsumerFeedbackType / ProductRating / SatisfactionLevel

Namespace	No namespace
Annotations	Fair Good Excellent or 5 star rating?
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1

Source	`<xs:element name="SatisfactionLevel" type="xs:string" minOccurs="0" maxOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>Fair Good Excellent or 5 star rating?</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element ConsumerFeedbackType / ServiceProviderRating

Namespace	No namespace

Diagram	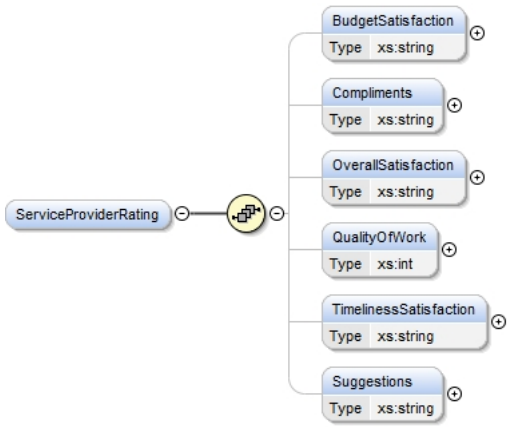
Properties	content: complex minOccurs: 0
Model	BudgetSatisfaction{0,1} , Compliments{0,1} , OverallSatisfaction{0,1} , QualityOfWork{0,1} , TimelinessSatisfaction{0,1} , Suggestions{0,1}
Children	BudgetSatisfaction, Compliments, OverallSatisfaction, QualityOfWork, Suggestions, TimelinessSatisfaction
Instance	<ServiceProviderRating> <BudgetSatisfaction>{0,1}</BudgetSatisfaction> <Compliments>{0,1}</Compliments> <OverallSatisfaction>{0,1}</OverallSatisfaction> <QualityOfWork>{0,1}</QualityOfWork> <TimelinessSatisfaction>{0,1}</TimelinessSatisfaction> <Suggestions>{0,1}</Suggestions> </ServiceProviderRating>
Source	<xs:element name="ServiceProviderRating" minOccurs="0"> <xs:complexType> <xs:sequence> <xs:element name="BudgetSatisfaction" type="xs:string" minOccurs="0" maxOccurs="1"/> <xs:element name="Compliments" type="xs:string" minOccurs="0" maxOccurs="1"/> <xs:element name="OverallSatisfaction" type="xs:string" minOccurs="0" maxOccurs="1"/> > <xs:element name="QualityOfWork" type="xs:int" minOccurs="0" maxOccurs="1"/> <xs:element name="TimelinessSatisfaction" type="xs:string" minOccurs="0" maxOccurs="1"/> <xs:element name="Suggestions" type="xs:string" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:complexType> </xs:element>

Element ConsumerFeedbackType / ServiceProviderRating / BudgetSatisfaction

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xs:element name="BudgetSatisfaction" type="xs:string" minOccurs="0" maxOccurs="1"/>

Element ConsumerFeedbackType / ServiceProviderRating / Compliments

Namespace	No namespace
Diagram	

Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="Compliments" type="xs:string" minOccurs="0" maxOccurs="1"/>`

Element ConsumerFeedbackType / ServiceProviderRating / OverallSatisfaction

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="OverallSatisfaction" type="xs:string" minOccurs="0" maxOccurs="1"/>`

Element ConsumerFeedbackType / ServiceProviderRating / QualityOfWork

Namespace	No namespace
Diagram	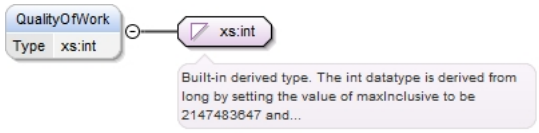
Type	xs:int
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="QualityOfWork" type="xs:int" minOccurs="0" maxOccurs="1"/>`

Element ConsumerFeedbackType / ServiceProviderRating / TimelinessSatisfaction

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="TimelinessSatisfaction" type="xs:string" minOccurs="0" maxOccurs="1"/>`

Element ConsumerFeedbackType / ServiceProviderRating / Suggestions

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple

	minOccurs: 0 maxOccurs: 1
Source	`<xs:element name="Suggestions" type="xs:string" minOccurs="0" maxOccurs="1"/>`

Element CertifyingAuthority / CAID

Namespace	No namespace
Diagram	
Type	xs:int
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	`<xs:element name="CAID" type="xs:int" minOccurs="1" maxOccurs="1"/>`

Element CertifyingAuthority / CAName

Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple minOccurs: 1 maxOccurs: 1
Source	`<xs:element name="CAName" type="xs:string" minOccurs="1" maxOccurs="1"/>`

Element CertifyingAuthority / MailingAddress

Namespace	No namespace
Diagram	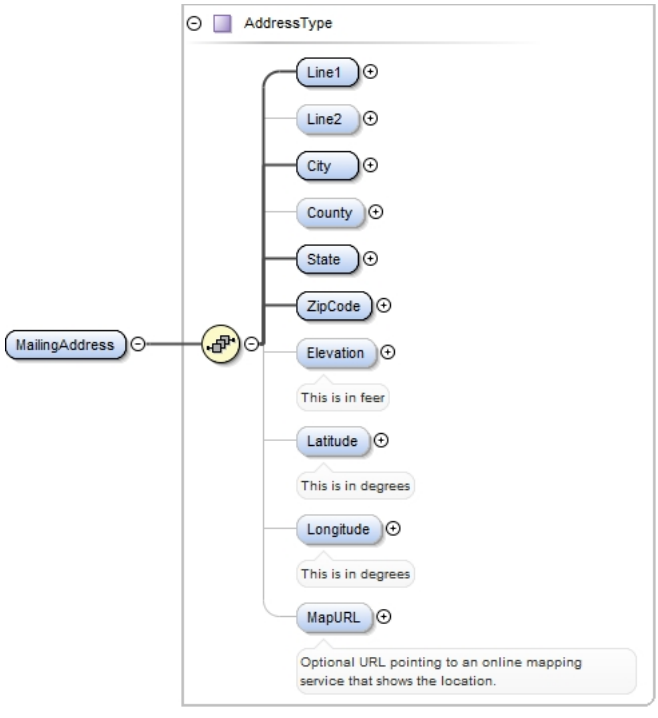

Type	AddressType
Properties	content: complex minOccurs: 1 maxOccurs: 1
Model	Line1 , Line2{0,1} , City , County{0,1} , State , ZipCode , Elevation{0,1} , Latitude{0,1} , Longitude{0,1} , MapURL{0,1}
Children	City, County, Elevation, Latitude, Line1, Line2, Longitude, MapURL, State, ZipCode
Instance	<MailingAddress> <Line1>{1,1}</Line1> <Line2>{0,1}</Line2> <City>{1,1}</City> <County>{0,1}</County> <State>{1,1}</State> <ZipCode>{1,1}</ZipCode> <Elevation>{0,1}</Elevation> <Latitude>{0,1}</Latitude> <Longitude>{0,1}</Longitude> <MapURL>{0,1}</MapURL> </MailingAddress>
Source	<xs:element name="MailingAddress" type="AddressType" minOccurs="1" maxOccurs="1"/>

Element CertifyingAuthority / Contact

Namespace	No namespace
Diagram	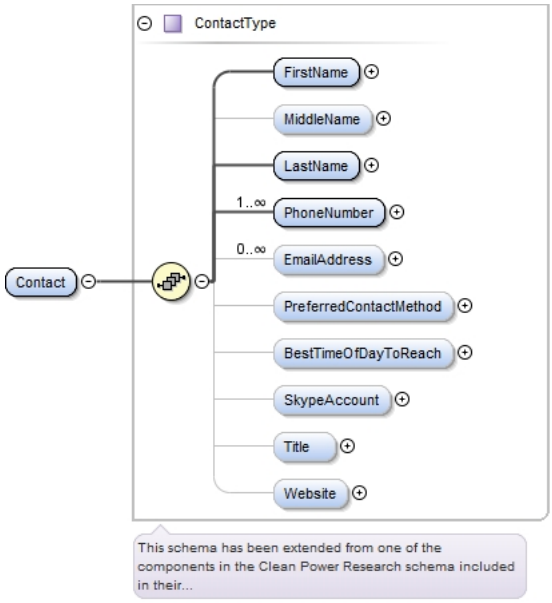
Type	ContactType
Properties	content: complex minOccurs: 1 maxOccurs: unbounded
Model	FirstName , MiddleName{0,1} , LastName , PhoneNumber+ , EmailAddress* , PreferredContactMethod{0,1} , BestTimeOfDayToReach{0,1} , SkypeAccount{0,1} , Title{0,1} , Website{0,1}
Children	BestTimeOfDayToReach, EmailAddress, FirstName, LastName, MiddleName, PhoneNumber, PreferredContactMethod, SkypeAccount, Title, Website
Instance	<Contact> <FirstName>{1,1}</FirstName> <MiddleName>{0,1}</MiddleName> <LastName>{1,1}</LastName> <PhoneNumber>{1,unbounded}</PhoneNumber> <EmailAddress>{0,unbounded}</EmailAddress> <PreferredContactMethod>{0,1}</PreferredContactMethod> <BestTimeOfDayToReach>{0,1}</BestTimeOfDayToReach> <SkypeAccount>{0,1}</SkypeAccount> <Title>{0,1}</Title> <Website>{0,1}</Website>

	`</Contact>`
Source	`<xs:element name="Contact" type="ContactType" minOccurs="1" maxOccurs="unbounded"/>`

Attribute(s)

Attribute `ParticipantType / @id`

Namespace	No namespace	
Type	xs:ID	
Properties	use:	`required`
Used by	Complex Type	ParticipantType
Source	`<xs:attribute name="id" use="required" type="xs:ID"/>`	

Attribute `DataOriginatorType / ParticipantID / @ParticipantID`

Namespace	No namespace
Annotations	`This references the specific Participant`
Type	xs:IDREF
Properties	content: `simple`
Used by	Element DataOriginatorType/ParticipantID

Source	`<xs:attribute name="ParticipantID" type="xs:IDREF">`
	`  <xs:annotation>`
	`  <xs:documentation>This references the specific Participant</xs:documentation>`
	`  </xs:annotation>`
	`</xs:attribute>`

Attribute `AreaType / @Unit`

Namespace	No namespace	
Annotations	`Unit of measurement.`	
Type	AreaUnitEnumType	
Properties	use:	`optional`
	default:	`SquareMeters`
Facets	enumeration	`SquareCentimeters`
	enumeration	`SquareFeet`
	enumeration	`SquareInches`
	enumeration	`SquareKilometers`
	enumeration	`SquareMeters`
	enumeration	`SquareMiles`
	enumeration	`SquareMillimeters`
	enumeration	`SquareYards`
Used by	Complex Type	AreaType

Source	`<xs:attribute name="Unit" type="AreaUnitEnumType" use="optional" default="SquareMeters">`
	`  <xs:annotation>`
	`  <xs:documentation>Unit of measurement.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:attribute>`	

Attribute `SpaceType / @id`

Namespace	No namespace	
Type	xs:ID	
Properties	content:	`simple`
Used by	Complex Type	SpaceType

Source	<xs:attribute name="id" type="xs:ID"/>

Attribute EnergyType / @Unit

Namespace	No namespace	
Annotations	Unit of measurement specified as an enum. This should be used for defining the type value's units. If the proper enum is not listed, please use the UnitDesc field to specify the units. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.	
Type	EnergyUnitEnumType	
Properties	use:	optional
Facets	enumeration	BTU
	enumeration	Joules
	enumeration	KilowattHours
	enumeration	Therms
Used by	Complex Type	EnergyType
Source	<xs:attribute name="Unit" type="EnergyUnitEnumType" use="optional"> <xs:annotation> <xs:documentation>Unit of measurement specified as an enum. This should be used for defining the type value's units. If the proper enum is not listed, please use the UnitDesc field to specify the units. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.</xs:documentation> </xs:annotation> </xs:attribute>	

Attribute EnergyType / @UnitDesc

Namespace	No namespace	
Annotations	Unit of measurement specified as a string This should be used for defining the type value's units if the proper enum is not listed in Unit. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.	
Type	xs:string	
Properties	content:	simple
Used by	Complex Type	EnergyType
Source	<xs:attribute name="UnitDesc" type="xs:string"> <xs:annotation> <xs:documentation>Unit of measurement specified as a string This should be used for defining the type value's units if the proper enum is not listed in Unit. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.</xs:documentation> </xs:annotation> </xs:attribute>	

Attribute EnergyType / @Fuel

Namespace	No namespace	
Annotations	Fuel type specified as an enum. This should be used for defining the type value's fuel. If the proper enum is not listed, please use the FuelDesc field to specify the units. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the FuelDesc may contain a default type.	
Type	EnergyClassEnumType	
Properties	use:	optional
Facets	enumeration	Coal (anthracite)
	enumeration	Coal (bituminous)
	enumeration	Coke
	enumeration	Diesel

	enumeration	District Chilled Water	
	enumeration	District Hot Water	
	enumeration	District Steam	
	enumeration	Electricity	
	enumeration	Fuel Oil (No. 1)	Number 1 is similar to kerosene and is the fraction that boils off right after gasoline.
	enumeration	Fuel Oil (No. 2)	
	enumeration	Fuel Oil (No. 4)	Number 4 fuel oil is usually a blend of distillate and residual fuel oils, such as No. 2 and 6; however, sometimes it is just a heavy distillate. No. 4 may be classified as diesel, distillate or residual fuel oil.
	enumeration	Fuel Oil (No. 5 and No. 6)	Number 5 fuel oil and Number 6 fuel oil are called residual fuel oils (RFO) or heavy fuel oils. More Number 6 oil is produced compared to Number 5 oil, the terms heavy fuel oil and residual fuel oil are sometimes used as names for Number 6. Number 5 and 6 are what remains of the crude oil after gasoline and the distillate fuel oils are extracted through distillation. Number 5 fuel oil is a mixture of 75-80 % Number 6 oil and 25-20% of Number 2 oil. Number 6 oil may also contain a small amount of No. 2 to get it to meet specifications.
	enumeration	Geothermal	
	enumeration	Kerosene	
	enumeration	Liquid Propane	
	enumeration	Natural Gas	
	enumeration	Other	
	enumeration	Propane	
	enumeration	Steam	
	enumeration	Wood	
Used by	Complex Type	EnergyType	
Source	<xs:attribute name="Fuel" type="EnergyClassEnumType" use="optional"> <xs:annotation> <xs:documentation>Fuel type specified as an enum. This should be used for defining the type value's fuel. If the proper enum is not listed, please use the FuelDesc field to specify the units. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the FuelDesc may contain a default type.</xs:documentation> </xs:annotation> </xs:attribute>		

Attribute EnergyType / @FuelDesc

Namespace	No namespace	
Annotations	FuelType specified as a string. This should be used for defining the type value's fuel if the proper enum is not listed in Fuel. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the FuelDesc may contain a default type.	
Type	xs:string	
Properties	content:	simple
Used by	Complex Type	EnergyType
Source	<xs:attribute name="FuelDesc" type="xs:string"> <xs:annotation> <xs:documentation>FuelType specified as a string. This should be used for defining the type value's fuel if the proper enum is not listed in Fuel. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the FuelDesc may contain a default type.</xs:documentation> </xs:annotation> </xs:attribute>	

Attribute DimensionType / @Unit

Namespace	No namespace	
Annotations	Unit of measurement.	
Type	DimensionUnitEnumType	
Properties	use:	optional
	default:	Meters
Facets	enumeration	Centimeters
	enumeration	Feet
	enumeration	Inches
	enumeration	Kilometers
	enumeration	Meters
	enumeration	Miles
	enumeration	Millimeters
	enumeration	Yards
Used by	Complex Type	DimensionType
Source	<xs:attribute name="Unit" type="DimensionUnitEnumType" use="optional" default="Meters"> <xs:annotation> <xs:documentation>Unit of measurement.</xs:documentation> </xs:annotation> </xs:attribute>	

Attribute AtticType / @id

Namespace	No namespace	
Type	xs:IDREF	
Properties	content:	simple
Used by	Complex Type	AtticType
Source	<xs:attribute name="id" type="xs:IDREF"/>	

Attribute CeilingType / @id

Namespace	No namespace	
Type	xs:IDREF	
Properties	content:	simple
Used by	Complex Type	CeilingType
Source	<xs:attribute name="id" type="xs:IDREF"/>	

Attribute DoorType / @UFactor

Namespace	No namespace	
Type	xs:double	
Properties	use:	required
Used by	Complex Type	DoorType
Source	<xs:attribute name="UFactor" use="required" type="xs:double"/>	

Attribute DoorType / @id

Namespace	No namespace	
Type	xs:IDREF	
Properties	content:	simple

Used by	Complex Type	DoorType
Source	<xs:attribute name="id" type="xs:IDREF"/>	

Attribute FenestrationType / @id

Namespace	No namespace	
Type	xs:IDREF	
Properties	content:	simple
Used by	Complex Type	FenestrationType
Source	<xs:attribute name="id" type="xs:IDREF"/>	

Attribute FoundationType / @id

Namespace	No namespace	
Type	xs:IDREF	
Properties	content:	simple
Used by	Complex Type	FoundationType
Source	<xs:attribute name="id" type="xs:IDREF"/>	

Attribute GarageType / @id

Namespace	No namespace	
Type	xs:IDREF	
Properties	content:	simple
Used by	Complex Type	GarageType
Source	<xs:attribute name="id" type="xs:IDREF"/>	

Attribute LayoutPlaneType / @id

Namespace	No namespace	
Annotations	Unique identifier for this layout plane.	
Type	xs:ID	
Properties	content:	simple
Used by	Complex Type	LayoutPlaneType
Source	<xs:attribute name="id" type="xs:ID"> <xs:annotation> <xs:documentation>Unique identifier for this layout plane.</xs:documentation> </xs:annotation> </xs:attribute>	

Attribute RoofType / @id

Namespace	No namespace	
Type	xs:IDREF	
Properties	content:	simple
Used by	Complex Type	RoofType
Source	<xs:attribute name="id" type="xs:IDREF"/>	

Attribute WallType / @id

Namespace	No namespace	
Type	xs:IDREF	

Properties	content:	simple
Used by	Complex Type	WallType
Source	<xs:attribute name="id" type="xs:IDREF"/>	

Attribute WindowType / @id

Namespace	No namespace	
Type	xs:IDREF	
Properties	content:	simple
Used by	Complex Type	WindowType
Source	<xs:attribute name="id" type="xs:IDREF"/>	

Attribute FlowType / @Unit

Namespace	No namespace	
Annotations	Unit of measurement.	
Type	FlowUnitEnumType	
Properties	use:	optional
Facets	enumeration	CFM
	enumeration	CubicMPerHr
	enumeration	CubicMPerMin
	enumeration	GPH
	enumeration	GPM
	enumeration	LPerSec
Used by	Complex Type	FlowType
Source	<xs:attribute name="Unit" type="FlowUnitEnumType" use="optional"> <xs:annotation> <xs:documentation>Unit of measurement.</xs:documentation> </xs:annotation> </xs:attribute>	

Attribute PressureType / @Unit

Namespace	No namespace	
Annotations	Unit of measurement.	
Type	PressureUnitEnumType	
Properties	use:	optional
Facets	enumeration	Atmospheres
	enumeration	CentimetersOfH2O
	enumeration	CentimetersOfMercury
	enumeration	InchesOfH2O
	enumeration	InchesOfMercury
	enumeration	kPa kiloPascals
	enumeration	MillimetersOfMercury
	enumeration	Pascals
	enumeration	PSI Pounds per Square Inch
Used by	Complex Type	PressureType
Source	<xs:attribute name="Unit" type="PressureUnitEnumType" use="optional"> <xs:annotation> <xs:documentation>Unit of measurement.</xs:documentation> </xs:annotation> </xs:attribute>	

Attribute EnvelopeType / @id

Namespace	No namespace
Type	xs:ID
Properties	content: simple
Used by	Complex Type EnvelopeType
Source	`<xs:attribute name="id" type="xs:ID"/>`

Attribute PowerType / @TestCondition

Namespace	No namespace
Annotations	The "rating" or list of conditions at which the power was tested.
Type	xs:string
Properties	use: optional
Used by	Complex Type PowerType

Source	`<xs:attribute name="TestCondition" type="xs:string" use="optional">`
	`  <xs:annotation>`
	`  <xs:documentation>The "rating" or list of conditions at which the power was tested.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:attribute>`

Attribute PowerType / @Unit

Namespace	No namespace
Annotations	Unit of measurement specified as an enum. This should be used for defining the type value's units. If the proper enum is not listed, please use the UnitDesc field to specify the units. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.
Type	PowerUnitEnumType
Properties	use: optional
Facets	enumeration BtuPerHour enumeration BtuPerSecond enumeration Candela enumeration Footcandle enumeration FootPoundForcePerSecond enumeration Horsepower enumeration KilocaloriesPerSecond enumeration KilogramForceMeterPerSecond enumeration Kilowatt enumeration Lumen enumeration Watt
Used by	Complex Type PowerType
Source	`<xs:attribute name="Unit" type="PowerUnitEnumType" use="optional">` `  <xs:annotation>` ` <xs:documentation>Unit of measurement specified as an enum. This should be used for defining the type value's units. If the proper enum is not listed, please use the UnitDesc field to specify the units. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.</xs:documentation>` ` </xs:annotation>` `</xs:attribute>`

Attribute PowerType / @UnitDesc

Namespace	No namespace

Annotations	Unit of measurement specified as a string This should be used for defining the type value's units if the proper enum is not listed in Unit. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.
Type	xs:string
Properties	default: kwh
Used by	Complex Type PowerType
Source	<xs:attribute default="kwh" name="UnitDesc" type="xs:string"> <xs:annotation> <xs:documentation>Unit of measurement specified as a string This should be used for defining the type value's units if the proper enum is not listed in Unit. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.</xs:documentation> </xs:annotation> </xs:attribute>

Attribute PowerType / @Fuel

Namespace	No namespace	
Annotations	Fuel type specified as an enum. This should be used for defining the type value's fuel. If the proper enum is not listed, please use the FuelDesc field to specify the units. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the FuelDesc may contain a default type.	
Type	EnergyClassEnumType	
Properties	use: optional	
	default: Electricity	
Facets	enumeration Coal (anthracite)	
	enumeration Coal (bituminous)	
	enumeration Coke	
	enumeration Diesel	
	enumeration District Chilled Water	
	enumeration District Hot Water	
	enumeration District Steam	
	enumeration Electricity	
	enumeration Fuel Oil (No. 1)	Number 1 is similar to kerosene and is the fraction that boils off right after gasoline.
	enumeration Fuel Oil (No. 2)	
	enumeration Fuel Oil (No. 4)	Number 4 fuel oil is usually a blend of distillate and residual fuel oils, such as No. 2 and 6; however, sometimes it is just a heavy distillate. No. 4 may be classified as diesel, distillate or residual fuel oil.
	enumeration Fuel Oil (No. 5 and No. 6)	Number 5 fuel oil and Number 6 fuel oil are called residual fuel oils (RFO) or heavy fuel oils. More Number 6 oil is produced compared to Number 5 oil, the terms heavy fuel oil and residual fuel oil are sometimes used as names for Number 6. Number 5 and 6 are what remains of the crude oil after gasoline and the distillate fuel oils are extracted through distillation. Number 5 fuel oil is a mixture of 75-80 % Number 6 oil and 25-20% of Number 2 oil. Number 6 oil may also contain a small amount of No. 2 to get it to meet specifications.
	enumeration Geothermal	
	enumeration Kerosene	
	enumeration Liquid Propane	
	enumeration Natural Gas	
	enumeration Other	

	enumeration	Propane
	enumeration	Steam
	enumeration	Wood
Used by	Complex Type	PowerType
Source	<xs:attribute name="Fuel" type="EnergyClassEnumType" use="optional" default="Electricity"> <xs:annotation> <xs:documentation>Fuel type specified as an enum. This should be used for defining the type value's fuel. If the proper enum is not listed, please use the FuelDesc field to specify the units. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the FuelDesc may contain a default type.</xs:documentation> </xs:annotation> </xs:attribute>	

Attribute PowerType / @FuelDesc

Namespace	No namespace	
Annotations	FuelType specified as a string. This should be used for defining the type value's fuel if the proper enum is not listed in Fuel. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the FuelDesc may contain a default type.	
Type	xs:string	
Properties	default:	Electricity
Used by	Complex Type	PowerType
Source	<xs:attribute default="Electricity" name="FuelDesc" type="xs:string"> <xs:annotation> <xs:documentation>FuelType specified as a string. This should be used for defining the type value's fuel if the proper enum is not listed in Fuel. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the FuelDesc may contain a default type.</ xs:documentation> </xs:annotation> </xs:attribute>	

Attribute YearScheduleType / WeekScheduleId / @weekScheduleIdRef

Namespace	No namespace	
Type	xs:IDREF	
Properties	use:	required
Used by	Element	YearScheduleType/WeekScheduleId
Source	<xs:attribute name="weekScheduleIdRef" type="xs:IDREF" use="required"/>	

Attribute YearScheduleType / @id

Namespace	No namespace	
Type	xs:ID	
Properties	use:	required
Used by	Complex Type	YearScheduleType
Source	<xs:attribute name="id" use="required" type="xs:ID"/>	

Attribute ScheduleType / @id

Namespace	No namespace	
Type	xs:ID	
Properties	use:	required
Used by	Complex Type	ScheduleType
Source	<xs:attribute name="id" use="required" type="xs:ID"/>	

Attribute ScheduleType / @type

Namespace	No namespace		
Type	scheduleEnumType		
Properties	use:	required	
Facets	enumeration	Temp	This defines the a set temperature for a heating or cooling system
	enumeration	Fraction	Defines the fraction of use. Typically used for lighting and occupancy
	enumeration	OnOff	Used for schedules for fans and heating and cooling availability
Used by	Complex Type	ScheduleType	
Source	<xs:attribute name="type" use="required" type="scheduleEnumType"/>		

Attribute ZoneType / @id

Namespace	No namespace	
Type	xs:ID	
Properties	use:	optional
Used by	Complex Type	ZoneType
Source	<xs:attribute name="id" type="xs:ID" use="optional"/>	

Attribute BuildingType / @id

Namespace	No namespace	
Type	xs:ID	
Properties	content:	simple
Used by	Complex Type	BuildingType
Source	<xs:attribute name="id" type="xs:ID"/>	

Attribute GroundAreaType / @id

Namespace	No namespace	
Type	xs:ID	
Properties	content:	simple
Used by	Complex Type	GroundAreaType
Source	<xs:attribute name="id" type="xs:ID"/>	

Attribute WirewaySegmentType / @Id

Namespace	No namespace	
Type	xs:ID	
Properties	use:	required
Used by	Complex Type	WirewaySegmentType
Source	<xs:attribute name="Id" type="xs:ID" use="required"/>	

Attribute WirewaySegmentType / @EquipmentDefinitionIdRef

Namespace	No namespace
Annotations	If the WirewaySegment is a junction box or disconnect switch, this refers to its EquipmentDefinition. A WirewayBox may be a pass through where multiple ConduitSegments are combined into a single ConduitSegment for example. A disconnect switch box may

	also be modeled as a WirewayBox, provided that the circuit(s) involved are simply disoconnected and not combined in any way. DO NOT use WirewayBox to represent a combiner, or distribution panel.
Type	xs:IDREF
Properties	content: simple
Used by	Complex Type WirewaySegmentType
Source	<xs:attribute name="EquipmentDefinitionIdRef" type="xs:IDREF"> <xs:annotation> <xs:documentation>If the WirewaySegment is a junction box or disconnect switch, this refers to its EquipmentDefinition. A WirewayBox may be a pass through where multiple ConduitSegments are combined into a single ConduitSegment for example. A disconnect switch box may also be modeled as a WirewayBox, provided that the circuit(s) involved are simply disoconnected and not combined in any way. DO NOT use WirewayBox to represent a combiner, or distribution panel.</xs:documentation> </xs:annotation> </xs:attribute>

Attribute SiteType / @id

Namespace	No namespace
Type	xs:ID
Properties	content: simple
Used by	Complex Type SiteType
Source	<xs:attribute name="id" type="xs:ID"/>

Attribute EquipmentDefinitionType / @Id

Namespace	No namespace
Type	xs:ID
Properties	use: required
Used by	Complex Type EquipmentDefinitionType
Source	<xs:attribute name="Id" type="xs:ID" use="required"/>

Attribute EquipmentInstanceType / @Id

Namespace	No namespace
Type	xs:ID
Properties	use: required
Used by	Complex Type EquipmentInstanceType
Source	<xs:attribute name="Id" type="xs:ID" use="required"/>

Attribute EquipmentInstanceType / @EquipmentDefinitionIdRef

Namespace	No namespace
Annotations	ID Ref of the associated equipment definition for this equipment instance. For example, in case of a PVModule, this would be the ID of the PvModuleDefinition element that describes this particular PV module instance.
Type	xs:IDREF
Properties	use: required
Used by	Complex Type EquipmentInstanceType
Source	<xs:attribute name="EquipmentDefinitionIdRef" type="xs:IDREF" use="required"> <xs:annotation> <xs:documentation>ID Ref of the associated equipment definition for this equipment instance. For example, in case of a PVModule, this would be the ID of the PvModuleDefinition element that describes this particular PV module instance.</xs:documentation> </xs:annotation>

	</xs:attribute>

Attribute EfficiencyType / @Unit

Namespace	No namespace		
Annotations	Unit of measurement specified as a string This should be used for defining the type value's units if the proper enum is not listed in Unit. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.		
Type	EfficiencyUnitEnumType		
Properties	use:	optional	
Facets	enumeration	AFUE	The annual fuel utilization efficiency (AFUE; pronounced 'A'-'Few') is a thermal efficiency measure of combustion equipment like furnaces, boilers, and water heaters. The AFUE differs from the true 'thermal efficiency' in that it is not a steady-state, peak measure of conversion efficiency, but instead attempts to represent the actual, season-long, average efficiency of that piece of equipment, including the operating transients.
	enumeration	BoilerEff	???
	enumeration	COP	The coefficient of performance or COP (sometimes CP), of a heat pump is the ratio of the change in heat at the "output" (the heat reservoir of interest) to the supplied work.
	enumeration	EER	The Energy Efficiency Ratio (EER) of a particular cooling device is the ratio of output cooling (in Btu/hr) to input electrical power (in Watts) at a given operating point (indoor and outdoor temperature and humidity conditions). The EER is related to the coefficient of performance (COP) commonly used in thermodynamics, with the primary difference being that the COP of a cooling device is unit-less: the cooling load and the electrical power needed to run the device are both measured using the same units, e.g. watts.
	enumeration	effectiveness	???
	enumeration	EnergyFactor	"Energy Factor is the ratio of useful energy output from the water heater to the total amount of energy delivered to the water heater. The higher the EF is, the more efficient the water heater." - http://www.energystar.gov/index.cfm?c=water_heat.pr_crit_water_heaters "Energy Factor is a metric that was previously used to compare relative efficiencies of clothes washers. The higher the Energy Factor is, the more efficient the clothes washer is. For clothes washers, Energy Factor is calculated using the following formula:[2]" Energy Factor = 392 x Volume (ft^3) / Annual Energy Usage (kWh) - http://www.energystar.gov/index.cfm?fuseaction=clotheswash.display_column_definitions
	enumeration	FanEff	is this Specific Fan power?
	enumeration	HSPF	HSPF (Heating Seasonal Performance Factor) is a term used in the heating and cooling industry. HSPF is specifically used to measure the efficiency of air source heat pumps. The efficiency of air conditioners are often rated by the Heating Seasonal Performance Factor (HSPF) as defined by the Air Conditioning, Heating, and Refrigeration Institute in its standard

			210/240 Performance Rating of Unitary Air-Conditioning and Air-Source Heat Pump Equipment last updated in 2008.
	enumeration	kWPerkW	???
	enumeration	kWPerTon	kiloWatts per Ton - power to weight ratio of an engine
	enumeration	LumensPerWatt	The ratio of luminous flux in lumens to power measured in watts.
	enumeration	MechanicalEff	???
	enumeration	MotorEff	???
	enumeration	SEER	The Seasonal Energy Efficiency Ratio (SEER) has the same units of Btu/W·hr, but instead of being evaluated at a single operating condition, it represents the expected overall performance for a typical year's weather in a given location.
	enumeration	ThermalEff	In thermodynamics, the thermal efficiency is a dimensionless performance measure of a device that uses thermal energy, such as a boiler, a furnace, or a refrigerator.
Used by	Complex Type	EfficiencyType	
Source			

```
<xs:attribute name="Unit" type="EfficiencyUnitEnumType" use="optional">
  <xs:annotation>
    <xs:documentation>Unit of measurement specified as a string This should be used for defining the type value's units if the proper enum is not listed in Unit. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.</xs:documentation>
  </xs:annotation>
</xs:attribute>
```

Attribute EfficiencyType / @UnitDesc

Namespace	No namespace	
Annotations	Unit of measurement specified as a string This should be used for defining the type value's units if the proper enum is not listed in Unit. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.	
Type	xs:string	
Properties	content:	simple
Used by	Complex Type	EfficiencyType
Source		

```
<xs:attribute name="UnitDesc" type="xs:string">
  <xs:annotation>
    <xs:documentation>Unit of measurement specified as a string This should be used for defining the type value's units if the proper enum is not listed in Unit. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.</xs:documentation>
  </xs:annotation>
</xs:attribute>
```

Attribute EfficiencyType / @TestCondition

Namespace	No namespace		
Annotations	This represents the operating conditions (typically certified test conditons or full load) at which the efficiency is realized. Note that at other conditions, the efficiency may be a different value.		
Type	TestConditionEnumType		
Properties	use:	optional	
Facets	enumeration	AHRI	Air-Conditioning, Heating and Refrigeration Institute
	enumeration	Full Load	
	enumeration	NEMA	National Electrical Manufacturers Association
	enumeration	PTC	???

	enumeration	STC ???
Used by	Complex Type	EfficiencyType
Source	<xs:attribute name="TestCondition" type="TestConditionEnumType" use="optional"> <xs:annotation> <xs:documentation>This represents the operating conditions (typically certified test conditons or full load) at which the efficiency is realized. Note that at other conditions, the efficiency may be a different value.</xs:documentation> </xs:annotation> </xs:attribute>	

Attribute PrimeMoverSystemType / @id

Namespace	No namespace
Type	xs:ID
Properties	content: simple
Used by	Complex Type PrimeMoverSystemType
Source	<xs:attribute name="id" type="xs:ID"/>

Attribute DistributionSegmentType / @id

Namespace	No namespace
Type	xs:ID
Properties	content: simple
Used by	Complex Type DistributionSegmentType
Source	<xs:attribute name="id" type="xs:ID"/>

Attribute DistributionSystemType / @id

Namespace	No namespace
Type	xs:ID
Properties	content: simple
Used by	Complex Type DistributionSystemType
Source	<xs:attribute name="id" type="xs:ID"/>

Attribute CircuitConnectionType / @EquipmentWhereConnectedIdRef

Namespace	No namespace
Annotations	In cases where the CircuitConnection element is used within an EquipmentInstance that does not have a parent element to which the CircuitConnection is assumed to connect, a reference ID can be used to associate this CircuitConnection to another EquipmentInstance elsewhere in a document instance. For example, a PvSystem may have an AcPointOfConnection that uses a new ElectricalPanel as an AC combiner for more than one Inverter. The new electrical panel can be described by an ElectricalPanel element in the PvDesign (which in turn refers to an ElectricalPanelDefinition element). in the AcPointOfConnection's EquipmentWhereConnected element. That ElectricPanel's EnergizingCircuitConnection element may reference another ElectricPanel in an instance of the Project's ExistingElectricalHierarchy element.
Used by	Complex Type CircuitConnectionType
Source	<xs:attribute name="EquipmentWhereConnectedIdRef"> <xs:annotation> <xs:documentation>In cases where the CircuitConnection element is used within an EquipmentInstance that does not have a parent element to which the CircuitConnection is assumed to connect, a reference ID can be used to associate this CircuitConnection to another EquipmentInstance elsewhere in a document instance. For example, a PvSystem may have an AcPointOfConnection that uses a new ElectricalPanel as an AC combiner for more than one Inverter. The new electrical panel can be described by an ElectricalPanel element in the PvDesign (which in turn refers to an ElectricalPanelDefinition element). in the AcPointOfConnection's EquipmentWhereConnected element. That ElectricPanel's EnergizingCircuitConnection element may reference another ElectricPanel in an instance of the Project's ExistingElectricalHierarchy element.</xs:documentation> </xs:annotation> </xs:attribute>

Attribute HVACSystemType / @id

Namespace	No namespace
Type	xs:ID
Properties	content: simple
Used by	Complex Type HVACSystemType
Source	`<xs:attribute form="unqualified" name="id" type="xs:ID"/>`

Attribute LightingZoneType / @id

Namespace	No namespace
Type	xs:ID
Properties	content: simple
Used by	Complex Type LightingZoneType
Source	`<xs:attribute name="id" type="xs:ID"/>`

Attribute LightingControlGroupType / @id

Namespace	No namespace
Type	xs:ID
Properties	content: simple
Used by	Complex Type LightingControlGroupType
Source	`<xs:attribute name="id" type="xs:ID"/>`

Attribute PvModuleType / @LayoutPlaneIdRef

Namespace	No namespace
Annotations	ID of the LayoutPlane that this module belongs to. This must match the "id" field of one of the items in the LayoutPlanes field of the PvDesignType instance this module belongs to.
Used by	Complex Type PvModuleType

Source	`<xs:attribute name="LayoutPlaneIdRef">`
	`  <xs:annotation>`
	`  <xs:documentation>ID of the LayoutPlane that this module belongs to. This must match the "id" field of one of the items in the LayoutPlanes field of the PvDesignType instance this module belongs to.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:attribute>`

Attribute PvArrayType / @Id

Namespace	No namespace
Properties	use: required
Used by	Complex Type PvArrayType
Source	`<xs:attribute name="Id" use="required"/>`

Attribute PvArrayType / @ModuleDefinitionIdRef

Namespace	No namespace
Type	xs:IDREF
Properties	use: required
Used by	Complex Type PvArrayType
Source	`<xs:attribute name="ModuleDefinitionIdRef" type="xs:IDREF" use="required"/>`

Attribute PvArrayType / @LayoutPlaneIdRef

Namespace	No namespace

Type	xs:IDREF
Properties	content: simple
Used by	Complex Type PvArrayType
Source	`<xs:attribute name="LayoutPlaneIdRef" type="xs:IDREF"/>`

Attribute VolumeType / @Unit

Namespace	No namespace
Annotations	Unit of measurement.
Type	VolumeUnitEnumType
Properties	use: optional
Facets	enumeration CubicCentimeters enumeration CubicFeet enumeration CubicInches enumeration CubicKilometers enumeration CubicMeters enumeration CubicMiles enumeration CubicMillimeters enumeration CubicYards enumeration Gallons enumeration Liters enumeration Foot-Acres
Used by	Complex Type VolumeType

Source	`<xs:attribute name="Unit" type="VolumeUnitEnumType" use="optional">`
	`  <xs:annotation>`
	`  <xs:documentation>Unit of measurement.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:attribute>`

Attribute VolumeType / @UnitDesc

Namespace	No namespace
Annotations	Unit of measurement specified as a string This should be used for defining the type value's units if the proper enum is not listed in Unit. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.
Type	xs:string
Properties	content: simple
Used by	Complex Type VolumeType
Source	`<xs:attribute name="UnitDesc" type="xs:string">` `  <xs:annotation>` ` <xs:documentation>Unit of measurement specified as a string This should be used for defining the type value's units if the proper enum is not listed in Unit. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.</xs:documentation>` ` </xs:annotation>` `</xs:attribute>`

Attribute TemperatureType / @Unit

Namespace	No namespace
Annotations	Unit of measurement.
Type	TemperatureUnitEnumType
Properties	use: optional
Facets	enumeration C Celsius

	enumeration	F	Fahrenheit
	enumeration	K	Kelvin
	enumeration	R	Rankine A thermodynamic (absolute) temperature scale named after the Scottish engineer and physicist William John Macquorn Rankine, who proposed it in 1859.
	enumeration	Re	The Réaumur scale (°Ré, °Re, °R), also known as the "octogesimal division",[1] is a temperature scale in which the freezing and boiling points of water are set to 0 and 80 degrees respectively. The scale is named after René Antoine Ferchault de Réaumur, who first proposed something similar in 1730.[2] AT: why are we including this? Does someone have a use case?
Used by	Complex Type	TemperatureType	
Source	<xs:attribute name="Unit" type="TemperatureUnitEnumType" use="optional"> <xs:annotation> <xs:documentation>Unit of measurement.</xs:documentation> </xs:annotation> </xs:attribute>		

Attribute WaterHeatingSystemType / @id

Namespace	No namespace	
Type	xs:ID	
Properties	use:	optional
Used by	Complex Type	WaterHeatingSystemType
Source	<xs:attribute name="id" type="xs:ID" use="optional"/>	

Attribute MonetaryType / @Unit

Namespace	No namespace	
Type	MonetaryUnitEnumType	
Properties	content:	simple
Facets	enumeration	dollars
	enumeration	cents
Used by	Complex Type	MonetaryType
Source	<xs:attribute name="Unit" type="MonetaryUnitEnumType"/>	

Attribute EmissionsType / @Unit

Namespace	No namespace	
Annotations	Unit of measurement specified as an enum. This should be used for defining the type value's units. If the proper enum is not listed, please use the UnitDesc field to specify the units. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.	
Type	EmissionsUnitEnumType	
Properties	content:	simple
Facets	enumeration	pounds
	enumeration	tons
	enumeration	kilograms
Used by	Complex Type	EmissionsType
Source	<xs:attribute name="Unit" type="EmissionsUnitEnumType"> <xs:annotation>	

	<xs:documentation>Unit of measurement specified as an enum. This should be used for defining the type value's units. If the proper enum is not listed, please use the UnitDesc field to specify the units. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.</xs:documentation> </xs:annotation> </xs:attribute>

Attribute EmissionsType / @UnitDesc

Namespace	No namespace
Annotations	Unit of measurement specified as a string This should be used for defining the type value's units if the proper enum is not listed in Unit. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.
Type	xs:string
Properties	content: simple
Used by	Complex Type EmissionsType
Source	<xs:attribute name="UnitDesc" type="xs:string"> <xs:annotation> <xs:documentation>Unit of measurement specified as a string This should be used for defining the type value's units if the proper enum is not listed in Unit. These are all optional attributes in order to allow for a simplified value descriptions since these are used throughout the IEP schemas. Additionally the UnitDesc may contain a default type.</xs:documentation> </xs:annotation> </xs:attribute>

Attribute EmissionsType / @Emissions

Namespace	No namespace
Type	EmissionsEnumType
Properties	content: simple
Facets	enumeration CO2 enumeration NOX enumeration SOX enumeration Methane
Used by	Complex Type EmissionsType
Source	<xs:attribute name="Emissions" type="EmissionsEnumType"/>

Attribute EmissionsType / @EmissionsDesc

Namespace	No namespace
Type	xs:string
Properties	content: simple
Used by	Complex Type EmissionsType
Source	<xs:attribute name="EmissionsDesc" type="xs:string"/>

Attribute GenericValueType / @Unit

Namespace	No namespace
Type	xs:string
Properties	content: simple
Used by	Complex Type GenericValueType
Source	<xs:attribute name="Unit" type="xs:string"/>

Attribute MeasureType / @id

Namespace	No namespace

Type	xs:ID	
Properties	content:	simple
Used by	Complex Type	MeasureType
Source	<xs:attribute name="id" type="xs:ID"/>	

Attribute LineItemType / @id

Namespace	No namespace	
Type	xs:IDREF	
Properties	use:	optional
Used by	Complex Type	LineItemType
Source	<xs:attribute name="id" use="optional" type="xs:IDREF"/>	

Attribute ScopeOfWorkType / @id

Namespace	No namespace	
Type	xs:ID	
Properties	content:	simple
Used by	Complex Type	ScopeOfWorkType
Source	<xs:attribute name="id" type="xs:ID"/>	

Attribute DayScheduleType / @id

Namespace	No namespace	
Type	xs:ID	
Properties	use:	required
Used by	Complex Type	DayScheduleType
Source	<xs:attribute name="id" use="required" type="xs:ID"/>	

Attribute DayScheduleType / @type

Namespace	No namespace		
Type	scheduleEnumType		
Properties	use:	required	
Facets	enumeration	Temp	This defines the a set temperature for a heating or cooling system
	enumeration	Fraction	Defines the fraction of use. Typically used for lighting and occupancy
	enumeration	OnOff	Used for schedules for fans and heating and cooling availability
Used by	Complex Type	DayScheduleType	
Source	<xs:attribute name="type" use="required" type="scheduleEnumType"/>		

Attribute Day / @dayScheduleIdRef

Namespace	No namespace	
Annotations	ID for operation schedules	
Type	xs:IDREF	
Properties	use:	required
Used by	Element	Day
Source	<xs:attribute name="dayScheduleIdRef" type="xs:IDREF" use="required"> <xs:annotation>	

```
    <xs:documentation>ID for operation schedules</xs:documentation>
  </xs:annotation>
</xs:attribute>
```

Attribute `Day / @dayType`

Namespace	No namespace	
Type	dayTypeEnum	
Properties	use:	required
Facets	enumeration	Weekday
	enumeration	Weekend
	enumeration	Holiday
	enumeration	WeekendOrHoliday
	enumeration	HeatingDesignDay
	enumeration	CoolingDesignDay
	enumeration	Sun
	enumeration	Mon
	enumeration	Tue
	enumeration	Wed
	enumeration	Thu
	enumeration	Fri
	enumeration	Sat
	enumeration	All
Used by	Element	Day
Source	`<xs:attribute name="dayType" type="dayTypeEnum" use="required"/>`	

Attribute `WeekScheduleType / @id`

Namespace	No namespace	
Type	xs:ID	
Properties	use:	required
Used by	Complex Type	WeekScheduleType
Source	`<xs:attribute name="id" use="required" type="xs:ID"/>`	

Attribute `WeekScheduleType / @type`

Namespace	No namespace	
Type	scheduleEnumType	
Properties	use:	required
Facets	enumeration	Temp — This defines the a set temperature for a heating or cooling system
	enumeration	Fraction — Defines the fraction of use. Typically used for lighting and occupancy
	enumeration	OnOff — Used for schedules for fans and heating and cooling availability
Used by	Complex Type	WeekScheduleType
Source	`<xs:attribute name="type" use="required" type="scheduleEnumType"/>`	

Attribute `ProjectType / @id`

Namespace	No namespace	
Type	xs:ID	
Properties	content:	simple

Used by	Complex Type	ProjectType
Source	<xs:attribute name="id" type="xs:ID"/>	

Attribute AngleType / @Unit

Namespace	No namespace	
Annotations	Unit of measurement.	
Type	AngularUnitEnumType	
Properties	use:	optional
	default:	degrees
Facets	enumeration	degrees
	enumeration	"in 12"
	enumeration	radians
Used by	Complex Type	AngleType
Source	<xs:attribute name="Unit" type="AngularUnitEnumType" use="optional" default="degrees"> <xs:annotation> <xs:documentation>Unit of measurement.</xs:documentation> </xs:annotation> </xs:attribute>	

Attribute TimeType / @Unit

Namespace	No namespace	
Annotations	Unit of measurement.	
Type	TimeUnitEnumType	
Properties	use:	optional
Facets	enumeration	Day
	enumeration	Hour
	enumeration	Minute
	enumeration	Month
	enumeration	Second
	enumeration	Week
	enumeration	Year
Used by	Complex Type	TimeType
Source	<xs:attribute name="Unit" type="TimeUnitEnumType" use="optional"> <xs:annotation> <xs:documentation>Unit of measurement.</xs:documentation> </xs:annotation> </xs:attribute>	

Attribute WeightType / @Unit

Namespace	No namespace	
Annotations	Unit of measurement.	
Type	WeightUnitEnumType	
Properties	use:	optional
Facets	enumeration	Kilograms
	enumeration	Pounds
	enumeration	Tons
Used by	Complex Type	WeightType
Source	<xs:attribute name="Unit" type="WeightUnitEnumType" use="optional"> <xs:annotation> <xs:documentation>Unit of measurement.</xs:documentation> </xs:annotation>	

```
</xs:attribute>
```

Attribute `VelocityType / @Unit`

Namespace	No namespace	
Annotations	`Unit of measurement.`	
Type	VelocityUnitEnumType	
Properties	use:	`optional`
Facets	enumeration	`FeetPerMinute`
	enumeration	`FeetPerSecond`
	enumeration	`KilometerPerHour`
	enumeration	`Knots`
	enumeration	`MetersPerMinute`
	enumeration	`MetersPerSecond`
	enumeration	`MilesPerHour`
Used by	Complex Type	VelocityType
`Source`		

```
<xs:attribute name="Unit" type="VelocityUnitEnumType" use="optional">
  <xs:annotation>
    <xs:documentation>Unit of measurement.</xs:documentation>
  </xs:annotation>
</xs:attribute>
```

Attribute `DensityType / @Unit`

Namespace	No namespace	
Annotations	`Unit of measurement.`	
Type	DensityUnitEnumType	
Properties	use:	`optional`
Facets	enumeration	`GramsPerCubicCm`
	enumeration	`KgPerCubicM`
	enumeration	`LbsPerCubicFt`
	enumeration	`LbsPerCubicIn`
Used by	Complex Type	DensityType
`Source`		

```
<xs:attribute name="Unit" type="DensityUnitEnumType" use="optional">
  <xs:annotation>
    <xs:documentation>Unit of measurement.</xs:documentation>
  </xs:annotation>
</xs:attribute>
```

Attribute `DayType / @dayScheduleIdRef`

Namespace	No namespace	
Annotations	`ID for operation schedules`	
Type	xs:IDREF	
Properties	use:	`required`
Used by	Complex Type	DayType
`Source`		

```
<xs:attribute name="dayScheduleIdRef" use="required" type="xs:IDREF">
  <xs:annotation>
    <xs:documentation>ID for operation schedules</xs:documentation>
  </xs:annotation>
</xs:attribute>
```

Attribute `DayType / @dayType`

Namespace	No namespace
Type	dayEnumType

Properties	use:	required
Facets	enumeration	Weekday
	enumeration	Weekend
	enumeration	Holiday
	enumeration	WeekendOrHoliday
	enumeration	HeatingDesignDay
	enumeration	CoolingDesignDay
	enumeration	Sun
	enumeration	Mon
	enumeration	Tue
	enumeration	Wed
	enumeration	Thu
	enumeration	Fri
	enumeration	Sat
	enumeration	All
Used by	Complex Type	DayType
Source	<xs:attribute name="dayType" use="required" type="dayEnumType"/>	